This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

+ *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.

+ *Refrain from automated querying* Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.

+ *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.

+ *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at `http://books.google.com/`

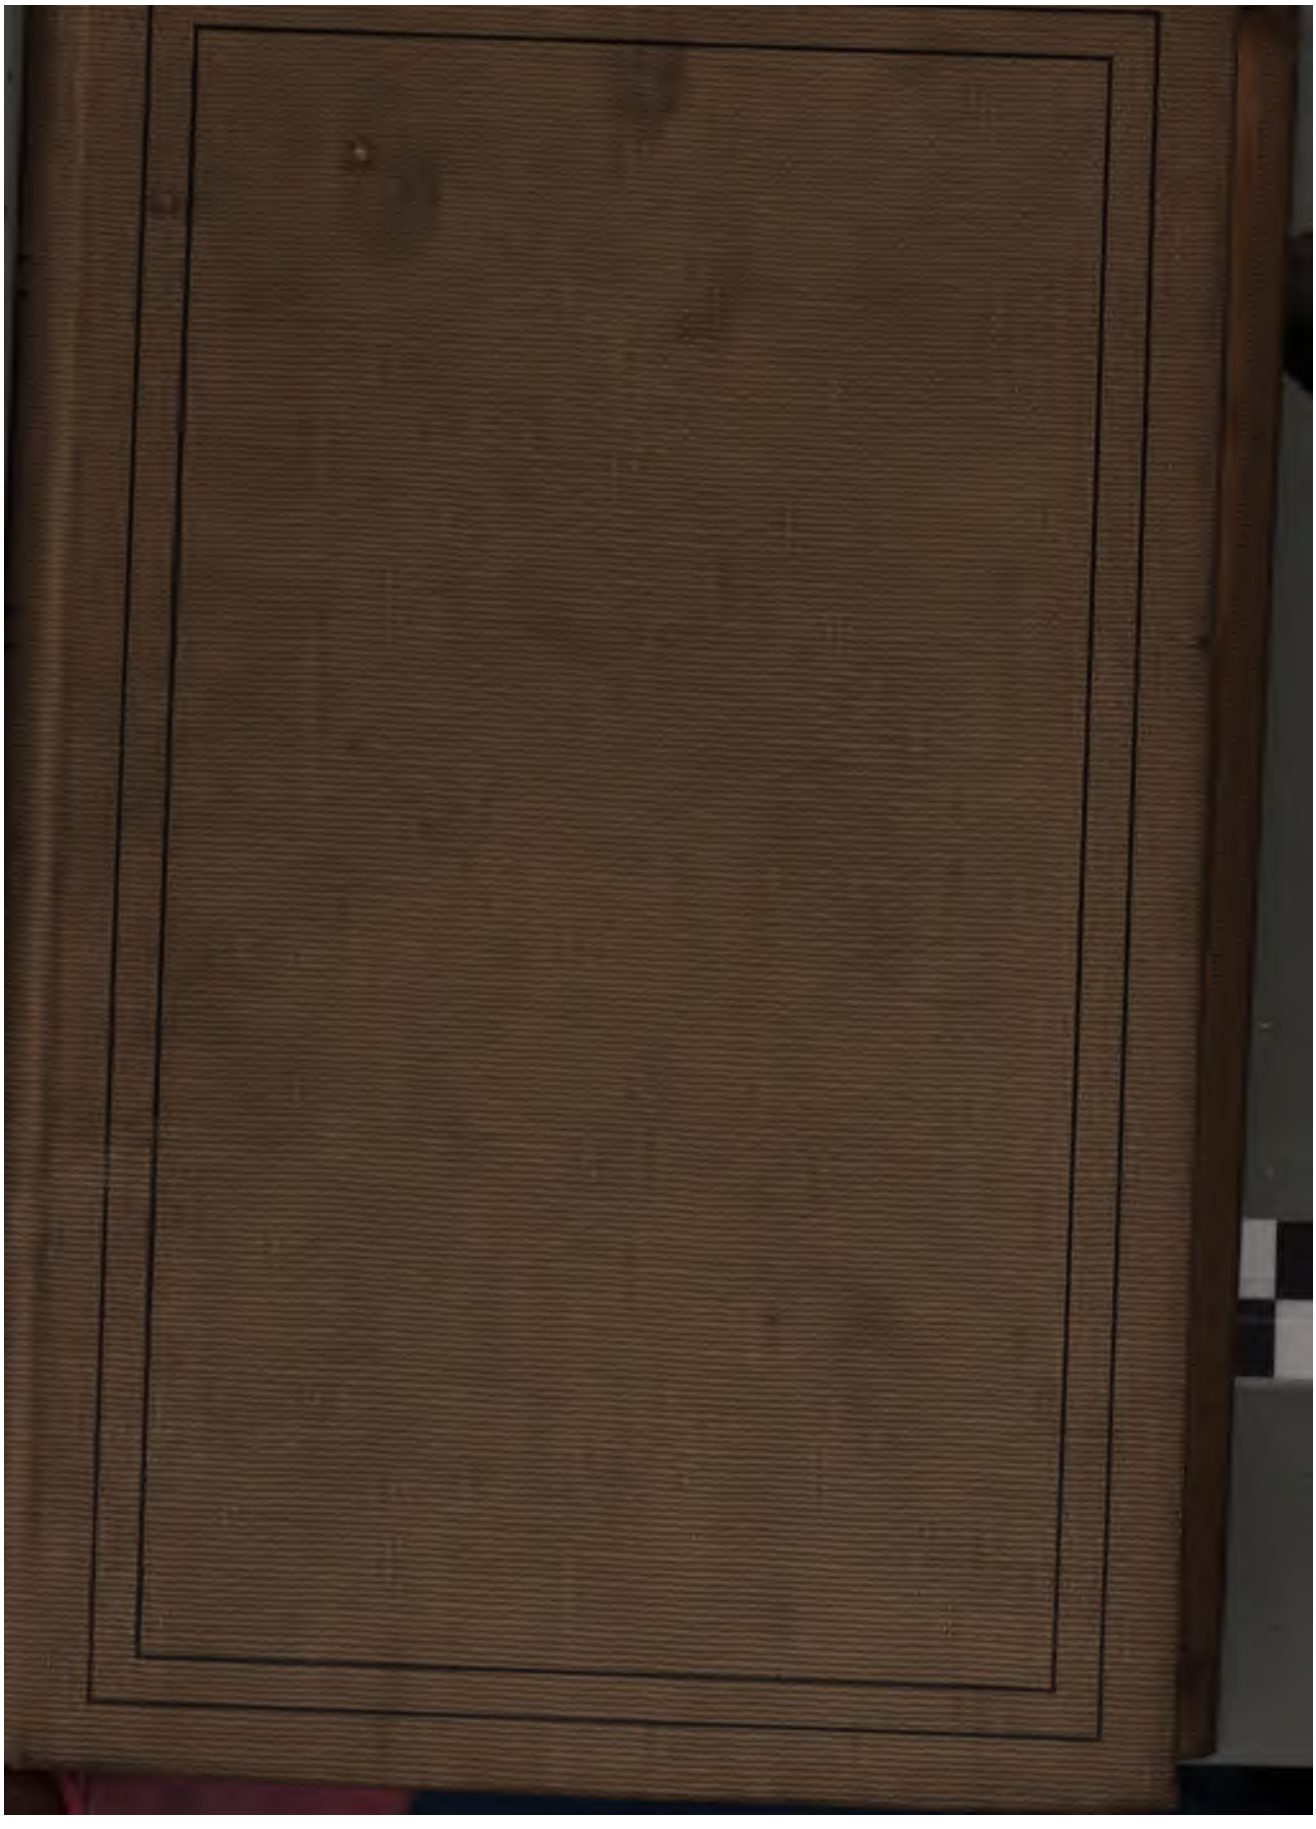

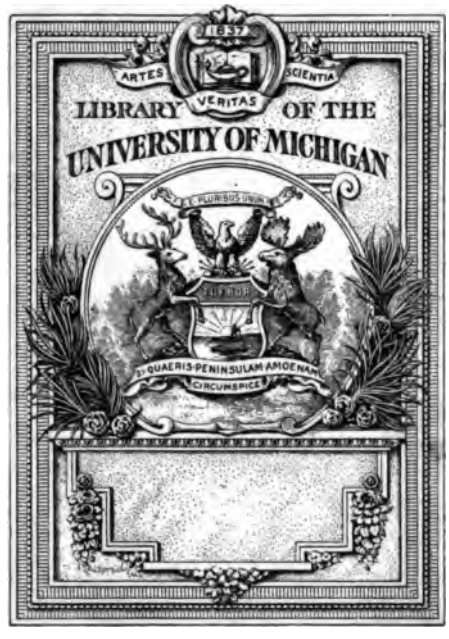

THE GIFT OF
Dept. of Documents

DEPARTMENT OF THE INTERIOR

UNITED STATES GEOLOGICAL SURVEY

GEORGE OTIS SMITH, DIRECTOR

BULLETINS

Nos. 326-328

WASHINGTON

GOVERNMENT PRINTING OFFICE

1908

CONTENTS

Geological Survey, bulletin 326; Arkansas coal field.
same, 327; Geologic reconnaissance in Matanuska and Talkeetna basins, Alaska.
same, 328; Gold placers of parts of Seward Peninsula, Alaska.

207901

Bulletin No. 326

Series { A, Economic Geology, 104
B, Descriptive Geology, 128

DEPARTMENT OF THE INTERIOR
UNITED STATES GEOLOGICAL SURVEY
GEORGE OTIS SMITH, DIRECTOR

THE ARKANSAS COAL FIELD

By ARTHUR J. COLLIER

WITH

REPORTS ON THE PALEONTOLOGY

By DAVID WHITE and G. H. GIRTY

WASHINGTON
GOVERNMENT PRINTING OFFICE
1907

CONTENTS.

	Page.
Introduction	1
Need of investigation	1
Personnel	1
Itinerary	2
Acknowledgments	2
General conclusions	4
Geography	4
Position and extent of the coal field	4
Maps of the coal field	5
Commercial relations	7
Towns and villages	8
Drainage	8
Topographic provinces	9
General geology	10
Stratigraphy	10
General description and correlation	10
Atoka formation	13
Hartshorne sandstone	15
Spadra shale	17
Fort Smith formation	18
Paris shale	20
Savanna formation	21
Surficial deposits	22
Paleontology	23
Conclusions drawn from studies of the fossils	23
Report on fossil plants, by David White	24
Extent and character of the collections	24
Flora of the Coal Hill coal	25
Flora of the Spadra coal	26
Flora of the Coal Ridge or Charleston coal	27
The Paris flora	28
Lots of doubtful age	28
The Van Buren flora	30
Other collections	31
Report on marine Carboniferous fossils from the coal field of Arkansas, by George H. Girty	31
Structure	35
General features	35
Anticlines	36
Backbone anticline	37
Biswell Hill anticline	37
Massard Prairie anticline	38
Montreal anticline	38
Hartford anticline	38

General geology—Continued.
Structure—Continued.
Anticlines—Continued. Page.
Mill Creek Ridge anticline 38
Game Hill anticline 38
Prairie View anticline 38
Coal Hill anticline 39
Russellville anticline 39
Synclines 39
Fort Smith syncline 39
Central syncline 39
Greenwood syncline 39
Sugarloaf syncline 39
Poteau syncline 39
Paris syncline 40
Prairie View syncline 40
Cabin Creek syncline 40
London basin 40
Ouita and Shinn basins 40
Faults 40
General types 40
Backbone Ridge fault 41
Devils Backbone and Pine Ridge faults 42
Caulksville fault 42
Prairie View fault 42
Clarksville fault 42
Big Danger fault 43
Spadra fault 44
Hartman fault 44
Coal Hill fault 45
Altus fault 45
Mill Creek fault 45
Massard fault 46
Mulberry fault 46
Minor structural features 47
Joints 47
Miniature folds 48
Economic geology 49
The coal beds 49
Distribution 49
Coals of the Hartshorne horizon 50
Character and distribution 50
Bonanza and Jenny Lind district 51
Greenwood and Huntington district 56
Location and extent 56
Character and thickness of the coal 56
Hackett region 57
Greenwood region 59
Montreal, Burma, and Midland regions 60
Huntington region 61
Depths to the coal 62
Bates and Coaldale district 62

Economic geology—Continued.
The coal beds—Continued.
Coals of the Hartshorne horizon—Continued. Page.
Spadra district 68
Prairie View district 72
Russellville district 74
Ouita basin 74
Shinn basin 75
Philpott district 75
Other localities 76
Coals of the Coal Ridge or Charleston horizon 77
Charleston district 77
Bonanza and Jenny Lind district 78
Van Buren and Alma district 79
Huntington district 79
Paris district 79
Spadra district 80
Philpott district 80
Coals of the Paris horizon 80
Coals in the Atoka formation 81
Character of the coal 83
Physical characteristics 83
Classification of the coal 84
Efficiency of the coal 86
Special tests and analyses 87
Analyses made by Arkansas Geological Survey 87
Fuel-testing plant samples 88
Chemical analyses 95
Coking tests 99
Briquetting tests 100
Boiler tests 101
Conditions of mining and development 103
Production 103
Methods of mining 105
System of working coal 105
Mining 105
Haulage, ventilation, and drainage 106
Minimum limit of thickness 106
Preparation of the coal for market 106
Labor 107
Portion of contract between miners and operators 107
Mines, openings, and exposures of coal 112
Index 151

ILLUSTRATIONS.

Page.
PLATE I. Generalized columnar section of the coal-bearing rocks 12
II. *A*, View of Potato Hill; *B*, Exposure of Hartshorne sandstone south of Shinn basin 16
III. *A*, Exposure of the Hartshorne sandstone near Piney Creek, east of Knoxville; *B*, Apparent unconformity in Hartshorne sandstone due to false bedding 18

Page.

PLATE IV. *A*, Jointing of sandstone in quarry at Cabin Creek; *B*, Irregular bedding in sandstone of Atoka or Winslow formation, one-half mile west of Ozark 20
V. Breaker at Scranton Anthracite Coal Company's mine, Spadra district 106
VI. Geologic and economic map and sections of the Arkansas coal field ..... In pocket.

FIG. 1. Map showing geographic position and railroad connection of the Arkansas coal field 5
2. Outline map of Arkansas coal field, showing mining centers, railroads, settlements, etc 6
3. Graphic sections of upper part of Atoka formation 14
4. Graphic sections of Hartshorne formation 16
5. Graphic sections of Spadra shale 18
6. Graphic sections of Fort Smith formation 20
7. Graphic sections of Paris shale 21
8. Map showing structural features of Arkansas coal field 36
9. Diagram of Backbone Ridge fault 41
10. Diagram of Clarksville fault 43
11. Minor structural features of coal beds 48
12. Distribution of Hartshorne coal horizon 51
13. Diagram showing relation of topography to geologic structure at Long Prairie, near Jenny Lind 52
14. Diagram showing relation of topography to geologic structure at Massard Prairie 52
15. Profile of coal bed at Jenny Lind 53
16. Graphic sections of coal along outcrop from Bonanza to Oak Grove 54
17. Graphic sections of coal on outcrop from Jenny Lind to Massard Prairie 55
18. Graphic sections of coal on outcrop from Hackett to Greenwood and Fidelity 58
19. Graphic sections of coal on outcrop in Montreal, Burma, and Midland regions 60
20. Graphic sections of coal on outcrop from Huntington through Hartford to Chasteen slope 61
21. Characteristic sections of coal bed on outcrop south of Poteau Mountain 63
22. Map showing structure of Coal Hill–Denning district 67
23. Graphic sections of coal at Denning 68
24. Map of Spadra and Prairie View coal fields 69
25. Sections showing thickness of coal bed in Spadra district, and in undeveloped field north of Lamar 71
26. Graphic sections of coal in Prairie View field 73
27. Characteristic sections of coal bed at Charleston horizon 77
28. Diagram showing composition of coals from different parts of the Arkansas field 85
29. Diagram showing relative calorific values of coals from different parts of the Arkansas field 87

THE ARKANSAS COAL FIELD.

By ARTHUR J. COLLIER.

INTRODUCTION.

Need of investigation.—Both the Carboniferous and the Tertiary rocks of Arkansas contain extensive deposits of coal, but only those of the older system in a field situated within the valley of Arkansas River and adjacent to the western boundary of the State have been exploited and are known to the trade. These coals have always borne a high reputation, but the demand for them has greatly increased in recent years. They grade from bituminous to semi-anthracite, and comparative experiments at the Geological Survey's fuel-testing plant have shown that coals of as good quality are not found elsewhere in the United States west of West Virginia.[a] New uses for them have been found which indicate their importance in the commercial development of the Middle West. At the same time mining operations within the field have demonstrated that its structure is more complex and the known areas of workable coal more limited than the results of earlier surveys would indicate.

For these reasons a number of operators and dealers in Arkansas coal called on the United States Geological Survey for more definite information regarding the extent and geologic structure of these coal beds, and in compliance with this demand a detailed reconnaissance investigation of the field was made from March 1 to August 1, 1906, the results of which are embodied in this report.

Personnel.—In both the field and the office the writer was efficiently assisted by Mr. Carl D. Smith, who was already familiar with the problems involved, through his previous connection with the survey of adjacent coal fields in Indian Territory, and who was identified with this investigation throughout both the field and the office work; by Mr. Sidney Paige, who participated in the field work during the first two months of the season, before his departure for Alaska, and after his return assisted in preparing some of the maps; and by Mr. R. D. Mesler, who brought to this work an

[a] Campbell, M. R., Classification of coals, in Report on the operations of the coal-testing plant, 1904: Prof. Paper U. S. Geol. Survey No. 48, 1906, pp. 156–173.

experience gained in adjacent regions north and west, and remained with the party through two months of the field season. Much of the accuracy of this report is due to the faithful work of these geologists.

Mr. M. R. Campbell, geologist in charge of economic geology of fuels, spent two weeks with the party in the field, making many valuable suggestions and directing the course of the work. Prof. A. H. Purdue, of the University of Arkansas, author of the Winslow folio, also visited the party while in the northwestern part of the field and contributed valuable information regarding the details of the structure there, as indicated by his interpretation of the geology of the Winslow quadrangle.[a]

Itinerary.—The field party began work early in March, 1906, at Midland, Ark., and, after carrying the investigation eastward along the southern boundary of the coal field to its eastern extremity near Dardanelle, turned westward along the northern boundary and completed the greater part of the field work by the last of June. Mr. Smith, however, with a smaller outfit, remained in the field until the last of July, reviewing many doubtful points regarding which the interpretation had not been fully settled during the first examination. Although the underground workings of many of the mines were examined and the coal from them was sampled, investigations of that character were prevented during the latter part of the season by a general strike among the miners. All the mines were shut down, and the fans and often the pumps were stopped, making the workings inaccessible.

Acknowledgments.—In the course of this investigation full use has been made of the maps and reports concerning the region that have previously been issued by various geological organizations. The most complete report on this field was made by the Geological Survey of Arkansas, under the direction of Dr. J. C. Branner, and published in 1888.[b] This report contains a brief summary of the information obtained by the Arkansas Survey, and was published in advance of a more complete description of the field. Further information regarding the structure and geology of this part of Arkansas was subsequently published by Winslow.[c] Unfortunately, the final report of the Arkansas Survey on the coal field has never been published, and the manuscripts were not available. A very large and important part of the work of the State Survey in this region consisted in the preparation of detailed topographic maps on a scale of 1 mile to the inch, with contour intervals of 20 feet, but like the final coal report these maps were never issued to the public, though the plates were

[a] Purdue, A. H., Description of the Winslow quadrangle: Geologic Atlas U. S., folio —, U. S. Geol. Survey, 1907.

partially engraved by the United States Geological Survey. A small edition was printed from the partially engraved plates and used during the season of 1906 as a basis for field mapping, and, although often inaccurate in topographic detail and generally deficient in culture, they are, nevertheless, the most useful maps of this field yet prepared and were of great assistance in the geologic work.

The results obtained and the conclusions reached in this paper have to a considerable extent been made possible by the careful detailed work which has been done by members of the United States Geological Survey in areas north and west of that under discussion. Acknowledgments for suggestions and information contained in published reports and for advice in the conduct of the field work are due to Mr. Joseph A. Taff,[a] who has for many years been identified with the work of the Survey in the adjacent coal fields of Indian Territory, and also to Prof. A. H. Purdue,[b] whose detailed and accurate geologic map of the Winslow quadrangle includes a portion of the northern part of this field.

Since the disorganization of the State Survey developments within the coal field have been very extensive. Many new openings on the coal have been made and much prospecting by drilling and other means has been done to determine the extent of the coal beds. The greater part of the information thus obtained was available and has been used in the preparation of this report. In the course of the field work many suggestions relative to the work were received from coal operators and prospectors, to whose cooperation much of the value of this report is due.

The various companies and individuals to whom the writer is more especially indebted for such information and assistance are as follows: The Western Coal and Mining Company of St. Louis, Mo., operating in the Jenny Lind and Denning districts, supplied the records of over 100 drill holes in various parts of the field. The Cherokee Construction Company of Fort Smith, Ark., operating mines near Midland and Hartford, a company that has done much intelligent prospecting in the western part of the field, permitted the examination of all their well records and mine maps. The Central Coal and Coke Company, operating at Bonanza and Huntington, who have accumulated much information regarding various parts of the field, supplied copies of their more important records. Mr. H. H. Jackman, man-

[a] Taff, Joseph A., and Adams, George I., Geology of the eastern Choctaw coal field: Twenty-first Ann. Rept. U. S. Geol. Survey, pt. 2, 1900, pp. 259–311.

Taff, Joseph A., Description of the Coalgate quadrangle: Geologic Atlas U. S., folio 74, 1901; also Description of the Atoka quadrangle, folio 79, 1902, U. S. Geol. Survey; The Southwestern coal field: Twenty-second Ann. Rept. U. S. Geol. Survey, pt. 3, 1902, pp. 361–413; maps of segregated coal lands in Indian Territory; U. S. Department of the Interior Circulars Nos. 1, 2, 3, 4, 5, and 6, 1904; Description of the Tahlequah quadrangle, folio 122, U. S. Geol. Survey, 1905. (Also Sallisaw and Windingstair folios, in preparation.)

[b] Purdue, A. H., Description of the Winslow quadrangle: Geologic Atlas U. S., folio —, U. S. Geol. Survey, 1907.

ager of the Spadra Creek Coal Company of Spadra, furnished records of a number of characteristic well sections in various parts of the field. Mr. Harry Kelly, president of the Mansfield Gas Company of Fort Smith, who has supervised the drilling of many deep wells in the rocks below the coal measures, kindly permitted an examination of the records of 13 typical wells, each over 1,000 feet deep, near Mansfield and Fort Smith, and supplied data obtained from many years of intelligent study of local geology. Messrs. Martin Rafter, State mine inspector, of Coal Hill; Henry Strother, real estate agent, of Fort Smith; Fremont Stokes, of Clarksville, and many others contributed material aid in assembling information regarding the facts herewith presented, and mine operators in general throughout the field very courteously granted access to mine maps and provided every facility possible for the examination of the underground workings.

General conclusions.—It will be shown in the following pages that the areas known to contain workable coal are more limited than is generally supposed, but that several promising districts of considerable extent have not yet been prospected. The complexity of the geologic structure along the northern edge of the field is here indicated for the first time, and it is believed that considerable unnecessary expense in searching for coal in unfavorable localities may be avoided, or if such work is undertaken the chances of success or failure may be better understood by use of the information here presented.

GEOGRAPHY.

Position and extent of the coal field.—The coal field herein described is situated in the western part of the State of Arkansas, adjoining the Indian Territory line, from which it extends eastward for 75 miles. Its general geographic position is shown in fig. 1, and its outline and extent are shown in fig. 2. It is about 50 miles wide at its western end, but the belt containing workable coal contracts sharply 12 miles from the boundary, beyond which its average width is not more than 20 miles. The areas of workable coal are more or less irregularly distributed over the district above described and some of them are in detached basins not known to be connected with one another. This irregularity and subdivision of the field is due in part to a complex geologic structure and in part to the peculiarities and local variations in the coal beds themselves, making them unfit for mining in some parts of the field, although their presence there is well known. The productive areas of the east end of the field are north of and those of the west end are south of Arkansas River.

Since nearly all the workable coal beds occur in or above the

overlying this horizon. (See fig. 2.) Coal beds that have been prospected at only a few localities also occur in some of the lower rocks, and their outcrops are found at considerable distances beyond the limits of the field as defined above. Most of these are probably not of commercial value but some of them may prove valuable locally, so that the extent of the coal fields will probably be increased by future discoveries.

Maps of the coal field.—This region was surveyed and subdivided into townships and sections of conventional size more than fifty years ago, but the maps made at that time show very few of the

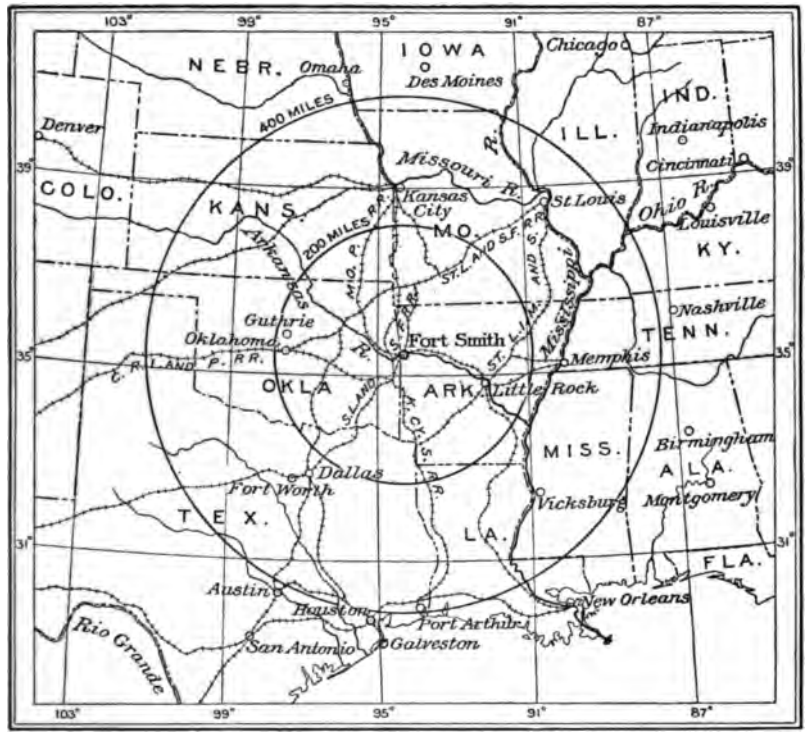

FIG. 1.—Map showing geographic position and railroad connection of the Arkansas coal field.

improvements now existing. The section and township corners established by these surveys were marked by the customary wooden posts and witness trees, but the original monuments have long ago rotted away or have been replaced by later ones established by local surveyors. At many places old fences and roads, placed on the lines when they were new, are the only evidences remaining to indicate their positions. These surveys were made with the needle compass, and the lines thus established often varied several degrees from true meridians and parallels. Nearly all the published maps

of Arkansas, however, are based on them and are sufficiently accurate for ordinary purposes.

The topographers of the United States Geological Survey made a reconnaissance of the field in 1888, the result of their work being topographic sheets of several thirty-minute quadrangles on a scale of one-half inch to the mile. Unfortunately, these maps were deficient both in topographic detail and in culture, a most notable defect being the omission of township and section lines, which are of the utmost economic value in any map to be used by the residents of the district. When the Arkansas Geological Survey undertook to interpret the geology of the coal field the existing maps were found to be inadequate, and they therefore conducted a topographic sur-

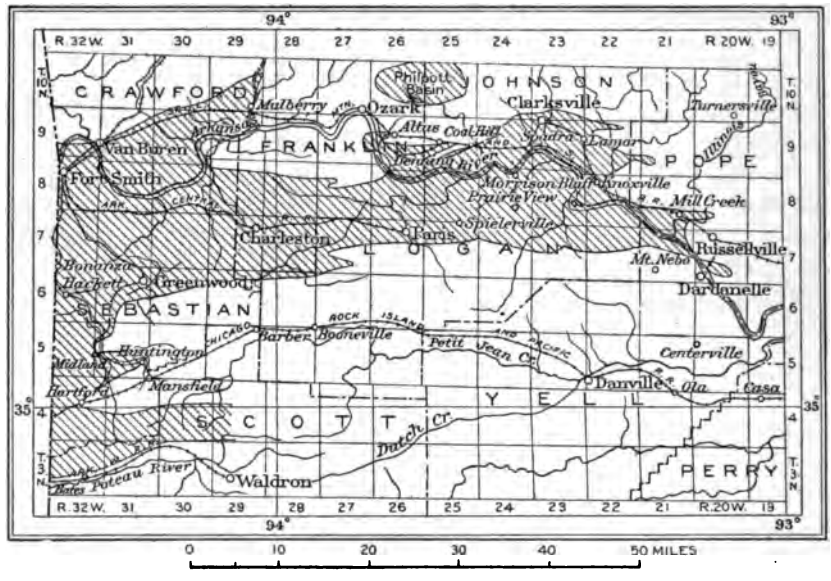

FIG. 2.—Outline map of Arkansas coal field, showing mining centers, railroads, settlements, etc.

vey in connection with their geologic work, using the base presented by the Land Office maps for control. The topography was sketched by a number of assistants, who retraced the section lines and determined elevations by aneroid barometers. This work resulted in the preparation of a detailed topographic map on a scale of 1 inch to the mile, covering the whole of the coal field. Unfortunately, the State survey was discontinued before this map was completed and and it has never been published, though the engraving of the plates by the United States Geological Survey was nearly completed. In many respects it is the most complete map of the Arkansas coal field

herewith presented, however, is based on the United States Geological Survey sheets of the region with the addition of the township and section lines, the topography being omitted in order to insure more speedy publication. Although a contour map would be more desirable from a scientific point of view, it is thought that the map as prepared will be of nearly equal value to those who are interested in the development of the field. The geologic structure is complex, but the scale, one-half inch to the mile, is sufficiently large to show all that is known or can be learned at present, except in some small areas where there have been more extensive developments, the details of which are presented in various text figures.

Commercial relations.—Fort Smith, the center of the coal-mining industry, is the principal town in western Arkansas. Its population in 1900, as determined by the Twelfth Census, was 11,587; its present population is about 20,000. It is approximately 250 miles from Kansas City, 350 miles from St. Louis, and 400 miles from the Gulf of Mexico, with which it is connected by the lines of the St. Louis and San Francisco, the St. Louis, Iron Mountain and Southern, and the Kansas City Southern railway systems (see fig. 1, p. 5). Branch lines and independent railroads of less importance, which radiate from Fort Smith and afford transportation to the various coal-mining districts are as follows:

The Little Rock and Fort Smith branch of the Iron Mountain Railway extends through the whole length of the field, north of the river, with spurs and branch roads to the mines near Denning, Coal Hill, Spadra, and Russellville. South of the river the Arkansas Central Railroad extends from Fort Smith to Paris; a branch of the Iron Mountain Railway leads to Greenwood, with a spur to the mines at Jenny Lind; the Mansfield branch of the St. Louis and San Francisco system affords transportation to the mines at Bonanza, Hackett, Montreal, and Huntington and connects with the Choctaw (Chicago, Rock Island and Pacific) line from Memphis; the Midland Valley Railroad follows the outcrop of the coal from Hackett east to Greenwood and thence south past Montreal and Midland to Hartford, affording transportation to a large number of small mines; and the extreme southern part of the field is reached by the Waldron branch of the Kansas City Southern Railway.

With the development of the mining industry new railroads have been projected, and during the last season surveys were in progress for a line connecting Fort Smith with the undeveloped district near Prairie View, 10 miles east of Paris, in Logan County. A railroad is also in course of construction from Dardanelle southward across a district that lies outside of the coal field as at present recognized but contains prospects of coal, some of which will probably be developed into mines.

The coal field is well supplied with wagon roads, very few of which are in good condition in either winter or summer, though in many places, where they are located along the outcrops of ridge-making sandstones, the road bed is firm but rough. Nearly all the roads for a few miles out of Fort Smith are macadamized and dressed with crushed chert from the northern part of the State. They are in good good condition the year round and effectually demonstrate the practicability and value of such improvements. The cost of such roads is so great, however, that it will doubtless be many years before they are extended over the whole of this field.

Towns and villages.—Outside of Fort Smith the important towns are the county seats and the villages around the mines. The county seats are supported mainly by agricultural trade and most of them present a thrifty and attractive appearance. They are: Van Buren, Crawford County, population 2,573; Greenwood, Sebastian County, population 491; Ozark, Franklin County, population 848; Paris, Logan County, population 836; Clarksville, Johnson County, population, 1,086; Russellville, Pope County, population 1,832; and Dardanelle, Yell County, population 1,602.[a]

The more important coal-mining towns are Bonanza, population 906; Jenny Lind, population 425; Huntington, population 1,298; Hartford, population 460; Coal Hill, population 1,341; Denning, population 700; and Spadra, population 260.

Drainage.—The coal field is drained by Arkansas River and its tributaries. Arkansas River is the main waterway and extends through the whole length of the field. It rises in the Rocky Mountains about 400 miles northwest of this region and joins the Mississippi at the eastern boundary of the State, where it carries a large volume of water. Before the building of railroads it was the principal method of transportation in this part of the State, but it is very little used at present, no steamers having been seen on the river during the last field season. It flows over a wide bed filled with many sandbars and was probably never navigable during extremely low stages. The river bed is generally from 50 to 100 feet below the general lowland level of the region. Its banks are bordered by flood plains, at some places several miles wide, that are overflowed every few years, back of which there is in many localities a low escarpment rising to the general lowland plain.

Most of the tributaries of the Arkansas that enter the main stream from the south rise within the coal-bearing district and are always heavily charged with very fine sediment. Poteau River, one of the largest of these, is the source of water supply for Fort Smith, and although the water is said to be wholesome it is never clear. This

river rises south of Poteau Mountain but within a short distance crosses the State line into Indian Territory, in which the major part of its course is located. It again reaches the State line near its mouth, which is in Arkansas. The other notable streams south of the river are Vache Grasse, Sixmile, Hurricane, and Shoal creeks, all of which are sluggish and muddy, like Poteau River.

Nearly all the streams that enter Arkansas River from the north rise within the Boston Mountain area and are clear except at times of freshet. They carry larger volumes of water than the streams entering the river from the south. The more important northern tributaries of the Arkansas within the coal district are Lee Creek, Frog Bayou, Mulberry River, Horsehead, Spadra, and Piney creeks, and Illinois Bayou. None of these tributaries, except possibly a part of Poteau River, can be regarded as navigable.

Topographic provinces.—In this region three topographic provinces, the Boston Mountains, the Arkansas Valley, and the Ouachita Mountains, extending from Arkansas westward into Indian Territory, are recognized by geologists.

The Boston Mountains, which comprise the southern part of the Ozark Mountain region, consist of broad, flat-topped hills forming a dissected plateau whose highest point is about 2,000 feet above the sea.[a] In this region the strata are approximately horizontal; the flat-topped hills are capped by beds of hard sandstone, and the valleys, which are regarded as of comparatively recent origin, are deep and narrow. The southern edge of this mountain district in Arkansas is marked in many places by rather abrupt escarpments that rise from the lowlands of the valley to the lower plateau levels.

The Arkansas Valley province, comprising a belt about 50 miles wide, in which the coal fields are situated, lies south of the Boston Mountains, and is characterized by elevations averaging not more than 500 feet above the sea. Its more definite features are a base-level plain comprising a network of broad alluvial valleys surmounted by many ridges and flat-topped hills, most of whose summits blend in an even sky line about 650 to 700 feet above the sea. Where the strata are moderately inclined the topography is marked by many long, persistent, even-topped ridges, whose summits are from 50 to 100 feet above the base-level plain. A few of the hills take the form of low, broad domes mantled with hard sandstone, and at some places where the rocks are nearly horizontal there are buttes whose summits reach from 1,000 to 3,000 feet above tide, and from 400 to 2,000 feet above the general lowland. Notable among elevations of this character are Sugarloaf and Poteau mountains, near the western end of the coal field, and Magazine, Short, and Nebo moun-

[a] Purdue, A. H., Physiography of the Boston Mountains, Arkansas: Jour. Geol., vol. 9, 1901, pp. 694-701. Hershey, O. H., Peneplain of the Ozark highland: Am. Geologist, vol. 27, 1901, pp. 25-41.

tains, near its eastern end. Magazine Mountain, with an elevation of 3,000 feet, is the highest eminence in Arkansas. Potato Hill, a cone-shaped butte of this type, is shown in Pl. II, *A*. All of these features are direct resultants of the erosion of diverse bed-rock structures, the long, narrow ridges indicating moderately inclined rocks, while the buttes (Pl. II, *A*) indicate horizontal rocks in synclinal basins, and the domes are short anticlines. As a general rule the ridges are more pronounced in the southern part of the field, while the topography of the northern part partakes more of the nature of that found in the Boston Mountains.

The Ouachita Mountain province, which lies south of Arkansas Valley, is characterized by many sharp ridges, produced by the erosion of steeply dipping beds striking approximately east and west.[a] These ridges rise to a nearly uniform height, suggesting an old base-level erosion plain which has been so unequally elevated that while it is over 2,000 feet above the sea at the Arkansas-Indian Territory boundary it declines to only about 500 feet at its eastern end near Hot Springs.[b] From this description it will be seen that Arkansas Valley, in which these coal fields lie, is situated between two mountain masses of very distinct types, and that its topography is to a considerable extent intermediate in character between the two.

GENERAL GEOLOGY.

STRATIGRAPHY.

GENERAL DESCRIPTION AND CORRELATION.

The Arkansas field comprises the eastern end of a large area of coal land which has its greatest extent in Indian Territory. The stratigraphic relations of the rocks of that part of the field which lies in Indian Territory have already been studied in detail and mapped by geologists of the Survey.[c] A part of the northern edge of the coal field in Arkansas has also been mapped, and the results of investigations made there have been submitted for publication.[d] The formations comprising the stratigraphic column in Arkansas are directly comparable to those of Indian Territory, and there is also a marked similarity in the general type of geologic structure in the two districts. The various rock formations as defined and named

[a] Griswold, L. S., Ann. Rept. Geol. Survey Arkansas for 1890, vol. 3, 1892, pp. 195–202.

[b] Ashley, G. H., Geology of the Paleozoic area of Arkansas south of the novaculite region: Proc. Am. Philos. Soc., vol. 36, 1897, pp. 217–318.

[c] Taff, Joseph A., and Adams, George I., Geology of the eastern Choctaw coal field: Twenty-first Ann. Rept. U. S. Geol. Survey, pt. 2, 1900, pp. 259–311.

Taff, Joseph A., Coalgate folio (No. 74), 1901, and Atoka folio (No. 79), 1902, U. S. Geol. Survey; The Southwestern coal field, Twenty-second Ann. Rept. U. S. Geol. Survey, pt. 3, 1902, pp. 361–413; Maps of segregated coal lands in Indian Territory, U. S. Department of the Interior Circulars Nos. 1, 2, 3, 4, 5,

in Indian Territory will therefore be described as they occur in Arkansas.

All the rocks herein described belong to the middle Carboniferous or Pennsylvanian series. They present a rather monotonous sequence of sandstones and shales with little contrast between individual beds. Except for the coal beds themselves there are no members that can be identified with certainty by lithologic characters. Limestone beds, which are interspersed through the series in other fields and aid the geologist by serving as horizon markers, are here almost totally wanting. Moreover, there is much local variation in the character of the rocks, and especially in the sandstone lenses, and correlations from one part of the field to another that are based on lithologic similarity alone are of little value.

In the region north of the coal field, near Fayetteville, lower Carboniferous (Mississippian) shales, sandstones, and limestones are exposed, and farther south these are overlapped by about 1,500 feet of shales and sandstones called the Winslow formation. The Winslow extends to the edge of the coal field, and the upper bed of this formation, as described by Purdue, apparently forms the base of the coal-bearing rocks of Arkansas. In Indian Territory the basal bed of the coal-bearing strata is a thick, often massive, sandstone, named for the town of Hartshorne. This sandstone overlies several thousand feet of shale, with only occasional sandstone beds interspersed, which has been called the Atoka shale in the southern part of the coal field, but occupies a position equivalent to that of the Winslow formation in the northern part. It is therefore evident that the Pennsylvanian rocks below the coal-bearing beds rapidly increase in thickness toward the south.

The coal-bearing rocks in Indian Territory comprise several thousand feet of sandstone and shale, which has been divided as follows:

Coal-bearing rocks in Indian Territory.

	Feet.
Boggy shale	2,000
Savanna sandstone	1,000
McAlester shale	2,000
Hartshorne sandstone	200

The Hartshorne sandstone, at the base of the series, is a thin but very persistent formation, which has been traced for 150 miles across the southern edge of the Indian Territory field, but has not heretofore been identified at its northern edge. The McAlester shale, which overlies the Hartshorne sandstone, contains the Hartshorne and McAlester coals. A group of massive sandstones and interbedded shales, including the Witteville coal bed, make up the Savanna formation, which is overlain by the Boggy shale, also including one or two coal beds.

The coal-bearing rocks of Arkansas were separated by the Geological Survey of Arkansas into three divisions, as follows:[a]

Coal-bearing rocks in Arkansas, according to the Geological Survey of Arkansas.

	Feet.
Western and upper division, including Huntington and other coal beds..	3,000±
Intermediate barren division, a succession of shale and sandstone beds which, though variable in magnitude, have an aggregate thickness not less than.	500
Eastern and lower division, including the coal beds in Coal Hill, Spadra, Ouita, and Shinn basins.....	250±

These divisions were not clearly defined, and the rocks below the coal-bearing formations were not discussed. The correlation of these groups into which the coal measures of Arkansas and Indian Territory have been subdivided by various surveys is set forth in the following table:

Stratigraphic relations in the Arkansas-Indian Territory coal field as exhibited in reports already published and in the present report.

Arkansas Survey preliminary report.	Indian Territory-southwestern Arkansas coal fields, J. A. Taff.[b]	Winslow folio, U. S. Geol. Survey, A. H. Purdue.	Arkansas coal field Collier and others (this report).
	Boggy shale, 3,000 feet.		
	Savanna sandstone, 1,200–1,500 feet.		Savanna formation.
	McAlester shale, 2,000–2,500 feet.		Paris shale, 700 feet.
			Fort Smith formation, 400 feet.
Upper or western coal-bearing division, 3,000 feet.			Spadra shale, 350–500 feet.
Intermediate barren division, 500± feet.	Hartshorne sandstone, 100–200 feet	Winslow formation, 1,500 feet.	Hartshorne sandstone, 100–300 feet.
Lower or eastern coal-bearing division, 250+ feet.	Atoka shale, 2,000–7,000 feet.		Atoka formation, 1,500–5,000 feet.
		Lower Carboniferous or Mississippian rocks.	

In the course of the present investigation the formations mapped in the Indian Territory coal field were traced from the Arkansas-Indian Territory boundary eastward into Arkansas with a considerable degree of success. The Hartshorne sandstone had already been located on the boundary line at three localities, Bonanza, Hackett, and the south slope of Poteau Mountain,[c] from which points its outcrop was traced without a single break in continuity eastward along

nes of coal beds.	Section.	Formation and thickness in feet.	General character of formations.
		Savanna. 100–1,000.	In Indian Territory this formation comprises three sandstone members with interbedded shales; only the lower part is present in Arkansas.
is.....		Paris. 600–700.	Sandy shale with thin beds of shaly sandstone. Paris coal bed about 400 feet from top.
rleston.....		Fort Smith. 375–425.	Sandstone interbedded with shale. Formation yields building stones, flagstones, and brick shale. Coal beds are usually too thin for mining.
per Hartshorne.		Spadra. 400–500.	Shale with lenses of sandstone. Hartshorne coal at base is most important bed in Arkansas.
rtshorne.....		Hartshorne. 100–300.	Typically massive sandstone, but varying to sandy shale in some places.
		Atoka. 1,500–5,000+.	Mainly shale, but sandstone lenses comprise from one-tenth to one-third of the section. Coal beds in the eastern part of the field may be thick enough in some places for mining.

GENERALIZED COLUMNAR SECTION OF THE COAL-BEARING ROCKS OF ARKANSAS.

continuity along the north side of the field is broken at a number of places and its recognition here depended on stratigraphic evidences other than continuous exposures. Nevertheless, the formation has been identified with a considerable degree of certainty in several disconnected areas within the field, along its northern border, and its character over the whole field is fairly well known.

The McAlester shale formation extends from Indian Territory into Arkansas, where it comprises the whole of the coal-bearing series. Some of the lower beds of the Savanna formation are probably also present in Arkansas, though it has not been possible to identify them with certainty at any point.

The McAlester formation as represented in Arkansas contains a group of sandstone beds near its middle portion. These were traced over a large part of the field and their stratigraphic position determined. On the geologic map herewith presented this group of sandstones is differentiated from the more shaly parts of the McAlester formation, subdividing it into three members called Spadra shale, Fort Smith formation, and Paris shale, which can be recognized throughout the field. The economic value of such a subdivision will not fail to be appreciated, since the boundaries of the formations mapped will serve as contour lines indicating approximately the depth of the Hartshorne coal horizon.

The rocks that underlie the Hartshorne formation in Arkansas have received little attention. They comprise a succession of shale and sandstone known to exceed 5,000 feet in thickness near the southern edge, but they are probably not more than 2,000 feet thick near the northern boundary of the field. In the southern part this group consists mainly of shale, but along the northern boundary the sandstone beds are much more important, making up possibly one-third of the section.

The subdivisions of the coal-bearing rocks of Arkansas, as differentiated and described in this report, are briefly tabulated as follows:

Coal-bearing rocks of Arkansas.

	Feet.
Savanna formation	200+
McAlester group:	
Paris shale	600
Fort Smith formation	400–500
Spadra shale	400–500
Hartshorne sandstone	50–400
Atoka formation	1,500–5,000

The general relations and lithologic features of these subdivisions are set forth in Pl. I.

ATOKA FORMATION.

The rocks belonging to this formation outcrop in the surrounding regions both north and south of the coal field and also occur in a number of limited areas included in it, the best known of which is

that in the Backbone Ridge between Hackett and Bonanza. They have also been penetrated at a number of places by deep drill holes through the overlying rocks. South of the coal field the rocks of the Atoka formation are tilted at high angles, and extensive sections of them can be measured, but on the north their attitude is more commonly horizontal and only the upper members are exposed. In the latter region these rocks correspond in stratigraphic position with the Winslow formation as mapped by Purdue in the Winslow quadrangle.

In general the Atoka formation consists of shales with occasional sandstone beds, which in the northern part make up possibly as much as one-third of the section, while farther south the proportion of sandstone is very much less. The thickness of these rocks north

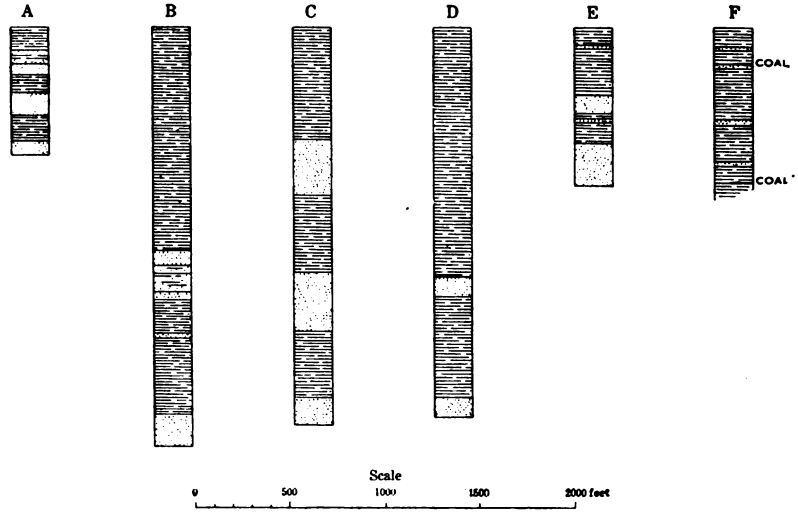

FIG. 3.—Graphic sections of the upper part of the Atoka formation. A, north of Van Buren; B, Massard Prairie; C, Jenny Lind; D, south of Huntington; E, Denning; F, Dardanelle.

of the coal field has been estimated to be approximately 1,500 feet, but near Mansfield, in the southern part, over 3,000 feet are exposed and 2,000 more have been pierced by deep drilling. The shales vary from fine-grained, black or blue clay stones to gray argillaceous sandstones. Generally the more sandy beds are harder, and where they outcrop form ridges and other prominent topographic features. Although the rocks of this formation have not been investigated in close detail, the observations made and the records of deep wells drilled through them show that the sandstone members are lenticular bodies, having no general distribution over the field. In many

The variation in the succession of sandstones and shales making up the Atoka formation is graphically shown in the sections presented in fig. 3. Lentils of coal, most of which are too thin to be of value, occur at rather infrequent intervals. Such coals seem to be more common in the eastern part of the field than in the western, a condition which may be partly due to the better exposures in the eastern portion. Some of these beds have been mined locally, and attempts to exploit them at various places are still in progress, though nearly all the old openings are deserted.

Though fossil plants have been found associated with the coal beds at several points, no satisfactory collections of them have been made. Several collections of marine invertebrates, which are described under the heading "Paleontology" (pp. 31–35), were obtained from some of the upper beds near Van Buren.

These rocks have been prospected successfully at a number of places in the search for oil and gas. The natural gas used at Fort Smith is obtained from sandstone lenses 1,000 to 2,000 feet below the top of the formation, while that at Mansfield and Huntington comes from sands 4,000 feet stratigraphically below the top of the formation.

HARTSHORNE SANDSTONE.

The Hartshorne sandstone is economically the most important formation, outside of the coal beds themselves, to be described in the district, since its outcrop indicates the position of the most important coal horizon. It had been identified at Bonanza and Hackett, on the Arkansas-Indian Territory boundary, previous to the beginning of this investigation. From these points its outcrop has been traced eastward around the end of the Backbone Ridge anticline, and its identity with the sandstone of Devils Backbone Ridge, which underlies the coal bed at Montreal and Burma, is established by drill holes at short intervals across the Greenwood syncline. From the latter localities it has been traced by continuous exposure eastward through the whole length of the coal field. The outcrop of this sandstone marks the northern boundary of the coal field through most of its length, and the rock also occurs in a number of isolated areas within the coal district, as is shown on the accompanying geologic map.

This formation is essentially sandstone, but does not differ materially from many of the heavier sandstone beds contained in the underlying rocks, except for its more general distribution over the field. Usually it can be identified by the presence of one or more coal beds in the rocks immediately above it. In its typical exposures it consists of massive, irregularly bedded rock, at most places more than 100 feet thick, and where the dips are moderately high it almost

invariably makes a prominent ridge. Locally, however, the sandstone becomes shaly and in places it may consist of two comparatively thin sandstone members with sandy shale between, or it may thin out to a single sandstone less than 20 feet thick. For example, at Burma the Hartshorne is a heavy sandstone over 50 feet thick, above which there is a coal bed overlain by another sandstone of nearly equal thickness, the two beds together forming the Devils Backbone Ridge. On the north side of the Huntington basin, a few miles east of Burma, the Hartshorne formation contains only 15 feet of hard rock, and the sandstone which overlies it at Burma is absent. Though the rocks stand at a comparatively high angle, the northern rim of the basin is not marked by any noticeable ridge. A similar variation in the Hartshorne sandstone occurs near Russellville, on the north side of Shinn basin, where it consists only of sandy shales, which do not appear in the topography, although they dip at a rather high angle. South of Shinn basin, only half a mile away, the Hartshorne formation is represented by a 75-foot bed of hard sandstone,

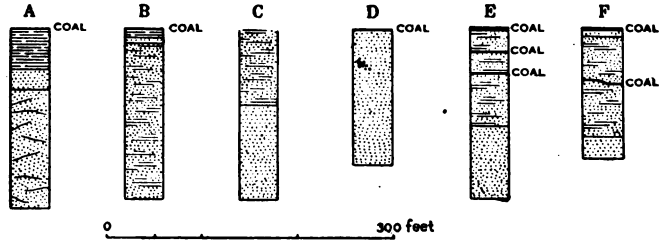

FIG. 4.—Graphic sections of the Hartshorne formation. A, Jenny Lind; B, Hackett; C, Chismville; D, Denning; E, Shinn basin; F, Ouita basin.

which makes a prominent ridge. Where exposed on Massard Prairie, near Fort Smith, the Hartshorne sandstone is only 10 to 12 feet thick, while farther northeast it is still thinner, and near Arkansas River it consists only of disconnected lenses of hard sandstone in a black shale. These variations in the sandstone and some detail as to its composition are shown in fig. 4. The peculiarities of bedding are illustrated in Pl. II, *B*, and Pl. III, *A* and *B*.

The coal bed which occurs in the rocks immediately above the sandstone and is called the Hartshorne coal has been traced westward into Indian Territory for 150 miles and to the eastern limits of the field in Arkansas. It is not probable that any one coal bed is continuous through this whole distance, but that there are several beds within a few feet of one another vertically, some one of which is nearly always present. In a large part of the Indian Territory field there are two coal beds, called the lower and upper Hartshorne coals, with

A. VIEW OF POTATO HILL.

A cone-shaped butte formed by the erosion of horizontally bedded shales in a synclinal basin.

B. EXPOSURE OF HARTSHORNE SANDSTONE SOUTH OF SHINN BASIN.

Showing one of many phases of the Hartshorne sandstone.

are present in the southwestern part of the Arkansas field, near Montreal and Burma, but in other parts of the field only one of them, probably the lower, has been found.

This formation is barren of fossil remains, neither plants nor invertebrates having been found in it, with the exception, possibly, of a few fragments of *Stigmaria*. At many places, however, lumps of mud are included in the sand, which on weathering out leave cavities resembling those left by fossil invertebrates. This sandstone is not known to have yielded natural gas or oil, though it has yielded good flows of artesian water at several places, where drill holes have penetrated it.

SPADRA[a] SHALE.

The Spadra shale, named from the town of Spadra, in Johnson County, stands next in economic importance to the Hartshorne sandstone, which it overlies, since at its base it contains the most important coal beds. It is well known to coal operators and miners in Arkansas, being represented at nearly all of the mining towns. This formation is distributed over the whole of the workable coal field and its outcrop is eroded in many places to form broad valleys, many of which were indicated on the older maps of the region, where they are described as prairies. The residual soil it produces seems to be comparatively poor and the vegetation on it is relatively scant. In general this formation consists of fine-grained blue, black, or gray clay shales, but locally it contains sandy beds and in some places thin sandstone lenses, none of which extend for very great distances. The most prominent sandstone lens observed is one near Burma, in Sebastian County, which forms the parting between the upper and lower Hartshorne coals. This sandstone which has a maximum thickness of 60 feet, is irregularly cross-bedded, contains mud lumps, and resembles the Hartshorne sandstone in hardness, but it thins out and disappears within a few miles in each direction from its thickest part. At many other places sandstones having a thickness as great as 20 feet occur, but these are of irregular distribution and of no great extent. The thickness of the formation, which is well known not only from surface observations but from many drill holes that have penetrated it, varies from 350 to 500 feet. These differences may be due to either one of two causes—either the shale beds themselves vary in thickness in different parts of the field, or, as seems more likely, some of the sandy members at the base of the overlying formation thin out locally and disappear. The formation appears to be abnormally thin where it outcrops along the southern edge of the central part of the field, in some sections not exceeding 200 feet in thickness.

[a] The name Spadra stage, applied to the time this formation was deposited, was published by John J. Stevenson in 1895. Trans. New York Acad. Sci., vol. 15, 1896, p. 51.

This condition is attributed tentatively to the rather intense local folding of the beds, it being inferred that the softer shale has been either squeezed or sheared. A number of characteristic sections of the Spadra shale taken from various parts of the field are shown in fig. 5.

Fossil plants and occasionally invertebrate animal remains occur in the shale overlying the Hartshorne coal bed and representative collections were made from it at several localities. These collections have been examined by David White and G. H. Girty, whose reports on them are given in full on pages 24–35 of this paper. Although the Spadra shale has a flora that is to a certain extent characteristic of it, many of the species represented have also been collected from beds much higher in the stratigraphic column and therefore

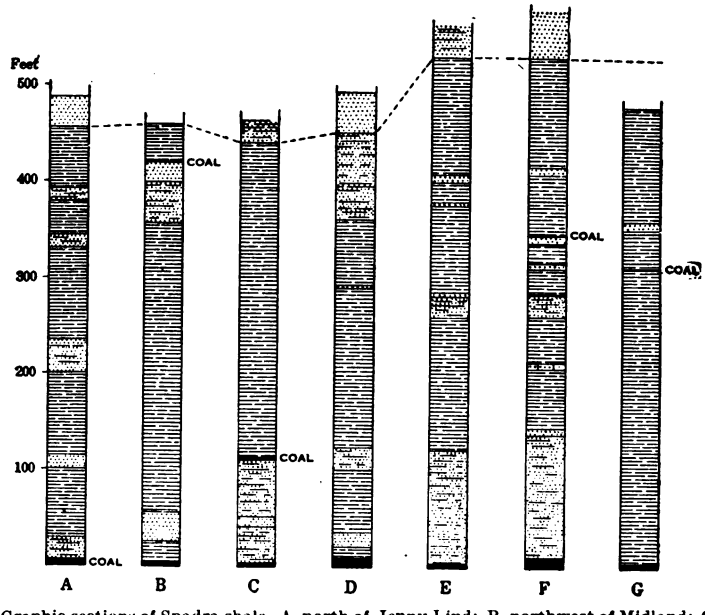

FIG. 5.—Graphic sections of Spadra shale. A, north of Jenny Lind; B, northwest of Midland; C, southwest of Hartford; D, east of Greenwood; E, north of Prairie View; F, east of Spadra; G, Shinn basin.

such collections of fossils are of little value in correlating formations in different parts of the field. The various fossils collected from these coal measures indicate that they were deposited very rapidly as compared with those of eastern coal fields.

These shales have been used to a limited extent near Fort Smith for brickmaking, but otherwise they have no economic value except for the coal beds.

FORT SMITH FORMATION.

A. EXPOSURE OF THE HARTSHORNE SANDSTONE NEAR PINEY CREEK EAST OF KNOXVILLE.

Showing the false bedding characteristic of this formation in some places.

B. APPARENT UNCONFORMITY IN HARTSHORNE SANDSTONE, DUE TO FALSE BEDDING.

Illustrating another phase of irregularity in the bedding.

is shown by the geologic map. The formation consists of a group of thin and to some extent variable sandstone beds, with interbedded shale members, and is named from the city of Fort Smith, in Sebastian County. In general the sandstones are ripple-marked, the markings presenting considerable variety in both size and form, and many of the individual beds are characterized by a wavy cleavage approximately parallel to the minor undulations of the bedding planes. False bedding or cross-bedding, which is a common feature of the Hartshorne sandstone, is unusual in the Fort Smith formation, though it is not entirely absent. The shales are nearly everywhere more or less arenaceous and the resulting soils are reddish or yellowish and sandy. At Fort Smith the lower sandstone member is extensively quarried and has yielded most of the flagstones with which the city is paved. The formation here consists of a lower member, 20 to 50 feet thick, of hard, flaggy, ripple-marked sandstone, above which there are 40 to 60 feet of shale overlain by hard sandstone and shaly sandstone nearly 100 feet thick. Near the upper part of the formation there is a coal bed which was formerly mined and which appears on the map prepared by the Geological Survey of Arkansas as the Hermann and Wilson pits.

One of the best exposures of the formation is found in the region east of Greenwood. Here the lower sandstone member, which is probably identical with that at Fort Smith, forms a prominent ridge constituting the rim of a synclinal basin in which the town of Bloomer is situated. Above this sandstone is nearly 200 feet of shale, which is overlain by a series of hard, shaly sandstones forming Grand and Coal ridges, aggregating about 200 feet in thickness. There are two coal beds in the upper part of the formation here, the lower one of which has been opened in a number of pits and varies in thickness from 18 inches to 3 feet. The lower sandstone member of the formation is also typically exposed in Tennessee Ridge, which forms the northern wall of Long Prairie at Jenny Lind, and from this occurrence it has been locally called the "Tennessee sandstone."

The individual beds comprising this formation in the eastern end of the field have not been definitely correlated with those in the western part. In the vicinity of Spadra it is probable that the lower sandstone member corresponding to the sandstone of Tennessee Ridge is either absent or so shaly that it can not be identified, while a bed a little higher stratigraphically has taken its place as the first distinct sandstone above the Spadra shale. This sandstone forms the escarpment at the front of Big Danger Hill south of Clarksville and is about 60 feet thick.

The upper part of the Fort Smith formation is probably not represented in this part of the field. In general the formation here is much more sandy than the Spadra shale. It contains several small, unim-

portant coal beds, which have not been examined in detail nor correlated with those in the western part of the field.

The average thickness of the Fort Smith formation is estimated at 400 feet. Detailed sections exposed at various localities are shown in fig. 6.

Fossil plants occur in association with some of the coal beds, and several collections made from them have been examined by David White, who refers to them as the Coal Ridge flora. This flora seems to differ only slightly from that of the Hartshorne horizon, though it can be distinguished.

The sandstones of this formation have been quarried for paving and building stones at several places. At Fort Smith the lower sandstone member has been extensively worked, yielding flagstones from which most of the city's sidewalks are made. These flags are from 3 to 6 inches thick and, though hard and durable, their surfaces are invariably ripple-marked and rough.

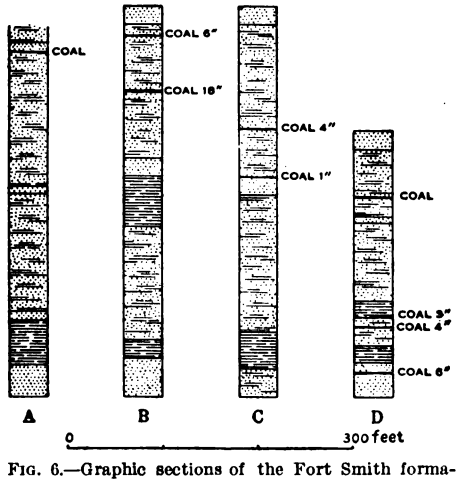

FIG. 6.—Graphic sections of the Fort Smith formation. A, section at Fort Smith; B, section north of Auburn; C, section north of Prairie View; D, section northeast of Lamar.

At Cabin Creek station (Lamar post-office), in the eastern part of the field, a more massive bed, somewhat higher in the formation, is quarried, yielding a good stone, which is shipped to more distant markets, some of it going as far as New Orleans. A view of this quarry showing the characteristic bedding and joint planes of the rock is shown in Pl. IV, *A*.

The rock quarried at Spielerville and used in the construction of the Subiaco College buildings is probably taken from a sandstone bed in this formation, and most of the brick factories near Fort Smith have obtained their material from shale beds that are included in it.

PARIS SHALE.

The Paris shale, which takes its name from the town of Paris in Logan County, covers two large areas, essentially broad synclinal basins, in the central part of the field. One syncline near Paris is surmounted by Short and Little Short mountains. The other, south of Charleston, surrounds the base of Potato Hill. It also occurs in

A. QUARRY AT CABIN CREEK.

Illustrating the system of jointing which prevails over the Arkansas coal field.

B. SANDSTONE OF ATOKA OR WINSLOW FORMATION, ONE-HALF MILE WEST OF OZARK.

Illustrating a type of irregular bedding characteristic of certain sandstones below the coal-bearing rocks.

the Spadra shale, but is almost invariably more sandy and contains a greater number of sandstone lenses, whose distribution has not been determined in close detail. The sandstone lenses, however, are generally softer than those included in the Spadra formation and do not contrast so strongly in topographic expression with the including shales.

The total thickness is estimated from the dips of the outcrops to be between 600 and 700 feet. Its upper limit is marked in the Paris basin by the base of the heavy sandstone which caps Short and Little Short mountains. Detailed sections of the formation as exposed at Short Mountain and Potato Hill are given in fig. 7.

The Paris coal bed occurs from 200 to 300 feet above the base of the Paris formation and about 400 feet below its upper limit. A large collection of fossil plants and invertebrate animal remains from the sandy shale in the roof of this bed was submitted to David White and G. H. Girty, whose reports are given on pages 24–35.

The flora resembles that from the Coal Ridge horizon but is provisionally correlated with that from above the McAlester coal bed of Indian Territory, which occupies a similar relation to the Hartshorne coal horizon. Except for its coal this formation yields no minerals of economic value. Its sandstones are usually too soft for building purposes and its shales have not been utilized in brick-making.

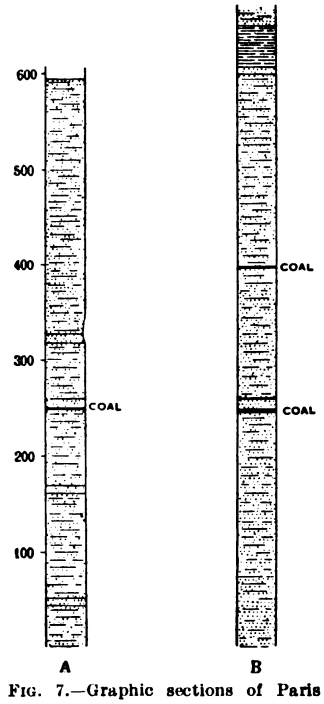

FIG. 7.—Graphic sections of Paris shale. A, Potato Hill; B, Short Mountain.

SAVANNA FORMATION.

The Savanna sandstone occurs in only a few small areas in Arkansas, where it caps several isolated mountains and buttes. This formation as represented in Indian Territory is described as a group of three more or less massive and thick sandstone beds with intervening shaly members, the total thickness being approximately 1,000 feet. In Arkansas only the lower part of this formation is present. Short and Little Short mountains near Paris are regarded as type localities. At Short Mountain the Savanna is represented by a massive sandstone nearly 100 feet thick, which lies as a flat cap forming a mesa on the summit. The conditions are similar at Little Short Mountain, which is capped by the same bed. The sandstone beds at the top of Magazine Mountain, which are provisionally correlated with the Savanna, have a total thickness of several hundred feet and contain some conglomeratic beds with quartz and chert pebbles as large as one-eighth

of an inch in diameter. This formation is also represented in Sugarloaf and Poteau mountains, where the detail of its beds is so obscured by talus that it has not been mapped closely.

In general the Savanna formation has little economic value in Arkansas. No coal beds have yet been discovered in it, though such beds may be present in Poteau and Sugarloaf mountains. The sandstone beds in Short Mountain are massive and could probably be used for building stones where large blocks are required.

SURFICIAL DEPOSITS.

Many of the lowland areas within the coal field are mantled over with deposits of silt, sand, or gravel that were laid down on surfaces formed by the erosion of the coal-bearing rocks. As noted above, there are remnants of several old plain surfaces representing different stages of erosional development in Arkansas Valley. The most recent stage is represented by the flood plains of Arkansas River and its tributary streams. A somewhat earlier stage is indicated by the general lowland area above the flood-plain level, while a much earlier stage is represented by the level-topped ridges and hills surmounting this lowland. The difference in elevation between the highest and lowest plain is about 400 feet. Deposits of gravel and sand are of wide distribution on the surfaces representing the two later stages, where they have received casual attention. These deposits are evidently distinct in age, though it is often hard to differentiate them in the field. On the accompanying geologic map, Pl. VI, they are indicated only in those areas where they are so thick as to conceal effectually the underlying strata and render it impossible to discover the geologic relations of the coal-bearing rocks. The recent deposits are not differentiated from the earlier ones.

The recent deposits, which are most extensively represented in the flood plains of Arkansas River, are composed generally of rather fine silt and sand, gravels and coarse pebbles being of rare occurrence. Their surfaces are marked by oxbow lakes and other ordinary flood-plain features. They comprise much of the richest agricultural land in this district, though they are subject to overflow at long intervals.

The earlier of these deposits, where identified, usually consist of sand and moderately fine gravel containing many pebbles of chert. Generally they are indicated by waterworn pebbles strewn over the surface, but in good exposures, such as banks of streams and road cuts, they are stratified and are often 20 feet or more in thickness. Such deposits are invariably more or less eroded and show none of the original surface features of flood-plain deposits.

Flat surfaces of this lowland plain of the earlier period are in many [redacted] feet in height

by 50 feet in diameter, whose origin has been the subject of much speculation.

The mounds generally occur in localities of poor drainage, and in Arkansas are especially common over clay soils formed by the disintegration of the shale beds, though not confined to them exclusively. The general distribution of the mounds, not only here but in other States, disproves the theory very common in Arkansas that they are formed by escaping gases and are therefore good indications of gas, oil, or coal. Of the other hypotheses regarding them the one that they were built by burrowing animals of some kind now extinct seems to the writer most probable. At any rate they were produced under conditions not now existing in Arkansas Valley, and they can safely be taken as an infallible diagnostic feature of the older erosion levels and surficial deposits.

PALEONTOLOGY.

CONCLUSIONS DRAWN FROM STUDIES OF THE FOSSILS.

Fossils representing the plant and animal life of the coal period are not generally distributed through the Arkansas coal measures, though they are abundant in certain beds at a few horizons where a number of fairly representative collections have been made. The fossil plants collected for the Arkansas Geological Survey were examined and reported on in a paper by H. L. Fairchild and David White which, like several other reports of that organization, has unfortunately never been published. Several collections of invertebrate fossils from the coal field were identified, described, and illustrated by Prof. J. P. Smith,[a] formerly of the Arkansas Survey, and the correlation of the coal measures with Carboniferous rocks of other regions was adequately discussed by him in several papers published by private organizations, which are available for reference in any good geological library.

Since the discontinuance of the Arkansas Geological Survey, many collections, of both plants and marine invertebrates, from corresponding rocks in Indian Territory, have been examined by David White[b] and G. H. Girty,[c] and are described in the publications of the United States Geological Survey.

The collections made in the course of the present investigations in Arkansas have been examined by Messrs. White and Girty, whose reports on them are presented on pages 24–35. In general these

[a] Smith, James Perrin, The Arkansas coal measures in their relation to the Pacific Carboniferous province: Jour. Geol., vol. 2, 1894, pp. 187–203; Marine fossils from the coal measures of Arkansas: Proc. Am. Philos. Soc., vol. 35, 1896, pp. 214–285, Pls. XVI–XXIV.

[b] White, David, Report on fossil plants from the McAlester coal field, Indian Territory, collected by Messrs. Taff and Richardson in 1897: Nineteenth Ann. Rept. U. S. Geol. Survey, pt. 3, 1899, pp. 457–534, Pls. LXVII–LXXVIII.

[c] Girty, G. H., Preliminary report on Paleozoic invertebrate fossils from the region of the McAlester coal field, Indian Territory: Nineteenth Ann. Rept. U. S. Geol. Survey, pt. 3, 1899, pp. 539–593, Pls. LXIX–LXXII.

fossils afford little ground for the stratigraphic correlation of individual beds and horizons, though they determine in a general way the age or time relations of the coals of Arkansas as compared with those of other States. Two conclusions of general interest may be drawn from a study of the fossils:

1. The Arkansas coal measures correspond to a lower part of the Pennsylvanian series of the Carboniferous. They are somewhat older than the coals of Kansas and younger than those of Alabama.

2. The great thickness of coal-bearing sediments of Arkansas was deposited in a relatively short time as compared with that required for the deposition of the corresponding rocks in Pennsylvania and West Virginia. The rapid sedimentation may account for the great stratigraphic intervals between the several coal beds and for much of the irregularity in the bedding.

REPORT ON FOSSIL PLANTS FROM THE COAL MEASURES OF ARKANSAS.

By David White.

EXTENT AND CHARACTER OF THE COLLECTIONS.

The fossil plants collected by Mr. Arthur J. Collier and assistants from the Arkansas coal fields have been examined very closely, and the identifications listed below are, for the most part, final, though a portion are subject to revision and must be regarded as preliminary.

A fact that becomes at once apparent on inspecting the plants collected by Mr. Collier is the remarkable lack of strong or characteristic differences between the ferns of the upper and lower horizons represented in the collections. The entire period covered by the approximately 1,200 feet represented therein is not greater than that embraced in less than 200 feet of a corresponding portion of the Allegheny formation in the Appalachian trough. The Coal Hill coal appears paleobotanically at the level of the Brookville coal in the Allegheny formation. The Coal Ridge flora, on the other hand, is perhaps not younger than the lower Kittanning coal of the Allegheny formation, while the Paris coal furnishes no evidence of a date later than upper Kittanning. The entire interval falls within the limits of the Cherokee formation in Kansas, and of the basal coal measures in Henry County, Mo., including beds probably not over 150 feet above the Mississippian surface.

In view of this great dilation of the basal Allegheny and consequent extraordinarily rapid sedimentation it is not surprising that very little distinct change is to be observed from one point to another, or that the horizons can with difficulty be detected paleobotanically

appear if the collections were more complete. On the contrary, where the collections are from very different horizons it is safe to infer that larger collections would show greater paleontological differences.

In listing and discussing the collections I shall treat them in several natural groups, which are assumed to represent as many horizons or phases of the floras. A small number of lots will be omitted on account of the absolute insufficiency of the material.

FLORA OF THE COAL HILL COAL.

The collections which I regard as probably belonging to this horizon represent a basal Alleghenian flora in which a few traces of Pottsville development are still to be seen, as illustrated particularly in *Mariopteris* and *Neuropteris*.

Fossil plants (lot D) from NE. ¼ SE. ¼ sec. 29, T. 9 N., R. 25 W., below Coal Hill coal.

Annularia sphenophylloides.
Sphenophyllum emarginatum.
Sphenophyllum suspectum.
Pseudopecopteris macilenta.
Cheilanthites trifoliolatus.
Cheilanthites squamosus.
Mariopteris occidentalis.
Mariopteris nervosa.
Pecopteris vestita.
Pecopteris (Scolecopteris) cf. miltoni.
Alethopteris serlii (lax).
Neuropteris capitata.
Neuropteris missouriensis.
Neuropteris scheuchzeri.
Neuropteris rogersii.
Linopteris squarrosa?.
Dolerophyllum angularis.
Cardiocarpon bicuspidatum?.
Rhabdocarpos sulcatus.

Fossil plants (lot E) from NE. ¼ sec. 24, T. 9 N., R. 26 W., west of Coal Hill.

Annularia sphenophylloides.
Sphenophyllum emarginatum var. minor.
Sphenophyllum suspectum.
Cheilanthites squamosus.
Mariopteris occidentalis.
Mariopteris nervosa.
Pecopteris plumosa.
Pecopteris vestita?.
Pecopteris sp., indet. fragment.
Alethopteris serlii.
Neuropteris scheuchzeri.
Wing of cockroach.

Fossil plants (lot B) from Southern Anthracite Coal Company's shaft No. 1, at Russellville, Ark., in sec. 16, T. 7 N., R. 21 W.

Annularia sphenophylloides.
Calamostachys sp.
Sphenophyllum fasciculatum.
Cheilanthites squamosus.
Mariopteris occidentalis.
Pecopteris vestita?.
Alethopteris serlii.
Aphlebia cf. hirsuta.
Neuropteris missouriensis.
Neuropteris capitata.
Neuropteris scheuchzeri.
Sigillariostrobus quadrangularis.
Wing of cockroach.

Fossil plants (lot C) from Humphrey's shaft, north of Russellville, Ark., in sec. 28, T. 8 N., R. 21 W.

Annularia radiata.
Annularia sphenophylloides.
Sphenophyllum emarginatum var. minor.
Mariopteris latifolia?.
Neuropteris cf. tenuifolia.
Neuropteris harrisii?.
Neuropteris missouriensis.
Neuropteris scheuchzeri.
Wing of cockroach.

Fossil plants (lot M) from Woodson's strip pit, one-fourth mile north of Burma station on the Frisco Railway, in sec. 19, T. 5 N., R. 31 W.

Annularia sphenophylloides.
Sphenophyllum emarginatum.
Alethopteris serlii.
Neuropteris harrisii.
Neuropteris missouriensis.
Neuropteris ovata.
Neuropteris cf. tenuifolia.

Fossil plants (lot C) from old No. 1 mine at Denning, Ark., in SE. ¼ sec. 22, T. 9 N., R. 26 W.

Annularia stellata.
Annularia sphenophylloides.
Phyllotheca? sp.
Sphenophyllum emarginatum.
Sphenophyllum majus.
Sphenophyllum suspectum.
Cheilanthites squamosus.
Mariopteris incompleta.
Mariopteris muricata.
Mariopteris occidentalis.
Mariopteris nervosa.
Sphenopteris sp.
Pecopteris emarginata.
Pecopteris cf. robusta.
Pecopteris vestita.
Pecopteris clintoni?.
Alethopteris serlii (lax).
Neuropteris capitata.
Neuropteris missouriensis.
Neuropteris scheuchzeri.
Lepidophloios scoticus?.
Sigillariostrobus quadrangularis.

The four lots first listed above appear to represent an identical flora. The plants in lot C show so close a relation to the flora of the Hartshorne coal of Indian Territory as in my judgment to justify the belief that it belongs to the same horizon—a conclusion sustained also by lot M.

Fossil plants (lot I) from NE. ¼ SW. ¼ sec. 29, T. 9 N., R. 25 W., southwest of Coal Hill.

Sphenophyllum emarginatum.
Mariopteris occidentalis.
Mariopteris nervosa.
Alethopteris serlii.
Neuropteris missouriensis?.
Rhabdocarpos sulcatus.
Rhabdocarpos ? sp.

The very small collection listed above is placed here on account only of its lack of difference from the preceding. In itself it is insufficient for paleontological correlation.

Fossil plants (lot K) from mine No. 4 Western Coal Company, in NW. ¼ SE. ¼, sec. 19, T. 9 N., R. 25 W., west of Coal Hill.

Neuropteris missouriensis.
Neuropteris scheuchzeri.
Lepidophyllum missouriense.
Asolanus camptotænia.
Cardiocarpon cf. circulare

This very meager collection differs from the other floras by the addition of two lepidophytes and by the relatively small number of ferns. Its inclusion with the Coal Hill flora is based purely on the stratigraphic data furnished by Mr. Collier.

Fossil plants (lot H) from shale 4 feet below Spadra coal in old Allen slope, in NE. ¼ sec 13, T. 9 N., R. 25 W., northwest of Hartman, Ark.

Annularia sphenophylloides.
Eremopteris cf. lincolniana.
Pseudopecopteris macilenta.
Mariopteris sp. cf. sphenopteroides? indet. fragment.
Sphenopteris cf. cristata.
Pecopteris vestita.
Alethopteris serlii.
Neuropteris ovata.
Neuropteris capitata?.
Neuropteris jenneyi.
Linopteris cf. squarrosa; small fragment.

Fossil plants (lot G) from SE. ¼ sec. 24, T. 10 N., R. 25 W., 4 miles north of Hartman, Ark.

Annularia sphenophylloides.
Eremopteris cf. lincolniana.
Pseudopecopteris macilenta.
Sphenopteris (Hawlea) cf. cristata?. Small fragment.
Pecopteris vestita?.
Aphlebia hirsuta.
Alethopteris serlii.
Neuropteris scheuchzeri.
Neuropteris jenneyi.
Linopteris cf. squarrosa.
Sigillariostrobus quadrangularis.

While apparently as old as the Coal Hill flora these two lots are not so far identical with the latter as might be expected. The two lots are very nearly identical in composition and it is possible that their difference from the flora of the Coal Hill coal may be due only to the fact that the fossils come from below the coal rather than from the roof shale.

The interesting feature connected with the Spadra flora is the occurrence of *Pseudopecopteris macilenta, Neuropteris jenneyi,* and *Linopteris squarrosa,* three species originally described from the small outlying basin in the zinc region of southwestern Missouri.

FLORA OF THE COAL RIDGE OR CHARLESTON COAL.

Fossil plants (lot L) from Carter's coal mine, in sec. 17, T. 7 N., R. 28 W., southeast of Charleston, Ark.

Annularia sphenophylloides.
Sphenophyllum emarginatum var. minor.
Sphenophyllum fasciculatum.
Sphenopteris sp. indet. fragment.
Aloiopteris winslovii.
Pecopteris vestita.
Pecopteris miltoni?.
Callipteridium membranaceum.
Neuropteris missouriensis.
Neuropteris scheuchzeri.
Lepidophyllum lanceolatum.
Cordaites (communis?).

Fossil plants (lot Q) from point 50 paces south of iron bridge, one-half mile east of Caulksville, Ark., in sec. 3, T. 7 N., R. 17 W.

Annularia sp.
Sphenophyllum emarginatum.
Sphenophyllum majus.
Eremopteris spinosa.
Neuropteris cf. rarinervis.
Neuropteris cf. missouriensis?.
Neuropteris scheuchzeri.
Linopteris münsteri.
Lepidocystis vesicularis.

Fossil plants (lot N) from sec. 3, south center, south of bridge east of Caulksville, Ark., in sec. 3, T. 7 N., R. 27 W.

Annularia sphenophylloides.
Sphenopteris cf. illinoisensis.
Renaultia sp. indet.
Pecopteris villosa?.
Pecopteris oreopteridia.
Pecopteris candolliana.
Neuropteris missouriensis.
Linopteris münsteri.
Lepidophyllum ovatifolium?.

Fossil plants (lot P) from shale over Coal Ridge or Charleston coal in northeast corner sec. 6, T. 7 N., R. 28 W., north of Charleston, Ark.

Asterophyllites equisetiformis.
Sphenopteris ? sp. indet.
Pecopteris vestita.
Neuropteris scheuchzeri.
Linopteris münsteri.

The plants contained in lots L, Q, and N belong to a flora which, though very closely allied to that of the Coal Hill coal, appears, nevertheless, to differ from the latter by the absence of some of the earlier forms related to *Cheilanthites*, *Mariopteris*, and *Neuropteris*. The flora is fairly homogeneous, though not rich. It is characterized by the presence of a considerable number of species which were not collected from the Coal Hill coal and which point to an approximate contemporaneity with the lower coal in Henry County, Mo. It is doubtful whether the flora here represented is younger than the Lower or Middle Kittanning, though it is possible that more complete collections will prove it to be young as the Upper Kittanning. Strictly speaking, this flora is perhaps as high as any that is represented in the collections. The five species of lot P are tentatively placed in the same group with L and Q, on account of the identity of the *Linopteris münsteri*. The flora of lot P itself is too small for correlative value.

THE PARIS FLORA.

Fossil plants (lot O) from coal seams of the Paris Coal Company, in sec. 10, T. 7 N., R. 26 W., one-half mile west of Paris, Ark.

Calamites suckowii.
Cheilanthites trifoliolatus.
Linopteris münsteri (abundant).
Lepidophyllum lanceolatum.
Lepidostrobus sp. (small).
Sigillaria discophora.
Androstachys? sp. indet.

This flora, which is possibly the youngest represented in the collections, appears to be closely joined to the preceding by the very abundant *Linopteris münsteri*. The remaining species are, however, largely unrepresented in the other collections, but their general stratigraphical significance is not such as to permit of regarding the Paris coal as very much later in date than the Coal Ridge coal. I do not regard it as younger than Upper Kittanning.

LOTS OF DOUBTFUL AGE.

Hereunder I list the collections in lots V, W, U, and X, all of which are probably from the same horizon. It would seem that these lots can not be younger than the Coal Ridge flora, while, on the other hand, the number of species which they hold in common with the Coal Hill flora would at first make them seem susceptible of reference

proportion of forms not represented in the collections from Coal Hill coal as to leave some doubt as to the correctness of such a reference. The general indications of some of these extraneous species would seem to preclude considering the material as later, at furthest, than Coal Ridge flora. This is particularly true of lot V, whose connection with the Coal Hill flora is less evident than appears in the case of lot U. I am, on the whole, slightly more disposed to regard them as representing the Coal Hill coal. At the same time the presence of the species whose general status would seem to point to a higher horizon must leave doubt as to whether collections U and V are not, perhaps, as young as the Coal Ridge coal. Lots X and W are listed in connection with lots U and V for the reason only that they are too limited in species to present any differences from the other lots.

Fossil plants (lot V) from NW. ¼ NE. ¼ sec. 23, T. 9 N., R. 27 W., 5 miles west of Altus, Ark.

Calamites sp. indet.
Annularia sphenophylloides.
Sphenophyllum emarginatum.
Sphenophyllum fasciculatum.
Mariopteris sphenopteroides.
Mariopteris nervosa.
Sphenopteris cf. pinnatifida.
Crossotheca ophioglossoides.
Pachypteris gracillima.
Pecopteris vestita.
Neuropteris rarinervis.
Neuropteris missouriensis.
Neuropteris clarksoni?.
Neuropteris ovata.
Neuropteris scheuchzeri.
Odontopteris bradleyi?.
Lepidodendron sp., indet. twig.
Lepidophyllum oblongifolium.

Fossil plants (lot W) from SW. ¼ sec. 17, T. 9 R. 26 W., N. 2, miles west of Altus, Ark.

Calamites ramosus.
Annularia sphenophylloides.
Mariopteris nervosa.
Pecopteris villosa?. Fragments.
Wing of cockroach.

Fossil plants (lot U) from near Central Coal and Coke Company's mine at Hartford, in sec. 15, T. 4 N., R. 32 W.

Annularia sphenophylloides.
Sphenophyllum emarginatum var. minor.
Sphenophyllum cf. majus.
Cheilanthites squamosus.
Mariopteris occidentalis.
Mariopteris incompleta.
Mariopteris sphenopteroides.
Aloiopteris winslovii.
Pecopteris vestita.
Pecopteris candolliana.
Pecopteris dentata.
Pecopteris jenneyi?.
Alethopteris serlii var missouriensis.
Neuropteris ovata.
Neuropteris scheuchzeri.

Fossil plants (lot X) from sec. 21, T. 10 N., R. 29 W., 2 miles west of Pleasant Hill, on old wire road.

Sphenopteris sp.
Alethopteris serlii.
Neuropteris ovata.
Neuropteris scheuchzeri.

THE VAN BUREN FLORA.

Fossil plants (lot T) from E. ½ SE. ¼ sec. 9, T. 9 N., R. 31 W.

Asterophyllites equisetiformis.
Annularia radiata.
Annularia sphenophylloides.
Sphenophyllum emarginatum.
Sphenophyllum fasciculatum?.
Cheilanthites pluckenetii.
Mariopteris sphenopteroides.
Mariopteris occidentalis.
Mariopteris nervosa.
Crossotheca ophioglossoides.
Sphenopteris cf. mixta.
Pecopteris vestita?.
Pecopteris villosa.
Pecopteris robusta?.
Pecopteris dentata.
Aphlebia hirsuta.
Alethopteris serlii.
Callipteridium inæquale?.
Callipteridium sullivantii.
Neuropteris ovata.
Neuropteris fimbriata.
Neuropteris missouriensis.
Neuropteris scheuchzeri.
Neuropteris clarksoni?.
Cordaites cf. principalis.
Cordaianthus sp.
Cardiocarpon fluitans.
Rhabdocarpus sp.

The review of the species listed above shows at once that the Van Buren flora is most intimately associated with that represented by lots U and V. Its species are identical with the former, but they are, by the generally recognized range of the forms, shown to be of approximately the same age. The Van Buren flora (lot T) is therefore, I believe, to be considered as not younger than the Coal Ridge flora. If it can be shown that lots V and W are as old as Coal Hill it will then be possible to refer lot T to nearly as low an horizon. In this connection it may be of interest to compare lots U and V, as well as T, with two collections made by Mr. Taff from the Poteau and Sallisaw quadrangles of Indian Territory. I am not informed as to the stratigraphical position of the Indian Territory floras, though it is probable that Mr. Taff can readily supply the data; but it is desirable to call attention to the strong evidence of approximate contemporaneity which would appear to exist between these localities and those of the lots last discussed.

Fossil plants (lot 2180) from lower coal at Witteville, Ind. T. (Poteau quadrangle), in NE. ¼ sec. 15, T. 7 N., R. 25 E.

Sphenophyllum emarginatum.
Cheilanthites squamosus.
Mariopteris sphenopteroides.
Mariopteris nervosa.
Mariopteris incompleta.
Mariopteris occidentalis.
Pecopteris vestita.
Neuropteris ovata.
Neuropteris rarinervis.
Neuropteris scheuchzeri.
Odontopteris bradleyi.

Fossil plants (lot 2737) from center of sec. 13, T. 11 N., R. 23 E., Sallisaw (Ind. T.) quadrangle.

Annuluria stellata.
Annularia sphenophylloides.
Sphenophyllum emarginatum.
Sphenophyllum fasciculatum.
Sphenophyllum cf. thoni.
Mariopteris sphenopteroides.
Mariopteris occidentalis.
Mariopteris incompleta.
Sphenopteris pinnatifida.
Sphenopteris mixta.
Sphenopteris cf. cristata?.
Pecopteris vestita?.
Pecopteris robusta?.
Alethopteris ambigua.
Callipteridium sullivantii.
Neuropteris missouriensis.
Neuropteris scheuchzeri.
Linopteris cf. münsteri.
Cordaianthus ovatus.

OTHER COLLECTIONS.

The following localities are represented by collections too small and of too little value to deserve formal consideration from a correlative standpoint, especially in a case like the present, where the expansion of the formations is so great as to show but little floral change in an interval of hundreds of feet.

The first of these lots, from shale just above the quarry at the Catholic church, may belong to the Coal Ridge or Van Buren stage.

Fossil plants (lot S) from sec. 2, T. 7 N., R. 25 W.

Pecopteris vestita.
Pecopteris oreopteridia.
Cardiocarpon branneri.
Cardiocarpon cf. circulare.

Fossil plants (lot J) from sec. 31, T. 7 N., R. 28 W.

Neuropteris missouriensis.

Fossil plants (lot R) from Caulk's pit, east of Caulksville.

Alethopteris serlii.
Linopteris sp.

Fossil plants (lot A) from sec. 16, T. 9 N., R. 22 W.

Neuropteris missouriensis.
Mariopteris occidentalis.
Mariopteris sp.

REPORT ON MARINE CARBONIFEROUS FOSSILS FROM THE COAL FIELDS OF ARKANSAS.

By GEORGE H. GIRTY.

From Sixmile Creek, south of bridge east of Caulksville.

Aviculipecten whitei.

From No. 1 mine of Consolidated Anthracite Coal Company, Spadra, Ark., in sec. 24, T. 9 N., R. 24 W.

Pleurophorus subcostatus?.

No label.

Pleurophorus subcostatus.
Aviculipecten whitei.

From shale on Little Piney Creek above junction with Big Piney.

Euomphalus catilloides?.

From southeast corner sec. 30, T. 7 N., R. 29 W., in sandstone over coal.

Sedgwickia aff. topekensis.

From Sixmile P. O., in sec. 25, T. 8 N., R. 28 W.

Marginifera muricata.
Composita subtilita.
Edmondia aff. E. subtruncata.
Edmondia? sp.
Leda aff. L. nasuta.
Schizodus? sp.
Astartella varica?
Deltopecten aff. D. occidentalis.
Yoldia aff. Y. carbonaria.
Pleurophorus angulatus.
Euphemus nodicarinatus.
Platyceras aff. P. nebraskense.
Nautilus sp.
Orthoceras sp.
Various small undet. gasteropods.

From south side of Spadra Hill, in sec. 29, T. 9 N., R. 24 W.

Crania? sp.
Aviculipecten whitei.
Aviculipecten sp.
Leda? sp.
Pleurophorus oblongus.
Naticopsis nana.
Naticopsis sp.
Pleurotomaria? sp.
Murchisonia? sp.
Ostracoda.

From southwest corner NW. ¼ NE. ¼ sec. 15, T. 9 N., R. 32 W.

Lophophyllum profundum.
Derbya sp. (not crassa).
Productus sp.
Squamularia perplexa.
Spirifer rockymontanus.
Composita subtilita.
Hustedia mormoni.
Aviculipecten sp.
Myalina perniformis.
Astartella vera.
Nucula ventricosa.
Edmondia aff. E. nebraskensis.
Pleurophorus angulatus.
Macrodon obsoletus.
Patellostium? sp.
Orthoceras sp.

From NW. ¼ sec. 15, T. 9 N., R. 32 W., 3 miles northwest of Van Buren.

Crinoidal.
Lophophyllum profundum.
Composita subtilita.
Pleurophorus angulatus.
Soleniscus klipparti.
Pleurotomaria sp.

From road 50 paces south of railroad, in sec. 9, T. 9 N., R. 31 W. (C. D. S).

Crinoidal.
Prismopora sp.
Rhombopora sp.
Derbya sp. (not crassa).
Marginifera muricata.
Composita subtilita.
Diclasma? sp.
Hustedia mormoni.
Macrodon obsoletus.
Deltopecten occidentalis.
Schizodus sp.
Pleurophorus immaturus?
Naticopsis sp.
Pleurotomaria sp.

From vicinity of Plymouth, Ark., on road 100 paces north of town, in NW. ¼ sec. 35 T. 11 N., R. 29 W.

Michelinia sp.
Polypora ? sp.
Fistulipora ? sp.
Derbya sp. (not crassa).
Marginifera ingrata?.
Spirifer rockymontanus.
Composita subtilita.
Hustedia mormoni.
Macrodon obsoletus?.
Leda aff. L. nasuta.
Astartella concentrica Conrad.
Euomphalus catilloides.
Euphemus nodicarinatus.
Nautilus sp.

From W. ½ sec. 35, T. 9 N., R. 28 W., just south of hill.

Marginifera muricata.
Hustedia mormoni
Derbya crassa?.
Composita subtilita.
Avicula acosta?.
Lima retifera?.
Aviculipecten sp. *a*.
Nucula ventricosa.
Leda sp.
Astartella ? sp.
Pteria ohioensis?
Astartella concentrica Conrad.
Pleurotomaria aff. brazoensis.

From one-fourth mile north of Burma station, on Frisco Railroad, Woodson's strip pit, sec. 19, T. 5 N., R. 31 W.

Naiadites elongatus.
Allerisma ? sp.

From near southwest corner of sec. 15, T. 9 N., R. 32 W.

Monilipora sp.
Crinoidal.
Lophophyllum profundum.
Rhombopora sp.
Spirifer sp.
Spirifer rockymontanus.
Spirifer cameratus.
Spiriferina kentuckyensis?.
Composita subtilita.
Dielasma sp.
Deltopecten occidentalis.
Deltopecten aff. D. texanum.
Aviculipecten sp. *a*.
Nucula ventricosa?.
Astartella varica.
Schizodus sp.
Modiola aff. M. subelliptica.
Euomphalus catilloides.
Bellerophon sp.
Loxonema ? sp.
Griffithides sp. *a*.

From mine of Union Coal Company, west of Paris, Ark.

Aviculipecten whitei.
Pleurophorus subcostatus.

From point 3 miles northeast of Fort Smith, Ark., on Wilson farm, in sec. 1, T. 8 N., R. 32 W.

Marginifera ? sp.
Spirifer rockymontanus.
Spiriferina kentuckyensis.
Composita subtilita.

From west end of Poteau Mountain, Indian Territory, 2½ miles northwest of Coaldale, Ark.

Lophophyllum profundum.
Crinoidal fragments.
Stenopora ? sp.
Fistulipora sp.
Rhombopora lepidodendroides.
Septopora biserialis.
Lingulidiscina aff. L. convexa.
Derbya crassa.
Productus cora.
Productus cf. P. nebraskensis.
Marginifera ingrata.
Spirifer rockymontanus.
Spirifer cameratus.
Spiriferina kentuckyensis.
Composita subtilita.
Hustedia mormoni.
Pugnax osagensis.
Dielasma bovidens?.
Aviculipecten aff. A. coxanus.
Aviculipecten germanus.
Lima retifera?.
Pteria ohioensis?.
Pseudomonotis ? sp.
Leda bellistriata.
Myalina aff. M. perniformis.
Solenomya sp.
Schizodus affinis?.
Allerisma terminale?.
Parallelodon tenuistriatus.
Cypricardinia carbonaria.
Astartella concentrica?.
Astartella varica.
Edmondia mortonana?.
Pleurophorus immaturus?.
Pleurophorus tropidophorus.
Euconospira n. sp.
Pleurotomaria aff. P. tenuicincta.
Pleurotomaria aff. P. subconstricta.
Pleurotomaria aff. P. giffordi.
Patellostium marcouanum.
Bellerophon harrodi?.
Aclis stevensana.
Sphærodoma sp.
Orthoceras cribrosum?.
Nautilus sp.
Phillipsia cliftonensis?.

From west end of Poteau Mountain, Indian Territory, 2½ miles northwest of Coaldale, Ark., at point 150 feet above shale fossils.

Deltopecten occidentalis?.
Myalina perattenuata.
Myalina aviculoides.
Aviculipinna americana.
Allerisma terminale.
Schizodus compressus.
Pleurophorus sp.

All these fossils are of Pennsylvanian age, and all show closely related faunal facies. I regard them as rather low in the Pennsylvanian. Very little discrimination can be made between these collections on the strength of their invertebrate faunas. Those from the black shale associated with coal beds have to a certain extent an individual aspect, owing to their limited variety, a fact which I ascribe to impure or brackish water conditions, but even these are related to the more varied and more obviously marine assemblages of species.

The lot collected near Sixmile post-office, in sec. 25, T. 8 N., R. 28 W., which represents, I believe, the highest horizon in the collection from Arkansas, has to a limited extent peculiarities that differentiate it from some of the other collections coming from lower beds. One fact in point is the relatively restricted representation of brachiopods, which group is more abundant in some of the other lots. The pelecypods are largely the same. It is very doubtful, however, whether

collections from the same horizon at somewhat separated points would be necessary to determine this fact.

Lithologically the collections from shale on the west end of Poteau Mountain in Indian Territory are distinct from the others; and though a good many species are common to both series of collections, I believe the Poteau Mountain material to represent a younger horizon. This is perhaps especially true of the collection obtained from 150 feet above the shale fauna. The latter can possibly be correlated with the Flint Ridge horizon of Ohio.

STRUCTURE.

GENERAL FEATURES.

The coal field of Arkansas lies in a long, comparatively narrow synclinal trough extending eastward along Arkansas River valley from the Indian Territory line. North and south of the field the coal-bearing strata have been eroded, leaving only barren rocks of the Atoka and Winslow formations exposed. This trough lies between the Boston Mountains on the north and the Ouachita Mountains on the south, two elevated land masses which have very different geologic structures. The Ouachita region is characterized by long, sharp ridges formed by the erosion of alternating hard and soft beds dipping at high angles. They are in fact strike ridges of upturned rocks. The various strata comprising this mass have been subjected to violent strains and compressed in a north-south direction, throwing them into folds whose axes extend approximately east and west. Subsequent to this crumpling the upper parts of the folds have been eroded, leaving the edges of the harder beds projecting in ridges as we now find them. In the process of folding the strata were here and there broken and in many places the beds slipped out of position so that their outcrops are not now continuous for very great distances. Such fractures are called faults by geologists. As a general rule, the faults of the Ouachita Mountain province are of the kind that is produced by compression. In such faults the fracture plane is, as a rule, inclined, and the beds on the upper side have slipped over those on the lower side—in fact, are thrust over them—and for this reason such displacements are called thrust faults. In general the faults of the Ouachita Mountain region extend approximately east and west parallel with the trend of the ridges.[a]

The rocks of the Boston Mountain province[b] are not so intensely folded as those of the Ouachita province, but are, as a rule, only slightly distorted from their original horizontal positions. They are

[a] For a description of the geologic structure of the Ouachita Mountains, see Taff, Joseph A., Atoka folio (No. 79), pp. 6 and 7; Coalgate folio (No. 74), p. 5; and manuscripts of McAlester, Windingstair, and Tuskahoma folios, not yet published.

[b] Purdue, A. H., Winslow folio. (In preparation.)

characterized by low dips, seldom exceeding 4° or 5°. This mass appears to have been raised up like a great block of the earth's crust, allowing the lowlands of Arkansas Valley to break away from it. Where one part of the earth's crust is raised up higher than an adjoining part, the beds at the two levels must either bend or break. A flexure produced in this way is described as a monocline or monoclinal fold. Fractures or faults thus produced differ in type from those found in the Ouachita Mountains in that they occur in beds not crumpled by lateral pressure and otherwise little disturbed from their original positions. Usually in such faults the plane of fracture does not stand exactly vertical, and the beds on the upper or hanging-wall side slip down, while those on the lower or foot-wall side rise. Faults of this kind are described as normal, drop, or tension faults. They are characteristic of the geologic structure of the Boston Mountains, and a series of them, extending approximately east and west, occurs along the north side of Arkansas Valley, and in many places separates the Boston Mountain province from the coal field.

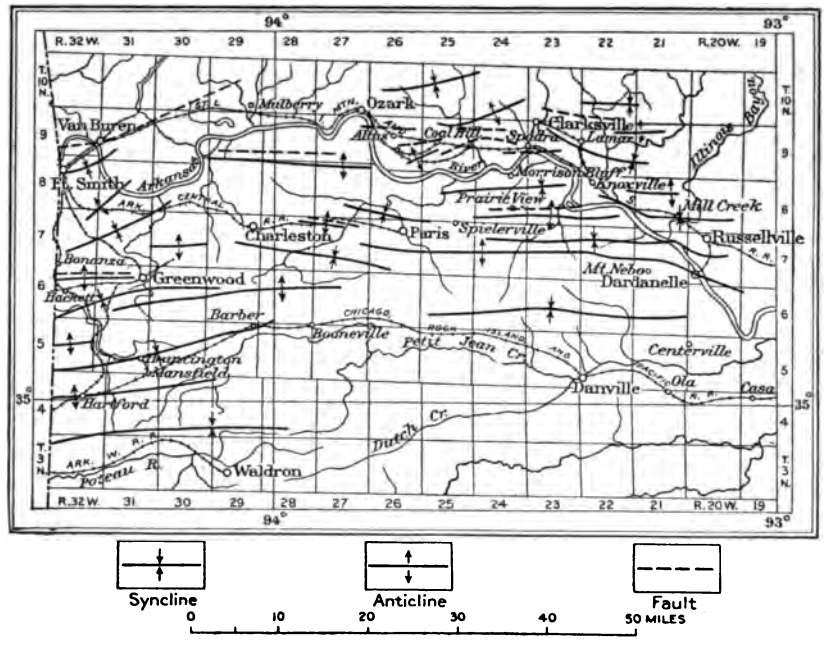

FIG. 8.—Map showing structural features of Arkansas coal field.

It will be seen from this description that the Arkansas Valley syncline, which contains the coal field, is peculiar in that on its south side the underlying rocks rise by pronounced folds and thrust faults, while

The structures within the coal field partake of the nature of both these types, since the rocks are definitely folded at many places along the southern edge of the field, while near the northern edge the dips are gentle, the beds lie nearly flat, and normal faults are of frequent occurrence. The principal structural features of the field are shown in fig. 8.

ANTICLINES.

Although the coal field in general has been described as a synclinal trough, it is folded into a number of minor synclines and anticlines. The determination of these features is of great importance to the miner and coal prospector, since without a knowledge of this structure it is impossible to determine the best methods of prospecting and working the coal. Generally the largest areas of coal land are in the synclines, and where the structure is of this type the bed is at its greatest depth in the axis of the fold. The coal bed is most easily prospected around the margins of such basins, but in mining it is usually most economical to locate the main shaft at the deepest place, so that the loaded cars can be moved to it by gravity. Where the coal beds lie deep, however, the value to the prospector of recognizing the anticlinal structure is of almost equal importance, for it is in the anticlines that he must expect to find the coal for which he is searching nearest to the surface. In general the minor anticlines and synclines of the Arkansas coal field have approximately east and west axes only a few miles in length.

Backbone anticline.—Probably the best known anticline in the whole district is that in Backbone Ridge, between Bonanza and Hackett, which extends from the State line eastward for about 7 miles. The coal-bearing beds that outcrop on the north and south sides of this ridge are tilted at high angles, and in its axis rocks lying far below the coal horizons are exposed. (See fig. 9.) This anticline is an unsymmetrical fold resembling the Ouachita Mountain type, and represents a thrust of the rocks from the south over those on the north side of the ridge. The strata are broken along its axis and a well-marked thrust fault, which at the Indian Territory boundary has a displacement of over 2,000 feet, has been traced nearly to Greenwood, 7 miles to the east. The area of marked folding also ends here.

Biswell Hill anticline.—Biswell Hill, an elliptical domelike eminence northeast of Greenwood, which is mantled over by the Hartshorne sandstone, is the topographic expression of a broad anticline whose axis is parallel with and a short distance northeast of the east end of the Backbone Ridge anticline. The fold is slightly unsymmetrical in that the dips to the north are higher than those to the south. Like the Backbone Ridge anticline, it marks a barren

area surrounded by the outcrops of the Hartshorne coal, which dips away from it to the north and south. The structure, however, is apparently favorable for the accummulation of natural gas.

Massard Prairie anticline.—Another anticline, which is of considerable economic importance, since it has been successfully exploited for natural gas, is that at Massard Prairie, 5 miles southeast of Fort Smith. The surface indications here suggest a broad elliptical uplift with low dips to both the north and the south. The many drill holes in the axis of this fold indicate a barren area surrounded by the outcrop of the Hartshorne coal.

Montreal anticline.—Another anticline of some importance in coal mining is one which extends west from Montreal, in the southern part of Sebastian County, to the State line. This is a very broad fold, but it serves to bring the Hartshorne coal horizon nearer the surface than it is in the region north and south of it.

Hartford anticline.—The Hartford anticline, a broad fold whose axis extends for several miles in a northeast-southwest direction, is of great economic importance, since it brings the coal horizon within easy reach from the surface. At Coops Prairie, northeast of Hartford, this fold assumes a domelike structure almost ideal for the accumulation of natural gas. The wells located here supply the gas used at Huntington and at the Mansfield brick factories.

Mill Creek Ridge anticline.—East of Greenwood the coal field narrows down to a width not exceeding 15 miles, and in this strip there is at many places only one simple syncline from the south side of the coal field to the north. It comprises, however, a few minor anticlines which are worthy of mention. One of these is the Mill Creek Ridge, which extends from Arbuckle Island, in Sebastian County, to Roseville, in Franklin County. This ridge belongs rather to the northern edge of the coal field, from which it is not wholly disconnected. It is a broad, open fold characterized by low-dipping rocks. Since the rock which mantles this fold is for the most part Hartshorne sandstone, it can not be regarded as coal land, though its southern boundary marks the edge of the coal fields.

Game Hill anticline.—There is also a small, short, elliptical anticline in Logan County, extending westward from Caulksville to Branch, which is worthy of examination, since it brings the Hartshorne horizon within a few hundred feet of the surface. There is also some evidence here of a fault, which will be described later.

Prairie View anticline.—The Prairie View anticline, about 10 miles east of Paris, appears to be a broad, open fold, but of sufficient magnitude to bring up the Hartshorne sandstone and Atoka shale, leaving a barren area in the center. The folding here is rather pro-

association with the fold and the fact that the downthrow is on the north side suggests that it is a thrust fault.

Coal Hill anticline.—The Coal Hill anticline is a broad fold with east and west axis and low dips to both the north and the south. (See fig. 22.) It is of considerable economic importance, since it forms a barren area in the heart of the Coal Hill-Denning field, and will be described further in connection with the coal beds.

Russellville anticline.—The Russellville anticline is a very broad, dome-shaped uplift, with indefinite axis, between the Ouita and Shinn coal basins. It is surrounded by the outcrop of the Hartshorne sandstone.

SYNCLINES.

The synclines of the Arkansas coal field, especially near the southern edge of the field, are apt to be unsymmetrical, the beds on the south side having a higher dip than those on the north. Many of the synclines which occur near the north side of the coal field are faulted, so that only a part of the original fold is left. In general the more valuable coal deposits occur where the structure is synclinal.

Fort Smith syncline.—In the heart of the syncline beneath Fort Smith the Hartshorne coal horizon lies at a depth of 700 to 800 feet. This is a very broad fold, with rather indefinite axis. The strata dip northward from Massard Prairie at a low angle to the northern limit of the city, beyond which the dips are to the south.

Central syncline.—Another syncline of greater importance extends from the town of Central, in Sebastian County, southwestward to the State boundary. This also is a very broad and shallow trough, in the deepest part of which the Hartshorne horizon is probably not more than 800 feet below the surface.

Greenwood syncline.—South of Greenwood there is a more extensive trough of this kind, which extends from the boundary line at Hackett northeastward past Greenwood for about 30 miles. At its deepest point in this trough, south of Hackett, the coal horizon does not exceed 800 feet below the surface. At Greenwood the depth of the coal is not beyond 600 feet, while at Potato Hill, a prominent butte a few miles east of Auburn, the coal horizon is at a depth not less than 1,400 feet.

Sugarloaf syncline.—The next important syncline south of the Greenwood syncline may be described as the Sugarloaf syncline, since it includes the two peaks of Sugarloaf Mountain. It is an important coal basin, containing large areas where the coal is within easy reach from the surface, though the depth of the coal horizon below the top of the eastern peak of Sugarloaf Mountain is about 2,000 feet. East of Huntington this syncline has no economic importance, since the rocks exposed are below the coal horizon.

Poteau syncline.—Poteau and Whiteoak mountains mark the axis of a syncline in the center of which the coal horizon must be at great

depth, since the rocks exposed on the surface all have comparatively high dips.

Paris syncline.—In the central part of the field there is a broad and very deep syncline underlying the town of Paris, at which place the depth of the Hartshorne coal horizon is about 1,200 feet. This basin is unsymmetrical in that the rocks at the southern edge stand vertical and are sometimes slightly overturned, while those at the northern edge have only very gentle dips. East of Paris the syncline is constricted to a comparatively narrow trough, which extends eastward for several miles south of the Prairie View anticline.

Prairie View syncline.—The Prairie View syncline is a broad basin, with east-west axis, including the Prairie View coal field. Its structure is shown in fig. 24, and it will be further described in connection with the coal beds.

Cabin Creek syncline.—The Cabin Creek syncline is a very broad basin, whose longer axis extends from Clarksville southeastward nearly to Knoxville. The dips, both north and south, are low and practically symmetrical. In its axis the Hartshorne coal horizon is from 600 to 700 feet below the surface.

London basin.—Near its east end the coal field narrows down to a single broad synclinal basin with rather indefinite axis, which may be described as the London basin. This syncline lies between the ends of the Prairie View and Russellville anticlines, and its structure is not well known, for the surface is largely covered with alluvial deposits. The Hartshorne coal horizon is probably 600 to 800 feet below the surface in its deepest part.

Ouita and Shinn basins.—The London basin apparently divides at its west end, one limb passing north of the Russellville anticline, where it is known as the Ouita basin, the other, which passes south of Russellville, being the Shinn basin.

The Ouita basin is a shallow flexure from which the coal-bearing rocks extend westward in depth and are continuous with those of the London basin.

The Shinn basin is a comparatively sharp fold carrying the coal horizon to a depth of 600 feet. The coal-bearing rocks, however, are not connected with those of the London basin, an area of barren rocks intervening.

FAULTS.

General types.—The term fault, in the geologic sense, is applied only to a break or fracture of the earth's crust along which there has been some displacement of the rocks. It is often used by coal miners and operators in Arkansas to signify original defects in the coal, marked

It has already been shown that the Arkansas coal field exhibits both normal and thrust faults, whereby the rocks making up the coal-bearing series and comprising a part of the earth's crust have been broken and displaced. (See figs. 9 and 10.) Where a fault is encountered in the mines the coal bed is usually cut off abruptly, and it often requires much labor and great expense to find it again. Indeed, many mines have been abandoned for this cause, and the economic importance to the mine operator of a thorough understanding of the nature of the faults in his particular field is very great. Within this coal field eleven faults of large proportions and a number of smaller unimportant ones are known to occur, and it is probable that there are other faults which were not recognized in this rather rapid reconnaissance. It is not believed, however, that any faults affecting the more important parts of the district have been overlooked. The recognition of features of this kind in a region like the Arkansas coal field, where all the rocks are similar, is very difficult,

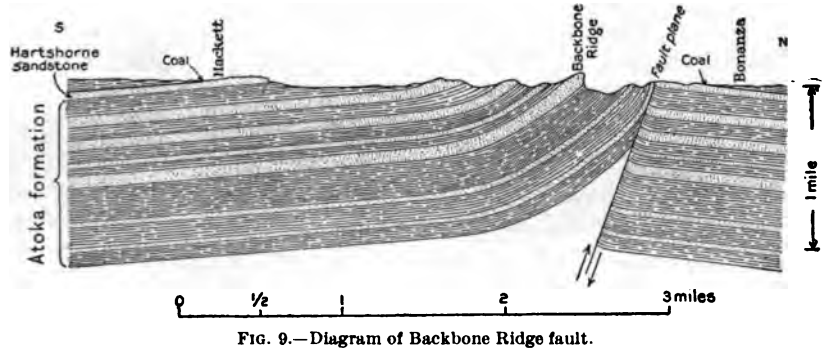

FIG. 9.—Diagram of Backbone Ridge fault.

and it has often been practically impossible to locate them with the accuracy desired. Therefore the position of many of the faults shown on the map must be regarded as only approximate.

Backbone Ridge fault.—The best known fault in the district is that along the axis of Backbone Ridge. (See fig. 9.) This displacement was recognized by the geologists of the Arkansas Survey and is represented on the geologic map published in the preliminary report on the coal field.[a] Its western end in Indian Territory has been located by J. A. Taff.[b]

The fault extends from the boundary eastward for about 8 miles to a point a mile northwest of Greenwood. Measurements during the past season indicate that the displacement is approximately 5,000 feet near the Indian Territory line. The fault occurs in barren rocks and does not affect the economic development of the field.

[a] Ann. Rept. Geol. Survey Arkansas for 1888, vol. 3, map of coal field (in pocket), Little Rock Press Printing Co., 1888. Winslow, Arthur, Geology of western Arkansas: Bull. Geol. Soc. America, vol. 2, 1891, fig. 4, p. 229.

[b] Taff, Jos. A., geology of the eastern Choctaw coal field: Twenty-first Ann. Rept. U. S. Geol. Survey, pt. 2, 1900, p. 285.

Devils Backbone Ridge and Pine Ridge faults.[a]—Faults of similar character probably also occur in some places along the southern boundary of the coal field, in what is known as the Devils Backbone Ridge at Chismville and as Pine Ridge farther east. For several miles along this ridge, which is composed of the Hartshorne sandstone, the beds are slightly overturned and the rocks on the south side are very much crumpled and at places broken. Although the evidence has not been worked out in the same detail for this area as for Backbone Ridge, there seems little doubt that thrust faulting has occurred, producing a certain amount of displacement.

Caulksville fault.—There is probably also a small fault, with a downthrow of 50 or 60 feet on the north side, extending from a point near Caulksville to Branch. This fault would run through the prairie between Game Hill and Rocky Hill. It is probably of very little economic importance, and would not interfere seriously with mining operations.

Prairie View fault.—The Prairie View fault, which has already been mentioned in connection with the Prairie View anticline, extends from sec. 25, T. 8 N., R. 25 W., eastward for about 7 miles to Arkansas River. The downthrow is to the north and the displacement is not less than 500 feet. This fault cuts off and defines the southern limit of what is called the Prairie View coal field. The evidences of disturbance here shown by drill records and surface geology are very conclusive, but there is nothing to show the character of the fault, though its association with moderate folds and its proximity to Pine Ridge, which marks a well-developed fold, would suggest that it is due to overthrust.

Faults which occur along the northern edge of the coal field are much more difficult to discover; the evidence regarding their existence is obscure, and they are very troublesome to the geologist who attempts to interpret the structure of the coal field. They are, however, much more troublesome and have been a source of great expense to those who have attempted to operate coal mines in this region. These faults are all of normal type; they are not accompanied by folds, and most of them extend in an approximately east-west direction. At their extremities the displacement gradually grows less and disappears, so that the beds can be traced continuously around the ends. In some of these faults, however, sandstone beds are brought against other sandstones, shales against shales, so that it is only by the most careful study that the displacement can be recognized or its nature determined.

Clarksville fault.—One of the first of these faults discovered during [redacted] miles south of

Lutherville westward for about 15 miles, and probably dies out a mile or so northwest of Clarksville. Through this distance the exact line of the fault could not be located with certainty in the time available. A few miles east of Clarksville sandstone belonging to the Fort Smith formation is dropped down and brought into contact with the Hartshorne sandstone, showing that the displacement is not less than 500 feet. (See fig. 10.) At the contact the two sandstone beds are not easily distinguishable, and in making a circuit northeastward from Clarksville across this fault, thence west for a few miles, and then south, the geologist is bewildered by finding that the sandstone which he must believe is still in the Fort Smith formation dips under the Spadra shale.

North of this fault the rocks below the coal horizon are raised and the coal-bearing rocks washed away except in small local basins. The economic importance of the fault, therefore, is very great.

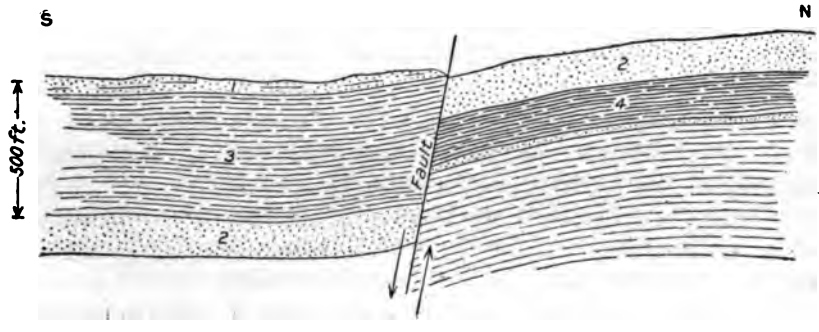

FIG. 10.—Diagram of Clarksville fault at a point 2¼ miles east of Clarksville, illustrating type of faulting common in the northern part of the coal field. 1, Fort Smith formation; 2, Hartshorne sandstone; 3, Spadra shale; 4, Atoka formation.

Big Danger fault.—Another fault which lies south of Clarksville and affects the value of the Spadra coal field will be called the Big Danger fault from the fact that the best surficial evidence of the existence of a fault is found at the south base of Big Danger Hill, in sec. 23, T. 9 N., R. 23 W. From that point the fault extends westward for a total distance of 10 miles. From Spadra west it is parallel with and about a quarter of a mile south of the line of the Iron Mountain Railway. It is a normal fault, with the downthrow on the south side. The amount of displacement is indicated by a drill hole to be about 270 feet opposite the mouth of Spadra Creek and about 300 feet at the east end of Spadra Hill. West of that point the displacement probably decreases gradually and dies out near the west end of Spadra Hill. The economic importance of this fault is very great, since south of it the Spadra coal bed has been dropped down so far that it has not yet been mined.

Spadra fault.—The name Spadra is applied to a fault which was first encountered in one of the mines in the Spadra field. It was afterwards located by a series of drill holes at a point a mile or two farther west, and its presence a short distance east of Hartman is indicated by the results of drilling. Its extension from Hartman in a southwesterly direction is based wholly on a study of the outcrops. The evidence is as follows: A pronounced escarpment extending southwestward from Hartman for a distance of about 4 miles marks the boundary of the river bottom lands. Bed-rock exposures along this scarp are favorable for study, and since a branch of the Iron Mountain Railway follows its base, indications of disturbance are to be seen at many places. The occurrence of the coal bed, as well as the surface distribution of the various other formations as far as they are known, can hardly be accounted for on any other hypothesis than that the Spadra fault follows the line of this escarpment after passing Hartman. This is a normal fault with downthrow to the south, the coal bed being raised on the north side. At its eastern end, where the fault was first encountered in one of the mines, the displacement is only a few feet, and, although it is reported to have caused great consternation at first, the coal was soon located again on the other side, and there was very little loss. It has not been encountered elsewhere in the mines, for the reason that none of them have extended their workings so as to cross the supposed line of the fault. About 2 miles east of Hartman the displacement, as indicated by a reported drill hole, is not less than 200 feet.

The recognition of this fault is of the utmost importance in the economic development of the Spadra field, since it indicates the possibility of coal in a large area south of Hartman, heretofore regarded as barren.

Hartman fault.—A fault extends from a point in sec. 14, T. 9 N., R. 25 W., about 1 mile north of Hartman, in an east-northeast direction through sec. 10, T. 9 N., R. 24 W., for a distance of 4 miles. It differs from the two faults just described in that the downthrow is on the north side. The fault was first encountered in the workings of the old Allen[a] slope about 1½ miles northeast of Hartman. It is reported that at this place the coal was followed down a slope to the south until the bed ended abruptly against a wall of sandstone. Although the mine has been abandoned for many years, the surface indications verify this report. The fault is traceable from the old mine westward across Horsehead Creek to a point north of Hartman, where a sandstone, presumably the Hartshorne, has been followed continuously around its western end. East of the old Allen mine the exact position of the fault could not be located nor its extent deter-

the point of original discovery is about 200 feet. The effect of this fault is to raise a part of the Hartshorne sandstone and Atoka shale south of the Allen mine and to produce a tongue of barren ground which extends from Hartman northeastward into the heart of the Spadra field.

Coal Hill fault.—The Coal Hill fault extends westward from a point 1½ miles east of the town of Coal Hill to a point about midway between the towns of Altus and Denning. It is of the same type as the Spadra fault; the downthrow is on the south side and the maximum amount of displacement is not less than 200 feet. The effect of the fault is to bring the shale which underlies the Hartshorne sandstone in contact with the Spadra shale. Anyone examining this field casually would be justified in the opinion that the coal bed mined between Coal Hill and Denning extends northward and passes under the Pond Creek Hills. The existence of this fault is indicated by the evident displacement of sandstone beds which are found to be identical at its ends. It is also proved by numerous drill holes within the coal field. A rather remarkable and significant condition in this field is that the workings of the various mines between Coal Hill and Denning all lie south of a rather definite east and west line, although there is no topographic or other evidence of the discontinuance of the coal bed to be seen on the surface. It is generally reported that the coal bed is divided by a thick shale parting near the fault, so that the workings are usually abandoned before the actual break is reached. In a few of the mines, however, the fault has been actually observed, though at present none of the workings which approach it are accessible. In one or two instances where the fault plane was reached the coal bed is reported to be dragged upward slightly, indicating the direction of the movement.

Altus fault.—A fault believed to pass through the town of Altus also extends in an east and west direction. Its existence is inferred from the distribution of geologic formations on the surface, although its exact location was not determined at any point on the ground. The Hartshorne sandstone, which mantles the hill south of Altus at an elevation of about 600 feet, is raised by this fault so that it also caps Catholic Hill, north of the town, at an elevation of 900 feet. This fault is of the same type as the Coal Hill fault, with which it is parallel, and it probably takes up the displacement where the latter dies out.

Mill Creek fault.—The Mill Creek fault apparently extends from Arkansas River at Arbuckle Island eastward to sec. 24, T. 9 N., R. 28 W. Mill Creek, which flows nearly due west from the latter point, follows a valley whose position is determined by the fault. The downthrow of this fault is to the north, and in this respect it differs from most of the faults of the northern part of the coal field.

The total amount of displacement, which can be easily measured, since the Hartshorne sandstone caps the hills on both sides of Mill Creek valley, probably does not exceed 200 feet at any point. This fault has little economic significance, since it is not believed that any coal beds large enough to work are affected by it.

Massard fault.—There is evidence of a fault near the mouth of Massard Creek about 7 miles southeast of Fort Smith. Its direction and linear extent could not be determined on account of imperfect geologic exposures, though at the point mentioned a lower bed of the Fort Smith formation is dropped down and brought in contact with the Hartshorne sandstone, thus indicating a displacement of at least 400 feet. In this case the downthrow is on the south side, like most of the northern faults. The course of the fault seems to be approximately northeast and southwest. Although the fault could not be located for more than a quarter of a mile there are some indications of disturbance in Massard Prairie southeast of the gas wells in sec. 1, T. 7 N., R. 32 W., and at the Indian Territory boundary 1 mile southwest of Cavanaugh. These conditions would be explained by the continuance of this fault from the mouth of Massard Creek southwestward through Massard Prairie and thence westward to the Indian Territory line. The evidence at hand for such a fault, however, can not be regarded as in any way conclusive, and the proximity of the gas wells on Massard Prairie seems to be prima facie evidence against the existence of a fault in the position mentioned. The position of the Massard fault can be proved only by systematic drilling, and therefore it has not been indicated on the geologic map except for a short distance at the mouth of Massard Creek.

Mulberry fault.—One of the most extensive faults or systems of faults recognized in the coal field extends from a point a few miles north of the town of Mulberry[a] southwestward past the town of Van Buren and for a distance of about 15 miles into Indian Territory.[b] The east end of this fault near Mulberry has already been mapped by Purdue, since it extends into the area covered by the Winslow quadrangle. At this point the evidence regarding the existence of a fault seems to be conclusive. Its course westward is marked through a considerable part of the distance by a prominent escarpment. For several miles between Alma and Van Buren the evidence of the existence of a fault is not conclusive, and it is possible that the movement is taken up in a monoclinal fold. The possible position of the fault is indicated by dotted lines. At the town of Van Buren the amount of the displacement can not be less than 300 feet, while it may be as great as 1,000 feet. At this place the soft shaly sand-

stone and shale of the coal-bearing rocks are brought in contact with some of the lower shale of the Winslow formation, and on superficial examination the conclusion would be justified that the coal-bearing rocks continue northward, passing under the Van Buren Hills.

This fault has a number of economic bearings. First, it limits the area of the coal-bearing rocks on the north. Although it is not known that the rocks of this group here carry any coal beds of commercial value, it is possible that valuable coal beds may be found in them. Second, the people of Fort Smith and Van Buren have been accustomed to regard those towns as lying in the center of a synclinal trough, and to believe that the Winslow sandstone dips under them from the Boston Mountains. If penetrated by deep wells these rocks could therefore be expected to yield a flow of good artesian water in place of the present unsatisfactory supply. The existence of a fault here is an unfortunate thing for this hope, since it is hardly conceivable that artesian water would pass across it. A number of deep wells which have been drilled near Fort Smith have failed to produce artesian water, and this failure may well be accounted for by the presence of the fault.

MINOR STRUCTURAL FEATURES.

Joints.—Nearly all the harder rocks, especially the thin beds of hard sandstone included in the shale, show on weathering a system of jointing characteristic of this field. The prevailing joints, which are developed with great regularity, are nearly vertical and invariably strike a few degrees west of north, regardless of other more dominant structures. Secondary irregular joints extend at right angles to these, and the two sets often give thin flat-lying sandstone beds the appearance of artificially laid paving stones. The intervals between the joints of the prevailing system vary from 2 or 3 inches to several feet, and advantage is taken of the joints in quarrying the rock, as shown in Pl. IV, *B*. This jointing is best developed in thin, regularly bedded sandstones and harder shales. It is somewhat irregular and obscure in the more massive cross-bedded sandstones, and can not be recognized at all in the softer shales. The coal beds generally do not show it, even though it may be very well developed in sandstone beds a short distance above or below. In some places where coal beds have sandstone roofs or floors the regular joints are confined to these rocks where they are well developed and do not extend into the coal. Nearly all the coal beds have a somewhat irregular vertical cleavage.

The average strike of the prevailing joints in the west end of the coal field is 15° west of north, while in the east end it is 5° west of north, and in other parts it is intermediate between these two direc-

tions. In any given locality the variations in direction are so small as to be difficult of detection even with a pocket compass, and, indeed, the joints are nearly as reliable for giving direction as such an instrument. In one instance which came under the writer's observation they were used in place of a sun dial for giving the time of day and were described as the "eleven o'clock marks." In geologic investigations when there is doubt as to whether certain rocks are outcrops or detached bowlders the direction of the prevailing joints will often be sufficient evidence to settle the question.

Miniature folds.—Another structural feature of minor importance very often seen in the coal field consists of small local folds or buckles in some of the beds, especially in the weathered zone near the surface. Such small folds are usually anticlinal in form, and where encountered in mines and strip pits are sometimes called rolls. In a few instances such folds are accompanied by apparent faults, though such occurrences are relatively rare.[a] Usually the zone of disturbance is only a few feet wide, and beyond it the beds affected continue with perfect regularity. In general, it is not believed that the flexures extend far in depth, since they are very common in such exposures as stream banks and road cuts, and are rarely, if ever, met with in deeper mine workings.

M. R. Campbell, while with the U. S. Geological Survey party in the Arkansas field, examined a number of these rolls, and in a recent paper describing them attributes their formation to expansion of the surface rocks due to weathering.[b]

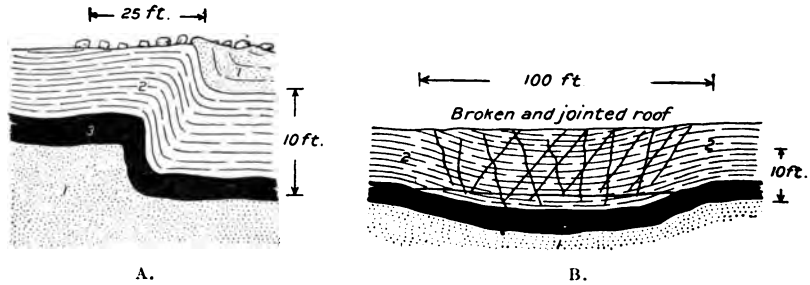

FIG. 11.—Minor structural features of coal beds. A, Miniature monocline in coal bed at Woodson's strip pit; B, miniature syncline in mine of Fidelity Fuel Company. 1, Sandstone; 2, shale; 3, coal.

Two such folds affecting coal beds are shown in fig. 11. The fold exposed at Woodson's strip pit (fig. 11, A), near Burma, partakes of the nature of a fault, since the coal bed is noticeably displaced by it. It is in apparent alignment with a small fault exposed in the Branner mine about half a mile away, and may possibly be due to the same cause. The trough in the Fidelity mine (fig. 11, B) is unusual in that the flexure is synclinal.

In general, the coal-bearing rocks are subject to great local variation in dip, so that, while they are thrown into broad anticlines and synclines that are easily recognized, the limbs of these folds carry minor anticlines and synclines which it is difficult to locate from surface exposures. Where encountered in the mines, such features are often also called rolls, but they are to be distinguished from the more local phenomena described above, since they are due to the same stresses that produced the more dominant structures, and presumably will extend in depth. The best examples of structure of this type, one of which is given in fig. 15 (p. 53), were found in the Bonanza and Jenny Lind district, though they are probably as common in some of the other districts, where opportunities for investigation are not so good.

ECONOMIC GEOLOGY.

THE COAL BEDS.

DISTRIBUTION.

Coal is by far the most important mineral product of this part of Arkansas, though natural gas, shale, and building stone are also utilized. Prospecting has thus far failed to demonstrate the presence of valuable oil-bearing sands.

Coal beds large enough to be worked occur at three horizons or stratigraphic positions in the coal-bearing rocks of Arkansas. These rocks were deposited as sediments on the bottom of a shallow sea or lake, and each layer of sand or shale represents a part of the deposit made at the same time. The coal beds were formed from vegetable matter at times when the water became so shallow as to permit the growth of vegetation over its surface, shutting out the ordinary sediments. Each coal bed, then, may be regarded as representing a part of the actual surface of the earth at some particular time, and coal beds that were formed at the same time, although they may never have been actually connected with each other, are said to belong to the same horizon.

For convenience in discussion the coal beds now to be described will be grouped according to the geologic horizons at or near which they occur, namely, the horizon of the Hartshorne coal, which takes its name from Hartshorne, Ind. T.; that of the Charleston coal, mined for local use near Charleston, Ark., and not known to be represented in Indian Territory; and that of the Paris coal, which in all probability corresponds approximately to the McAlester coal of Indian Territory.

The stratigraphic positions of these horizons are shown in Pl. I. Nearly all the various coals mined in Arkansas can be correlated with

one or another of these horizons. There is, however, still some doubt regarding the exact correlation of the Pickartz and Philpott coal beds, which lie north of the main body of the coal field as outlined, and it is possible that one of them may not be represented elsewhere in Arkansas. Small coal beds, some of which have been mined for neighborhood use, are also known to occur locally at many places in rocks which lie below the Hartshorne sandstone, and it is possible that future development will establish the fact that there are small areas of valuable coal at other horizons than those noted.

COALS OF THE HARTSHORNE HORIZON.

CHARACTER AND DISTRIBUTION.

The coal beds which occur at or near the horizon of the Hartshorne coal are economically the most important in both Indian Territory and Arkansas. This horizon is at the contact of the Hartshorne sandstone with the Spadra shale, and in general the coal bed is taken as the line of demarcation between these formations. As actually observed, however, there is from a few inches to 20 or 30 feet of shale or fire clay between the coal bed and the sandstone, a condition due to local variations either in the character of the upper part of the sandstone formation or in the exact position of the coal itself. In many places in its lower part the Spadra shale is somewhat sandy, and contains lenses of hard sandstone, which lie immediately above the coal bed. For this reason the exact contact of the Hartshorne with the Spadra formation is at some places difficult to determine, and it is probable that in some localities where the outcrop of the coal bed could not be found there have been minor errors in mapping. The Hartshorne sandstone, which is usually called "bed rock" in Arkansas, also varies greatly in character and thickness in different parts of the field. While typically a hard rock over 100 feet thick, described in drill sections as granite, in places it contains less than 10 feet of hard rock and in some localities is represented only by sandy shale or by irregular thin lenses of hard sandstone distributed through 15 or 20 feet of sandy shale, making it difficult to recognize except by its stratigraphic position. It has not been identified at all in the northern part of the Indian Territory field.

The extent and distribution of the Hartshorne coal horizon, as represented in the rocks of Arkansas, is seen in the outline map, fig. 12, which shows approximately the extent of the Arkansas coal field. The coal bed is subject to great local variation in thickness and character. Partings come and go without reference to any known rule,

and in some parts of the field the coal is entirely absent. Those areas in which there is reason to believe that the coal is sufficiently thick for mining are indicated in fig. 12. The local conditions and variations of this bed are best described under the headings of the various districts in which it is mined.

The area north of Backbone Ridge, in the western end of the field, will be described as one district, since the coal bed throughout this area exhibits a general similarity in character. The region south of Backbone Ridge is best described under several headings on

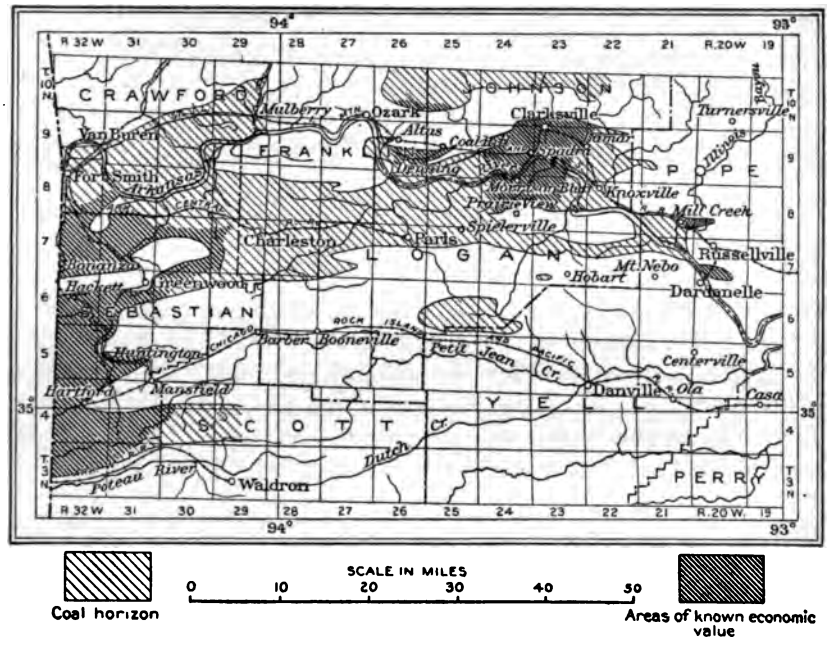

FIG. 12.—Distribution of Hartshorne coal horizon and areas in which the coal is known to be of economic value.

account of the local variations in the coal bed, though the mine workings are almost continuous. The various districts where coal is mined in the eastern end of the field are isolated from one another.

BONANZA AND JENNY LIND DISTRICT.

The district north of Backbone Ridge, in Sebastian County, includes several important mines, which are located along the southern outcrop of the coal bed near the towns of Bonanza and Jenny Lind. The position of the outcrop here is indicated by the Hartshorne sandstone, which is easily traced along the north side of Back-

bone Ridge and Biswell Hill to Oak Valley, where it turns southward and connects with the sandstone that underlies the coal at Greenwood and Hackett. From its southern outcrop at Jenny Lind the coal dips northward at an average angle of approximately 2½° for about 3 miles, where it is from 600 to 900 feet below the surface. It then rises with a still more gentle slope and outcrops at several points on Massard Prairie, from which it dips northward again and

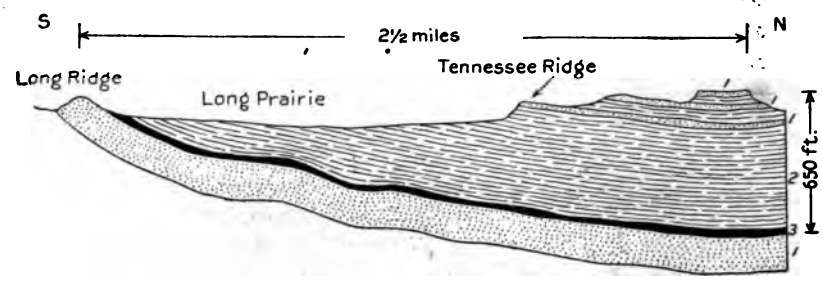

FIG. 13.—Diagram showing relation of topography to geologic structure at Long Prairie near Jenny Lind. 1, Sandstone; 2, shale; 3, coal.

passes under Fort Smith. The areas in which the coal is near the surface in this district are indicated by the extent of Long and Massard prairies. Long Prairie at Jenny Lind is a broad lowland, bounded on the south side by Long Ridge and on the north by Tennessee Ridge, the former being the topographic expression of the Hartshorne sandstone, which underlies the coal, the latter that of the

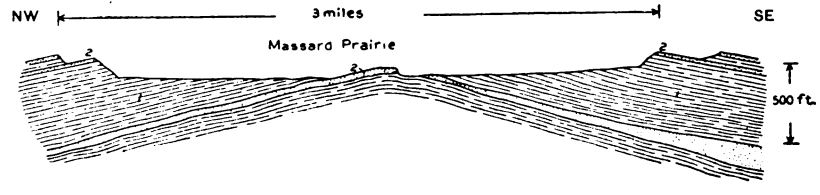

FIG. 14.—Diagram showing relation of topography to geologic structure at Massard Prairie. Section along road from Fort Smith to Greenwood. The gas wells are located in the center. 1, Shale; 2, sandstone.

lower member of the Fort Smith formation. The relation of this prairie to the bed-rock structure is shown in the sketch, fig. 13.

Massard Prairie is surrounded by the outcrops of a sandstone bed correlated with that of Tennessee Ridge, the relations of topography to bed-rock structure being shown in fig. 14. The coal bed which outcrops in the center of this prairie is probably the same as that at Jenny Lind and Bonanza, though the Hartshorne sandstone is represented by a bed not over 15 feet thick.

In the basin north of Jenny Lind the greatest depth to coal probably does not exceed 800 feet, while in a large part of the district it is within 500 feet of the surface. At Central, a small town about 6 miles northeast of Jenny Lind, coal has been mined from a smaller bed, estimated to lie about 850 feet above the Hartshorne coal, which will be described later in connection with the Charleston horizon. The nature of the coal bed is best shown in this district along the outcrop between Bonanza and Jenny Lind, where it has been mined for about 2½ miles northward from the outcrop. It is thick enough for mining along this crop line for about 10 miles, nearly all the way from Bonanza to Oak Valley post-office, beyond which point it is reported to be too thin for mining and to be divided by partings. In general the bed consists of two benches of coal, with a shale parting near the center. Some of its local variations are shown by the sections presented in fig. 16. At the most eastern

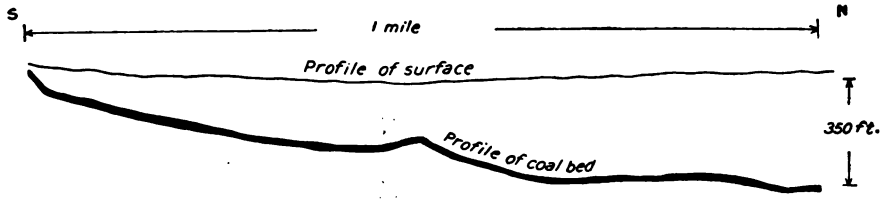

FIG. 15.—Profile of coal bed at Jenny Lind, showing variations in dip.

point at which the coal has been measured it has a thickness of 2 feet, with a small parting at the center.

At Bonanza the Central Coal and Coke Company of Kansas City has two mines, and near Jenny Lind there are two active mines operated by the Western Coal and Mining Company. East of Jenny Lind several strip pits and banks have been mined for local use, the Bostick bank, in sec. 13, T. 8 N., R. 31 W., being the most eastern point.

In the underground workings of the mines there is considerable irregularity in the dip of the coal north of the crop line. In some places along its outcrop the coal dips northward at angles as high as 15°, but after reaching a certain depth the dip flattens rather abruptly, and in some places is locally reversed before it again dips to the north. This condition in mine No. 17 at Jenny Lind is shown graphically in fig. 15.

The relative thickness and the variations of the coal benches and partings in the mines along the outcrop in this district are

shown in the sections presented in fig. 16. The coal is thickest in a mine about one-half mile northwest of the town of Jenny Lind. From this mine it gradually thins both eastward and westward, though its thickness varies locally. In these mines the only parting actually rejected in mining is the one that appears in the center of the bed in all the sections measured. This parting varies from less than an inch to over 6 inches in thickness. Although usually shaly, it is variable in character, in some places being described as a soft muck or a hard sulphur band. As a general rule the coal is said to be of better grade where the bed is thin and to contain more impurities in the thicker part. For example, in mine No. 17, at Jenny Lind, where it has the greatest thickness, there is a somewhat irregular band of bony coal, usually not above 1 inch thick, near the center of the upper bench. This is referred to by the miners as the "gray band," but it is not thrown out in mining. In the same mine there is often a sulphur band near the middle of the lower bench. This band is irregular in its occurrence, but is not of sufficient importance to cause any part of the coal to be rejected.

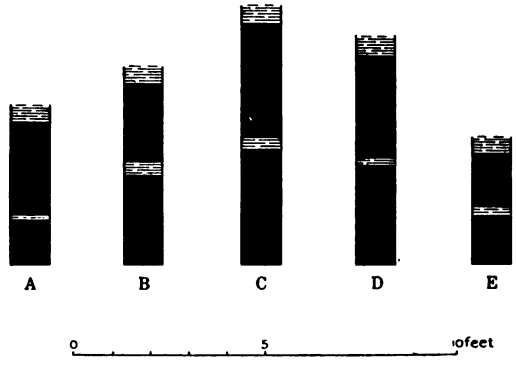

FIG. 16.—Graphic sections of coal along the line of outcrop from Bonanza east to Oak Grove. A, Mine No. 12 at Bonanza, sec. 3, T. 6 N., R. 32 W.; B, mine No. 18, sec. 36, T. 7 N., R. 32 W.; C, mine No. 17, Jenny Lind, sec. 32, T. 7 N., R. 31 W.; D, outcrop on sec. 34, T. 7 N., R. 31 W.; E, Bostick bank, sec. 13, T. 7 N., R. 31 W.

The coal in the upper bench in these mines has a somewhat brighter luster than that in the lower. It is not very distinctly jointed, and although face and butt slips, as they are called, can be found on close inspection, advantage is not taken of them in mining. In some localities a definite system of joints, which do not affect the coal, is apparent in the harder parts of the roof. The roof and floor generally consist of hard, more or less sandy shale; usually the floor is a little harder than the roof. Neither roof nor floor has any features that are especially unfavorable to mining, though in one of the mines, No. 18, near Jenny Lind, parts of the roof are likely to fall out on account of the joints.

The only knowledge we have of the coal beyond the northern limit of present mining development for a distance of several miles is that obtained by drilling. Over a comparatively large area here that is believed to be coal land drill holes have been put down to the coal

About 6 miles north of the Jenny Lind outcrop, however, this coal bed outcrops again on Massard Prairie, in the center of which there is probably a barren area, surrounded by outcrops of the coal. Coal has been mined from strip pits here for an almost continuous distance of about 3 miles, within which it was possible to measure the coal bed and to study its general appearance and physical character. The variations in the coal bed in its extent northward from the Jenny Lind outcrop to the center of Massard Prairie are shown by the group of graphic sections presented in fig. 17. Throughout this whole distance the bed is characterized by two benches with a varying shale parting between. The coal bed may possibly become progressively thinner northward from the Jenny Lind outcrop, but the field has not been sufficiently tested to demonstrate whether this is true or not. Three of the sections presented in fig. 17 were measured at the outcrop of the coal on Massard Prairie, where it is

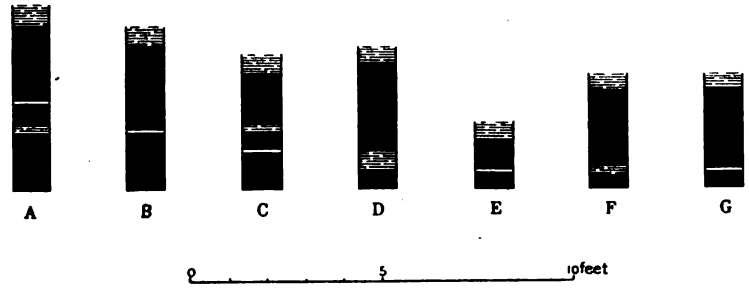

FIG. 17.—Graphic sections of the coal bed from the Jenny Lind outcrop northward to Massard Prairie. A, NW. ¼ sec. 21, T. 7 N., R. 31 W.; B, NE. ¼ sec. 19, T. 7 N., R. 31 W.; C, NE. ¼ sec. 14, T. 7 N., R. 32 W.; D, SE. ¼ sec. 9, T. 7 N., R. 32 W.; E, NE. ¼ sec. 2, T. 7 N., R. 32 W.; F, NE. ¼ sec. 36, T. 8 N., R. 32 W.; G, SW. ¼ sec. 30, T. 8 N., R. 31 W.

rather too thin to permit development on a large scale. It is operated, however, in a small way, to supply local demand at Fort Smith. The coal has a luster like that at Jenny Lind. That from the upper bench is brighter but much softer than that of the lower, and is also of a much better quality. The lower bench coal is high in sulphur and ash and after exposure to the air is coated with a white efflorescence. A chemical analysis of coal from Massard Prairie indicates that it may be of a somewhat higher grade chemically than that at Jenny Lind. (See table of analyses, p. 98.)

From Massard Prairie the coal dips northward at an angle of from 1° to 2° and passes under the town of Fort Smith, where a coal bed approximately 2 feet thick, which is probably identical with this one, has been reported at a depth of 500 feet in a well drilled for gas and oil.

GREENWOOD AND HUNTINGTON DISTRICT.

Location and extent.—The Hartshorne coal bed is continuous over an extensive region south of Backbone Ridge in Sebastian County, where a large number of mines are located along its outcrop. Although the same bed is believed to extend over this whole region, the character of the coal and peculiarities of the bed vary so much locally as to make a number of minor divisions necessary in describing it. In general the whole region could be divided into two parts by a line running south-southwest from Greenwood—a western part in which the coal bed is without partings and free from excessive ash, and an eastern part in which the coal bed is thick but divided and relatively impure. The local character can be more conveniently described, however, under headings which indicate the several centers of mining activity.

Beginning near the Indian Territory line at Hackett the coal outcrop south of Backbone Ridge has been traced eastward for several miles beyond Greenwood, where it turns northward and connects with the outcrop of the coal mined at Bonanza and Jenny Lind. From this line of outcrop the bed dips southward into the Greenwood syncline, south of which it rises and crops out along the flank of a ridge known as Devils Backbone. This ridge, which stretches for miles nearly east and west in an almost straight line and marks the southern boundary of the coal field, turns abruptly southward a few miles southwest of Greenwood and carries the coal outcrop southward to sec. 13, T. 5 N., R. 32 W., which is in the heart of a minor anticline between Midland and Montreal. The outcrop line then turns eastward, the coal dipping southward, and extends in that direction for several miles to Huntington. This town is situated in a syncline, around the end of which the outcrop again turns westward, the coal dipping to the north, and extends in a nearly straight line to Hartford, where it again turns to the east, swinging around the Hartford anticline. The coal bed east of Hartford was followed for only about 10 miles, to a point where the investigation was given up because the bed, although still of considerable size, was found to be so divided by partings as to be of no value. The coal dips to the south from the Hartford anticline and passes under Poteau Mountain, on the south flank of which it again comes to the surface and outcrops for several miles.

Character and thickness of the coal.—From the above description it will be seen that the Greenwood-Huntington district covers a large and roughly rectangular area, including several townships of land on which the almost continuous line of outcrop indicates that the coal

bed exists in sufficient size to make it of economic value. In a part of the district, notably that immediately east of the towns of Montreal and Midland, there is an upper coal bed from 40 to 60 feet above the Hartshorne coal, which probably corresponds with the upper Hartshorne coal reported from many points in Indian Territory. Where noted in Arkansas the upper Hartshorne coal is invariably an impure, dirty bed, broken by many shale partings, and is probably nowhere of economic value. The lower coal bed varies in thickness from a minimum of about 2 feet to a maximum of not less than 7 feet. Its floor is usually only a short distance above the hard beds of the Hartshorne sandstone, but its roof is variable. Although it generally consists of shale, a heavy lens of hard, often cross-bedded, sandstone, having a maximum thickness of 60 feet, overlies the coal bed for several miles at Montreal and Burma. In the northwestern part of the district the bed is without partings and is from 2 to 3½ feet thick. In the southeastern part it increases in size, at places, to 6 or 7 feet, and is divided by one or more partings of shale. As a general rule chemical analyses show that the coal is of better quality in the western than in the eastern part of the district.

The coal bed has been opened in a number of mines, small slopes, and strip pits along the whole line of outcrop described, and in some localities the workings have extended back for as much as 1½ miles. Beyond the data obtained by these workings, however, the only information as to the character of the coal is that derived from a few scattering drill holes. While it can not be said that the whole district has been prospected sufficiently to prove that it is all underlain by valuable deposits of coal, the evidence at hand seems to indicate that the greater part is valuable coal land. The maximum depths of the coal below the surface will be found beneath Sugarloaf and Poteau mountains, where the depth is from 1,400 to 2,500 feet. On the lower lands surrounding Sugarloaf Mountain the coal probably does not lie at a greater depth than 900 feet at any point, while its average depth probably does not exceed 600 feet, as indicated by the distribution of formations shown on the geologic map (Pl. VI). The various mines and openings at which the coal has been examined may be best described in order following the lines of outcrop.

Hackett region.—On the outcrop lines south of Backbone Ridge coal has been mined at many small openings between Hackett and Greenwood and from several larger mines east of Greenwood. The Midland Valley Railroad was located and built as near as possible to this line of outcrop in order to facilitate the marketing of the coal. The thickness of bed, partings, and benches, together with their

variations, are shown in the series of graphic sections, fig. 18, from which it will be seen that the coal bed at the State line consists of one bench of good coal without partings, having a thickness of 3½ feet. This general condition of the bed holds to within a mile of the town of Greenwood, east of which the bed thickens rapidly and is divided into two or more benches by shale partings.

Samples and analyses of the coal mined in the vicinity of Hackett and Excelsior indicate that for about 8 miles along this outcrop line the coal is unusually free from ash and other impurities and that its efficiency must be comparatively very high. In this respect it resembles the coals mined near Montreal and Midland, described later. From Hackett to Excelsior the bed is without partings, and varies in thickness from 2 to 3½ feet.

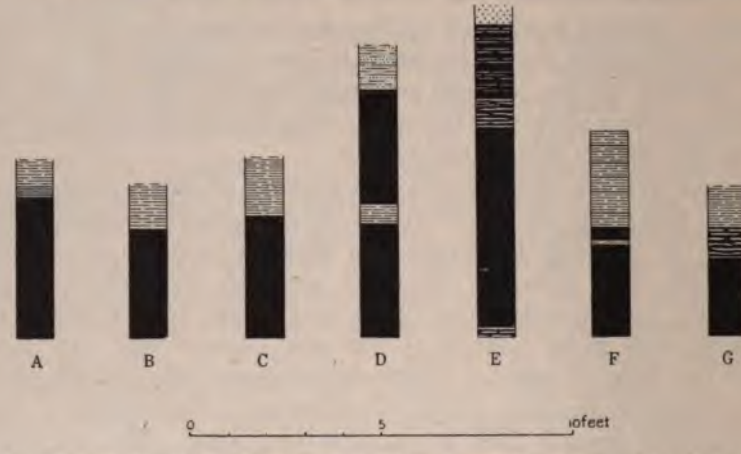

FIG. 18.—Graphic sections of coal showing variations along outcrop from Hackett east through Greenwood and Fidelity. A, Hackett City Smokeless Coal Company mine, sec. 21, T. 6 N., R. 32 W.; B, Bates and McWilliams mine, sec. 23, T. 6 N., R. 31 W.; C, Skinner mine, sec. 17, T. 6 N., R. 31 W.; D, Greenwood Coal and Lumber Company mine, sec. 12, T. 6 N., R. 31 W.; E, Banner mine, Fidelity Coal Company, sec. 6, T. 6 N., R. 30 W.; F, section at old McConnell pit, sec. 32, T. 7 N., R. 30 W., as given in Ann. Rept. Geol. Survey Arkansas, 1888, vol. 3, p. 16; G, drill hole, sec. 14, T. 7 N., R. 30 W.

The floor is a sandy shale with a hard sandstone a short distance below. The roof generally is a hard shale, which stands well, but in some of the mines there is a varying amount of draw slate above the coal.

Although indistinct joints that form face and butt slips in the coal can be recognized in nearly every mine, advantage is not taken of them in mining. The coal generally has a bright, live luster and a somewhat granular fracture. Coal was at one time extensively mined near the town of Hackett by the Central Coal and Coke Company, but the works there are said to have been abandoned on account of bad roof. The Smokeless Coal Company, of Hackett, recently opened a new mine about half a mile west of the town, and though

it is reported that 6 or 8 inches of draw slate occurs above the bed no difficulty is experienced with the roof. There are also two or three small mines in operation near Excelsior, and several old slopes and strip pits at other points. Many of these mines are small and are worked by undercutting with the pick.

Greenwood region.—In several mines east of Greenwood the character of the coal bed differs from that seen in mines near Hackett, the bed being very much thicker but divided by shale partings, as shown in fig. 18. Analyses of the coal show a much higher percentage of ash than that contained in the coal of the smaller bed at Hackett. In the mine of the Greenwood Coal and Lumber Company, in sec. 12, T. 6 N., R. 31 W., the coal has a maximum thickness of 7 feet, with a parting of shale near the center which varies in thickness from a fraction of an inch to 6 inches. Two miles farther east, at the Fidelity Fuel Company's mine, the bed is nearly 6 feet thick with a large shale parting in the upper half.

East of the mine of the Fidelity Fuel Company no operations are now in progress on this bed. It was formerly worked about 1 mile farther east, at an opening known as McConnell's, which is at present abandoned. The section measured here by the geologists of the Arkansas Survey gives only 33 inches of coal, with a shale parting near the top. Beyond this no measurements have been made on the outcrop of the coal, though it has been occasionally seen in wells and other accidental exposures. Near Auburn it is reported to have a thickness of 18 inches. A diamond-drill hole in sec. 14, T. 7 N., R. 30 W., 3 miles north of Auburn, showed that this coal bed was there 33 inches thick, 9 inches of which was reported as bone. East of this point the coal is not exposed for many miles, and no measurements have been made.

In all of the mines and openings noted the floor of the coal is only a few inches above a bed of hard sandstone, the upper member of the Hartshorne formation. The roof is invariably sandy shale.

On the outcrop line which follows Devils Backbone Ridge, southeast of Greenwood, small exposures have been found at points several miles east of Greenwood, the positions of which are shown on the geologic map. No coal has been produced at any of these points, nor have the coal beds been opened sufficiently to permit accurate measurements. The inclosing rocks here are tilted at a high angle, in some places are slightly overturned and probably sheared, so that the coal bed is probably more or less crushed. Small amounts of coal have been obtained from a strip pit in sec. 18, T. 6 N., R. 30 W., at a point where Vache Grasse Creek cuts across Backbone Ridge, but the workings have all been abandoned, and it was impossible to learn the exact thickness of the coal or the detail of its section.

Montreal, Burma, and Midland regions.—Along the outcrop line running southwest from Greenwood to Montreal and Midland the coal bed, as far as known, is without partings, and the quality of the coal resembles that at Hackett. Most of the development is to be found near Midland, about 10 miles southwest of Greenwood, though the general character of the bed and quality of the coal through a large area seem to be practically uniform, as shown by the graphic sections presented in fig. 19 and by the table of analyses.

About 2 miles southwest of the town of Greenwood coal has been mined recently from a small slope on sec. 21, T. 6 N., R. 31 W. At this point the coal dips northward at an angle of about 15° and has a thickness of 24 to 30 inches, without partings. The same bed of coal is opened again at the Moran mine, a slope on sec. 8, T. 5 N., R. 31 W., where it has a thickness of 40 inches without partings. South of this point there are many openings, both new and old, and it is

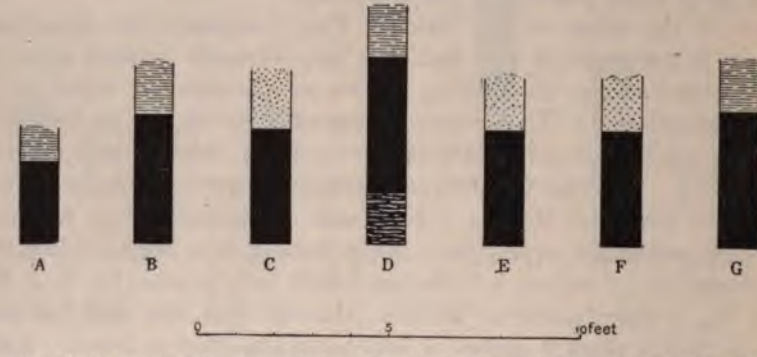

FIG. 19.—Graphic sections showing variations of coal bed and roof along outcrop in Montreal, Burma, and Midland regions. A, Slope on sec. 21, T. 6 N., R. 31 W.; B, Moran mine, sec. 8, T. 5 N., R. 31 W.; C, Irby mine, sec 7., T. 5 N., R. 31 W.; D, Banner Coal Company, sec. 19, T. 5 N., R. 31 W.; E, Denman Coal Company, sec. 19, T. 5 N., R. 31 W.; F, Turnipseed mine, sec. 20, T. 5 N., R. 31 W.; G, strip pit on sec. 21, T. 5 N., R. 31 W.

usually not difficult to trace the line of outcrop, although it is obscured by an overlying lens of sandstone that resembles in all respects the Hartshorne sandstone and has a maximum thickness of 60 feet. In general the exposures show from 2 to 4 feet of coal without partings. The coal bed dips at angles varying from 1° to 15°, but it seems to be invariably true that where the dip is high at the outcrop it rapidly decreases and the coal bed flattens out in depth.

A rather unexpected variation, locally described as a fault, occurs near the center of sec. 20, T. 5 N., R. 31 W., in the entry to a small slope mine where the coal, which in the mine has a thickness of over 3 feet, very suddenly changes in character and beds of shale abruptly take its place, the shale fingering in with lenses of coal. East of this place for a distance of about 1 mile the bed, as exposed by prospecting along the outcrop, consists for the most part of shale and bone,

but contains very little good coal. The coal is of good quality again in a strip pit near the south line of sec. 21, T. 5 N., R. 31 W., from which point it has been traced eastward to Huntington. In this distance the bed changes rapidly, becoming very much thicker and being divided by several partings.

In the vicinity of Midland and Burma an upper bed of coal, corresponding to the upper Hartshorne coal of Indian Territory, is indicated by drill records. This bed averages 60 feet above the lower one. It has a maximum thickness of approximately 5 feet, but is generally shaly or bony, and is described as a "dirty vein." It is not mined anywhere in Arkansas, though it may be found to be of some importance toward the Indian Territory line.

Huntington region.—The coal bed in the Huntington basin resembles that at Greenwood. Although characterized by great thickness it is divided by shale partings, and chemical analyses of the merchantable coal show that it contains a rather high percentage of ash. This character of the bed continues southwest along the outcrop nearly to Hartford, where the bed is not divided. East of Hartford, on the outcrop that lies south of the Hartford anticline, the bed becomes so much divided by partings as to be of little value.

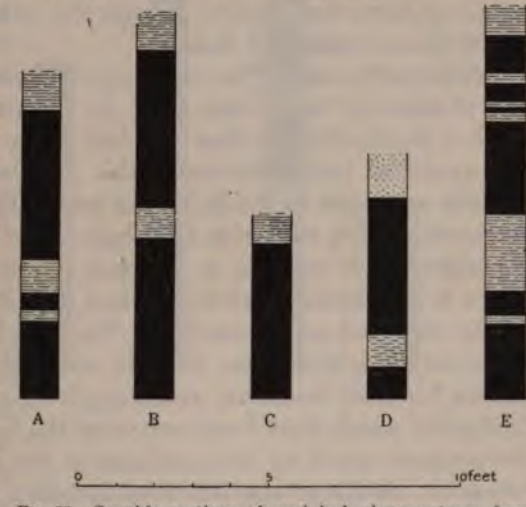

FIG. 20.—Graphic sections of coal bed along outcrop from Huntington through Hartford to the Chasteen slope. A, Mine No. 2, Central Coal and Coke Co., sec. 26, T. 5 N., R. 31 W.; B, Mammoth vein mine, sec. 1, T. 4 N., R. 32 E.; C, Bolen and Darnall mine, sec. 10, T. 5 N., R. 32 E.; D, Patterson Coal Company mine No. 1, sec. 14, T. 4 N., R. 32 W.; E, Chasteen pit, sec. 18, T. 4 N., R. 31 W.

The variations in the bed along the outcrop from Huntington to Hartford and then eastward along the southern outcrop are shown graphically in fig. 20. From the center of sec. 22, T. 5 N., R. 31 W., the coal has been stripped almost continuously along the outcrop for 2½ miles to the town of Huntington, where the outcrop and accompanying strip pit swing around a half circle to the south and then extend southeastward toward Hartford. There are two large mines operated from shafts as well as these strip pits in the synclinal basin near Huntington. The coal is in three benches separated by thin shale partings.

For several miles southeast of Huntington the coal is not mined though the position of the outcrop has been determined by prospecting. It is mined again, however, in sec. 32, T. 5 N., R. 31 W., where the

bed known as the Mammoth vein is over 8 feet thick, including a parting of several inches of shale near its center. At the town of Hartford, in sec. 10, T. 4 N., R. 32 W., the coal is worked in a number of small slopes and in two large ones. It consists here of a single bench of coal about 3½ feet thick. From this point the coal outcrop swings eastward around the western end of the Hartford anticline, and the coal is again mined in secs. 13 and 14, T. 4 N., R. 32 W. The coal bed here resembles the Huntington coal in that it consists of several benches of coal with partings between. East of this point there are no active mines. Although the coal has been prospected here, it is common report that the bed is separated into many benches. At the Chasteen mine, in sec. 18, T. 4 N., R. 31 W., it is very much divided and contains no bench over 2½ feet thick, though the total thickness of the bed is near 8 feet. East of this point no measurements have been made, though the outcrop of the coal has been traced for a number of miles.

Depths to the coal.—The coal dips westward at a low angle from the line of outcrop from Greenwood to Burma, but probably does not reach a depth of more than 800 feet below the surface at any point. The synclinal trough in which the town of Huntington is situated extends westward to the State line and includes Sugarloaf Mountains. For several miles west from Huntington the coal lies within 400 feet of the surface. It reaches its greatest depth in Sugarloaf Mountains, where it can probably all be reached by tunnels or slopes and should not be regarded as inaccessible. The anticline on which the town of Hartford is situated also extends southwestward to the Arkansas–Indian Territory boundary and along it the coal is all near the surface. Drill holes which have been sunk near the boundary line indicate that the greatest depth on this anticline at the boundary will not exceed 800 feet. South of the Hartford anticline the coal dips at a rather high angle and passes under Poteau Mountain. Some of the coal here is probably scarcely fit for mining on account of the divided condition of the coal bed, but further prospecting will no doubt develop a large area of coal land worthy of attention in this region also. The variations in the quality of the coal from the different mines of this district is indicated by the analyses in the table on pages 96–97.

BATES AND COALDALE DISTRICT.

The coal bed which dips southward from Hartford and passes under Poteau and Whiteoak mountains comes to the surface again in a line of outcrop parallel with the south flank of Poteau Mountain, where it has been traced from the Indian Territory line eastward for a distance of about 20 miles. It is continuous with the outcrop of coal beds

coals of the Arkansas field. The workings at Coaldale near the State line were not examined, but section A of the bed given in fig. 21 was reported by the operator. The bed here consists of over 7 feet of coal divided by a parting of shale. Three miles east of the State line, in sec. 21, T. 3 N., R. 32 W., the coal bed is divided into three benches and contains an aggregate of 8 feet of coal. Mining is done only in the largest bench, which is 4 feet thick. Nine miles farther east the coal bed still has a thickness of 5 or 6 feet, but is divided into many small benches, the largest of which is only 12 inches thick, and it is not probable that the coal can be successfully mined in this locality, though it is possible that the lower part of the bed was not all exposed. Croppings of this bed have been observed for about 2 miles farther east, but it has nowhere been opened so that a section could be measured, nor have any reports indicating a workable coal bed been received. These variations are shown by the graphic sections presented in fig. 21. The portion of the coal field that extends eastward from Lookout Gap and underlies Whiteoak Mountain was not examined, owing to the short time available for field work. Although the Hartshorne horizon is known to extend over a considerable area here, the facts presented indicate that the coal bed is probably divided and of little value. Both north and south of Poteau Mountain the coal dips at a high angle and the rocks maintain this dip well toward the center of the basin, indicating that the coal there is very deep. It is probable, however, that all of the coal can be mined from slopes entering the basin from the north and south sides.

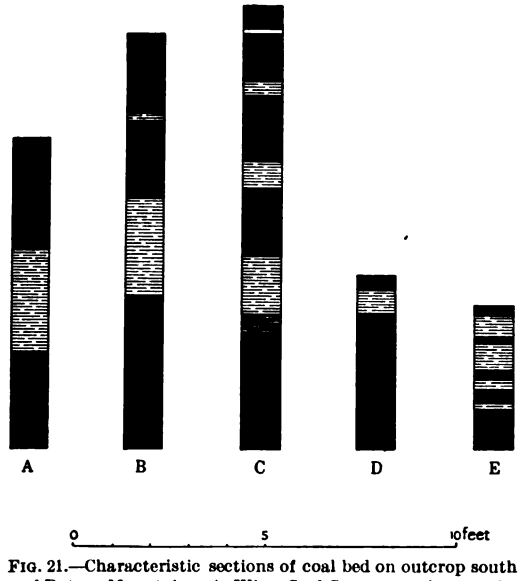

FIG. 21.—Characteristic sections of coal bed on outcrop south of Poteau Mountain. A, Witte Coal Company mine, sec. 19, T. 3 N., R. 32 W.; B, Seymour mine, sec. 21, T. 3 N., R. 32 W.; C, prospect hole in sec. 21, T. 3 N., R. 32 W.; D, Davidson slope, sec. 16, T. 3 N., R. 32 W., upper part of bed probably omitted; E, prospect hole in sec. 1, T. 3 N., R. 31 W.

CHARLESTON AND PARIS DISTRICT.

The Hartshorne coal has not been opened nor has the thickness of the bed been measured on the outcrop east of Auburn for a distance of about 35 miles, to what will be described as the Prairie View district. This unexplored region includes the towns of Charleston and Paris, near which coals of higher horizons are mined. The horizon

of the Hartshorne coal outcrops through the whole length of this region along the north base of Devils Backbone Ridge and its eastern extension, Pine Ridge. It also outcrops near the southern base of Mill Creek Ridge, on Grand Prairie, which extends from the Arkansas River at the mouth of Vache Grasse Creek eastward to Roseville. Along the southern outcrop line the presence of the bed is occasionally indicated by coal smut, but it is nowhere so exposed that its thickness can be measured, and the natural conclusion to be drawn is that along this line the bed is thin and of no economic value.

Along the northern outcrop, on Grand Prairie, no exposures of coal were seen by members of our party. There are some indications of a fault along the north side of this prairie, and it is possible that the coal horizon does not reach the surface, though it can not be at a very great depth. In the preliminary report of the Arkansas State Survey it is noted that coal occurs near the town of Vesta, probably at the Hartshorne horizon. This coal has been found in several wells near that place, but present information regarding it is no more advanced than that given by the State Survey. So far as known this coal bed has never been opened or accurately measured. Coal has been reported in a few shallow wells that penetrate the sandstone mantling Mill Creek Ridge near the town of Sub Rosa. If these reports are true this may possibly be the Hartshorne bed, though the stratigraphic evidence seems to locate it in the Hartshorne sandstone at a short distance below the general coal horizon.

The Hartshorne coal has been penetrated by diamond drills 3 miles northwest of Charleston, where it is approximately 2 feet thick and has a shale parting. East of this point the coal bed would be found at a depth usually exceeding 400 feet. At the base of Potato Hill and also at Paris its depth is estimated to be approximately 1,000 feet, while at Charleston it can probably be reached at from 800 to 900 feet. Between the towns of Branch and Caulksville there is an anticlinal flexure which probably brings the Hartshorne coal horizon within 300 or 400 feet of the surface. Although a certain amount of drilling has been done near Charleston and also near Paris, it is probable that none of the wells have reached a sufficient depth to find the Hartshorne coal.

South of Prairie View the Hartshorne sandstone is brought to the surface in an anticlinal flexure, along the axis of which there is a profound fault, as has been shown. A coal bed, presumably the Hartshorne, outcrops north of this anticline, and its extent has been partly determined by a number of drill holes, though the western boundary of the workable coal area can not be regarded as determined. South of the Prairie View anticline the Hartshorne horizon

inches. A coal bed about 400 feet below the Hartshorne sandstone outcrops at a number of places south of Pine Ridge and has in some localities been mistaken for the Hartshorne coal. It has been worked in strip pits in sec. 20, T. 7 N., R. 24 W., south of Ellsworth, but prospecting has not shown that the coal is of commercial value.

Coal of the Hartshorne horizon is also mined in the Denning and Coal Hill district, from which the coal bed dips southward at a rather low angle toward the Paris syncline. Drill records here indicate that the coal bed thins rapidly south of Denning, although its southern limit was not reached.

From the above facts it will be seen that the Hartshorne coal underlies a large area, about 15 miles wide, extending from Auburn eastward to Prairie View, in which the thickness and value of the coal has not been determined. The outcrops along the north and south sides of this area reveal no coal of commercial importance, but in view of the great local variation that may be expected in the Hartshorne coal further prospecting by deep drilling is fully warranted. The coal horizon can certainly be reached by a series of drill holes less than 400 feet deep on Grand Prairie along the northern edge of the basin and also in the center of the Caulksville anticline. The beds are so highly tilted and the structure so broken along the southern edge of the basin that the coal there would probably be of little value if found.

VAN BUREN AND ALMA DISTRICT.

Much that has been said in regard to the Charleston and Paris district can well be repeated in regard to the region north of the river in the vicinity of Van Buren and Alma. It is a district that has not been thoroughly prospected, though stratigraphic investigations show that it is underlain by the Hartshorne coal.

The coal outcrops at several places in the vicinity of Mulberry, where there is a small coal bed at a horizon very close to if not identical with that of the Hartshorne coal, which is usually overlain by 20 or 30 feet of sandstone and sandy shale that lies near the base of the Spadra formation. West of Mulberry the coal horizon is at a greater depth and does not outcrop, since at the northern edge of the field it is cut off by a fault north of which the Winslow sandstone is exposed. The depth of the Hartshorne horizon could not be estimated closely on account of the very obscure stratigraphic evidence, much of the surface being covered with deposits of gravel and sand.

A small coal bed found near Alma and Van Buren is provisionally correlated with the Charleston coal, which is about 800 feet above the Hartshorne horizon. What is probably the Hartshorne bed has been reached in a drill hole near Alma at a depth of 700 feet. It is reported to be 9 inches thick and overlies a sandstone 150 feet thick, provisionally correlated with the Hartshorne. A small coal bed which may also

correspond with the Hartshorne coal was formerly mined at the Hendricks pit, in sec. 16, T. 9 N., R. 31 W., 2 miles northeast of Van Buren.[a] This coal bed is said to be 2 feet thick. It overlies a hard, massive sandstone which is possibly equivalent to the Hartshorne. A coal bed is also reported in a number of wells in Van Buren which can not be definitely correlated with that south of the river from the stratigraphic evidence available, but probably corresponds very nearly with the Charleston coal. If this interpretation of the stratigraphy is correct, it necessitates the presence of a fault with a displacement of about 800 feet between the coal 2 miles northeast of Van Buren and that just mentioned. None of these coal beds have been found to be of sufficient size to warrant systematic development.

COAL HILL AND DENNING DISTRICT.

The Coal Hill and Denning district lies north of the Arkansas, between the river and the main line of the Iron Mountain Railway, about 40 miles east of the Indian Territory line. Its general outline and structure are shown in fig. 22. Along its north side the coal is cut off by a fault extending from Denning to a point a few miles east of Coal Hill, north of which the underlying rocks are raised. Half a mile south of this fault there is an anticlinal axis extending east and west through the district, in the center of which the underlying barren rocks are exposed south of Coal Hill. Near Denning the anticline pitches below the surface and the coal bed is continuous across it. South of Altus, at the west end of the Coal Hill fault, the coal bed approaches the surface, as indicated by drill records, and the Hartshorne sandstone rises and mantles Altus Hill.

A few miles west of Altus there is a smaller basin of coal land, including possibly 1 square mile, resting on this sandstone. The southern limb of the Coal Hill anticline, about 2 miles south of Coal Hill, is thrown down by the Spadra fault, so that the coal does not reach the surface.

Coal has been mined almost continuously from Coal Hill to Denning and southeastward from Denning around the southern limb of the anticline for several miles. The coal ranges in thickness from 1 to 5 feet, and the bed is usually characterized by a parting of shale or clay near the center, which varies greatly within short distances, being so thick in a number of places as to render the bed of no value.

Generally the parting thickens along the northern edge of the field, so that the underground workings have been stopped before they reach the fault. One of the first shafts sunk here for mining purposes found the parting over 4 feet in thickness and was abandoned for mining purposes, though it is still used as a pump shaft to drain one

of the mines farther south. South of the anticline coal has been mined near the outcrop, but beyond half a mile from the outcrop it is known only by rather meager drill records. These indicate that the bed becomes thin and of little value before the river is reached. Very little prospecting for this coal has been done at any distance south of the Coal Hill anticline, though its presence at a considerable depth

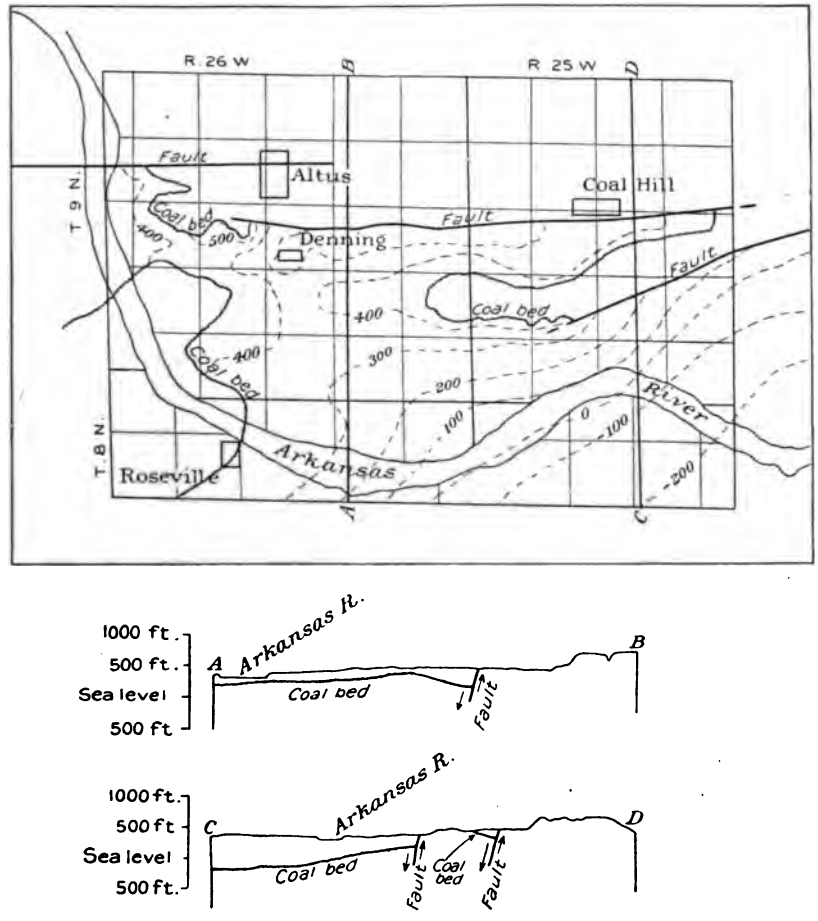

FIG. 22.—Map showing structure of Coal Hill-Denning district. Underground contour interval 100 feet. Diagrammatic profiles of land surface and coal bed along lines *A–B* and *C–D*; horizontal scale, 1 inch=3 miles; vertical scale, 1 inch=3,000 feet.

has been demonstrated by drilling, and it is reported that the parting is so thick as to preclude the possibility of successful mining. This coal bed probably extends eastward south of Hartman and is identical with that mined at Spadra, but for several miles the prospecting has not been sufficient to determine its quality and it does not outcrop at the surface. It will be found at a depth of several hundred feet and will doubtless present a number of difficulties for mining,

since it is below the flood plain of Arkansas River and the hard rocks are overlain by thick alluvial deposits.

Variations in the thickness of the coal and its partings in the Coal Hill district are shown graphically in fig. 23. The coal is semibituminous, as is shown by chemical analyses. It has a bright luster and is somewhat harder than that mined at the west end of the field.

Coal is mined for local trade from a number of small slopes in the small outlying basin west of Altus, in sec. 17, T. 9 N., R. 26 W. Here there are two coal beds, the lower averaging 2 feet and the upper 10 inches thick, with 18 feet of sandy shale between them. These two beds are regarded as equivalent to the two benches of the Denning coal bed with an excessive thickness for the parting. The coal resembles that of the Denning bed, though, being shallow, it

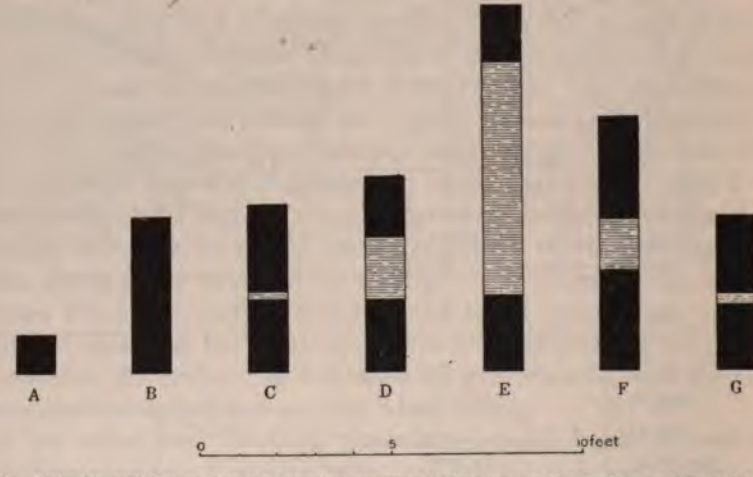

FIG. 23.—Graphic sections of coal at Denning, showing variations of the parting as revealed by drill records and other openings. A, Drill hole in NW. ¼ sec. 34, T. 9 N., R. 26 W.; B, drill hole in SW. ¼ sec. 27, T. 9 N., R. 26 W.; C, drill hole in NW. ¼ sec. 27 (average section of the bed as reported by Western Coal and Mining Co.); D, drill hole in NW. ¼ sec. 26, T. 9 N., R. 26 W.; E, drill hole near pump shaft in SW. ¼ sec. 23, T. 9 N., R. 26 W.; F, drill hole in SE. ¼ sec. 23, T. 9 N., R. 26 W.; G, drill hole near old Stiewell slope, sec. 20, T. 9 N., R. 25 W.

is affected by weathering and the joints are iron stained. Chemically it has a much lower percentage of sulphur.

A similar coal bed, with a parting more than 12 feet thick, is indicated by outcrops of coal smut on the south side of the river about 2 miles west of this basin in sec. 23 of the same township. No coal has been mined here. The outcrop probably indicates a small shallow basin of coal of the Hartshorne horizon resting on the Hartshorne sandstone.

SPADRA DISTRICT.

This district is also north of Arkansas River and its center is about 10 miles east of Coal Hill. It takes its name from the town of Spadra,

near which the coal bed outcrops and where the first developments were made. The coal differs slightly from that at Denning, in that it is considerably harder and of higher grade chemically. It is mined almost exclusively for domestic use and sold as semianthracite or Arkansas anthracite coal. The coal is somewhat thinner than at Coal Hill and Denning, though it is regarded as a continuation of the same bed, and it presents similar irregularities.

The structure of the Spadra field (fig. 24) is complicated, and its interpretation is made difficult by extensive deposits of sand and

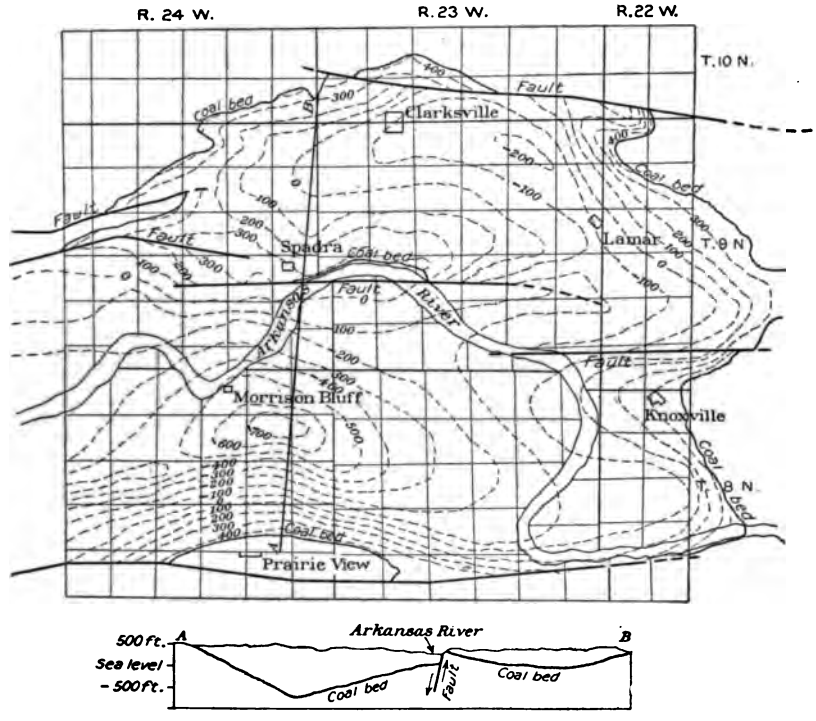

FIG. 24.—Map of Spadra and Prairie View coal fields, showing the nature of the deformation and faulting of the coal bed. Underground contour interval, 100 feet. Profiles of land surface and coal bed along line *A–B*. Vertical scale, 1 inch=4,000 feet. Horizontal scale, 1 inch=4 miles. Elevation of river at average stages, 300 to 320 feet.

gravel, which conceal a large part of the surface. It has been prospected by many companies and individuals, and though numerous drill holes have penetrated the coal horizon it has been impossible to assemble all of the information that has been obtained, since some of the records have been lost and others probably withheld. The available information, however, is sufficient to show that the continuity of the coal bed is broken by several faults of normal type that strike approximately east and west with downthrows generally to the south. Only one of these has been encountered in the mine workings, and its

extension conclusively demonstrated by drill holes. The others are indicated by stratigraphic evidence. The best known of these faults was first encountered 2 miles northwest of Spadra in one of the mines of the Eureka Coal Company, from which point it extends west-northwest nearly to the town of Hartman, where it turns a little south of west and continues to the center of the Coal Hill field.

Another fault, trending nearly east and west, marks approximately the southern limit of present mining operations. It is parallel with and a short distance north of Spadra Hill, a long ridge capped by flat-lying sandstone south of Spadra, and its east end is a few hundred yards north of the branch railroad at the south base of Big Danger Hill, in sec. 23, T. 9 N., R. 23 W., where its position is indicated by conclusive stratigraphic evidence. The displacement at the mouth of Spadra Creek is at least 200 feet. A small fault, which differs from those described in that the downthrow is to the north, lies north of the western part of the Spadra field, bringing in a small area of Spadra coal at the old Allen slope in sec. 18, T. 9 N., R. 24 W.

Another fault, which marks the northern boundary of the coal field northwest of Clarksville, occurs 3 miles north of Cabin Creek. The west end of this fault is probably north of Clarksville, from which point it extends eastward for about 15 miles. North of this fault the barren rocks below the coal horizon are exposed.

From Spadra the coal bed extends northward for about 5 miles. It underlies the town of Clarksville at a depth of from 400 to 500 feet, and outcrops 1½ miles northwest of Clarksville at a point noted by the Geological Survey of Arkansas as the Harkreader well,[a] from which point the outcrop can not be traced eastward with certainty. Coal again occurs and has been mined at a point 2 miles northeast of Clarksville, in what is known as the Mason drift, sec. 27, T. 10 N., R. 23 W. While it is probable that this coal is in the Hartshorne horizon, its characteristics are quite different from those of the Spadra bed, as will be shown later. The Spadra bed is known to extend from Spadra and Clarksville eastward, where it underlies Big Danger Hill and the massive sandstone of which it is composed. It has been penetrated by drill holes west of Cabin Creek (Lamar) at a depth of 550 feet, and the same bed probably outcrops on sections 6 and 7, T. 9 N., R. 23 W., 2 miles north of Cabin Creek.

The rather complicated structure of the coal field, as interpreted, is presented in the sketch map forming fig. 24, from which it will be seen that at the western limit of prospecting the coal bed is at a depth of 400 feet and that its depth probably increases westward.

On account of the miners' strike it was impossible to obtain measurements of the coal at the extreme west end of the district, though

drill holes have been made in this part of the field, but the owners would furnish no information regarding the coal except its distance below the surface. The coal bed is exposed by outcrop at the old Allen slope, in sec. 18, T. 9 N., R. 24 W., and also in an unnamed slope on section 17 of the same township, both of which have been abandoned for many years. The Allen slope, however, was open at the time the field was examined by the geologists of the Arkansas Survey, who report that the coal bed measures 4 feet, including a thin parting near the center. Old residents say that the coal is 3 feet thick at the slope in section 17, and the impression gained by conversation with mine owners and operators interested in the western part of the Spadra field is that approximately this thickness prevails over the entire west end of the field.

Coal mines are located at very short intervals from a point a short distance west of Montana post-office eastward along the railroad

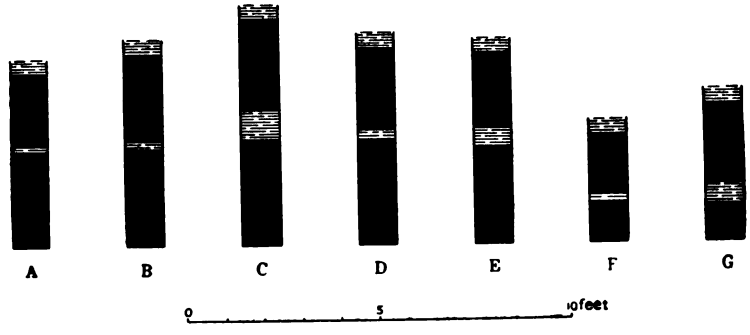

FIG. 25.—Sections showing thickness of the coal bed in the Spadra district and in the undeveloped field north of Lamar. A, Scranton Anthracite Co. mine, sec. 22, T. 9 N., R. 24 W.; B, Central Anthracite Co., sec. 22, T. 9 N., R. 24 W.; C, Eureka Anthracite Co., sec. 23, T. 9 N., R. 24 W.; D, Spadra Creek Coal Co., Needmore mine, sec. 23, T. 9 N., R. 24 W.; E, Consolidated Anthracite Coal Co., mine No. 1, sec. 24, T. 9 N., R. 23 W.; F, Brooks mine, Western Anthracite Coal Co., sec. 17, T. 9 N., R. 23 W.; G, prospect on sec. 7, T. 9 N., R. 22 W., north of Lamar.

for a distance of 6 or 7 miles. Nearly all of the openings are made by shafts that reach the coal at a depth of 200 feet or less. The average thickness of the coal is 2½ feet, including a small parting near the center of the bed. In general the coal dips to the north or northwest at a low angle, usually less than 3 per cent. The variations in the thickness of the coal bed and the position and size of the parting are shown in fig. 25.

The underground workings of the mines near Spadra extend for a maximum distance of 1 mile north from the main line of the Iron Mountain Railway, and two new mines have recently been opened near the southwest face of Big Danger Hill, about 2 miles northeast of Spadra. Although the records of much of the drilling that has been done north of these mines were not available, it is common report that in that direction the parting increases rapidly and makes much

of the coal unfit for mining. A shaft about 1½ miles northwest of Clarksville, near the old Harkreader well, was sunk in 1906, but had not reached the coal at the time of our examination. The coal bed, however, outcrops a short distance to the southwest, where it shows a thickness of 18 to 24 inches without parting.

At all of the mines and openings described thus far the coal bed is overlain directly by shale. The coal bed at the old Mason slope, which has been correlated provisionally with the Spadra coal, is different, however, in that it is overlain by several feet of hard sandstone. Coal has been mined from a strip pit 1½ miles southeast of the Mason drift, probably from a somewhat higher bed, though the exact location of the old pit is obliterated, and it was impossible to determine its stratigraphic position. In view of the tendency of the coal bed at Denning to divide in areas farther north, it seems at least possible that the same tendency may appear in the Spadra field—that the parting increases rapidly northward, separating the Spadra coal into two beds. The Mason coal may therefore represent the lower bench of the Spadra bed. The coal at the Mason slope is protected from erosion by the thin bed of sandstone which overlies it, and remnants of the coal bed have been found mantling the hill to the north at a number of places. Presumably it is the same bed that outcrops in a thickness of 15 inches on Dicks Branch, in sec. 10, T. 10 N., R. 23 W., 2 miles north of the Mason opening. It has been noted that the Spadra coal is believed to outcrop again northeast of Cabin Creek, where it has been opened at two points and seems to be sufficiently thick to warrant development. The section measured there is over 2 feet thick and is shown in fig. 25. From these openings the coal bed has been traced eastward and is correlated with two outcrops which are shown on the map near Piney Creek. At this point, however, the coal is of no value. It consists of 7 inches of coal overlying 2 feet of bony coal.

PRAIRIE VIEW DISTRICT.

This coal field lies on the south side of Arkansas River immediately south of the Spadra district. The presence of coal near the village of Prairie View has been known for many years and was noted in the report of the State Survey.[a] Attempts to prospect the field and determine the extent of the coal land have been made only within the last few years, and large areas of land have been purchased or optioned by a company known as the Arkansas Anthracite Company, whose headquarters are at Little Rock.

In the examination of the field preparatory to the purchase of coal lands 37 drill holes were sunk to various depths, 13 of which

of the holes were evidently not carried to depths sufficient to reach the horizon sought, while others showed that there are parts of the field in which the coal is too thin for exploitation. The greatest thickness of the Hartshorne coal reported is 5 feet and the least about 1 foot.

This field lies in a broad syncline having a general east-west axis. Its southern edge is along the Prairie View fault, and its northern edge, which is contiguous to the southern edge of the Spadra field, is along the Big Danger fault, both of which have been described. A large part of the land surface is covered with heavy deposits of sand and gravel, so that inferences drawn from bed-rock exposures are not of very great value. The structure of the field, as indicated by drill records and observations of outcrops, is shown in fig. 24.

Three analyses of coal from diamond-drill cores, obtained at different points in the field, published in the prospectus of the Arkansas Anthracite Company, are given in the table on page 88. The samples

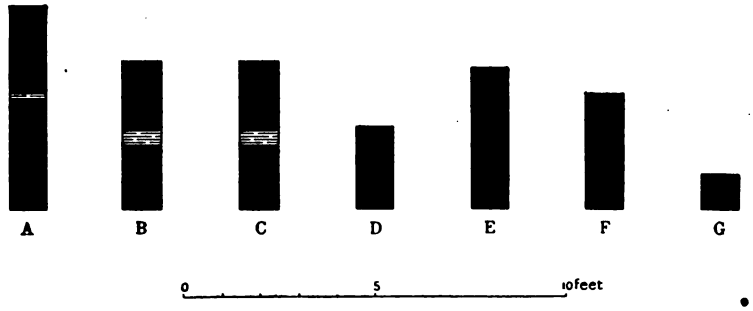

FIG. 26.—Graphic sections showing approximate thickness of coal at various points in the Prairie View field. A, B, and C from northern part of field; D, E, F, G from southern part. A, SW. ¼ SE. ¼ sec. 5, T. 8 N., R. 24 W.; B, SW. ¼ NW. ¼ sec. 2, T. 8 N., R. 24 W.; C, NE. ¼ SW. ¼ sec. 31, T. 9 N., R. 23 W.; D, SE. ¼ SE. ¼ sec. 17, T. 8 N., R. 24 W.; E, SE. ¼ SW. ¼ sec. 15, T. 8 N., R. 24 W.; F, NE. ¼ sec. 23, T. 8 N., R. 24 W.; G, SW. ¼ NE. ¼ sec. 24, T. 8 N., R. 24 W.

appear to be fully representative of the beds, and the analyses, which seem to be reliable, indicate that the coal in the northern part of the field is semianthracite, like that of the Spadra district, while that of the southern part is semibituminous, like that at Coal Hill. This is a condition to be expected from the facts learned in other parts of the Arkansas field. In the northern part of this district the bed is divided into two benches, resembling in this respect the Spadra coal, but in the southern half no parting is reported. Several graphic sections of the bed, as reported by engineers of the coal company, are given in fig. 26.

The east and west limits of workable coal in the Prairie View field can not be regarded as determined by the prospecting which has been done. Along the southern edge of the field, however, the drill holes show a thickness of 14 inches in sec. 24, T. 8 N., R. 24 W., east of which no workable coal was found. That the bed pinches out

altogether farther east is indicated by prospecting near Knoxville in T. 8 N., R. 23 W., where several drill holes have passed through the Hartshorne horizon without finding any coal. In the western part of the district very few drill holes have been sunk to the coal horizon, and the inference made by the coal company that workable coal does not extend in that direction does not seem fully justified.

This district is undeveloped except for these drill holes, and no coal has been mined except for local use. The field is not accessible from any of the existing railroads, but could be reached by an extension of the Arkansas Central road, which now terminates at Paris. The distance would be not more than 15 miles.

RUSSELLVILLE DISTRICT.

The Russellville district lies at the extreme eastern end of the coal field as at present recognized, and includes two small basins of coal land, known as the Ouita basin, a few miles north of Russellville, and the Shinn basin, a few miles south of that place. Between Knoxville and Russellville the Hartshorne sandstone comes to the surface and crosses Arkansas River in a slight anticlinal flexure, so that these basins are not connected with the Spadra and Prairie View basins, although the coal is in the same horizon. A few miles west of Russellville, in the vicinity of London, there is an area of land containing something over one and one-half townships which is underlain by Spadra shale and Hartshorne sandstone, and, as will be seen from the geologic map, the Ouita basin is a northeastern extension of this larger basin. The Shinn basin is not connected with the London basin, a belt of Hartshorne sandstone intervening between them.

Ouita basin.—The coal lands in the Ouita basin, which are partially worked out, are estimated to have covered an area of approximately 2 square miles. Although the formation that carries the coal extends westward over the larger area of the London basin, coal has not been mined in that basin except in the area noted, and prospect wells a few miles farther west, near London, have revealed no coal. On the south side of the river opposite London, as much as 18 inches of coal have been found in a drill hole penetrating the Hartshorne horizon. The coal beds of Shinn and Ouita basins are evidently small remnants of a more extensive sheet of coal, which have been protected in synclinal folds, while the greater part has been eroded. This coal bed probably thins rapidly toward the northwest and pinches out entirely in a few miles, though it probably was once continuous along the south side of the river. The northern, eastern, and southern boundaries of the Ouita basin are determined by the

point lie very deep and has been mined from many small slopes, strip pits, and shafts which have now been abandoned and have caved in. Owing to the careless methods of mining probably much of the coal has been left in the ground and will be lost. Moreover, Illinois Bayou, a strong stream which heads in the Ozark Mountains, flows across the basin and has no doubt eroded a great deal of the shallow coal, so that much of the area included in the basin is not coal land.

The field includes one active mine as well as a number of small slopes and shafts that are occasionally worked for local supply. When it was examined all of the mines were shut down owing to the strike, and most of them were full of water, so that the coal bed was absolutely inaccessible. Although it was impossible to make measurements of the thickness of this coal bed, reports concerning it, believed to be reliable, indicate that the bed is without parting and has an average thickness of 28 inches. The roof and floor are shale. As reported by the Geological Survey of Arkansas the coal is about 26 inches thick and is overlain by 4 inches of bony or "wild" coal.[a]

Shinn basin.—The Shinn basin lies about 2 miles south of Russellville and includes approximately 2 square miles of coal land. Like the Ouita basin, this is bounded on all sides by outcrops of Hartshorne sandstone. On the south side of the basin this bed rock dips at a very high angle and is in some places slightly overturned, indicating that the basin has considerable depth. Shafts sunk for mining purposes show that its maximum depth from the surface probably exceeds 600 feet. Coal has been mined along the northern side of the basin for a great many years, where there are several abandoned slopes, but owing to the high pitch of the coal and its greater depth only a comparatively small amount of the area has been mined. The coal here is somewhat thicker than in the Ouita basin, ranging between 40 and 46 inches, with an 8 to 10 inch parting. Two thin coal beds, which are not worked, are reported several feet below, and a bed of coal a foot thick, lying above the main bed, has been passed through by some of the shafts. There are only three active mines in the basin, one of which has a shaft 480 feet deep and is the deepest coal mine in Arkansas.

The coals from both of these basins are classed as semianthracite. They command a somewhat higher price than the Spadra and other coals farther west, and are used almost exclusively for domestic purposes.

PHILPOTT DISTRICT.

The Philpott district lies in an isolated synclinal trough extending east and west through T. 10 N., Rs. 24, 25, and 26 W., north of the Coal Hill and Spadra fields. It includes a number of prospects and

[a] Ann. Rept. Geol. Survey Arkansas, 1888, vol. 3, p. 34.

small mines which were operated before the larger mines along the railroad were opened. The coal produced was softer than the Spadra coal, and for local use formerly commanded a better price, since it ignites and burns more freely. Analyses show that it is semibituminous and of about the same grade as that at Coal Hill and Denning. (See table, p. 98.)

Two beds of coal, separated by from 600 to 800 feet of shale and shaly sandstone, occur here. The lower of these, known as the Pickartz bed, from the old Pickartz mine, is correlated on stratigraphic evidence with the Hartshorne bed. The shale and sandstone above it represent the Spadra and a part of the Fort Smith formation, and the upper coal bed, known as the Philpott coal, is near the Charleston coal horizon.

The Pickartz mine is situated in sec. 24, T. 10 N., R. 26 W., and the horizon of the coal has been traced eastward for a distance of nearly 18 miles, connecting with the coal which outcrops on Dicks Branch, sec. 10, T. 10 N., R. 23 W., and Minnow Creek, sec. 20, T. 10 N., R. 22 W. The position of this outcrop is shown on the geologic map, and from it the coal land extends northward in a synclinal trough 5 or 6 miles wide. The coal evidently passes under Mulberry Mountain, where the northern outcrop has not been determined. No mining has been done along this outcrop for many years.

The geologists of the Arkansas Survey reported the following section at the Pickartz mine:

Section of coal bed at Pickartz mine.

	Inches.
Coal	20 to 22
Shale	½ to 2
Coal	1 to 4

The coal exposed at Dicks Branch measures 15 inches and at Minnow Creek 14 inches. So far as known there has been very little prospecting by deep drills to determine the amount of coal contained in this basin, though such an investigation would seem to be warranted by the showings already made. The upper bed, on which the old Moomaw and Philpott mines were located, is described in connection with the coal of the Charleston horizon.

OTHER LOCALITIES.

The most extensive and the best known areas in which the Hartshorne coal horizon occurs have now been described, but this horizon has been noted at a few other localities, where the coal is probably not present in minable quantity. One of the largest of these areas underlies M[illegible]zine Mountain, in T. 6 N., Rs. 24 and 25 W. Another

southeast of Russellville, and comparatively large areas north and east of Russellville, are capped with Hartshorne sandstone, but in all these the overlying rocks in which the coal is contained have probably been eroded away. In the region north of the district investigated there may be areas covered by Hartshorne sandstone and some of the overlying rocks, in which some Hartshorne coal may be found, but they are not known at present.

COALS OF THE COAL RIDGE OR CHARLESTON HORIZON.

The Fort Smith formation near its upper part contains one or more coal beds which have been mined for local supply at many places in the Arkansas field. These coals lie from 800 to 900 feet stratigraphically above the Hartshorne horizon and are nowhere more than 3 feet thick, generally being too thin for mining except from strip pits. Owing to the erosion of intervening areas it has been impossible to correlate these upper beds in different districts by continuous exposures, and though no individual coal bed at this

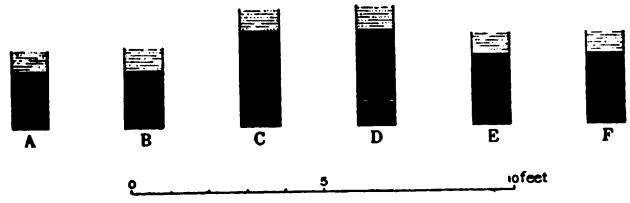

FIG. 27.—Characteristic sections of coal bed at Charleston horizon. A, Strip pit at Central, sec. 1, T. 7 N., R. 29 W.; B, slope under Coal Ridge, sec. 20, T. 7 N., R. 29 W.; C, Carters slope near Charleston, sec. 17, T. 7 N., R. 28 W.; D, prospect in bank of Big Creek, sec. 19, T. 7 N., R. 27 W.; E, Moomaw shaft near Ozark, sec. 22, T. 10 N., R. 26 W.; F, Philpott shaft, sec. 20, T. 10 N., R. 25 W.

horizon was probably ever continuous over the whole Arkansas coal field, it is believed that they are all within 100 feet of the same horizon. Coals at this horizon have been mined locally near Fort Smith, Central, Charleston, Caulksville, Alma, and in the Philpott basin. Their outcrops have been seen in many other places. The area covered by rocks of this horizon is indicated on the geologic map, Pl. VI. In general, the coal is of good quality and, as compared with Hartshorne coal, relatively free from ash, though on weathering it is often coated with white efflorescence. Graphic sections of coal beds of this horizon are shown in fig. 27.

CHARLESTON DISTRICT.

These coals are best exposed in the vicinity of Charleston, Franklin County, where the bed has been worked by stripping at many places indicated on the geologic map. In general, they have sandstone or sandy shale roofs and floors. The rocks overlying the coals contain at some places an abundance of fossil plants, which have already been described. (See report on paleobotany, pp. 24–31.) The coals are

best exposed and were first examined in the west end of Coal Ridge, in sec. 15, T. 7 N., R. 30 W., 2 miles north of Auburn, where they occur in a group of thin sandstones with intervening sandy shale. The outcrops of the inclosing rocks form two ridges, known as Grand Ridge and Coal Ridge. The sandstone of Grand Ridge is estimated to be about 800 feet above the Hartshorne sandstone and 150 feet below the sandstone forming Coal Ridge, which is the upper bed of the Fort Smith formation. Coal has been mined here from a succession of small slopes on a bed about 100 feet below the sandstone forming Coal Ridge. It has a thickness of 18 inches without partings. An analysis of a sample (U. S. G. S. No. 13) taken at this horizon is given in the table (p. 98). About 60 feet above the bed mined there is a smaller bed, which is of no importance here but is probably of greater thickness elsewhere, and it is probably true that some of the many outcrops near Charleston represent this small upper bed, while others represent the lower.

In sec. 27, T. 6 N., R. 30 W., about 1 mile south of Auburn, an old strip pit, which was full of water at the time of examination, probably represents the upper one of these two beds. The coal here shows a tendency to break into cubical blocks and is coated with a white efflorescence. Its thickness was not measured, but the coal has been mined for local purposes for many years, and the opening is mentioned in the report of the Arkansas State Survey under the name Bean pit. Coal has also been obtained in the bed of Big Creek from an opening called the Langston pit, 1 mile south of the Bean pit, but the locality was not examined. The bed worked here probably corresponds with that mined at Coal Ridge north of Auburn.

East and north of Charleston there are many openings on one or the other of these beds, which will not require description in detail, their positions being shown on the geologic map. It is probable that there are still some large areas of land which can be mined by stripping in the region, but the topographic maps at hand and the time available for the work were not sufficient to define them. Two miles east of Charleston, on the Carter place, there is a new slope from which more or less coal is taken every year. It was full of water when examined, but the coal is reported to be 3 feet thick.

The same coal is probably represented in an old pit on sec. 3, T. 7 N., R. 27 W., 1 mile east of the town of Caulksville, where it is reported to be only 13 or 14 inches thick.

BONANZA AND JENNY LIND DISTRICT.

Coal of the same horizon outcrops at a number of places between [redacted] n sec. 1, T. 7

without parting. The coal has a cubical fracture, and after mining becomes coated with a white efflorescence. The same coal has been penetrated by wells at a number of points in the region southwest of Central, and has been mined from strip pits at Little Vache Grasse Creek and probably at other points.

The coal at the old Herman mine, in sec. 1, T. 8 N., R. 22 W., near Fort Smith, is probably also at this horizon. It is said to have been worked before and during the civil war and is noted in the Arkansas Survey reports. When the old workings were examined only one exposure, revealing 10 inches of good coal overlain by 1 foot of "bony" coal, was found. The bed is contained in sandy shale resembling that near Charleston.

VAN BUREN AND ALMA DISTRICT.

Coal of probably the same horizon outcrops at several points on the north side of the river near Alma, the thickness of the bed nowhere exceeding 18 inches and averaging 9 or 10 inches. At the Sullivant pit, in sec. 13, T. 9 N., R. 31 W., the coal measures 13 inches, and at the Graves pit in sec. 33, T. 9 N., R. 30 W., it measures 18 inches. Analyses of samples from these pits made by the Geological Survey of Arkansas (11 and 16 in table, p. 88) show that the coal is semibituminous. The same bed, perhaps, outcrops on Arkansas River at Moores Rock, in T. 8 N., R. 30 W., and it has probably also been found in wells at Van Buren. None of these openings expose a coal of workable thickness.

HUNTINGTON DISTRICT.

The same coal bed is probably exposed in Sugarloaf and Poteau mountains. It outcrops at the base of the Sugarloaf Mountains near the gap, where old excavations show that it has been opened, though no reports as to its thickness were obtained. The accidental exposures seen do not indicate that it is sufficiently thick to be of commercial value. A bed which may correspond with this is exposed at the Noblet pit, in sec. 31, T. 4 N., R. 32 W., on Poteau Mountain, where it is reported to consist of four thin benches aggregating 31 inches.[a]

PARIS DISTRICT.

At Paris this horizon is from 200 to 400 feet below the surface, and its outcrops north and south of the Paris basin have not been seen. In the Prairie View region, however, a coal bed 9 or 10 inches thick at about the proper distance above the horizon of the Hartshorne coal has been examined at a number of localities, which are noted on the geologic map. In no place has it been found to be of sufficient thickness to give it economic value under present conditions.

[a] Ann. Rept. Geol. Survey Arkansas, vol. 3, 1888, p. 19.

SPADRA DISTRICT.

A number of small coal beds, none of which are of economic importance and which correspond closely in stratigraphic position with the Charleston horizon, outcrop in the vicinity of Cabin Creek east of Clarksville. Although the detail of the stratigraphic succession of these beds has not been closely determined, they are regarded as corresponding approximately with the group of beds represented at Charleston.

PHILPOTT DISTRICT.

The bed mined at the old Philpott and Moomaw openings, in T. 10 N., R. 26 W., also seems to correspond approximately in stratigraphic position with the Charleston bed, though the interval between it and the Hartshorne may be as small as 600 feet. This coal lies in a synclinal basin about 4 miles long by 2 miles wide in which the rocks dip at low angles, and the coal is nowhere very deep. At the Philpott slope, sec. 20, T. 10 N., R. 25 W., the bed is from 18 to 22 inches thick, without partings, and a similar thickness is reported from other openings in the basin. The coal is semibituminous. Analyses of samples taken by the Arkansas Geological Survey indicate that it is comparatively low in ash and that it is chemically of a somewhat higher grade than the coal from the Pickartz bed.[a] Most of the product of one or two small mines is sold for domestic use at Ozark, to which place it is hauled by wagons. The eastern boundary of this basin has not been definitely determined, though the stratigraphy indicates that it can not extend far beyond the limit stated above.

Although the bed is comparatively thin, it seems to be well adapted to "long wall" mining, which has not yet been attempted, and all the coal contained will doubtless ultimately be available.

A similar small basin containing this coal doubtless underlies Mulberry Mountain, a few miles farther north, where no coal has been mined and no investigations were made by the United States Geological Survey party.

COALS OF THE PARIS HORIZON.

The horizon of the Paris coal is from 1,000 to 1,200 feet above the Hartshorne horizon. Stratigraphically it is about midway between the top and the bottom of the Paris formation. At the type locality near Paris the coal bed is overlain by shaly sandstone and underlain by sandy shale. A few inches of draw slate generally lies above the coal and at places some fire clay lies between it and the sandy shale floor. The bed varies in thickness from 2 to nearly 3 feet where it is worked. Near Paris the outcrop of the bed has been traced around the margin of the basin in which Short Mountain and Little

The whole area underlain by this coal does not exceed 8 square miles, and in its western part the bed is probably too thin for mining. The coal has a bright luster and a rather indefinite cubical fracture. Chemically it is semibituminous and somewhat higher in hydrocarbon than the average Hartshorne coals in the same region. (See fig. 28, p. 85, and table of analyses, p. 98.) It is sold principally for domestic use. All the coal mined is hand picked or forked, the slack being left in the gob.

Outside of the Paris district this coal horizon is represented only in the vicinity of Potato Hill, where a coal bed provisionally correlated with it has been mined by stripping at several localities, though its thickness is not great enough at any opening to be of commercial importance. West of Potato Hill, in sec. 23, T. 6 N., R. 27 W., the coal is exposed in a strip pit which has been worked for local supply within the last year. The pit was full of water when examined, so that the coal could not be measured, but its thickness is reported to be about 14 inches. The same coal outcrops in several localities near Pine Hill, but it is not mined to any extent, and its thickness is not great enough to warrant development.

Except in these two areas the coal of this horizon has not been examined in Arkansas. It should outcrop in Sugarloaf, Poteau, and Magazine mountains, and it has probably been seen by prospectors and others in each of the two former localities, though it has not been reported from the latter. On stratigraphic and paleobotanic evidence it is provisionally correlated with the McAlester coal of Indian Territory. (See report on fossil plants, pp. 24–31.)

COALS IN THE ATOKA FORMATION.

Coal beds have been reported from many localities in the series of shales and sandstones underlying the Hartshorne, to which the name Atoka formation is applied. These lower coal beds are not continuous for any great distance and are thin, except in small areas. The investigation of the rocks below the Hartshorne horizon has been too limited and too unsystematic to enable the correlation of such coal beds with one another, and they will be described by localities without reference to horizons. In the western part of the field such coal has been reported at only one locality, in the center of the Backbone anticline, about 2 miles northeast of Hackett. The coal bed here lies between 500 and 1,000 feet below the Hartshorne sandstone and is not believed to be more than a few inches thick. Coal is also reported by the Geological Survey [a] of Arkansas in the neighborhood of Booneville, on Fletcher Creek, the locality being known as the Carlan drift. Although not examined, this coal is believed to be several hundred feet below the Hartshorne sandstone.

[a] Ann. Rept. Geol. Survey Arkansas, 1888, vol. 3, pp. 23, 59, and 80.

A small bed of coal which has been mined from strip pits for local use also outcrops on a bench on the north side of Rich Mountain 4 miles southwest of Ellsworth, in T. 7 N., R. 24 W. It was impossible to make an examination of this coal bed, as the pit has not been worked for several years and had caved in. The coal here is estimated to be about 300 to 400 feet below the Hartshorne sandstone. What is believed to be the same bed of coal has been penetrated by two drill holes in the vicinity of Shoal Creek, in T. 7 N., R. 23 W. It is 400 feet below the Hartshorne coal horizon, and one of the wells shows that it is nearly 4 feet thick, but is divided by shale partings. Where penetrated by the other well this bed is somewhat thinner.

Coal beds of horizons below the Hartshorne outcrop at several localities south of Shinn basin, in the Russellville district. The rocks here strike approximately east and west and dip northward under Shinn basin at high angles. There is some evidence of a fault here, making it difficult to estimate the interval between these coals and the Hartshorne horizon. It is probable that two beds are represented here, one about 400, the other from 800 to 1,000 feet below the Hartshorne. Prospecting with diamond drills was in progress here during the summer of 1906, though at the time the region was visited no coal thick enough to work had been discovered.

In the region south and southeast of Dardanelle the same beds have been mined occasionally since the civil war. Some old excavations in sec. 35, T. 6 N., R. 21 W., north of Centerville, expose from 18 to 20 inches of coal at the outcrop. Several drill holes which have been sunk on this bed indicate that it has a maximum thickness of a little less than 3 feet. The structure here indicates that this bed should dip north into an extensive synclinal basin, and should crop out again a few miles south of Dardanelle. Its northern outcrop, however, has not been recognized. Near the center of this syncline a higher bed of coal has been discovered in one or two wells and is reported to have a thickness of 14 to 15 inches. These beds are estimated to be about 400 feet and 800 feet, respectively, below the Hartshorne. What is probably the equivalent of the lower of these beds has been mined near Chickalah, south of Mount Nebo, and its occurrence west of Spring Mountain has been noted in the report of the Geological Survey of Arkansas, neither of which localities were examined. A thin coal that must also belong to one of the lower horizons has been reported near Atkins in T. 7 N., R. 18 W., and also near Galla Rock in T. 6 N., R. 20 W.

A coal bed 1 foot thick in one of these lower horizons outcrops and has been mined in the NE. ¼ sec. 24, T. 9 N., R. 26 W., in the Coal Hill district just north of the Coal Hill fault. This bed has been estimated

of Denning, where it is reported to be 5 feet thick. Between Altus and Ozark there are several outcrops of a coal bed less than 1 foot thick, which is probably near the same horizon.

A bed that is possibly slightly lower outcrops and has been prospected at the base of the sandstone on which the town of Ozark is built, and a similar coal outcrops south of Arkansas River opposite Ozark. The geologic work around Ozark has not been sufficient to demonstrate whether or not these various outcrops of coal can be correlated with one another. The beds vary greatly in thickness at different points, but are characterized by great irregularity and impurity, more than half of the bed usually being bone or black shale. A dirty coal bed somewhat resembling these, but more than 2 feet thick, has been reported from drill holes near the river several miles above Ozark. This bed, if present as reported, must necessarily be below the Hartshorne sandstone, and the results of prospecting thus far indicate that it has no economic value.

Drill holes that have been sunk to great depths in the neighborhood of Alma and Van Buren disclose no coal beds below the Hartshorne horizon. The same may be said of the drill holes in the vicinity of Fort Smith. Small coal beds of no economic value, which have not been correlated with each other nor with the beds herein described, are reported at several places in the large area underlain by Winslow sandstone north of the western part of the coal field, which has been examined in detail for the Winslow folio. All the evidence now available regarding coal below the Hartshorne horizon indicates that these coals are of greater thickness in the eastern part of the field than in the western, where they are practically absent.

From present indications further investigation of such beds in the vicinity of Russellville and Dardanelle is certainly justified and will probably result in extending the boundaries of the coal field as at present defined.

CHARACTER OF THE COAL.

PHYSICAL CHARACTERISTICS.

Most of the coals of Arkansas have a bright luster when freshly mined, though parts of some of the beds at a few places are described as dull. They generally present little evidence of stratification and seldom any cleavage parallel to the bedding, but the vertical cleavage or "cleat" is complex and somewhat indefinite. Except at one or two mines, the cleat is an unimportant factor in mining, entries and rooms being driven without respect to any inherent structure, though the many cleavage planes affect the value of the coal by making it fragile.

All of the coals are more or less brittle and friable and as mined yield from 10 to 40 per cent of fine slack, the percentage of which is probably an index to the relative hardness of the coal in different

parts of the field. For example, mine-run coal in the Jenny Lind, Greenwood, and Huntington districts, at the west end of the field, contains from 20 to 35 per cent slack, while that at Russellville, in the east end of the field, contains not more than 10 per cent. This difference, however, is due in part to the method of mining. Where the coal is mined by blasting or shooting off the solid, the percentage of slack is higher than that produced by hand or pick mining. The coals at Spadra and at Russellville seem to be of nearly equal hardness, but a much higher per cent of slack is produced in the former district owing to the use of powder in mining, the coal in the latter district being won by pick mining.

All of these coals are of comparatively high specific gravity, ranging from 1.29 to 1.49 and averaging about 1.35, which is equal to the average of Pennsylvania bituminous coals of better grade. Although hardness and specific gravity are not indicated by the results of chemical analysis, they are of the utmost importance in determining the uses to which any particular coal is best adapted. For example, the hard coals, even though they may produce a less amount of heat, are better adapted to domestic use than the soft ones. Coals of high specific gravity, other things being equal, are better adapted to use under locomotive and marine boilers than light ones, since a greater amount of fuel can be stored in the same space, and the heavier coals also give better results under forced draft. The relative hardness and specific gravity of different coals are doubtless due to a number of causes, the two more important probably being the degree of alteration of the original woody material of which it is composed and the amount of impurity contained in the coal as ash. One of the chief advantages of the Arkansas coals is that in burning they produce relatively little smoke.

CLASSIFICATION OF THE COAL.

The classification of coal into the various grades recognized in trade, based primarily on their physical properties and their adaptability to particular uses, coincides approximately with a classification based on the degree of alteration from their original woody character, coal of the lowest grade being lignite, while the most highly metamorphosed coal is anthracite. This classification is indicated by proximate chemical analyses showing the proportions of fixed carbon, volatile matter, water, and ash, which they contain. The method of analysis is as follows:

A small amount of coal is crushed and reduced to fine powder, weighed, and then dried at a temperature somewhat above the boiling point, which drives off the greater part of the moisture. It is again

covered crucible and heated in a Bunsen flame until all the gases are driven off and burned around the edges of the cover. It is then cooled and again weighed, the loss in weight being taken as the amount of volatile matter. The residue in the crucible now consists only of fixed carbon and ash. In the coking coals this residue will be fused into a solid mass, but in others it remains as an incoherent powder. It is then heated over the flame in an uncovered crucible until all of the carbon is burned and only ash remains, when it is again weighed and the difference between this weight and the preceding is taken as the fixed carbon and the weight of the residue as ash.

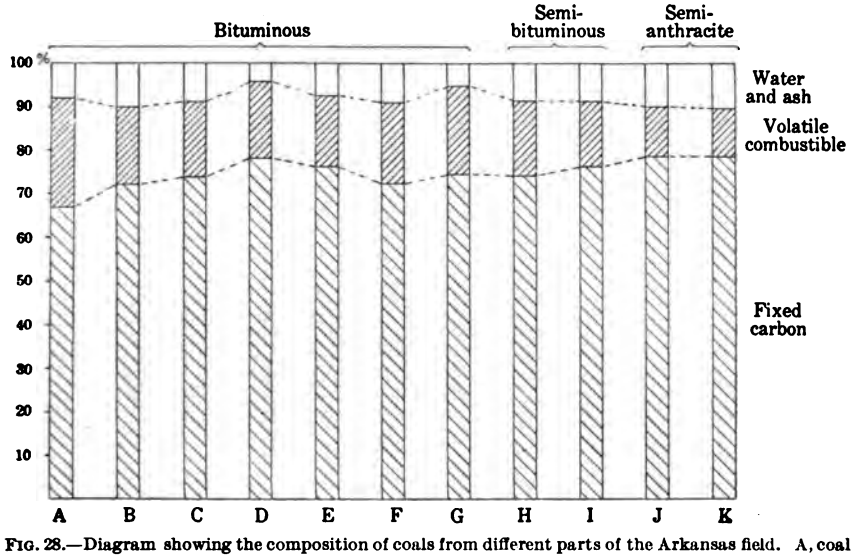

FIG. 28.—Diagram showing the composition of coals from different parts of the Arkansas field. A, coal from Bates district; B, Huntington coal; C, Bonanza and Jenny Lind coal; D, Hackett coal; E, Montreal, Midland, and Burma coal; F, Greenwood coal; G, Charleston coal; H, Paris coal; I, Coal Hill and Denning coal; J, Spadra coal; K, Russellville coal.

Such analyses are easily and quickly made and are usually sufficient for classification purposes when taken in connection with the obvious physical properties of the coal. Coals of higher grades are well differentiated by the relation between the percentages of fixed carbon and of volatile matter they contain. This relation is called the fuel ratio.

In the original Pennsylvania classification proposed by Persifor Frazer, jr.,[a] anthracite coals have fuel ratios above 12, semianthracite coals from 12 to 8, semibituminous coals from 8 to 5, and bituminous coals from 5 to 1. Generally, however, the limits of the various groups as understood in the trade are somewhat lower.[b] Arkansas anthracite or semianthracite coals have fuel ratios from 8½ to 6½ and

[a] Trans. Am. Inst. Min. Eng., vol. 6, p. 430; also Rept. MM, Second Geol. Survey Pennsylvania, 1879.

[b] Report on the coals of Maryland: Maryland Geol. Survey, vol. 5, 1905. p. 239. Campbell, M. R., Character of Yampa coals: Bull. U. S. Geol. Survey No. 297, 1906, p. 87.

the semibituminous coals from 6½ to 4½. As graded by this standard the Arkansas coals range from bituminous to semianthracite; those in the district south of Poteau Mountain are bituminous, their fuel ratios averaging about 3. The coals north of Poteau Mountain also, in the western part of the field, are near the dividing line between bituminous and semibituminous, and may perhaps be regarded as semibituminous, their fuel ratios averaging nearly 5; those in the Coal Hill–Denning and Paris districts are also semibituminous and of somewhat higher grade, while the coals in the Spadra and Russellville districts are semianthracite, their fuel ratios averaging above 7. The relative grades of the coals in the various districts are shown graphically in the group of diagrams forming fig. 28, those of the highest grade, from the eastern part of the field, being at the right, and those of lower grades, from the southwestern part, at the left of the figure.

A somewhat more satisfactory determination of the character of the coal is obtained from ultimate analyses, in which, by more elaborate chemical methods, the exact amounts of carbon, hydrogen, oxygen, sulphur, and other elements are determined.

EFFICIENCY OF THE COAL.

The relative efficiencies of various coals are determined in the laboratories by burning them in an apparatus called a calorimeter, in which the amount of heat developed by the total combustion of a given weight of the coal is accurately measured, and the results of such determinations are stated both in pound calories and in British thermal units, the former being the number of pounds of water, at maximum density, whose temperature can be raised 1 degree centigrade by the combustion of 1 pound of coal, the latter representing the number of pounds of water which will be raised 1° F. and being equal to nine-fifths of the former.

Calorific values of coal can be calculated very closely from ultimate analyses by Dulong's formula:

Heat value per pound, B. t. u. $= 146\ C + 620\ (H - \frac{O}{8})$, in which C, H, and O are, respectively, the percentages of carbon, hydrogen, and oxygen.

Proximate analyses give only the roughest approximations to the heat value of coals, owing to the very indefinite composition of the so-called volatile matter. Proximate analyses of coals within any given district or field, however, vary but slightly from one another, and it may be expected that the volatile combustible matter will have about the same relative value, so that if a few calorific determinations have been made the heat values of the others can be roughly estimated

Calorific determinations which have been made of Arkansas coals give an average value of 207 B. t. u. for each per cent of volatile matter and 146 B. t. u. for each per cent of fixed carbon. The heat value, in B. t. u., can therefore be roughly estimated from the proximate analyses as equal to 146 times the percentage of fixed carbon plus 207 times the percentage of volatile matter. The relative heat-producing values of the coals in the various parts of the field under discussion are shown graphically in fig. 29, from which it will be seen that the semianthracites of the eastern districts are slightly lower in efficiency than the semibituminous coals to the west.

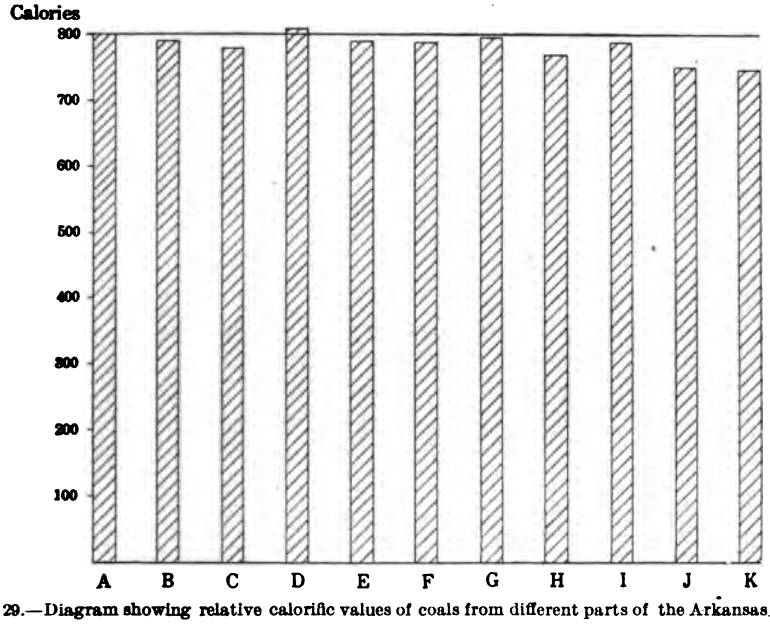

FIG. 29.—Diagram showing relative calorific values of coals from different parts of the Arkansas field. A, coal from Bates district; B, Huntington coal; C, Bonanza and Jenny Lind coal; D, Hackett coal; E, Montreal, Midland, and Burma coal; F, Greenwood coal; G, Charleston coal; H, Paris coal; I, Coal Hill and Denning coal; J, Spadra coal; K, Russellville coal.

SPECIAL TESTS AND ANALYSES.

ANALYSES MADE BY ARKANSAS GEOLOGICAL SURVEY.

Samples of coal from twenty-seven localities were collected by the Geological Survey of Arkansas, and proximate analyses, including specific-gravity determinations made by the chemists of the Survey, were published in their preliminary report.[a] No uniform method was followed in collecting these samples, some being taken from working faces of mines, while others were from carloads or from piles of coal left on the dumps. They can hardly be regarded, therefore, as strictly representative of the coal beds sampled. Moreover, the method of analyses is not stated in the report.

[a] Ann. Rept. Geol. Survey Arkansas, 1888, vol. 3, p. 43.

Proximate analyses of Arkansas coals made by the Geological Survey of Arkansas.

[Analyses by Dr. R. N. Brackett, assisted by Mr. J. P. Smith.[a]]

Sample No.	Name of pit or mine.	Nearest town.	Location.	Moisture.	Volatile matter.	Fixed carbon.	Ash.	Sulphur.	Fuel ratio.
1	Carnall's drift	Oak Valley	S. 18, T. 7 N., R. 30 W.	5.26	17.66	61.98	13.62	1.49	3.51
2	Page's pit	Greenwood	S. 19, T. 6 N., R. 30 W.	.85	16.39	78.22	3.30	1.24	4.77
3	Baxley's pit	Paris	S. 35, T. 8 N., R. 26 W.	1.23	15.75	75.34	5.28	2.40	4.79
4	Hackett Cy. shaft.	Hackett	S. 22, T. 6 N., R. 32 W.	.85	14.916	73.87	9.04	1.32	4.95
5	Pickartz drift	Ozark	S. 26, T. 10 N., R. 26 W.	.70	15.88	79.00	3.56	.86	4.97
6	Huntington slope.	Huntington.	S. 24, T. 5 N., R. 31 W.	.93	15.55	77.54	4.85	1.43	4.99
7	Claiborne's pit	Hartford	S. 17, T. 4 N., R. 31 W.	.94	15.54	78.36	4.01	1.15	5.04
8	Lewis's pit	Alston	S. 4, T. 9 N., R. 28 W.	.88	15.23	77.20	4.24	2.45	5.07
9	McConnel's shaft.	Greenwood	S. 32, T. 7 N., R. 30 W.	.600	15.38	78.30	4.58	1.14	5.09
10	Greenwood shaft	do	S. 12, T. 6 N., R. 31 W.	.82	14.87	75.82	5.97	2.52	5.10
11	Sullivant	Alma	S. 13, T. 9 N., R. 31 W.	.76	12.95	67.13	14.20	4.96	5.19
12	Bocquin	Jenny Lind	S. 31, T. 7 N., R. 31 W.	.75	14.98	77.87	5.00	1.40	5.20
13	Gwyn's drift	Hartford	S. 14, T. 4 N., R. 32 W.	.89	14.58	77.09	6.25	1.19	5.29
14	Carlan's slope	Booneville	S. 22, T. 5 N., R. 28 W.	.85	14.67	78.40	4.71	1.37	5.34
15	Moomaw's pit	Ozark	S. 22, T. 10 N., R. 26 W.	.66	14.89	79.81	3.27	1.37	5.36
16	Graves drift	Alma	S. 33, T. 9 N., R. 30 W.	.57	13.90	75.07	7.61	2.85	5.40
17	Petty's slope	Jenny Lind	S. 32, T. 7 N., R. 31 W.	1.78	13.33	76.23	7.05	1.62	5.72
18	Philpott shaft	Coal Hill	S. 20, T. 10 N., R. 25 W.	.87	14.13	80.92	3.09	.99	5.73
19	Watt's slope	Central	S. 13, T. 7 N., R. 31 W.	.74	12.62	72.61	9.97	4.07	5.75
20	Felker slope	Coal Hill	S. 24, T. 9 N., R. 26 W.	1.13	13.21	81.28	3.22	1.16	6.15
21	Ouita slope	Russellville	S. 30, T. 8 N., R. 20 W.	.98	12.20	76.82	8.17	1.83	6.29
22	Eureka shaft	Spadra	S. 23, T. 9 N., R. 24 W.	1.10	11.28	72.84	12.04	2.75	6.46
23	Coal Hill shaft.	Coal Hill	S. 20, T. 9 N., R. 25 W.	1.02	10.84	76.12	8.35	3.67	7.02
24	Allister slope	do	S. 24, T. 9 N., R. 26 W.	1.18	10.48	76.49	8.32	3.53	7.30
25	Mason drift	Clarksville	S. 27, T. 10 N., R. 23 W.	1.12	11.01	80.86	5.86	1.16	7.34
26	Harkreader's well	do	S. 34, T. 10 N., R. 24 W.	1.56	10.35	78.91	6.31	2.87	7.62
27	Shinn slope	Russellville	S. 21, T. 7 N., R. 20 W.	1.06	8.41	75.43	11.75	3.35	8.96

Proximate analyses of Arkansas coals furnished by mining companies.

W. C. & M. Co.[b]	Jenny Lind		0.49	13.64	76.73	7.12	.....	5.63
P. C. C. Co.[c]	Huntington		1.33	14.03	77.83	5.63	1.33	5.55
W. C. & M. Co.[b]	Denning		1.07	11.21	78.01	8.13	.....	6.96
A. A. Co.[d]	Prairie View.	S. 23, T. 8 N., R. 24 W.	1.1	14.6	73.2	9.7	1.4	5.01
Do	do	S. 31, T. 9 N., R. 23 W.	.6	10.7	77.5	10.1	1.1	7.24
Do	do	S. 12, T. 8 N., R. 24 W.	.6	10.1	75.4	11	2.9	7.46

[a] Ann. Rept. Geol. Survey Arkansas, 1888, vol. 3, p. 43.
[b] Western Coal and Mining Co., St. Louis Sampling and Testing Works, analyst, 1897. Twenty-second Ann. Rept. U. S. Geol. Survey, pt. 3, 1902, p. 398.
[c] Prairie Creek Coal Co., analyses by Bureau of Equipment, Navy Department, Washington, D. C.
[d] Arkansas Anthracite Co., Little Rock. Prospectus.

Many analyses of Arkansas coal from various localities have also been made by commercial assayers working for private parties, some of which have been reported to members of the Geological Survey. Like those made by the State Survey, the private analyses are not uniform in either the method of sampling or the method of analysis; but since many of the localities represented were not duplicated by the present survey, it seems advisable to republish them. All such analyses at hand, including those made by the State Survey and by private assayers, are presented in the above table.

FUEL-TESTING PLANT SAMPLES.

The agents of the United States Geological Survey fuel-testing plant, at the Louisiana Purchase Exposition, in 1904 and 1905, collected four sets of samples representing the Arkansas coal field.

collected mine samples from four other mines and obtained several carloads of slack from various localities for experimental work.

In taking mine samples the following method was invariably observed:[a]

> After the face of the coal was cleaned of any weathered coal or powder smoke a cut was made across the face of the coal from roof to floor, including all of the benches of coal mined and such impurities as were not removed in ordinary work. This cut was about 3 inches wide and 1 inch deep. The coal obtained from it, amounting to 25 or 30 pounds, was caught upon an oilcloth blanket spread upon the floor of the mine, so as to protect the sample from water and from including any shale or clay fragments.
>
> The coal composing the sample was then pulverized and quartered down according to the generally accepted rules for preparing samples until a quart sample was obtained, with the particles of coal reduced to a size not much greater than one-fourth inch in diameter. The sample was placed in an air-tight galvanized-iron can having a screw top, and the can was hermetically sealed by screwing the top down tight and covering the joint with tire tape. The can containing the sample was then mailed to the testing plant, and in almost all cases it reached its destination within two or three days of the date of sampling in the mine.

The four complete sets of samples from this field are described in the report of the fuel-testing plant as Arkansas Nos. 1, 2, 3, and 5, and they will be so designated in this report.

Arkansas No. 1, collected by M. R. Campbell and John W. Groves, represents the coal locally known as the Huntington coal. It is in the horizon of the Hartshorne coal of Indian Territory and is probably continuous with the Hartshorne bed. Sample A, laboratory No. 1046, was taken at a point where the coal bed has a thickness of 7 feet 7 inches, with two partings, one of black shale 5 inches, the other of shale and coal 10 inches thick. Sample B, laboratory No. 1045, represents the coal where the bed is 6 feet 6 inches thick, with two partings, one of black shale 5 inches, the other of shale and coal 1 foot thick. Sample C, laboratory No. 1114, represents as nearly as possible a carload containing 44 short tons of engine coal which was shipped to St. Louis to be tested.

Arkansas No. 2, sampled by M. R. Campbell and John W. Groves, represents the coal bed that is known locally as the "Jenny Lind vein." This bed is in the Hartshorne horizon, and is equivalent to if not identical with, the bed mined at Huntington, Ark., and Hartshorne, Ind. T. Sample A, laboratory No. 1053, represents the coal where the bed is 3 feet 8½ inches thick, with a shale parting 1½ inches thick near the center. Sample B, laboratory No. 1049, represents the bed where it is 3 feet 8 inches thick, with a similar parting 2½ inches thick. Sample C, laboratory No. 1160, represents, as near as possible, a carload shipped to St. Louis for testing.

Arkansas No. 3, sampled by John W. Groves, represents the coal mined at Jenny Lind. At the point where sample A, laboratory

[a] Campbell, M. R., Field work, in Preliminary report on the operations of the coal-testing plant of the United States Geological Survey: Bull. U. S. Geol. Survey No. 261, 1905, pp. 19-20.

No. 1115, was taken the bed has a thickness of 4 feet 8 inches, with a 3½-inch shale parting near the center. Sample B, laboratory No. 1118, represents the same bed where its thickness is 3 feet 9 inches, with a 3-inch parting. Sample C, laboratory No. 1296, represents a carload sent to St. Louis for testing.

Arkansas No. 4 was a carload sample of slack for briquetting tests, representing four mines near Denning.

Arkansas No. 5, collected by John W. Groves, 1½ miles west of Coal Hill, is from a bed locally known as the Denning bed. The coal bed is in the Hartshorne horizon, and is probably identical with the Hartshorne bed of Indian Territory. Sample A, laboratory No. 1130, was cut where the coal is 3 feet 9 inches thick, with a 5½-inch parting of shale and coal near the center. Sample B, laboratory No. 1131, was cut where the bed is 3 feet 9 inches and the shale parting 7 inches thick. Sample C, laboratory No. 1331, represents a carload consisting of about 20 short tons of lump coal over a 1.8-inch bar screen and about 20 tons of slack or coal that passed through this screen.

Arkansas No. 6, laboratory No. 1542, was a car sample of slack mined at Jenny Lind and was shipped to the fuel-testing plant by the operator for special tests in briquetting and coking.

Eight special samples taken for chemical tests from mines not represented by carload lots are as follows:

Laboratory numbers 1030 and 1031 represent a mine in sec. 36, T. 9 N., R. 31 W., near Jenny Lind. They were collected by John W. Groves. The same mine is represented by sample No. 9, collected by the Geological Survey party.

Laboratory Nos. 1040 and 1042 represent a mine in sec. 22, T. 9 N., R. 26 W., near Denning. The bed is the same as that represented by the samples under Arkansas No. 5, and the coal measures 3 feet 7 inches and 4 feet 5 inches, respectively, at the two points where samples were cut.

Laboratory Nos. 1052 and 1054 represent a mine in sec. 13, T. 5 N., R. 32 W., near Midland. They were collected by J. Shober Burrows. The coal is without partings and measures, respectively, 2 feet 10 inches and 2 feet 9 inches at the points where the samples were cut.

Laboratory Nos. 1066 and 1068 represent a mine in sec. 1, T. 4 N., R. 32 W., south of Midland. The bed is in the Hartshorne horizon and is a western extension of that mined at Huntington. It measures 8 feet 7 inches and 8 feet 5 inches, respectively, at the two points sampled, but is divided by a parting into two benches, both of which are mined.

Twenty-six samples from various mines were taken by the United States Geological Survey party in the summer of 1906. The method

each mine. These samples were numbered consecutively in the order in which they were collected and are as follows:

Sample No. 1, laboratory No. 3155, represents the coal at a strip pit near Burma in sec. 19, T. 5 N., R. 31 W. The bed mined is in the Hartshorne horizon and is regarded as equivalent to that mined at Hartshorne, Ind. T. The bed here is 3 feet 7 inches thick without partings. Sampled by C. D. Smith.

Sample No. 2, laboratory No. 3154, represents one of the working faces of a mine at Burma station in sec. 20, T. 5 N., R. 31 W. The bed is the same as that at the pit, represented by sample No. 1, laboratory No. 3155. It is 36 inches thick, has a hard sandstone roof and sandy shale floor, and is worked from a shaft about 60 feet deep. Sampled by C. D. Smith and A. J. Collier.

Sample No. 3, laboratory No. 3158, is from a mine near Burma station, in sec. 19, T. 5 N., R. 31 W. The coal bed has an average thickness of 36 inches and is the same as that of sample No. 2. It is overlain by a thick bed of hard sandstone, but in the western part of the workings shale of varying thickness intervenes between the coal and the sandstone. Sampled by C. D. Smith.

Sample No. 4, laboratory No. 3150, represents a mine in sec. 19, T. 5 N., R. 31 W., a short distance southeast of Montreal station on the St. Louis and San Francisco Railroad. The bed mined is the same as that at the Denman and Red Rock mines and is in the Hartshorne horizon, though the roof is shale. The sandstone lens, which constitutes the roof in the mines just mentioned, thins out and disappears before reaching this mine. The coal averages about 42 inches thick without partings. Sampled by C. D. Smith.

Sample No. 5, laboratory No. 3152, is from a mine located near Montreal station in sec. 13, T. 5 N., R. 32 W. The bed, which is the same as that just described, has an average thickness of 3 feet 4 inches. The sample was taken by C. D. Smith from one of the lowest entries in the slope.

Sample No. 6, laboratory No. 3156, is from a slope in sec. 19, T. 5 N., R. 31 W., near the line of the St. Louis and San Francisco Railroad. At this place the coal has been mined by stripping for half a mile or more along the outcrop and sample No. 1 was taken from a face exposed in the pits. Where the pitch of the coal has carried it to such a depth as to make strip mining impracticable, short slopes have been driven from the face as exposed. This sample was collected by C. D. Smith from the face in one of these slopes for comparison with sample No. 1, to determine the effect of weathering. The analyses of the two samples, 1 and 6, however, are nearly identical, and indicate that the coal is stable and only slightly affected by weathering.

Sample No. 7, laboratory No. 3148, is from a partially developed mine located about three-eighths of a mile northeast of Burma

station. The coal is reached by a shaft about 25 feet deep, which pierces the hard sandstone lens that forms the roof of the Red Rock and Denman mines. The bed is not quite so thick as that in the Red Rock mine, and about 4 inches near the top is thrown out in mining. The coal which is hand-picked and sacked, is used for blacksmithing purposes and brings a somewhat higher price than the other coals of the district. Sampled by C. D. Smith.

Sample No. 8, laboratory No. 3157, represents the coal at a mine in sec. 18, T. 6 N., R. 31 W., about 2 miles east of Hackett. The bed is 32 inches thick without partings. It is reached by a shaft 60 feet deep. The sample was taken by Sidney Paige from a clean dry working face. This coal is in the eastern extension of the bed mined at Hackett, Ark., and at Panama, Ind. T., and is almost identical in character. At Greenwood, a few miles farther east, it is very much thicker, but is divided by partings.

Sample No. 9, laboratory No. 3153, represents the coal from a mine at Jenny Lind. The bed averages about 6 feet. The sample was taken by C. D. Smith from a working face near the end of one of the west entries. The mine was rather damp with surface water, though the face of the coal was not wet.

Sample No. 10, laboratory No. 3151, represents the coal in a mine 1 mile west of Jenny Lind. It is the same mine as is represented by the sample Arkansas No. 3, previously collected for the fuel-testing plant. The bed where the sample was collected contains 38 inches of coal separated into two benches by a parting of hard shale 14 inches from the floor. It was sampled by Sidney Paige.

Sample No. 11, laboratory No. 3173, represents a mine in sec. 12, T. 6 N., R. 30 W., near Greenwood. The bed varies in thickness from 4 feet to 7 feet and is separated into two benches by a parting of soft shale near the center, which varies from a fraction of an inch to 6 inches. The sample was taken by C. D. Smith from a working face in the lower part of the mine as far as possible from the outcrop.

Sample No. 12, laboratory No. 3175, represents the coal in a mine a few miles east of Greenwood. The total thickness of the bed is about 8 feet, 5 feet of which in one bench is mined. The sample was collected by C. D. Smith and represents the part mined.

Sample No. 13, laboratory No. 3218, represents a bed that has supplied coal for neighborhood use from a number of strip pits and other openings near Charleston. The bed is stratigraphically from 800 to 900 feet above the Hartshorne horizon and is provisionally correlated with that formerly worked near Caulksville, Central, Fort Smith, and other places. It is believed to be at about the same horizon as the Philpott bed north of Coal Hill, though the exact

the Sky vein, Coal Ridge vein, etc. The sample, which is the only representative of the coal at this horizon, was taken by Sidney Paige from a small drift worked occasionally at the west end of Coal Ridge in sec. 20, T. 7 N., R. 29 W., a few miles north of Auburn. The face from which it was cut had probably been exposed to the air for several months. The bed has a thickness of 18 inches without partings.

Sample No. 14, laboratory No. 3174, is from a mine at Paris, Ark. The mine is located in sec. 10, T. 6 N., R. 26 W., and the coal bed is known and described in this report as the Paris coal. It is from 1,000 to 1,400 feet vertically above the Hartshorne coal and probably from 400 to 600 feet above the Charleston coal. The sample was taken from one of the working faces in the deepest part of the mine and represents a thickness of 26 inches without partings. The bed has a firm sandstone roof from which it is separated by half a foot or more of draw slate. It is underlain by a thin seam of fire clay and mining is done by undercutting.

Sample No. 15, laboratory No. 3177, represents a mine in the Shinn basin, south of Russellville, and was collected by C. D. Smith from a working face in the deepest part of the mine. The coal is reached by a shaft 70 feet deep, located in sec. 22, T. 7 N., R. 20 W. It varies in thickness from 30 to 36 inches. The bed is in the Hartshorne horizon and may be identical with that mined in the western part of the field at Huntington, Jenny Lind, and Greenwood.

Sample No. 16, laboratory No. 3176, from a mine in Shinn basin, south of Russellville, represents the same bed as sample No. 15. This is the deepest mine in Arkansas, the coal being reached by a 480-foot shaft. It is situated in sec. 21, T. 7 N., R. 20 W. The sample was collected by C. D. Smith from one of the working faces of the mine.

Sample No. 17, laboratory No. 3368, from a mine near Spadra, Ark., in the SW. ¼ sec. 14, T. 9 N., R. 24 W. The bed is 44 inches thick, with a parting of 3 inches or more near the middle. It is mined from a shaft 140 feet deep. The sample was cut by R. D. Mesler from one of the working faces of the mine.

Sample No. 18, laboratory No. 3369, is from the Brooks mine about 2 miles south of Clarksville in sec. 17, T. 9 N., R. 23 W. The coal bed is known as the Spadra bed and has a thickness of 34 inches with a 2-inch shale parting near the center. It is mined from a shaft 240 feet deep. The sample was taken by R. D. Mesler from one of the working faces of the mine.

Sample No. 19, laboratory No. 3370, is from a mine 2½ miles southwest of Coal Hill. The bed mined here is the same as that represented by the sample Arkansas No. 5, of the fuel-testing plant which was taken from a mine about 1½ miles to the west. Both of these are

in the Hartshorne horizon and are probably identical with the bed mined at Bonanza and Huntington. This mine is a small one and was not shut down during the strike. The sample was taken from one of the working faces, where the bed is 3½ feet thick with a half-inch parting near the center.

Sample No. 20, laboratory No. 3371, is from a small mine at Center Cross about 2 miles west of Altus. The coal bed is in the Hartshorne horizon and is regarded as equivalent to the Coal Hill and Denning bed from which sample No. 19 was collected. It consists, however, of two beds of coal, each about 2 feet thick with 18 feet of sandy shale between them, which is probably equivalent to the parting found in the Coal Hill and Denning beds. In the Denning field the parting is known to increase locally to a thickness of 6 or 7 feet. Only the lower bench, about 25 inches thick, is mined, and it alone is represented in this sample, which is cut from a working face. The mine, however, is shallow, and the total cover over the coal where sampled does not exceed 25 feet. Sampled by R. D. Mesler and A. J. Collier.

Sample No. 21, laboratory No. 3372, is from a mine in sec. 30, T. 8 N., R. 31 W., on Massard Prairie about 5 miles from Fort Smith. The coal bed which is regarded as equivalent to the bed mined at Jenny Lind and Bonanza, is from 27 to 30 inches thick, with a shale parting less than 1½ inches thick. Its upper bench is said to be softer and freer from impurities than the lower. The sample was collected by C. D. Smith from the working face under a cover of about 30 feet.

Sample No. 22, laboratory No. 3407, represents the coal from a mine in sec. 23, T. 9 N., R. 24 W., near Spadra. The coal is mined from a shaft 100 feet deep, and is known locally as the Spadra bed. It is in the Hartshorne horizon and is equivalent to the coal mined at Jenny Lind and Huntington, Ark., and at Hartshorne, Ind. T. The sample was taken by R. D. Mesler from one of the working faces, where the coal is 3 feet 5 inches thick with a 2-inch shale parting near the center.

Sample No. 23, laboratory No. 3503, represents the upper part of the coal bed at a mine in sec. 21, T. 3 N., R. 32 W., south of Poteau Mountain. This bed is divided into four benches, the upper three each about 2 feet thick, separated by 2-inch shale partings. The lower bench is about 4 feet thick and is separated from the upper ones by 30 inches of shale and bone. Only the lower bench is mined. This sample represents the three upper benches of the mine, including the partings, and was obtained by boring a hole upward from the roof of the lower bench through the upper three benches, the

Sample No. 24, laboratory No. 3505, represents the coal produced at a mine in sec. 21, T. 3 N., R. 32 W., near Bates. This is a new mine opened by a slope from which no entries have been turned. Only the lower bench, 4 feet thick, is mined. The sample was taken by C. D. Smith from the working face and represents unweathered coal.

Sample No. 25, laboratory No. 3500, represents the coal at a mine in sec. 14, T. 4 N., R. 32 W., about 2 miles east of Hartford. The coal bed is 52 inches thick, with a 10-inch clay parting near the bottom, and the lower bench is not mined. Only the upper bench, 3 feet 6 inches thick, is represented by the sample, which was collected by C. D. Smith from one of the working faces.

Sample No. 26, laboratory No. 3497, represents the coal mined in sec. 21, T. 6 N., R. 32 W. The mine is a new one and has been in operation for only a few months. It is opened by a slope with an incline of about 15° from the outcrop. The bed is 3 feet 8 inches thick and is without parting. It has a sandstone floor and about 4 inches of draw slate between the coal and the solid shale roof. The sample was collected by C. D. Smith from one of the working faces.

CHEMICAL ANALYSES.

Analyses and other tests of the samples described above were made under uniform conditions at the fuel-testing plant. All of the samples were tested by proximate analyses. After they had been pulverized most of the samples were exposed to dry air at ordinary temperatures until their weight became stable and their basis of moisture on air drying was carefully determined. In this way the samples were brought to a nearly uniform condition as regards moisture before analysis. In the following tables the analyses of the samples as received and after air drying are given. Owing to the provisions of the law authorizing the work done at the fuel-testing plant, the names of the operators from whose mines the samples were obtained can not be printed.

For comparison of coals from the various districts the analyses of the air-dried samples are preferable. It will be seen from these analyses that the moisture retained in the Arkansas coals after air-drying is nearly constant, the limits of variation being from 0.51 to 1.28 per cent. All the samples, except five, noted in the table, were mine samples.

Analyses of coal samples from Arkansas.

[U. S. Geol. Survey fuel-testing plant, analyst.]

District	Bates-Coaldale.		Greenwood-Huntington.					
Nearest town	Bates.		Hartford.			Huntington.		
Name of sample	U. S. G. S. No. 23.	U. S. G. S. No. 24.	U. S. G. S. No. 25.	Special.	Special.	Ark. No. 1 A.	Ark. No. 1 B.	Ark. No. 1 C.a
Laboratory number	3503.	3505.	3500.	1066.	1068.	1046.	1045.	1114.
Analysis of sample as received:								
Prox. Moisture	6.85	3.39	4.12	.80	.90	.75	1.02	3.24
Prox. Volatile matter	25.75	24.44	18.15	17.80	18.35	18.50	17.88	17.46
Prox. Fixed carbon	43.40	66.40	69.97	72.71	71.65	73.77	73.61	66.69
Prox. Ash	24.00	5.79	7.76	8.69	9.10	6.98	7.49	12.61
Ult. Sulphur	2.32	.87	.98	1.95	1.74	1.15	1.10	1.24
Ult. Hydrogen								4.15
Ult. Carbon								74.09
Ult. Nitrogen								1.44
Ult. Oxygen								6.47
Calorific value determined:								
Calories				7,934			8,019	7,294
British thermal units				14,282			14,434	13,129
Loss of moisture on air drying	5.90	2.50	3.40					2.10
Analysis of air-dried sample:								
Prox. Moisture	1.02	.89	.75					1.17
Prox. Volatile matter	27.38	25.07	18.79					17.83
Prox. Fixed carbon	46.12	68.10	72.43					68.12
Prox. Ash	25.51	5.94	8.03					12.88
Ult. Sulphur	2.46	.89	1.01					1.27
Ult. Hydrogen								4.00
Ult. Carbon								75.68
Ult. Nitrogen								1.47
Ult. Oxygen								4.70
Calorific value determined:								
Calories								7,450
British thermal units								13,410
Fuel ratio	1.69	2.72	3.86	4.08	3.91	3.99	4.12	3.82

District	Greenwood-Huntington—Continued.						
Nearest town	Burma.					Midland.	
Name of sample	U. S. G. S. No. 2.	U. S. G. S. No. 7.	U. S. G. S. No. 3.	U. S. G. S. No. 1.	U. S. G. S. No. 6.	Special.	Special.
Laboratory number	3154.	3148.	3158.	3155.	3156.	1052.	1054.
Analysis of sample as received:							
Prox. Moisture	2.44	4.53	2.65	3.54	2.80	.79	1.00
Prox. Volatile matter	16.85	16.52	15.70	14.89	15.93	19.68	16.90
Prox. Fixed carbon	74.97	74.03	74.52	74.88	74.06	69.62	71.80
Prox. Ash	5.73	4.92	7.13	6.69	7.21	9.73	10.30
Ult. Sulphur	2.57	1.76	2.86	1.21	.73	1.11	.60
Ult. Hydrogen							
Ult. Carbon							
Ult. Nitrogen							
Ult. Oxygen							
Calorific value determined:							
Calories						7,790	
British thermal units						14,022	
Loss of moisture on air drying	1.60	3.70	1.90	2.70	2.00		
Analysis of air-dried sample:							
Prox. Moisture	.85	.86	.76	.86	.82		
Prox. Volatile matter	17.12	17.16	16.01	15.30	16.28		
Prox. Fixed carbon	76.11	76.87	75.95	76.93	75.57		
Prox. Ash	5.82	5.10	7.26	6.88	7.36		
Ult. Sulphur	2.61	1.82	2.92	1.24	.74		
Ult. Hydrogen							
Ult. Carbon							
Ult. Nitrogen							
Ult. Oxygen							
Fuel ratio	4.45	4.48	4.75	5.05	4.67	3.53	4.24

Analyses of coal samples from Arkansas—Continued.

District	Greenwood-Huntington—Continued.					
Nearest town	Montreal.		Hackett.		Greenwood.	
Name of sample	U. S. G. S. No. 5.	U. S. G. S. No. 4.	U. S. G. S. No. 26.	U. S. G. S. No. 8.	U. S. G. S. No. 11.	U. S. G. S. No. 12.
Laboratory number	3152.	3150.	3497.	3157.	3173.	3175.
Analysis of sample as received:						
Prox. Moisture	2.57	3.01	3.55	3.64	2.31	2.26
Prox. Volatile matter	15.48	15.75	17.16	16.57	14.48	15.79
Prox. Fixed carbon	76.17	75.93	75.46	76.00	72.66	71.91
Prox. Ash	5.78	5.31	3.83	3.79	9.29	10.04
Ult. Sulphur	2.05	.93	.96	.83	3.12	1.20
Ult. Hydrogen	.....	.....	.....	.....	3.75	.....
Ult. Carbon	.....	.....	.....	.....	78.37	.....
Ult. Nitrogen	.....	.....	.....	.....	1.52	.....
Ult. Oxygen	.....	.....	.....	.....	3.95	.....
Calorific value determined:						
Calories	.....	.....	.....	.....	7,549	.....
British thermal units	.....	.....	.....	.....	13,588	.....
Loss of moisture on air drying	1.80	2.20	2.80	3.00	2.40	1.60
Analysis of air-dried sample:						
Prox. Moisture	.78	.83	.77	.66	.77	.67
Prox. Volatile matter	15.76	16.21	17.65	17.03	15.21	16.05
Prox. Fixed carbon	77.33	78.36	77.63	78.35	74.45	73.07
Prox. Ash	5.88	5.43	3.94	3.96	9.52	10.20
Ult. Sulphur	2.09	.95	.99	.85	3.20	1.22
Ult. Hydrogen	.....	.....	.....	.....	3.84	.....
Ult. Carbon	.....	.....	.....	.....	80.30	.....
Ult. Nitrogen	.....	.....	.....	.....	1.56	.....
Ult. Oxygen	.....	.....	.....	.....	4.05	.....
Calorific value determined:						
Calories	.....	.....	.....	.....	7,735	.....
British thermal units	.....	.....	.....	.....	13,923	.....
Fuel ratio	4.92	4.78	4.40	4.54	4.90	4.55

District	Bonanza-Jenny Lind.							
Nearest town	Bonanza.			Jenny Lind.				
Name of sample	Ark. No. 2 A.	Ark. No. 2 B.	Ark. No. 2 C.[a]	Ark. No. 3 A.	Ark. No. 3 B.	Ark. No. 3 C.[a]	U. S. G. S. No. 10.	Ark. No. 6.[b]
Laboratory number	1053.	1049.	1160.	1115.	1118.	1296.	3151.	1542.
Analysis of sample as received:								
Prox. Moisture	.78	.95	2.23	1.60	1.63	2.19	1.95	3.80
Prox. Volatile matter	16.60	18.70	16.03	17.40	16.86	19.47	15.55	13.89
Prox. Fixed carbon	73.53	73.38	72.55	73.09	69.03	66.71	73.27	68.50
Prox. Ash	9.09	6.97	9.20	7.91	12.66	11.63	9.23	13.81
Ult. Sulphur	2.50	2.12	1.78	1.42	1.46	1.28	1.23	1.26
Ult. Hydrogen	.....	.....	4.24	.....	.....	4.17	.....	.....
Ult. Carbon	.....	.....	78.83	.....	.....	75.31	.....	.....
Ult. Nitrogen	.....	.....	1.38	.....	.....	1.53	.....	.....
Ult. Oxygen	.....	.....	4.48	.....	.....	6.08	.....	.....
Calorific value determined:								
Calories	.....	7,993	7,639	7,868	.....	7,480	.....	.....
British thermal units	.....	14,387	13,750	14,162	.....	13,464	.....	.....
Loss of moisture on air drying	.....	.....	1.50	.80	.80	1.40	1.20	3.00
Analysis of air-dried sample:								
Prox. Moisture	.....	.....	.74	.81	.84	.80	.76	.82
Prox. Volatile matter	.....	.....	16.26	11.54	16.81	14.75	15.74	14.32
Prox. Fixed carbon	.....	.....	73.66	73.68	69.59	67.65	74.16	70.62
Prox. Ash	.....	.....	9.39	7.97	12.76	11.80	9.34	14.24
Ult. Sulphur	.....	.....	1.90	1.51	1.47	1.30	1.25	1.30
Ult. Hydrogen	.....	.....	4.13	.....	.....	4.07	.....	.....
Ult. Carbon	.....	.....	80.03	.....	.....	76.37	.....	.....
Ult. Nitrogen	.....	.....	1.40	.....	.....	1.55	.....	.....
Ult. Oxygen	.....	.....	3.20	.....	.....	4.91	.....	.....
Calorific value determined:								
Calories	.....	.....	7,756	7,931	.....	7,586	.....	.....
British thermal units	.....	.....	13,961	14,275	.....	13,655	.....	.....
Fuel ratio	4.43	3.92	4.52	4.20	4.10	3.43	4.71	4.93

[a] Car sample.

[b] Slack car sample.

Analyses of coal samples from Arkansas—Continued.

District	Bonanza-Jenny Lind—Continued.				Charleston.	Paris.
Nearest town	Jenny Lind.			Fort Smith.	Auburn.	Paris.
Name of sample	Special.	Special.	U. S. G. S. No. 9.	U. S. G. S. No. 21.	U. S. G. S. No. 13.	U. S. G. S. No. 14.
Laboratory number	1030.	1031.	3153.	3372.	3218.	3174.
Analysis of sample as received:						
Prox. Moisture	.95	.80	3.18	2.19	3.80	2.77
Prox. Volatile matter	17.91	17.20	14.64	14.00	15.96	14.69
Prox. Fixed carbon	71.52	74.35	76.06	72.15	75.86	73.47
Prox. Ash	9.62	7.65	6.12	11.66	4.38	9.07
Ult. Sulphur	2.07	1.64	1.51	2.06	2.21	2.79
Ult. Hydrogen	.....	.....	.....	.....	.....	4.02
Ult. Carbon	.....	.....	.....	.....	.....	78.71
Ult. Nitrogen	.....	.....	.....	.....	.....	1.46
Ult. Oxygen	.....	.....	.....	.....	.....	3.95
Calorific value determined:						
Calories	7,831	.....	.....	.....	.....	7,652
British thermal units	14,096	.....	.....	.....	.....	13,774
Loss of moisture on air drying	.....	.....	2.40	1.40	2.60	2.20
Analysis of air-dried sample:						
Prox. Moisture	.....	.....	.79	.80	1.23	.58
Prox. Volatile matter	.....	.....	15.00	14.20	16.39	15.02
Prox. Fixed carbon	.....	.....	77.93	73.18	77.88	75.12
Prox. Ash	.....	.....	6.27	11.83	4.49	9.27
Ult. Sulphur	.....	.....	1.58	3.09	2.27	3.04
Ult. Hydrogen	.....	.....	.....	.....	.....	3.87
Ult. Carbon	.....	.....	.....	.....	.....	80.48
Ult. Nitrogen	.....	.....	.....	.....	.....	1.49
Ult. Oxygen	.....	.....	.....	.....	.....	2.04
Calorific value determined:						
Calories	.....	.....	.....	.....	.....	7,824
British thermal units	.....	.....	.....	.....	.....	14,084
Fuel ratio	3.98	4.32	5.20	5.15	4.75	5.00

District	Denning-Coal Hill.						
Nearest town	Denning.		Altus.	Coal Hill.			
Name of sample	Special.	Special.	U. S. G. S. No. 20.	U. S. G. S. No. 19.	Ark. No. 5 A.	Ark. No. 5 B.	Ark. No. 5 C.[a]
Laboratory number	1040.	1042.	3371.	3370.	1130.	1131.	1331.
Analysis of sample as received:							
Prox. Moisture	.83	.84	3.71	3.41	1.38	1.80	2.36
Prox. Volatile matter	14.43	16.96	13.96	12.09	14.76	15.00	12.68
Prox. Fixed carbon	76.41	73.52	79.35	78.42	76.91	75.94	72.88
Prox. Ash	8.29	7.68	2.98	6.08	6.95	7.26	12.08
Ult. Sulphur	2.03	1.91	.74	4.05	1.52	1.94	1.99
Ult. Hydrogen	.....	.....	.....	.....	.....	.....	3.82
Ult. Carbon	.....	.....	.....	.....	.....	.....	76.44
Ult. Nitrogen	.....	.....	.....	.....	.....	.....	1.37
Ult. Oxygen	.....	.....	.....	.....	.....	.....	4.30
Calorific value determined:							
Calories	.....	8,136	.....	.....	7,982	.....	7,366
British thermal units	.....	14,645	.....	.....	14,339	.....	13,259
Loss of moisture on air drying	.....	.....	2.80	2.60	.70	1.30	1.10
Analysis of air-dried sample:							
Prox. Moisture	.....	.....	1.00	1.02	.68	.51	1.28
Prox. Volatile matter	.....	.....	14.36	12.39	14.87	15.19	12.82
Prox. Fixed carbon	.....	.....	80.04	80.35	77.45	76.94	73.69
Prox. Ash	.....	.....	4.60	4.23	7.00	7.36	12.21
Ult. Sulphur	.....	.....	.76	4.13	1.53	1.97	2.01
Ult. Hydrogen	.....	.....	.....	.....	.....	.....	3.74
Ult. Carbon	.....	.....	.....	.....	.....	.....	77.29
Ult. Nitrogen	.....	.....	.....	.....	.....	.....	1.39
Ult. Oxygen	.....	.....	.....	.....	.....	.....	3.36
Calorific value determined:							
Calories	.....	.....	.....	.....	7,907	.....	7,445

Analyses of coal samples from Arkansas—Continued.

District	Spadra.			Russellville.	
Nearest town	Spadra.		Clarksville.	Russellville.	
Name of sample	U. S. G. S. No. 17.	U. S. G. S. No. 22.	U. S. G. S. No. 18.	U. S. G. S. No. 15.	U. S. G. S. No. 16.
Laboratory number	3368.	3407.	3369.	3177.	3176.
Analysis of sample as received:					
Prox. Moisture	2.11	2.15	1.72	2.33	2.07
Prox. Volatile matter	11.42	10.82	10.46	10.60	9.81
Prox. Fixed carbon	77.83	76.87	79.50	77.67	78.82
Prox. Ash	8.64	10.16	8.32	9.40	9.30
Ult. Sulphur	1.99	2.30	2.49	1.81	1.74
Ult. Hydrogen	.....	.....	.....	.....	3.62
Ult. Carbon	.....	.....	.....	.....	80.28
Ult. Nitrogen	.....	.....	.....	.....	1.47
Ult. Oxygen	.....	.....	.....	.....	3.59
Calorific value determined:					
Calories	7,619	.....	7,704	.....	7,612
British thermal units	13,714	.....	13,867	.....	13,703
Loss of moisture on air drying	1.00	1.40	.70	1.60	1.40
Analysis of air-dried sample:					
Prox. Moisture	1.12	.76	1.03	.74	.68
Prox. Volatile matter	11.54	10.97	10.53	10.77	9.93
Prox. Fixed carbon	78.62	77.96	80.06	78.93	79.94
Prox. Ash	8.73	10.30	8.38	9.55	9.43
Ult. Sulphur	2.01	2.33	2.51	1.84	1.76
Ult. Hydrogen	.....	.....	.....	.....	3.67
Ult. Carbon	.....	.....	.....	.....	81.42
Ult. Nitrogen	.....	.....	.....	.....	1.49
Ult. Oxygen	.....	.....	.....	.....	3.64
Calorific value determined:					
Calories	7,693	.....	7,758	.....	7,720
British thermal uuits	13,853	.....	13,965	.....	13,896
Fuel ratio	6.82	7.11	7.59	7.33	8.04

COKING TESTS.

Although some of the Arkansas coals, especially those from the western part of the field, seem to coke in laboratory experiments, none of them have yet been successfully coked on a commercial scale. Laboratory tests made at St. Louis indicated that the samples called Arkansas Nos. 1 and 2, representing the mines at Huntington and Bonanza, respectively, are coking coals.[a] Parts of each of the five representative carload samples sent to the fuel-testing plant were tried in a beehive coking oven and all gave negative results.[b]

In order to determine whether or not the Arkansas coals could be made to produce coke by mixing them with small amounts of more highly bituminous coal from other sources, or by adding pitch to act as a binder, a test was made of lump and slack coal from mine No. 18 at Jenny Lind. A charge consisting of a small amount of briquets, containing 6 per cent of hard pitch, was placed in an oven with a coking coal and produced a dense coke high in ash.

Equal parts of unwashed slack mixed with 8 per cent of hard pitch and briquets made of the same material gave a very dark coke with large cells. This charge contained 640 pounds of pitch and weighed

[a] Prof. Paper U. S. Geol. Survey No. 48, pt. 1, 1904, p. 300. [b] Idem, pt. 3, pp. 1328–1332.

8,000 pounds. It burned 42 hours and yielded 4,056 pounds of coke and 539 pounds of breeze and ash.

Slack mixed with 8 per cent of pitch, without briquetting, gave a dark-gray coke that was high in ash and had no metallic ring, which can be used where high ash and sulphur are not important considerations. These tests are valuable, since they show that although most of the Arkansas coals are naturally noncoking they may be made so by the addition of pitch.

BRIQUETTING TESTS.

The friable nature of the coal and the high percentage of slack resulting from it are notable drawbacks connected with the coal-mining industry in Arkansas. The slack has a high fuel value and is not notably impure as regards ash, but is difficult to burn economically, since it requires special grates and is not worth more than one-third as much as the lump coal. For this reason any method of utilizing the slack and increasing its value is of considerable importance, and the possibility of making it into briquets has therefore been considered. The fuel-testing plant at St. Louis was equipped with two briquetting machines, one of English make, producing a rectangular briquet 6 by 5 by 4 inches, the other of American design, producing eggettes weighing 0.3 pound. Slacks from nearly every part of the Arkansas field were tested, but all attempts to produce briquets from the coal alone were unsuccessful. It was found, however, that by adding to the slack from 6 to 10 per cent of pitch, obtained from the by-products of various gas plants, good briquets, that have a somewhat higher heat- and steam-producing value than the original coal, can be made. A full description of the various briquetting tests made at St. Louis is contained in the report of the fuel-testing plant, pp. 1389 to 1472, from which the following more salient results have been abstracted.[a]

Slack from the mines at Huntington was tested with a hard pitch, 6 tons being mixed with 9.25 per cent of pitch and made into briquets in the English machine. The briquets were compact and well pressed, but were too friable for handling, showing that they contained insufficient pitch. They were also brownish in color and very dirty. Coal from Jenny Lind was also tested with hard pitch, briquets being made in the English machine. Six tons of crushed lump coal were run through the machine, which was set to give approximately 11 per cent of pitch, but the briquets were pitchy and wrinkled, and probably contained nearer 15 than 11 per cent. Although these were not commercial briquets, a boiler test made

[a] Survey No. 48.

with them showed that they were well adapted to produce steam. The pitch used for both these lots of briquets was too hard to give the best results.

Seventeen tons of coal from the Denning field were briquetted in the English machine with 6 per cent of comparatively soft pitch, for the purpose of making locomotive tests on the Missouri Pacific Railway. Excellent briquets were obtained, which were readily handled while warm, stood a good deal of handling when cold, and did not break so readily as the original lumps of coal. They were tested for locomotive use in comparison with Illinois coal. Three trips were made from St. Louis to Washington, Mo., and return, making a total of 324 miles for each fuel. The comparative results of the test are best stated in terms of the number of miles run per ton of coal, which for the Arkansas briquets averaged 21 miles per ton, while with the coal from Illinois only 19 miles per ton was made by the same train. The results showed that the Arkansas briquets have greater efficiency than the Illinois coal and indicate that by briquetting the slack it is possible to obtain a high-grade fuel. The briquets were said to be too large for locomotive use and had to be broken before the engine could steam well.

BOILER TESTS.

Seventy boiler tests of car samples representing coals from many different localities and fields in the United States were made under uniform conditions at the fuel-testing plant in St. Louis, and the tabulated results obtained have been published in part 2 of the report of the coal-testing plant for the year 1904.[a] Eight of these tests were of coals from the Arkansas field, including both natural coal and briquets made by combining slack or crushed coal with a certain amount of pitch. Four of the tests were of natural coal.

The boiler plant was equipped with two 210-horsepower Heine water-tube boilers. The same boilers were used for all the tests, and an effort was made to have the coals nearly uniform in size, the usual size being small lump and egg mixed with varying amounts of slack. Full details regarding these tests are available for further examination in the professional paper cited, from which a few of the more obvious and important results have been abstracted in the accompanying table to show the relative efficiencies of various Arkansas coals. From these figures it will be seen that while the coal (Arkansas No. 5) from the Denning district is higher in the scale of classification than the other coals tested, its efficiency in heat and steam production is some-

[a] Prof. Paper U. S. Geol. Survey No. 48, 1906.

what lower. The results selected from the report cited for purposes of comparison are—

1. The number of pounds of water at the boiling point which can be converted into steam at the same temperature by the combustion of 1 pound of dry coal.

2. The amount of heat absorbed by the boiler, stated in British thermal units. This is equal to the number of pounds of water evaporated at 212° multiplied by 965.7 the number of British thermal units required to convert 1 pound of water into steam. This result is given for comparison with the next to indicate the proportion of the total heat value of the coal available for the production of steam. It is a factor which depends to a considerable extent on the appliances for burning the coal, and with engines better adapted to any particular coal would probably be larger than the figures given.

3. The calorific value of the dry coal stated in British thermal units as determined by the oxygen calorimeter. This factor gives the total heat value of the coal.

4. The number of pounds of coal per hour required to produce one indicated horsepower. This figure is calculated theoretically from the determinations given in the first column, together with other factors, it being estimated that 34½ pounds of water evaporated per hour into dry steam from and at 212° F. equal 1 horsepower.

5. The last column gives the number of pounds of dry coal consumed per hour per electric horsepower, which may be regarded as the actual measured horsepower produced. It will be seen that as far as these tests go the coals from Bonanza and Jenny Lind, Arkansas Nos. 2 and 3, are more efficient than those from Denning and Huntington, Arkansas Nos. 5 and 1, respectively. In order to compare the efficiency of the Arkansas coals in general with the coals from other parts of the United States with which they come in competition, a second table is given in which the average results from 4 Arkansas coals are combined with similar results from 12 coals from West Virginia, 6 from Illinois, 4 from Indian Territory, 8 from Kansas, and 8 from Missouri. It will be readily seen from this table that average Arkansas coals are nearly, though probably not quite, as efficient as those from West Virginia, and that they are better than coals from Indian Territory and Kansas, and very much better than those from Illinois and Missouri.

Although these results and the comparisons based on them would undoubtedly be modified if they were obtained from boilers and grates especially adapted to the coal burned, it is believed that they show fairly well the relative efficiency of the Arkansas coal as compared with other coals with which it comes into competition.

Determinations of efficiency of four Arkansas coals by boiler tests, and averages of coals from various other States for comparison.

Designation.	Water at 212° F. evaporated per pound of coal.	British thermal units absorbed by boiler.	Calorific value in B.t.u. determined by oxygen calorimeter.	Pounds of coal per hour per indicated horsepower.	Pounds of coal used per electric horsepower hour
	Pounds.				
Arkansas No. 1, Huntington	8.86	8,556	13,572	3.12	3.86
Arkansas No. 2, Bonanza	9.72	9,387	14,244	2.91	3.59
Arkansas No. 3, Jenny Lind	9.50	9,174	14,151	2.98	3.68
Arkansas No. 5, Coal Hill	8.04	7,764	13,617	3.52	4.34
4 Arkansas coals	9.03	8,720	13,893	3.13	3.87
12 West Virginia coals	9.72	9,388	14,466	2.92	3.61
6 Illinois coals	7.55	7,292	12,292	3.75	4.64
4 Indian Territory coals	8.19	7,909	12,820	3.46	4.28
8 Kansas coals	8.23	7,948	12,983	3.20	4.26
8 Missouri coals	7.60	7,239	12,169	3.77	4.66
2 Alabama coals	8.17	7,894	12,746	3.33	4.11

CONDITIONS OF MINING AND DEVELOPMENT.

PRODUCTION.

The statistics of coal mining in Arkansas for the last sixty-five years show a production of 220 tons in the year 1840 and 200 tons in 1860.[a] During those years the coal was used almost exclusively for blacksmithing, and was obtained from strip pits, which were worked only occasionally. The development of the coal industry on a commercial scale was started about 1870, when a steam plant was put in operation at the mouth of Spadra Creek. Coals from the Ouita basin and the Coal Hill mines were brought to market about 1873, after the extension of the Little Rock and Fort Smith Railroad.

By the year 1880 the production had reached 14,778 tons, and from that time it steadily increased until 1903, when it attained a maximum of 2,229,172 tons. The decline in production since 1903 is attributed to the competition of fuel oil, of which there was overproduction in Texas. Present conditions, however, indicate that the demand for Arkansas coal is again increasing, and were it not for the scarcity of labor and a general strike from April to June, inclusive, the production in 1906 would probably have nearly equaled that of 1903.

The four tables following, abstracted from Mineral Resources of the United States for 1905,[b] show the progressive increase of the coal production since 1840, the amounts produced in the various counties since 1901, and the production, value, average price per ton, and number of men employed in the various counties in 1904 and 1905.

From the third table it will be seen that the greatest output is from Sebastian County, though the coals of the eastern end of the district—namely, from Shinn and Ouita basins—command the highest

[a] Ann. Rept. Geol. Survey Arkansas for 1888, vol. 3, p. 27.

[b] Mineral Resources U. S. for 1905, U. S. Geol. Survey, 1906, pp. 550–552.

price, while those from the Paris basin are second in price and those from the Spadra and Coal Hill fields third. A fourth table showing the average price per ton of the coals of neighboring States which come in competition with the Arkansas coals is given for comparison.[a]

Average production of coal in Arkansas, 1840–1905.

[Short tons.]

Year.	Quantity.	Year.	Quantity.	Year.	Quantity.
1840	220	1888	276,871	1898	1,205,479
1860	200	1889	279,584	1899	843,554
1880	14,778	1890	399,888	1900	1,447,945
1881	20,000	1891	542,379	1901	1,816,136
1882	25,000	1892	535,558	1902	1,943,932
1883	50,000	1893	574,763	1903	2,229,172
1884	75,000	1894	512,626	1904	2,009,451
1885	100,000	1895	598,322	1905	1,934,673
1886	125,000	1896	675,374		
1887	129,600	1897	856,190		

Coal production of Arkansas, 1901–1905, by counties.

[Short tons.]

County.	1901.	1902.	1903.	1904.	1905.	Increase (+) or decrease (−), 1905.
Franklin	504,946	338,013	394,884	408,494	420,384	+ 11,890
Johnson		193,258	198,999	217,667	214,234	− 3,433
Logan		21,751	27,286	35,300	26,090	− 9,210
Pope		34,966	48,836	51,488	39,685	− 11,803
Sebastian	1,305,190	1,325,181	1,528,888	1,234,794	1,189,455	− 45,339
Other counties and small mines	6,000	30,763	[a] 30,279	61,708	44,825	− 16,883
Total	1,816,136	1,943,932	2,229,172	2,009,451	1,934,673	− 74,778
Total value	$2,068,613	$2,539,214	$3,360,831	$3,102,660	$2,880,738	−$221,922

[a] Includes also production of Perry County.

Coal production of Arkansas, in 1904 and 1905, by counties, uses, etc.

1904.

County.	Loaded at mines for shipment.	Sold to local trade and used by employees.	Used at mines for steam and heat.	Total quantity.	Total value.	Average price per ton.	Average number of days active.	Average number of employees.
	Short tons.	*Short tons.*	*Short tons.*	*Short tons.*				
Franklin	400,994	2,000	5,500	408,494	$582,703	$1.43	168	695
Johnson	210,062	2,050	5,555	217,667	392,445	1.80	175	652
Logan	30,700	3,770	830	35,300	77,461	2.19	194	115
Pope	44,053	460	6,975	51,488	168,245	3.27	189	229
Sebastian	1,174,630	24,544	35,620	1,234,794	1,780,203	1.44	158	2,820
Scott and Washington	59,720	1,068	920	61,708	101,603	1.65	194	69
Total	1,920,159	33,892	55,400	2,009,451	3,102,660	1.54	165	4,580

1905.

Franklin	413,384	1,000	6,000	420,384	$585,419	$1.39	202	750
Johnson	204,091	1,771	8,372	214,234	364,390	1.70	164	730
Logan	24,390	800	900	26,090	58,388	2.24	191	104
Pope	33,952	813	4,920	39,685	140,030	3.53	217	140
Sebastian	1,150,856	7,667	30,932	1,189,455	1,668,597	1.40	168	2,389
Scott and Washington	42,500	1,245	1,080	44,825	63,914	1.43	216	79

Average prices for coal at the mines in Arkansas and neighboring regions, 1901–1905.

[Per short ton.]

State or Territory.	1901.	1902.	1903.	1904.	1905.
Alabama	$1.10	$1.20	$1.22	$1.20	$1.21
Arkansas	1.14	1.31	1.51	1.54	1.49
Illinois	1.03	1.03	1.17	1.10	1.06
Indiana	1.01	1.10	1.23	1.11	1.05
Indian Territory	1.62	1.51	1.82	1.82	1.76
Iowa	1.39	1.47	1.65	1.61	1.56
Kansas	1.22	1.30	1.52	1.52	1.46
Kentucky	.95	.99	1.06	1.04	.99
Missouri	1.24	1.38	1.61	1.63	1.58

METHODS OF MINING.

The methods of mining practiced in Arkansas are well adapted to the local conditions. The following general statements regarding these methods are given for the information of readers who are not familiar with those conditions.

System of working coal.—Coal was first mined in Arkansas by stripping, and in some pits this method of mining is still followed, but most of the coal now mined is from deeper workings, which are reached either by slopes or shafts, the deepest mine in the State being a 480-foot shaft in Shinn basin in the eastern part of the field. In regard to mining by stripping little need be said, since the workings operated in this way are of rather small extent, and much of the coal accessible by this method has already been mined. As a rule, the overlying soil and shale are removed either by hand or by horsepower to a maximum depth of about 10 feet. The quality of the coal obtained is not greatly affected by weathering, and some coal beds that are only 18 inches thick can be profitably worked.

Most of the deeper mines are still comparatively shallow, the average depth being less than 200 feet. In such mines, whether opened by shaft or slope, the room-and-pillar system of mining prevails, with local modifications, throughout the whole field. The pillars are not drawn after the rooms are exhausted. The entries are usually double in the larger mines, but in many small mines single entries are used. Some of the beds, especially those in which the coal is thin but of high grade, could probably be worked more economically by the "long wall" system, though it is not known that this has been employed anywhere up to the present time.

Mining.—The actual mining of the coal is generally done by shooting or blasting it off the solid face of the bed. Owing to the friable nature of the coal, this practice results in the formation of a large percentage of slack, but it seems to be the most effective method possible in many of the mines, where the floor is hard and not well adapted to undercutting. In some of the smaller mines, where the coal is of high grade and commands a good price, undercutting by hand is the method used, and *in a few mines* where the bed is divided by a parting

of soft shale or clay this is mined out by hand and the upper bench wedged down, after which the lower one is either wedged up or shot off the solid. Where the coal is hand-mined the percentage of slack is generally lower regardless of other characters of the coal.

No mining machines of any kind are used in Arkansas, and such machines are not likely to be used in the immediate future, since the beds generally are comparatively thin, and the percentage of slack from the cuttings of machines would probably be nearly as great as that made by shooting from the solid.

Haulage, ventilation, and drainage.—In most of the larger mines haulage from the rooms to the main heading is by mules and in the main gangway by rope or cable, or, as in one of the mines at Bonanza, by electric motors. In many of the mines mules are used throughout and in a few instances the cars are moved wholly by hand. Ventilation is accomplished in the larger mines by fans and in the smaller ones by fire boxes. The mines are comparatively free from gas, and accidents from this cause are relatively rare. During the year ending June 30, 1906, 8 men were killed and 34 injured, among over 4,000 employed in the mines, and most of these accidents were due to other causes than gas. Open lamps are used throughout practically all the workings. Since most of the entries are below drainage levels, pumping is almost invariably necessary. In most of the mines steam pumps are used, but some of the small mines are bailed with buckets.

Minimum limit of thickness.—The minimum thickness of coal mined for shipment is found in the Ouita basin, where the bed averages less than 2½ feet. That mined at Paris is between 2 and 2½ feet, and the coal mined for local supply in the Philpott basin is between 18 and 20 inches thick. Special agreements are made with the miners in working these thin coals. In general a uniform rate per ton applies throughout the Arkansas field for mining all coals in beds more than 2 feet 10 inches thick. Mining in thinner beds is considered "deficient work," for which special rates are made. Under favorable conditions it is probable that beds only 18 inches thick will ultimately be worked at a profit.

PREPARATION OF THE COAL FOR MARKET.

The coal is sold either in the form it comes from the mines, as "mine-run," which includes both lump and slack, or, more commonly, is prepared for sale by passing it over screens which separate the slack from the lump. In general, bar screens not more than 6 feet wide and 16 feet long, with 1¼ inch spaces between the bars, are used. At some of the mines lump coal to be used for domestic purposes is

BREAKER AT SCRANTON ANTHRACITE COAL COMPANY'S MINE, SPADRA DISTRICT.

Showing a new and modern equipment for hoisting, screening, and sorting the Arkansas anthracite coal.

kets within the coal field. The slack from all of the larger mines is marketed, the prices being usually less than one-third the price of lump coal. Slack from the bituminous coals of the west end of the field is sold in Kansas City and St. Louis, where it is used for producing steam in stationary engines. The semianthracite slack from the Spadra field is used in lead and zinc smelters at Joplin, Mo. One of the most complete plants for screening and sorting coal in Arkansas is shown in Pl. V.

Within the last two years the Central Coal and Coke Company has established a plant near Hackett for washing slack produced at their mines. Many of the impurities are thus removed from the slack, together with the finer coal dust, and the remainder, about 80 per cent of the original quantity, is raised in value almost to that of the lump coal. Washing plants have not yet been established in other parts of the field, though it is probable that similar results can be obtained elsewhere.

LABOR.

Except in a few very small mines all of the labor of extracting the coal is performed under contract by piecework at a definite rate per ton. The operator, therefore, has little to do in directing the miners except to decide what parts of the land shall be first developed. The rates for mining coal are established by definite agreements between the operators and the labor union. There are practically no miners in the field except union men. The conditions of mining as affected by the labor element, therefore, are best set forth by the contract between the operators and the labor union, which is given below.

During 1904 and 1905 the coal-mining industry in Arkansas was not interrupted by the labor strikes which prevailed in other States, but in 1906 all of the principal mines were shut down from the 1st of April to the 1st of July. Only a few small mines and strip pits worked by nonunion miners or by union men under special agreements continued in operation, and their output was unimportant. For two months preceding the strike all of the mines were unusually active, the coal obtained being hoarded in anticipation of the trouble. The amount of coal produced during these months was limited only by the capacity of the mines and the number of the men available.

PORTION OF MINERS' CONTRACT FOR DISTRICT 21, U. M. W. A.[a]

PRICES FOR MINING IN ARKANSAS.

All coal in Arkansas, at the option of the operator, to be mined and paid for on a sliding scale in proportion to the percentage, or weight, of lump coal contained in the whole, based on the present prices and size of screens where such are established.

That the question of establishing a scale of prices for mining mine-run coal in all the anthracite mines of Arkansas be referred to Commissioner Brown, on the part of the

[a] Joint Interstate Agreement and Contracts for Districts 14, 21, and 25 of Operators and Miners, adopted at Kansas City, Mo., June 16, 1906, for period ending March 31, 1908, pp. 39-51.

operators, and District President Hanraty, of District 21, on the part of the miners, for adjustment.

The price for mine-run coal per ton shall be 62 cents.

For screened coal, per ton, 90 cents.

The operators are to have the option of paying on a screened-coal or mine-run basis. When the coal is mined on a screened-coal basis, the screens used shall be not more than 6 feet wide, have bars not more than 16 feet long, and a 1¼-inch space between the bars.

OUITA.

For hand-picked coal, free from slack, slate, sulphur, bony, and black jack, the price shall be as follows:

From the 1st of September to the 1st of March	$1.22
From the first of March to the 31st of August	1.07

SPADRA.

For screened coal per ton, from the 1st of September to the 1st of March	$1.02
From the 1st of March to the 31st of August	.92

For all coal under 3 feet in height, for each 3 inches less of coal, there shall be 5 cents per ton additional to above prices.

The price for narrow work shall be as follows:

20 feet gob entries or air courses	per yard..	$1.12
18 feet gob entries or air courses	do....	1.25
16 feet gob entries or air courses	do....	1.50
12 feet gob entries or air courses	do....	1.75
8 feet entries or air courses	do....	2.00
All brushing, 16 inches	do....	1.12

And all over 16 inches, 7 cents for each inch extra.

The company shall have the right to do all brushing by shift work at $2.56 per day when desired.

All cross-cuts in rooms shall be	per yard..	$1.12
All room turning shall be	do....	1.12

RUSSELLVILLE.

Ten cents per ton less than the price paid at Ouita.

ENTRY YARDAGE, ETC.

Entry, yardage, and deficient work will be 1903 rate. The same rules and customs defining deficient work in district 21 shall be in force during the life of this agreement.

For mining hand-picked or forked coal free from slate, slack, and other impurities, $1.05 per ton shall be paid.

Where draw slate or rock comes with coal the following prices shall be adopted:

For all over 1 inch and under 5 inches, 5 cents per ton extra; over 5 inches and less than 10 inches, 9 cents per ton extra; over 10 inches and less than 15 inches, 14 cents per ton extra; over 15 inches and less than 20 inches, 19 cents per ton extra.

LOCAL CONDITIONS.

The brushing price at Bonanza, Jenny Lind, Coal Hill, and Denning shall be $1.40 for 18 inches of brushing. Where the company requires more than 18 inches to be brushed, they agree to pay 8 cents per inch for each additional inch over the 18 inches.

Draw slate in air courses will be paid as follows:

For 3 inches or over	$0.25

All coal in Arkansas 2 feet 10 inches and less in height shall be considered deficient work, except where special price has been made.

Scale of prices to be paid for draw slate and rock at Bache & Denman's mines at Burma and Montreal No. 2:

Over 4 inches and up to 8 inches, 56 cents per yard; over 8 inches and up to 12 inches, 84 cents per yard; over 12 inches, to be settled locally. Brushing entries to be $1.41 per yard.

Where bottom is taken up in rooms and room necks it shall be paid 56 cents per yard. This applies to Bache & Denman's mines at Burma only.

All break-throughs in Arkansas, when required to cut through, to be paid at the 1903 rate.

Brushing bottom in entries, at Dallas mine, Burma, Ark.; width of brushing to be 4 feet, height 4 feet 6 inches on top of rail. All over and above this height and width to be paid at the rate of 7 cents per inch.

Air courses and rooms, 4 cents per inch for bottom brushing, width or roadway 3 feet.

Where miners at Coal Hill, No. 18 Jenny Lind, and Denning, Ark., have been pushing cars both ways the company shall assist the miner one way when necessary; and all miners in the Indian Territory who have been pushing their cars both ways shall receive for all coal pushed over 200 feet 5 cents per ton extra. The conditions that prevail at Lehigh apply to all mines on the Atoka track in regard to lowering cars down to the switch.

That the loading rate of the McCurtain machine scale be extended over those mines in Arkansas which now carry 62 cents per ton mine-run tonnage rate. Where punching machines are installed, in Arkansas, the McCurtain cutting rate to be adopted. Where chain machines are installed, in Arkansas, the rate for runners and helpers shall be established by the commissioner and district president, and in case of their failure to agree, the matter will be taken up in the manner provided for other controversies.

Inside day wage scale.

Track layers	per day	$2.56
Track layers' helpers	do	2.36
Trappers	do	1.13
Bottom cagers	do	2.56
Drivers	do	2.56
Trip riders	do	2.56
Pushers	do	2.56
Water haulers and machine haulers	do	2.56
All other inside day labor	do	2.36
Spragging, coupling, and greasing, when done by boys	do	1.75
Shot firers under normal conditions	do	3.00

The fire boss shall receive $3.04 per day and shall be subject to discharge by the management of the mine without appeal; if competent, shall be given other work.

The fire runner shall receive not less than $2.56 where such is employed.

Electric hoist operators:

For boys[a]	per day	$2.00
Electric slope engineers	do	2.56
Motormen	do	2.56
Pump men (inside)	do	2.56
Head machinist	do	3.10
Machinists	do	2.75
Day wages for digging coal	do	2.81
Machine runners	do	3.00
Machine helpers	do	2.75
Shaft sinkers	do	3.04

[a] "Boys" means those of maximum age of 19 years.

Outside day wage scale.

First blacksmiths	per day..	$3.00
Second blacksmiths	do....	2.75
Blacksmiths' helpers	do....	2.36
Carpenters[a]	do....	2.43
All other outside day labor[b]	do....	2.02½

Scale for engineers.

Engineers:		
First class, 500 tons and over	per month..	$79.00
Second class, 300 to 500 tons	do....	73.00
Third class, 300 tons or less	do....	65.00

Tail rope and slope engineers, 5.9 per cent above present wages.

The minimum rate for tail rope and slope engineers shall be $2.38 per day, or $62 per month; provided, further, that the maximum rate for tail rope and slope engineers shall be $2.70 per day or $70 per month, twenty-six days to constitute a month's work and nine hours to constitute a day's work. All overtime in excess of nine hours to be paid for at a proportionate rate per hour.

The mining prices inside and outside day-wages scale (except engineers) provided for in this contract is based upon an eight-hour work day.

GENERAL CONDITIONS.

There shall be two pay days a month and the operators shall issue to each employee a statement of his account, which the employee may retain. The dates of pay days shall be arranged between the respective companies and their employees.

Where air courses are driven in chute or platform work—that is, where the coal is in a greater pitch than 20°—the work shall be considered as air-course work and shall be paid for at the regular district price, provided such air course or brake-through is cut or sheared before being shot.

The company shall put in all batteries, wing boards, and platforms in all chute work in district No. 21.

The miners shall load their own coal in pitching veins in this district at the regular scale price.

No person employed underground shall use an inferior grade of lard oil, and the use of any other except lard oil is prohibited. Rope riders in mine slopes are excepted.

The taking up of bottom for stub switches for chute rooms will be done by the miner and payment for same is referred to local union and mine officials for adjustment. In the event of their failure to agree, general resolutions to govern.

Where coal is screened before being weighed it shall be dumped on flat sheets and passed over the screen specified in the Pittsburg agreement, and there shall be no obstruction on said screen.

When an employee leaves the employment of a company he shall receive all money due him within three days from the date of notice. Settlement must be asked for between the hours of 8 a. m. and 6 p. m. on day settlement is due.

All company men shall receive an equal share of all work when competent to do such work.

The gas man shall place marks at last inside break-through, showing clearly whether there is any standing gas in working place. Should there be standing gas, he shall place gas mark at room neck in addition to mark at inside break-through; but should working place be clear, he shall place marks so indicating this at coal face. No miner shall be permitted to brush out gas.

Miners shall have the right to send out their dull tools on top of loaded cars and the company shall deliver same to blacksmith shop for sharpening, and no man be allowed to carry tools up or down shaft. In slopes the company shall deliver the same to parting or bottom. The company shall not be responsible for tools.

Any underground employee not on hand to go down to work at the hour for commencing work shall not be entitled to go below except at the convenience of the company.

When an employee is sick or injured he shall be given a cage at once. When a cage load of men come to the bottom of the shaft who have been prevented from working by reason of falls or other things over which they have no control, they shall be given a cage at once. For the accommodation of individual employees less than a cage load who have been prevented from working as above cage will be run mid-forenoon, noon, and mid-afternoon to each working day: *Provided, however*, That the foregoing shall not be permitted to enable men to leave their work for other than the reasons stated above.

The sinking of slopes and driving narrow work through faults shall be left to local union and mine management for adjustment.

All double-shift places to be paid 28 cents per yard extra.

All wet entries, rooms, slopes, slope air courses, and all other work connected with the slopes shall be left to local union and superintendent or manager for agreement of price.

Frozen or seamy coal, stuck top or bottom, shall be deficient work, and shall be paid for extra, the same to be determined by mine committee and pit boss. If they fail to agree the miner shall be given an average place in the mine.

There shall be no deduction for school purposes except authorized by the individuals.

For the health and safety of the miners' lives, air courses shall be kept up with the entries as near as possible, and crosscuts shall be driven every 40 feet; where gas exists, they shall be driven every 30 feet. No room shall be turned inside the last crosscut.

Scale price for blacksmithing miners' tools and machine mine tools.

Three-fourths of 1 per cent on gross earnings for blacksmithing of miners' tools, and three-eighths of 1 per cent on gross earnings for machine coal loaders' tools.

All sharpening and repairing of tools shall be done as promptly as possible.

The present conditions in regard to double and single work shall prevail.

Any employee absenting himself from work two days and not reporting for work on the morning of the third day shall forfeit his right to his working place, unless excused by mine foreman, but shall be given another place on turn; provided, however, this shall not apply in case of sickness.

Where a fall occurs in any working place the company shall make preparations to clean up same within four hours from time of notice; failing to do so the miner or miners affected shall clean up same, company paying at the rate of $2.56 per shift.

Price for moving all draw slate and rock exceeding 2 inches in thickness, 2½ cents per inch per running yard for each 5 feet in width, and all over and above to be paid accordingly. This applies to all mines except where there is a special contract.

Where rooms are driven up narrow on account of bad top, the yardage shall be same as that in air courses, measurements to be made from the entry; and when room is widened out one-half room turning shall be paid. Where bottom is taken up entry yardage shall be paid. This does not apply in rooms that have been widened out, then narrowed up and renecked, but in these cases the prices shall be the 1903 rate.

When a car leaves working place it is in charge of the company and average weight shall be paid for broken cars. Such cars shall be reported by the man that dumps the coal. The company shall keep all cars in good repair.

All coal 4 feet and over where it comes down to under a thickness of 3 feet 4 inches shall be declared deficient work. This applies to Arkansas and the Indian Territory.

Where cars are delivered at working face all timber and rails shall be delivered there.

Where powder is taken into the mine in kegs it shall be delivered to the working place; otherwise it shall be handled according to the methods in vogue at the various mines.

When any employee shall be requested to fill the place of another employee, as specified herein, he shall receive the wages of the employee whose place he takes, plus 28 cents; provided further, that it is not compulsory on any man who may not wish to take such place.

All questions that have been left to the president of the United Mine Workers of America, District 21, and commissioner of the Operators' Association, or to arbitration shall become a part of this contract and be binding upon both parties when the same have both been decided and agreed upon by the said president and commissioner, or by arbitration; and the operators shall furnish the district secretary of the United Mine Workers of America and also post at the mines the prices to be paid on and after June 16, 1906, based hereon.

Color shall be no bar to employment.

In behalf of the Southwestern Interstate Coal Operators' Association.

W. C. PERRY,
President.
S. J. TONKIN,
Secretary.

In behalf of the miners.

PETE HANRATY,
President District No. 21.
S. F. BRACKNEY,
Secretary District No. 21.

MINES, OPENINGS, AND EXPOSURES OF COAL.

The following table presents in condensed form data of interest in regard to the mines, openings, and exposures of coal in the Arkansas field.

Table of mines, openings, and exposures of coal.

Location.			Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
T. N.	R. W.	Section.						
9	32	13, SW. ¼ NE. ¼.		Prospect.	Coal, 6 in.	Hartshorne.	U. S. Geol. Survey.	
8	32	2, SE. ¼ SW. ¼.	Herman.	Old strip.	Shale roof. Bone, 12 in. Coal 10 in. Shale floor.	Fort Smith.	U. S. Geol. Survey.	
		9, SW. ¼.		Gas well, 500 ft.	Coal, 2 ft.	Hartshorne.	H. E. Kelly.	
		25, SE. ¼.		Old shaft.	No record.	Hartshorne.	U. S. Geol. Survey.	
		25, SE. ¼ SW. ¼.		Old shaft.	No record.	Hartshorne.	U. S. Geol. Survey.	
		35, SE. ¼.		Old strip.	Shale roof. Coal, 9 in. Shale, 1 in. Coal, 5 in.	Hartshorne.	U. S. Geol. Survey.	
		36, NW. ¼ NE. ¼.	Angelo Birt.	Strip.	Shale roof. Coal, 2 ft. Shale, 3 in. Coal, 4 in.	Hartshorne.	U. S. Geol. Survey.	
7	32	1, NE. ¼.		Old strip.	Coal, 1 ft. 8 in.	Hartshorne.	Citizen.	
		10, SW. ¼ SW. ¼.		Drill hole, 190 ft.	Coal, 2 ft. 4 in. Shale, 6 in. Coal, 6 in.	Hartshorne.	Citizen.	

Table of mines, openings, and exposures of coal—Continued.

Location.		Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
R. W.	Section.						
32	14, SE. ¼ NE. ¼.		Drill hole, 192 ft.	Shale roof. Coal, 1 ft. 4 in. Shale, 2 in. Coal, 6 in. Gray band, 1 in. Coal, 11 in.	Hartshorne.	Central Coal and Coke Co.	12 ft. below this is a 4-ft. bed of shaly coal.
	33, SE. ¼ SW. ¼.		Drill hole, 276 ft.	Shale roof. Coal, 1 ft. Clay, 3 in. Coal, 2 ft. 3 in.	Hartshorne.	Central Coal and Coke Co.	
	34, NE. ¼.		Drill hole, 347 ft.	Shale roof. Coal, 2 ft. 2 in. Shale, 1 in. Coal, 11 in. Shale floor.	Hartshorne.	Central Coal and Coke Co.	
	34, NE. ¼ SW. ¼.	No. 26, Central Coal and Coke Co.	Shaft, 350 ft.	Shale roof. Coal, 3 ft. Shale floor.	Hartshorne.	Central Coal and Coke Co.	
	36, SE. ¼ NW. ¼.	No. 18, Western Coal and Mining Co.	Shaft, 260 ft.	Shale roof. Coal, 3 ft. 2 in. Shale, 2 in. Coal, 1 ft. 2 in. Shale floor.	Hartshorne.	Western Coal and Mining Co.	Coal has live luster, is hard, varies from 3 ft. 2 in. to 6 ft. in thickness.
	4, lot 4.	No. 20, Central Coal and Coke Co.	Shaft.	Shale roof. Coal, 2 ft. 5 in. Shale, 1 in. Coal, 1 ft. 2 in.	Hartshorne.	Central Coal and Coke Co.	Coal and parting vary in thickness.

		5, S. ½.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	
6	32	21, SW. ¼ NW. ¼.	Hackett City Smokeless Coal Co.	Slope.	Shale roof. Coal, 3 ft. 8 in. Sandstone floor.	Hartshorne.	U. S. Geol. Survey.	
		22, SW. ¼.		Old shaft.	Coal, 3 ft.	Hartshorne.	Arkansas Geol. Survey.	
		24.		Drill hole.	Shale roof. Coal, 1 ft. 2 in. Sandstone floor.	Hartshorne.	Cherokee Construction Co.	
		11, SW. ¼ SE. ¼.		Drill hole, 240 ft.	Shale roof. Coal, 2 ft. 8 in.	Hartshorne.	Cherokee Construction Co.	51 ft. above this is a 6-ft. bed of coal and bone.
		12, SE. ¼ SW. ¼.		Drill hole, 187 ft.	Shale roof. Coal, 3 ft. 1 in. Shale floor.	Hartshorne.	Cherokee Construction Co.	45 ft. above this is a 5 ft. 6 in. bed of coal and bone.
		12. SW. ¼ SW. ¼.		Drill hole, 186 ft.	Shale roof. Coal, 2 ft. 7 in. Bone, 11 in.	Hartshorne.	Cherokee Construction Co.	39 ft. above this is a 5 ft. 6 in. bed of coal and bone.
5	32	13, SW. ¼.		Old shaft, 170 ft.	Shale roof. Coal, 3 ft. 4 in.	Hartshorne.	Dallas Coal Co.	55 ft. above this is another bed of coal.
		14, NE. ¼ NE. ¼.		Drill hole, 163 ft.	Shale roof. Coal, 2 ft. 9 in. Bone, 8 in. Shale floor.	Hartshorne.	Cherokee Construction Co.	45 ft. above this is a 5 ft. 6 in. bed of bone, coal, and shale.
		14, SE. ¼ SE. ¼.		Drill hole, 203 ft.	Shale roof. Coal, 2 ft. 7 in. Bone, 8 in.	Hartshorne.	Cherokee Construction Co.	48 ft. above this is a 4 ft. 6 in. bed of dirty coal.

Table of mines, openings, and exposures of coal—Continued.

Location.		Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
R. W.	Section.						
32	14, SW. ¼ NE. ¼.		Drill hole, 177 ft.	Shale roof. Coal, 3 ft. 3 in. Shale floor.	Hartshorne.	Cherokee Construction Co.	45 ft. above this is a 3 ft. 4 in. bed of coal, bone, and shale.
	14, NW. ¼ NE. ¼.		Drill hole, 183 ft.	Shale roof. Coal, 2 ft. 9 in. Bone, 8 in. Shale floor.	Hartshorne.	Cherokee Construction Co.	41 ft. above this is a 6 ft. 10 in. bed of coal, shale, and bone.
	14, SW. ¼ NW. ¼.		Drill hole, 239 ft.	Shale roof. Coal, 2 ft. 11 in. Shale floor.	Hartshorne.	Cherokee Construction Co.	40 ft. above this is a 3 ft. 3 in. bed of dirty coal.
	22, NE. ¼ NE. ¼.		Drill hole, 456 ft.	Shale roof. Coal, 3 ft. 3 in. Sandstone floor.	Hartshorne.	Cherokee Construction Co.	50 ft. above this is a 4 ft. 2 in. bed of coal and bone.
	1, lot 4 or 5.	No. 4, Cherokee Construction Co.	Shaft, 170 ft.	Sandstone roof. Coal, 4 ft. 3 in. Shale, 8 in. Coal, 3 ft. 6 in. Shale floor.	Hartshorne.	Cherokee Construction Co.	
	1, lot 8.		Old slope.	No record.	Hartshorne.	U. S. Geol. Survey.	
	1, lot 12.		Old slope.	No record.	Hartshorne.	U. S. Geol. Survey.	
	2, NE. ¼.		Old slope.	No record.	Hartshorne.	U. S. Geol. Survey.	
	2, SE. ¼ NW. ¼.		Old slope.	No record.	Hartshorne.	U. S. Geol. Survey.	

		2, W. ½ SW. ¼.		Old slope.	No record.	Hartshorne.	U. S. Geol. Survey.	
		6, lot 13.		Crop.		Charleston.	U. S. Geol. Survey.	Blossom.
		10, SE. ¼ NW. ¼.	No. 4, Bolen-Darnall Coal Co.	Slope.	Shale roof. Coal, 4 ft.	Hartshorne.	U. S. Geol. Survey.	
4	32	10, SW. ¼ SW. ¼.	No. 2, Bolen-Darnall Coal Co.	Slope.	Shale roof. Coal, 4 ft.	Hartshorne.	U. S. Geol. Survey.	
		13, NW. ¼ SE. ¼.	Arkansas Smokeless Coal Co.	Slope	Sandstone roof. Coal, 3 ft. 8 in. Shale, 1 ft. 4 in. Coal, 8 in. Shale floor.	Hartshorne.	U. S. Geol. Survey.	2 in. bone in top bench. Lower bench not mined.
		14, NE. ¼ SE. ¼.	Patterson Coal and Mining Co.	Slope.	Sandstone roof. Coal, 3 ft. 6 in. Clay, 10 in. Coal, 10 in. Shale floor.	Hartshorne.	U. S. Geol. Survey.	3 ft. or more of "black jack" lies below the coal.
		15, N. ½ NW. ¼.	No. 4, Central Coal and Coke Co.	Slope.	Shale roof. Coal, 4 ft.	Hartshorne.	U. S. Geol. Survey.	
		17, SW. ¼ NW. ¼.		Drill hole.	Sandstone roof. Coal, 4 ft. 3 in. Shale floor.	Hartshorne.	Cherokee Construction Co.	110 ft. above this is a 5-ft. bed of coal and bone.
		22, NW. ¼ NW. ¼.	Central Coal and Coke Co.	Drill hole.	Shale roof. Coal, 3 ft. 6 in. Shale, 3 in. Coal, 2 in. Shale, 7 in. Coal, 11 in. Bone, 1 ft. 8 in.	Hartshorne.	Cherokee Construction Co.	52 ft. above this is a 5 ft. 9 in. bed of bone and coal. 100 ft. above is a 5-ft. bed of shale and coal.

R. W.	Section	Name of opening	Kind of exposure	Section of coal bed	Stratigraphic horizon	Examined or reported by		Remarks
11 E.	SW. ¼ NE. ¼		Drill hole, 177 ft.	Shale roof Coal, 3 ft. 8 in. Shale floor	Hartshorne	Cherokee Construction Co.		40 ft. above this is a 4 ft. 4 in. bed of coal, bone, and shale
11 E.	NW. ¼ NE. ¼		Drill hole, 191 ft.	Shale roof Coal, 2 ft. 9 in. Bone, 8 in. Shale floor	Hartshorne	Cherokee Construction Co.		41 ft. above this is a 4 ft. 10 in. bed of coal, shale, and bone
11 E.	SW. ¼ NW. ¼		Drill hole, 180 ft.	Shale roof Coal, 2 ft. 11 in. Shale floor	Hartshorne	Cherokee Construction Co.		40 ft. above this is a 3 ft. 4 in. bed of dirty coal
11 E.	NE. ¼ NE. ¼		Drill hole, 056 ft.	Shale roof Coal, 3 ft. 8 in. Sandstone floor	Hartshorne	Cherokee Construction Co.		80 ft. above this is a 4 ft. 4 in. bed of coal and bone
	1, lot 4 or 5.	No. 4, Cherokee Construction Co.	Shaft, 170 ft.	Sandstone roof Coal, 4 ft. 6 in. Shale, 8 in. Coal, 3 ft. 6 in. Shale floor.	Hartshorne	Cherokee Construction Co.		
	1, lot 8.		Old slope.	No record.	Hartshorne	U. S. Geol. Survey.		
	1, lot 12.		Old slope.	No record.	Hartshorne.	U. S. Geol. Survey.		
	2, NE. ¼.		Old slope.	No record.	Hartshorne.	U. S. Geol. Survey.		
	2, SE. ¼ NW. ¼.		Old slope.	No record.	Hartshorne.	U. S. Geol. Survey.		

		[illegible]		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.
		22, SW. ¼.	G. W. Crabtree.	Slope.	Sandstone roof. Coal, 4 ft. 6 in. Parting, 1 ft. Coal, 6 in. Parting, 2 in. Coal, 1 ft. 10 in.	Hartshorne.	U. S. Geol. Survey.	Coal is exposed in several places near here.
		26, NW. ¼ NE. ¼.	Central Coal and Coke Co., No. 2.	Shaft, 49 ft.	Shale roof. Coal, 4 ft. Parting, 9 in. Coal, 6 in. Parting, 3 in. Coal, 2 ft. 6 in. Shale floor.	Hartshorne.	Central Coal and Coke Co.	Benches are variable in thickness.
		27, NW. ¼ SW. ¼.	Central Coal and Coke Co., No. 3.	Shaft, 23 ft.	Shale roof. Coal, 4 ft. Parting, 9 in. Coal, 6 in. Parting, 3 in. Coal, 2 ft. 6 in. Shale floor.	Hartshorne.	Central Coal and Coke Co.	Coal has sandstone roof on west side of shaft.
		12, SW. ¼.	Bethel.	Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.
		15, NW. ¼.		Old workings.	No record.	Hartshorne.	U. S. Geol. Survey.	
		16, SW. ¼.		Old slope.	No record.	Hartshorne.	U. S. Geol. Survey.	
4	31	17, NE. ¼ SW. ¼.	Claborn.	Prospect.	Coal, 10 in. Shale, 4 in. Shaly coal, 8 in. Coal, 1 ft. 7 in. Shale, 2 ft. 6 in. Coal, 2 ft. 4 in. Shale, 2 ft. Coal, 4 in. to 1 ft. Shale, 8 ft. Coal, 3 in.	Hartshorne.	Arkansas Geological Survey.	

Table of mines, openings, and exposures of coal—Continued.

Location.		Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
W.	Section.						
	19, SW. ¼.	Witte Coal Co.	Slope.	Shale roof. Coal, 5 ft. Shale, 7 in. Coal, 2 ft. 6 in. Shale floor.	Hartshorne.	D. Lytle.	Only the upper bench is mined.
	21, NE. ¼ NE. ¼.	Davidson.	Slope.	Shale roof. Coal, 4 ft. Shale, 8 in. Coal, 3 ft. 4 in. Shale floor.	Hartshorne.	U. S. Geol. Survey.	Partings contain more or less coal.
32	21, NW. ¼ NE. ¼.		Slope.	Shale roof. Coal, 7 in. Shale, 1 in. Coal, 1 ft. 3 in. Shale, 4 in. Coal, 1 ft. 9 in. Shale, 8 in. Coal, 1 ft. 9 in. Shale, 1 ft. 6 in. Bone, 6 in. Coal, 3 in. Shale floor.	Hartshorne.	U. S. Geol. Survey.	Partings contain thin seams of coal. Coal beds contain shale bands.
	21, NE. ¼ NW. ¼.	Seymour Coal Co.	Slope.	Shale roof. Coal, 2 ft. Shale, 3 in. Coal, 2 ft. Shale, 2 ft. Coal, 2 ft. Shale, 2 ft. 6 in. Coal, 4 ft.	Hartshorne.	U. S. Geol. Survey.	Only the lowest bench is worked.

		3, NE. ¼.		Crop.	Sandstone roof. Coal, 4 in. Sandstone floor.	Hartshorne.	U. S. Geol. Survey.	Exposed in railroad cut.
9	31	13, NE. ¼.	Sullivant.	Crop.	Shale roof. Coal, 1 ft.	Fort Smith.	U. S. Geol. Survey.	
		16, NW. ¼.	Hendricks.	Old slope.	Coal, 2 ft.	Fort Smith.	Arkansas Geol. Survey.	Possibly another bed 5 ft. below.
		28, SW. ¼.		Slope.	Shale roof. Coal, 1 ft. 11 in.	Hartshorne.	U. S. Geol. Survey.	
		30, NW. ¼.		Shaft, 85 ft.	Shale roof. Coal, 1 ft. 10 in. Shale, 4 in. Coal, 1 ft.	Hartshorne.	U. S. Geol. Survey.	
8	31	30, SW. ¼.		Shaft, 42 ft.	Same as next above.	Hartshorne.	Citizen.	
		30, SW. ¼.	Montgomery and Jones.	Slope.	Shale roof. Coal, 1 ft. 10 in. Shale, 1½ in. Coal, 8 in.	Hartshorne.	U. S. Geol. Survey.	Parting varies up to 1½ in.
		1, N. ½.		Old slopes.	Shale roof. Coal, 1 ft. 8 in.	Charleston.	U. S. Geol. Survey.	Coal varies from 14 in. to 20 in.
7	31	3, NE. ¼ SW. ¼.		Prospect.	Shale roof. Coal, 1 ft. 6 in.	Charleston.	U. S. Geol. Survey.	
		13, SW. ¼.	Bostick.	Old slope.	Coal, 2 ft. 10 in. Parting.	Hartshorne.	U. S. Geol. Survey.	

Table of mines, openings, and exposures of coal—Continued.

Location.		Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
W.	Section.						
31	17, NE. ¼ NW. ¼.		Drill hole, 792 ft.	Coal, 1 ft. 3 in. Shale, ½ in. Coal, 1 ft. Shale, 4½ in. Coal, 1 ft. 7 in.	Hartshorne.	Cherokee Construction Co.	
	19, SW. ¼ NE. ¼.		Drill hole, 660 ft.	Shale roof. Coal, 2 ft. 2 in. Shale, 1 in. Coal, 1 ft. 6 in. Shale floor.	Hartshorne.	Cherokee Construction Co.	
	21, NE. ¼ NW. ¼.		Drill hole, 689 ft.	Coal, 3 ft. 9 in. Parting, 2½ in.	Hartshorne.	Western Coal and Mining Co.	
	22, SW. ¼ SW. ¼.		Drill hole, 89 ft.	Coal, 3 ft. 9 in. Parting, 1 in.	Hartshorne.	Western Coal and Mining Co.	
	22, SE. ¼ NE. ¼.		Drill hole, 25 ft.	Coal, 3 ft. 7 in. Parting, 3 in.	Hartshorne.	Western Coal and Mining Co.	
	22.		Drill hole, 305 ft.	Coal, 6 ft.	Hartshorne.	Western Coal and Mining Co.	Location in section not known.
	28, NE. ¼ SW. ¼.		Drill hole, 198 ft.	Coal, 4 ft. 5 in.	Hartshorne.	Western Coal and Mining Co.	
	31, SW. ¼ NW. ¼.		Drill hole, 271 ft.	Coal, 4 ft. 5 in. Parting, 8 in.	Hartshorne.	Western Coal and Mining Co.	
	31, NW. ¼ SW. ¼.		Drill hole, 129 ft.	Coal, 4 ft. 7 in. Parting, 5 in.	Hartshorne.	Western Coal and Mining Co.	

32, NE. ¼ NE. ¼.		Drill hole, 204 ft.	Coal, 4 ft.	Hartshorne.	Western Coal and Mining Co.		
32, SE. ¼ NE. ¼.		Drill hole, 60 ft.	Coal, 5 ft. Parting, 1 in.	Hartshorne.	Western Coal and Mining Co.		
32, SW. ¼ NE. ¼.		Drill hole, 77 ft.	Coal, 5 ft. 4 in. Parting, 1½ in.	Hartshorne.	Western Coal and Mining Co.		
32, SW. ¼ SW. ¼.	Western Coal and Mining Co., No. 17.	Shaft, 212 ft.	Shale roof. Coal, 3 ft. Shale, 4 in. Coal, 3 ft.	Hartshorne.	U. S. Geol. Survey.	Some sulphur and gray bands in coal.	
12 NW. ¼ NE. ¼.	Greenwood Coal and Lumber Co., No. 1.	Slope.	Shale roof. Coal, 3 ft. Parting, up to 6 in. Coal, 3 ft. Sandstone floor.	Hartshorne.	U. S. Geol. Survey.	Coal varies in thickness from 4 ft. to 7 ft.	
12, SE. ¼ SW. ¼.		Drill hole, 13 ft.	Coal, 3 ft. 1 in. Parting, 2 in.	Hartshorne.	Western Coal and Mining Co.		
12, SW. ¼ SE. ¼.		Drill hole, 138 ft.	Coal, 3 ft. 5 in.	Hartshorne.	Western Coal and Mining Co.	Bony coal; contains sulphur.	
12, NW. ¼ SE. ¼.		Drill hole, 75 ft.	Coal, 3 ft.	Hartshorne.	Western Coal and Mining Co.		
12, NW. ¼ SE. ¼.		Drill hole, 112 ft.	Coal, 6 ft. 7 in. Parting, 1 in.	Hartshorne.	Western Coal and Mining Co.		
12, SE. ¼ SW. ¼.		Drill hole, 16 ft.	Coal, 2 ft. 2 in.	Hartshorne.	Western Coal and Mining Co.		
12, SE. ¼ SW. ¼.		Drill hole, 11 ft.	Coal, 3 ft.	Hartshorne.	Western Coal and Mining Co.		

Table of mines, openings, and exposures of coal—Continued.

Location. R. W.	Section.	Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
	12, NE. ¼ SE. ¼.		Drill hole, 215 ft.	Coal, 7 ft. 7 in. Partings, 5 in.	Hartshorne.	Western Coal and Mining Co.	One 4 in. and one 1 in. parting.
	12, NW. ¼ NW. ¼		Drill hole, 15 ft.	Coal, 2 ft. 11 in. Shale floor.	Hartshorne.	Western Coal and Mining Co.	
	12, NW. ¼ SE. ¼.		Drill hole, 80 ft.	Shale roof. Coal, 3 ft. Shale floor.	Hartshorne.	Cherokee Construction Co.	
	12, SE. ¼ NE. ¼.		Drill hole, 125 ft.	Shale roof. Coal, 3 ft. 3 in. Parting, 1 in. Coal, 3 ft. 4 in.	Hartshorne.	Cherokee Construction Co.	
	12, SE. ¼ SW. ¼.		Drill hole, 10 ft.	Coal, 2 ft. 5 in. Shale, 2 in. Coal, 8 in.	Hartshorne.	Cherokee Construction Co.	
	12, SW. ¼ SE. ¼.		Drill hole, 150 ft.	Shale roof. Coal, 3 ft. 5 in. Shale floor.	Hartshorne.	Cherokee Construction Co.	Coal is bony and contains sulphur.
31	13, NE. ¼ NE. ¼.		Drill hole, 39 ft.	Coal, 2 ft. 7 in.	Hartshorne.	Western Coal and Mining Co.	
	13, NE. ¼ NW. ¼.		Drill hole, 40 ft.	Shale roof. Coal, 2 ft. 7 in. Shale floor.	Hartshorne.	Cherokee Construction Co.	

		17, S. ½ NW. ¼	Skinner and Knott.	Slope.	Shale roof. Coal, 3 ft. Sandstone floor.	Hartshorne.	U. S. Geol. Survey.	Coal varies between 2 ft. 5 in. and 4 ft.
		18, NE. ¼ SW. ¼	Swofford.	Slope.	Shale roof. Coal, 2 ft. 8 in.	Hartshorne.	U. S. Geol. Survey.	Coal varies between 2 ft. 8 in. and 2 ft. 10 in.
		18, SW. ¼.	Bates and McWilliams	Shaft, 70 ft.	Shale roof. Coal, 2 ft. 10 in. Sandstone floor.	Hartshorne.	U. S. Geol. Survey.	Coal varies between 2 ft. 8 in. and 3 ft.
		21, NE. ¼.		Slope.	Shale roof. Coal, 2 ft. 6 in. Sandstone floor.	Hartshorne.	U. S. Geol. Survey.	A bed of bony coal lies 50 ft. below this.
		21, N. ½ SW. ¼.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.
		29, SW. ¼.		Old workings.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.
		5, SE. ¼.		Prospect.	Coal.	Hartshorne.	U. S. Geol. Survey.	
		7, SE. ¼ SE. ¼.	Irby Coal Co.	Slope.	Sandstone roof. Coal, 3 ft. Shale floor.	Hartshorne.	U. S. Geol. Survey.	
5	31	8, NE. ¼ NE. ¼.	Moran Coal Co.	Slope.	Shale roof. Coal, 3 ft. 4 in. Sandstone floor.	Hartshorne.	U. S. Geol. Survey.	
		18, SW. ¼.	Cherokee Construction Co.	Slope No. 5.	Coal, 3 ft. 4 in.	Hartshorne.	Cherokee Construction Co.	Coal variable in thickness.
		19, NW. ¼ NW. ¼.	Branner Coal Co.	Shaft, 60 ft.	Shale roof. Coal, 3 ft. 6 in.	Hartshorne.	U. S. Geol. Survey.	

Table of mines, openings, and exposures of coal—Continued.

Location W.	Section.	Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
31	19, NE. ¼ NW. ¼.	C. C. Woodson.	Strip.	Shale roof. Coal, 3 ft. 7 in. Shale floor.	Hartshorne.	U. S. Geol. Survey.	
	19, NE. ¼ NE. ¼.		Strip.	Shale roof. Coal, 3 ft. Shale floor.	Hartshorne.	U. S. Geol. Survey.	
	19, E. ½ SE. ¼.	Denman Coal Co.	Shaft 50 ft.	Shale roof. Coal, 3 ft. Shale floor.	Hartshorne.	U. S. Geol. Survey.	
	19, SW. ¼.		Drill hole, 253 ft.	Shale roof. Coal, 3 ft. 5 in. Sandstone floor.	Hartshorne.	Cherokee Construction Co.	58 ft. above this is another bed of coal.
	19, SE. ¼ SW. ¼.		Drill hole, 270 ft.	Shale roof. Coal, 3 ft.	Hartshorne.	Cherokee Construction Co.	55 ft. above is another bed.
	20, NW. ¼ SW. ¼.	Dallas Coal Co.	Shaft, 60 ft.	Sandstone roof. Coal, 3 ft. Shale floor.	Hartshorne.	U. S. Geol. Survey.	
	20, NE. ¼ SW. ¼.	C. C. Turnipseed.	Slope.	Sandstone roof. Coal, 3 ft.	Hartshorne.	U. S. Geol. Survey.	
	20, S. ½ NW. ¼.	Dallas Coal Co.	Shaft, 24 ft.	Sandstone roof. Coal, 3 ft.	Hartshorne.	U. S. Geol. Survey.	Blacksmithing coal.
	21, SE. ¼.		Strip.	Shale roof. Coal, 3 ft. 6 in.	Hartshorne.	U. S. Geol. Survey.	

		21, SE. ¼ NE. ¼.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.
		22, SW. ¼.	G. W. Crabtree.	Slope.	Sandstone roof. Coal, 4 ft. 6 in. Parting, 1 ft. Coal, 6 in. Parting, 2 in. Coal, 1 ft. 10 in.	Hartshorne.	U. S. Geol. Survey.	Coal is exposed in several places near here.
		26, NW. ¼ NE. ¼.	Central Coal and Coke Co., No. 2.	Shaft, 49 ft.	Shale roof. Coal, 4 ft. Parting, 9 in. Coal, 6 in. Parting, 3 in. Coal, 2 ft. 6 in. Shale floor.	Hartshorne.	Central Coal and Coke Co.	Benches are variable in thickness.
		27, NW. ¼ SW. ¼.	Central Coal and Coke Co., No. 3.	Shaft, 23 ft.	Shale roof. Coal, 4 ft. Parting, 9 in. Coal, 6 in. Parting, 3 in. Coal, 2 ft. 6 in. Shale floor.	Hartshorne.	Central Coal and Coke Co.	Coal has sandstone roof on west side of shaft.
		12, SW. ¼.	Bethel.	Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.
		15, NW. ¼.		Old workings.	No record.	Hartshorne.	U. S. Geol. Survey.	
		16, SW. ¼.		Old slope.	No record.	Hartshorne.	U. S. Geol. Survey.	
4	31	17, NE. ¼ SW. ¼.	Claborn.	Prospect.	Coal, 10 in. Shale, 4 in. Shaly coal, 8 in. Coal, 1 ft. 7 in. Shale, 2 ft. 6 in. Coal, 2 ft. 4 in. Shale, 2 ft. Coal, 4 in. to 1 ft. Shale, 8 ft. Coal, 3 in.	Hartshorne.	Arkansas Geological Survey.	

Table of mines, openings, and exposures of coal—Continued.

Location. W.	Section.	Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
31	18 E. ½ SE. ¼.	Chasteen.	Prospect.	Coal, 1 ft. Parting, 3 in. Coal, 6 in. Parting, 1 in. Coal, 2 in. Parting, 2 in. Coal, 2 ft. 6 in. Parting, 1 ft. 11 in. Coal, 8 in. Parting, 4 in. Coal, 2 ft.	Hartshorne.	U. S. Geol. Survey.	All of the lowest bench of coal was not seen, though it is probably 2 ft., as reported.
31	1, SE. ¼ NE. ¼.		Prospect.	Shale roof. Coal, 3 in. Parting, 7 in. Coal, 2 in. Parting, 8 in. Coal, 3 in. Parting, 3 in. Coal, 4 in. Parting, 2 in. Coal, 1 ft. Shale floor.	Hartshorne.	U. S. Geol. Survey.	All of the bed is not exposed.
	8, NE. ¼ SW. ¼.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.
	9, NW. ¼.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.
	10, NW. ¼.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.
	17, NW. ¼.		Drill hole, 391 ft.	Shaly coal, 1 ft. 7 in.	Hartshorne.	Central Coal and Coke Co.	

9	30	17, NW. ¼.			Coal, 9 in.	300 ft. above Hartshorne.	Central Coal and Coke Co.	Same drill hole as one next above.
		19.	Gross.	Drill hole.	Coal, 10 in.	Hartshorne.	G. P. Gross.	
		33, SE. ¼ NE. ¼.	Graves.	Prospect.	Coal, 1 ft. 6 in.	Fort Smith.	U. S. Geol. Survey.	
8	30	22, NE. ¼.		Crop.	Coal.	Fort Smith.	U. S. Geol. Survey.	Blossom.
7	30	7.		Drill hole, 698 ft.	Bone coal, 4 ft. Coal, 4 ft.	Hartshorne.	Cherokee Construction Co.	On the Edenborn farm.
		14, NW. ¼ SW. ¼.		Drill hole, 268 ft.	Shale roof. Bone coal, 9 in. Coal, 2 ft. Shale floor.	Hartshorne.	Cherokee Construction Co.	
		24, S. ½ NE. ¼.		Old working.	Coal, 1 ft. 6 in.	Hartshorne.	Citizen.	
		25, NW. ¼.		Old working.	Coal, 1 ft. 4 in.	Hartshorne.	Citizen.	
		32, SE. ¼ SE. ¼.	McConnel.	Old working.	Shale roof. Coal, 4 in. Shale, 1 in. Coal, 2 ft. 5 in.	Hartshorne.	Arkansas Geol. Survey.	
6	30	5, lot 5.		Drill hole, 100 ft.	Shale roof. Coal, 6 ft. 10 in. Shale floor.	Hartshorne.	Western Coal and Mining Co.	Bands of coal in roof and floor.
		5, lot 5.		Drill hole, 36 ft.	Shale roof. Coal, 1 ft. 9 in. Shale floor.	Hartshorne.	Western Coal and Mining Co.	
		5, lot 5.		Drill hole, 50 ft.	Shale roof. Coal, 2 ft. 3 in. Shale floor.	Hartshorne.	Western Coal and Mining Co.	

Table of mines, openings, and exposures of coal—Continued.

Location.		Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
W.	Section.						
	5.		Drill hole, 345 ft.	Shale roof. Coal, 2 ft. 9 in. Bone coal, 3½ in. Coal, 2 ft. 6 in. Shale, 2½ in. Coal, 3½ in. Shale, 1 ft. Coal, 4½ in. Bone coal, 2 in. Coal, 1 in. Parting, 1 in. Coal, 1½ in. Bone coal, 3 in. Coal, 1 ft. 7½ in.	Hartshorne.	Western Coal and Mining Co.	Diamond drill hole on the McCord farm.
	6, lot 13.		Drill hole, 25 ft.	Shale roof. Coal. Shale floor.	Hartshorne.	Cherokee Construction Co.	
30	6, SW. ¼ SW. ¼.		Drill hole, 20 ft.	Coal, 5 ft. 6 in. Shale floor.	Hartshorne.	Cherokee Construction Co.	
	6, lot 8.		Drill hole, 38 ft.	Shale roof. Coal, 1 ft. 6 in. Shale, 2 in. Coal, 2 ft. 7½ in.	Hartshorne.	Cherokee Construction Co.	½-inch sulphur band in lower bench.
	6, SE. ¼ NE. ¼.	Fidelity Fuel Co., Banner mine.	Slope.	Shale roof. Coal, 5 ft. 3 in. Bone coal, 3 in. Sandstone floor.	Hartshorne.	U. S. Geol. Survey.	

		7, lot 4.		Drill hole, 315 ft.	Sandstone roof. Coal, 3 ft. Shale, 1 ft. 5 in. Coal, 4 ft. 1½ in. Shale floor.	Hartshorne.	Cherokee Construction Co.	
		19, N. ½.		Old working.	Coal.	Hartshorne.	U. S. Geol. Survey.	No record.
4	30	8, S. ½.	Lewis Pogue.	Old working.	Coal.	Hartshorne.	Citizen.	In two benches.
		9, SW. ¼.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.
		13, NE. ¼ SW. ¼.		Drill hole, 320 ft.	Coal, 6 in. Fire-clay floor.	Fort Smith.	Cherokee Construction Co.	
3	30	3, NW. ¼.		Prospect.	Coal.	Hartshorne.	U. S. Geol. Survey.	
		4, NW. ¼.	Holloway.	Well.	Coal.	Hartshorne.	Citizen.	Coal struck in well.
		5, NE. ¼.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.
		6, W. ½.		Prospect.	Coal.	Hartshorne.	U. S. Geol. Survey.	
10	29	10, N. ½ SE. ¼.		Crop.	Coal, 5 in.	Hartshorne.	U. S. Geol. Survey.	
		21, SW. ¼.		Old strip.	Coal, 1 ft.	Hartshorne.	U. S. Geol. Survey.	
		36, N. ½.		Crop.	Clay roof. Coal, 1 ft. 1 in. Bone coal, 5 in.	Hartshorne.	U. S. Geol. Survey.	Exposed in road.
		36, E. ½.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Exposed in road.
8	29	11, SE. ¼	Vesta.	Old working.	Coal.	Hartshorne.	Citizen.	

Table of mines, openings, and exposures of coal—Continued.

Location.		Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
W.	Section.						
	5.		Drill hole, 345 ft.	Shale roof. Coal, 2 ft. 9 in. Bone coal, 3½ in. Coal, 2 ft. 6 in. Shale, 2½ in. Coal, 3½ in. Shale, 1 ft. Coal, 4½ in. Bone coal, 2 in. Coal, 1 in. Parting, 1 in. Coal, 1½ in. Bone coal, 3 in. Coal, 1 ft. 7½ in.	Hartshorne.	Western Coal and Mining Co.	Diamond drill hole on the McCord farm.
	6, lot 13.		Drill hole, 25 ft.	Shale roof. Coal. Shale floor.	Hartshorne.	Cherokee Construction Co.	
30	6, SW. ¼ SW. ¼.		Drill hole, 20 ft.	Coal, 5 ft. 6 in. Shale floor.	Hartshorne.	Cherokee Construction Co.	
	6, lot 8.		Drill hole, 38 ft.	Shale roof. Coal, 1 ft. 6 in. Shale, 2 in. Coal, 2 ft. 7½ in.	Hartshorne.	Cherokee Construction Co.	½-inch sulphur band in lower bench.
	6, SE. ¼ NE. ¼.	Fidelity Fuel Co., Banner mine.	Slope.	Shale roof. Coal, 5 ft. 3 in. Bone coal, 3 in. Sandstone floor.	Hartshorne.	U. S. Geol. Survey.	

		7, lot 4.		Drill hole, 315 ft.	Sandstone roof. Coal, 3 ft. Shale, 1 ft. 5 in. Coal, 4 ft. 1½ in. Shale floor.	Hartshorne.	Cherokee Construction Co.	
		19, N. ½.		Old working.	Coal.	Hartshorne.	U. S. Geol. Survey.	No record.
4	30	8, S. ½.	Lewis Pogue.	Old working.	Coal.	Hartshorne.	Citizen.	In two benches.
		9, SW. ¼.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.
		13, NE. ¼ SW. ¼.		Drill hole, 320 ft.	Coal, 6 in. Fire-clay floor.	Fort Smith.	Cherokee Construction Co.	
3	30	3, NW. ¼.		Prospect.	Coal.	Hartshorne.	U. S. Geol. Survey.	
		4, NW. ¼.	Holloway.	Well.	Coal.	Hartshorne.	Citizen.	Coal struck in well.
		5, NE. ¼.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.
		6, W. ½.		Prospect.	Coal.	Hartshorne.	U. S. Geol. Survey.	
10	29	10, N. ½ SE. ¼.		Crop.	Coal, 5 in.	Hartshorne.	U. S. Geol. Survey.	
		21, SW. ¼.		Old strip.	Coal, 1 ft.	Hartshorne.	U. S. Geol. Survey.	
		36, N. ½.		Crop.	Clay roof. Coal, 1 ft. 1 in. Bone coal, 5 in.	Hartshorne.	U. S. Geol. Survey.	Exposed in road.
		36, E. ½.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Exposed in road.
8	29	11, SE. ¼	Vesta.	Old working.	Coal.	Hartshorne.	Citizen.	

Table of mines, openings, and exposures of coal—Continued.

Location.		Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
R. W.	Section.						
29	13, NW. ¼ NW. ¼.		Prospect, 16 feet deep.	Coal.	Charleston.	Citizen.	
	16, NE. ¼ NE. ¼.		Old workings.	Coal; no record.	Charleston.	U. S. Geol. Survey.	
	16, W. ½.		Old workings.	Coal; No record.	Charleston.	U. S. Geol. Survey.	
	20, NW. ¼.	Coal Ridge.	Old slope.	Shale roof. Coal, 1 ft. 6 in. Shale floor.	Charleston.	U. S. Geol. Survey.	
	25, SW. ¼.		Crop.	Coal.	Paris.	U. S. Geol. Survey.	Blossom.
	27, NW. ¼.		Strip.	Coal, 1 ft. 2 in.	Paris.	Citizen.	
	31 SW. ¼.	Bean.	Strip.	Coal, 1 ft. 8 in.	Charleston.	Arkansas Geol. Survey.	
29	5, SW. ¼ NE. ¼.	McClellan.	Drill hole, 28 ft.	Coal, 1 ft. 7½ in.	Hartshorne.	McClellan.	Coal crops out near.
	6, S. ½.	Langston.	Strip.	Coal, 1 ft. 6 in.	Fort Smith.	Arkansas Geol. Survey.	
29	7, SE. ¼.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom in road.
28	4, W. ½.	Lewis.	Old working.	Coal, 1 ft. 2 in.	Hartshorne.	Arkansas Geol. Survey.	
	6, SW. ¼ NW. ¼.	Anderson.	Prospect.	Coal; no record.	Hartshorne.	U. S. Geol. Survey.	

		8, SE. ¼ SE. ¼.	Logan.	Prospect.	Coal.	Hartshorne.	Logan.	
		11, NW. ¼.		Well.	Coal, 1 ft. 6 in.	Hartshorne.	Citizen.	Reported as struck in a well.
		17, E. ½.		Crop.	Coal.	Spadra.	Citizen.	
		28, SW. ¼.	Minden.	Strip.	Coal, 1 ft. 8 in.	Charleston.	U. S. Geol. Survey.	
8	28	29, SW. ¼.		Crop.	Coal, 1 ft. 5 in.	Charleston.	U. S. Geol. Survey.	
		31, NW. ¼ NW. ¼.		Old strip.	Coal, 1 ft. 5 in.	Charleston.	U. S. Geol. Survey.	
		32, SW. ¼.		Crop.	Coal, 10 in.	Charleston.	U. S. Geol. Survey.	
		32, NW. ¼ SE. ¼.	Fealy.	Strip.	Coal, 1 ft. 8 in.	Charleston.	U. S. Geol. Survey.	
		34, SE. ¼.	Cotton.	Crop.	Coal, 1 ft. 8 in.	Charleston.	U. S. Geol. Survey.	
		2, NE. ¼.		Crop.	Coal, 1 ft. 4 in.	Charleston.	U. S. Geol. Survey.	
		3, SE. ¼ NE. ¼.		Crop.	Coal.	Charleston.	U. S. Geol. Survey.	
		13, SW. ¼.		Crop.	Coal, 1 ft. 6 in.	Charleston.	U. S. Geol. Survey.	
7	28	16, SW. ¼.		Old working.	Coal, 1 ft. 6 in.	Charleston.	U. S. Geol. Survey.	
		17, SE. ¼ NE. ¼.	Carter.	Slope.	Coal, 2 ft. 6 in.	Charleston.	C. C. Carter.	Reported to vary between 30 in. and 36 in.
		22, NW. ¼.		Prospect.	Coal.	Charleston.	U. S. Geol. Survey.	

Table of mines, openings, and exposures of coal—Continued.

Location.		Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
R. W.	Section.						
28	22, SW. ¼ NE. ¼.		Prospect.	Coal.	Charleston.	U. S. Geol. Survey.	
	23, N. ½.		Prospect.	Coal, 1 ft. 8 in.	Charleston.	U. S. Geol. Survey.	
	24, NW. ¼.		Strip.	Coal, 1 ft. 6 in.	Charleston.	U. S. Geol. Survey.	
	24, NE. ¼.			Coal, 9 in.	Charleston.	U. S. Geol. Survey.	
	30, SE. ¼.		Slope.	Coal, 1 ft. 6 in.	Charleston.	U. S. Geol. Survey.	
	32, NW. ¼.		Prospect.	Coal, 1 ft. 10 in.	Charleston.	U. S. Geol. Survey.	
	33, NW. ¼.		Prospect.	Coal, 1 ft. 8 in.	Charleston.	U. S. Geol. Survey.	
	33, NE. ¼.		Prospect.	Coal.	Charleston.	U. S. Geol. Survey.	
27	3, SW. ¼.		Prospect.	Coal, 10 in.	Below Hartshorne.	U. S. Geol. Survey.	
	8, SE. ¼ NW. ¼.		Prospect.	Coal, 10 in.	Below Hartshorne.	U. S. Geol. Survey.	
	10, SW. ¼.		Prospect.	Coal.	Below Hartshorne.	U. S. Geol. Survey.	
	34, SE. ¼.		Crop.	Coal.	Below Hartshorne.	U. S. Geol. Survey.	

		36, NE. ¼.	Adams.	Crop.	Coal.	Below Hartshorne.	U. S. Geol. Survey.	
9	27	9, SE. ¼.		Drill hole, 258 ft.	Shaly coal, 2 in. Coal, 11 in. Shaly coal, 1 in. Coal, 11 in. Shale, 2 in. Coal, 10 in.	Below Hartshorne.	Central Coal and Coke Co.	
		11, NW. ¼.		Prospect.	Coal, 5 in.	Below Hartshorne.	U. S. Geol. Survey.	
		23, NE. ¼.		Prospect.	Coal.	Hartshorne.	U. S. Geol. Survey.	In two benches.
		22, SE. ¼.		Prospect.	Coal, 1 ft. 2 in.	Charleston.	U. S. Geol. Survey.	
		30, NW. ¼.	Carpenter.	Prospect.	Coal, 1 ft. 10 in.	Charleston.	U. S. Geol. Survey.	
8	27	35, SW. ¼.	Ockenfels.	Crop.	Coal, 6 in.	Paris.	U. S. Geol. Survey.	
		35, NE. ¼.			Coal, 10 in.	Paris.	Citizen.	
		3, SW. ¼.		Strip.	Coal, 1 ft. 11 in.	Charleston.	Citizen.	
		10, NE. ¼.	Caulk's.	Prospect.	Coal, 1 ft. 1 in.	Charleston.	U. S. Geol. Survey.	Base of coal not seen.
		13, N. ½.		Prospect.	Coal.	Spadra.	U. S. Geol. Survey.	Blossom.
7	27	14, NE. ¼.		Prospect.	Coal.	Hartshorne.	U. S. Geol. Survey.	Crops in road east of creek.
		18, SW. ¼.			Coal.	Charleston.	U. S. Geol. Survey.	
		19, W. ½.			Coal, 2 ft. 6 in.	Charleston.	U. S. Geol. Survey.	
		33, W. ½.		Prospect.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.

Table of mines, openings, and exposures of coal—Continued.

Location.		Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
.W.	Section.						
	12, SW. ¼.		Old working.	Coal.	Charleston.	U. S. Geol. Survey.	
	13, NE. ¼ NW. ¼.		Well, 27 ft.	Coal; no record.	Charleston.	N. G. Greer.	
	22.	Old Moomaw openings.	Slopes.	Coal, 1 ft. 10 in.	Charleston.	U. S. Geol. Survey.	Five or six openings.
26	23, NW. ¼ SW. ¼.		Slope.	Coal, 1 ft. 10 in.	Charleston.	Adams.	
	23, SW. ¼ NW. ¼.		Slope.	Coal, 1 ft. 10 in.	Charleston.	Adams.	
	27, NW. ¼ NW. ¼.		Prospect.	Coal, 2 ft. 2 in.	Hartshorne.	Adams.	
	6, SE. ¼ SE. ¼.		Crop.	Coal, 6 in.	Below Hartshorne.	U. S. Geol. Survey.	Crops in railroad cut.
	7, SE. ¼.		Crop.	Coal.	Below Hartshorne.	U. S. Geol. Survey.	
	17, SW. ¼.	Garritz.	Slope.	Coal, 2 ft. 1 in.	Hartshorne.	U. S. Geol. Survey.	18 ft. above this is a 22-in. bed.
	20, NE. ¼ NW. ¼.		Drill hole, 457 ft.	Coal, 5 feet.	Below Hartshorne.	Western Coal and Mining Co.	
	21, SE. ¼ NW. ¼		Drill hole, 24 ft.	Coal, 6 in. Shale, 1 ft. 2 in. Coal, 2 ft.	Hartshorne.	Western Coal and Mining Co.	

21, SW. ¼ SW. ¼.		Drill hole, 66 ft.	Coal, 2 ft. 6 in. Shale, 4 in. Coal, 2 ft. 3 in.	Hartshorne.	Western Coal and Mining Co.	
22, NE. ¼ SW. ¼.		Drill hole, 258 ft.	Coal, 2 ft. Shale, 8 in. Coal, 2 ft. 2 in.	Hartshorne.	Western Coal and Mining Co.	
22, NW. ¼ SW. ¼.	No. 2, Western Coal and Mining Co.	Shaft, 185 ft.	Coal, 2 ft. 3 in. Shale, 3 in. Coal, 2 ft.	Hartshorne.	Western Coal and Mining Co.	Benches and partings variable.
23, NW. ¼ SE. ¼.		Drill hole.	Coal, 2 ft. 5 in. Shale, 1 ft. Coal, 2 ft.	Hartshorne.	Western Coal and Mining Co.	
23, SE. ¼ SE. ¼.	No. 3, Western Coal and Mining Co.	Shaft, 160 ft.	Coal, 2 ft. 8 in. Shale, 1 ft. 2 in. Coal, 2 ft. 7 in.	Hartshorne.	Western Coal and Mining Co.	Benches and partings variable.
24, NW. ¼ SW. ¼.		Drill hole, 116 ft.	Coal, 1 ft. 7 in. Shale, 3 ft. Coal, 1 ft. 11 in.	Hartshorne.	Western Coal and Mining Co.	
24, SW. ¼ SE. ¼.		Drill hole, 27 ft.	Coal, 4 ft. 6 in.	Hartshorne.	Western Coal and Mining Co.	
24 NE. ¼.		Old slope.	Coal, 1 ft.	Below Hartshorne.	U. S. Geol. Survey.	
25, SE. ¼.		Shaft.	Coal.	Hartshorne.	U. S. Geol. Survey.	
25, SW. ¼.	No. 5, Western Coal and Mining Co.	Shaft.	Coal.	Hartshorne.	U. S. Geol. Survey.	
26, SW. ¼ NE. ¼.		Drill hole, 36 ft.	Coal, 4 ft. 2 in.	Hartshorne.	Western Coal and Mining Co.	

Table of mines, openings, and exposures of coal—Continued.

Location.		Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
R. W.	Section.						
	27, NE. ¼ NE. ¼.		Drill hole, 121 ft.	Coal, 2 ft. Shale, 2 in. Coal, 2 ft. 7 in.	Hartshorne.	Western Coal and Mining Co.	
	27, SE. ¼.		Drill hole, 106 ft.	Coal, 4 ft. 3 in.	Hartshorne.	Western Coal and Mining Co.	
26	28 NE. ¼ NE. ¼.		Drill hole, 142 ft.	Coal, 2 ft. 3 in. Shale, 3 in. Coal, 2 ft.	Hartshorne.	Western Coal and M ining Co.	
	28, NE. ¼ SE. ¼.		Drill hole, 137 ft.	Coal, 4 ft.	Hartshorne.	Western Coal and Mining Co.	
	34, S. ½ NW. ¼.		Drill hole, 108 ft.	Coal, 1 ft.	Hartshorne.	Western Coal and Mining Co.	
	26, SW. ¼ SW. ¼.		Crop.	Coal.	Paris.	U. S. Geol. Survey.	Blossom.
	28, SE. ¼.		Crop.	Coal.	Paris.	U. S. Geol. Survey.	Blossom.
	28, SW. ¼.		Crop.	Coal, 2 ft. 6 in.	Paris.	U. S. Geol. Survey.	
	29, SE. ¼.		Crop.	Coal.	Paris.	U. S. Geol. Survey.	Blossom.
26	29, SW. ¼ SW. ¼.	Goldsworthy.	Old working.	Shale roof. Coal, 2 ft. 4 in.	Paris.	U. S. Geol. Survey.	
	31, NE. ¼.		Crop.	Coal.	Above Paris.	U. S. Geol. Survey.	Blossom in road.

		35, NW. ¼ NE. ¼.	Blue Ribbon.	Slope.	Coal.	Paris.	U. S. Geol. Survey.	
		35, E. ½.	Baxley.	Slope.	Coal.	Paris.	U. S. Geol. Survey.	
		1, SW. ¼.	Domestic Coal Co.	Slope.	Shale roof. Coal, 2 ft. 6 in.	Paris.	U. S. Geol. Survey.	
		1, SE. ¼ NW. ¼.	Enterprise Mining Co.	Slope.	Shale roof. Coal, 2 ft. 2 in.	Paris.	U. S. Geol. Survey.	
		2, SE. ¼.	Spot Cash.	Shaft.	Coal.	Paris.	U. S. Geol. Survey.	
7	26	3, SE. ¼.		Drill hole, 182 ft.	Coal, 2 ft. 8 in.	Paris.	Citizen.	
		6, SE. ¼.		Strip.	Coal.	Paris.	U. S. Geol. Survey.	
		10, SW. ¼ NW. ¼.	Union Coal Co.	Shaft.	Coal.	Paris.	U. S. Geol. Survey.	
		10, SE. ¼ NE. ¼.	Paris Coal Co.	Slope.	Coal, 2 ft. 2 in. Fire-clay floor.	Paris.	U. S. Geol. Survey.	
		15, NE. ¼.		Prospect.	Coal; no record.	Spadra.	U. S. Geol. Survey.	
		18, W. ½.	Pete Close.	Slope.	Shale roof. Coal, 1 ft. 6 in.	Charleston.	U. S. Geol. Survey.	Reported to vary between 18 in. and 26 in.
10	25	20, NE. ¼.	Philpott.	Slope.	Shale roof. Coal, 1 ft. 10 in.	Charleston.	U. S. Geol. Survey.	
		26, SE. ¼ SE. ¼.		Prospect.	Coal, 1 ft. 8 in.	Below Harts-horne.	U. S. Geol. Survey.	

Table of mines, openings, and exposures of coal—Continued.

Location.		Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
R. W.	Section.						
25	31, SE. ¼.		Crop.	Coal, 1 ft.	Below Hartshorne.	U. S. Geol. Survey.	
	35, SE. ¼.		Crop.	Coal, 8 in.	Below Hartshorne.	U. S. Geol. Survey.	
	3, N. ½.		Crop.	Coal, 8 in.	Below Hartshorne.	U. S. Geol. Survey.	
	13, NW. ¼.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Exposed in road.
	19, NW. ¼ SE. ¼.	No. 4, Western Coal and Mining Co.	Shaft, 160 ft.	Shale roof. Coal, 3 ft. 5 in. Parting, 4 in.	Hartshorne.	Western Coal and Mining Co.	Parting varies between 4 in. and 10 in.
	19, NW. ¼ SW. ¼.		Old working.	Coal; no record.	Hartshorne.	U. S. Geol. Survey.	
	19, SE. ¼ SE. ¼.		Drill hole, 36 ft.	Coal, 1 ft. 4 in. Shale, 2 in. Coal, 2 ft. 2 in.	Hartshorne.	Western Coal and Mining Co.	
	19, SW. ¼ SW. ¼.		Old slope.	Coal; no record.	Hartshorne.	U. S. Geol. Survey.	
	20, SE. ¼ NE. ¼.		Shaft.	Coal; no record.	Hartshorne.	U. S. Geol. Survey.	Not working.
	20, NW. ¼ NE. ¼.	Stiewell.	Old shaft.	Coal; no record.	Hartshorne.	U. S. Geol. Survey.	

9	25	20, SE. ¼ SW. ¼.		Drill hole, 27 ft.	Coal, 1 ft. 9 in. Shale, 6 in. Coal, 2 ft.	Hartshorne.	Western Coal and Mining Co.	
		21 NE. ¼ NE. ¼.		Drill hole, 72 ft.	Coal, 2 ft. 6 in. Shale, 4 in. Coal, 8 in.	Hartshorne.	Jollin.	In the N. ½ of sec. 21 are 12 drill holes showing coal.
		21, SE. ¼ NE. ¼.		Drill hole, 29 ft.	Coal, 2 ft. 9 in.			
		29, NW. ¼.		3 shafts.	Coal, 3 ft. 10 in.	Hartshorne.	Citizen.	Small parting near center.
		29, SW. ¼.		Old slopes.	Coal; no record.	Hartshorne.	U. S. Geol. Survey.	Coal is in two benches.
		30, NE. ¼.		Shaft.	Coal, 3 ft. 10 in.	Hartshorne.	Citizen.	
		30, SW. ¼.	Black Diamond.	Shaft, 28 ft.	Shale roof. Coal, 2 ft. Parting. Coal, 2 ft. Shale floor.	Hartshorne.	U. S. Geol. Survey.	Coal varies between 3 ft. 6 in. and 4 ft. Parting not always present.
		30, SW. ¼.	Henry West.	Shaft.	Coal.	Hartshorne.	Citizen.	Same as next above.
8	25	12, SE. ¼ SE. ¼.		Drill hole, 567 ft.	Coal, 10 in. Parting, 10 ft. Shaly coal, 2 ft.	Hartshorne.	Arkansas Anthracite Coal Co.	
		9, SE. ¼ SE. ¼.		Drill hole, 502 ft.	Shaly coal, 6 in.	Hartshorne.	Arkansas Anthracite Coal Co.	
		7, SE. ¼ SW. ¼.		Drill hole, 481 ft.	Coal, 10 in.	Hartshorne.	Arkansas Anthracite Coal Co.	
		22, SE. ¼.		Crop.	Coal.	Charleston.	U. S. Geol. Survey.	Blossom in road.

Table of mines, openings, and exposures of coal—Continued.

Location.		Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
R. W.	Section.						
25	8, S. ½.		Crop.	Coal.	Charleston.	U. S. Geol. Survey.	Blossom in road.
	12, NE. ¼ NE. ¼.		Crop.	Coal, 1 ft. 3 in.	Charleston.	U. S. Geol. Survey.	
24	9, NE. ¼.		Crop.	Coal, 1 ft. 5 in.	Charleston.	U. S. Geol. Survey.	
	36, E. ½.	McConnell.	Slope.	Coal, 1 ft. 8 in.	Hartshorne.	U. S. Geol. Survey.	Shaft is being sunk near.
	1, NW. ¼.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom in road.
	3, NE. ¼.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom in road.
	5, NW. ¼.		Old working.	Coal; no record.	Hartshorne.	U. S. Geol. Survey.	
	6, NE. ¼.		Old working.	Coal; no record.	Hartshorne.	U. S. Geol. Survey.	
	7, SE. ¼.		Old working.	Coal, 1 ft. 10 in.	Hartshorne.	U. S. Geol. Survey.	
	8, W. ½.		Old slope.	Coal, 1 ft. 9 in.	Hartshorne.	U. S. Geol. Survey.	
	10, N. ½.		Drill hole, 226 ft.	Coal, 3 ft. 8 in. Parting, 6 in.	Hartshorne.	Citizen.	

		14, SW. ¼.	Pigg and Collier, Eureka Anthracite Coal Co.	Shaft, 140 ft.	Shale roof. Coal, 1 ft. 4 in. Parting, 6 in. Coal, 1 ft. 10 in.	Hartshorne.	U. S. Geol. Survey.
		17, SW. ¼ NW. ¼.		Old slope.	Coal, 3 ft.	Hartshorne.	U. S. Geol. Survey.
		18, NW. ¼.		Old working.	Coal; no record.	Hartshorne.	U. S. Geol. Survey.
9	24	19.		Drill hole, 443 ft.	Coal; no record.	Hartshorne.	Citizen.
		20, N. ½.	Southwestern Coal Co.	Shaft, 315 ft.	Coal; no record.	Hartshorne.	U. S. Geol. Survey.
		20, S. ½.		Drill hole, 483 ft.	Coal; no record.	Hartshorne.	Citizen.
		21, SW. ¼.		Drill hole, 448 ft.	Coal; no record.	Hartshorne.	Citizen.
		21, E. ½.		Drill hole, 268 ft.	Coal, no record.	Hartshorne.	Citizen.
		22, W. ½.	Scranton Anthracite Coal Co.	Shaft, 200 ft.	Coal, 1 ft. 8 in. Parting, 2 in. Coal, 1 ft. 8 in.	Hartshorne.	U. S. Geol. Survey.
		22, NE. ¼.	Central Anthracite Coal Co.	Shaft, 200 ft.	Coal, 1 ft. 8 in. Parting, 2 ft. Coal, 1 ft. 8 in.	Hartshorne.	U. S. Geol. Survey.
		23, SE. ¼.	Duck's Nest.	Shaft, 42 ft.	Coal, 2 ft. 10 in. Parting?.	Hartshorne.	Martin Rafter.
		23, NW. ¼ NW. ¼.	Needmore Mine, Spadra Creek Coal Co.	Shaft, 100 ft.	Shale roof. Coal, 1 ft. 5 in. Parting, 2 in. Coal, 1 ft. 10 in. Sandstone floor.	Hartshorne.	U. S. Geol. Survey.

Table of mines, openings, and exposures of coal—Continued.

Location.		Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
R. W.	Section.						
24	23, NW. ¼ NW. ¼.	McWilliams, Ward & Co.	Shaft, 85 ft.	Coal; no record.	Hartshorne.	U. S. Geol. Survey.	
	23, NE. ¼ NE. ¼.	No. 5, Consolidated Anthracite Coal Co.	Slope.	Shale roof. Coal, 1 ft. 4 in. Parting, 4 in. Coal, 1 ft. 8 in. Sandstone floor.	Hartshorne.	U. S. Geol. Survey.	
	24, NW. ¼ NW. ¼.	Clark and McWilliams.	Shaft, 100 ft.	Coal, 3 ft. 3 in. Parting ?.	Hartshorne.	Martin Rafter.	
	24, NW. ¼ NE. ¼.	No. 1, Consolidated Anthracite Coal Co.	Shaft, 87 ft.	Shale roof. Coal, 1 ft. 4 in. Parting, 4 in. Coal, 1 ft. 8 in.	Hartshorne.	U. S. Geol. Survey.	
	24, NE. ¼ NW. ¼.	No. 3, Consolidated Anthracite Coal Co.	Shaft, 91½ ft.	Shale roof. Coal, 1 ft. 4 in. Parting, 4 in. Coal, 1 ft. 8 in. Sandstone floor.	Hartshorne.	U. S. Geol. Survey.	
	2, SW. ¼ NW. ¼.		Drill hole, 848 ft.	Coal, 3 ft. 6 in. Parting, 4 in.	Hartshorne.	Arkansas Anthracite Coal Co.	
	5, SW. ¼ SE. ¼.		Drill hole.	Coal, 5 ft. 4 in. Parting, 1 in.	Hartshorne.		Thickness of coal includes parting.
	12, NW. ¼ NW. ¼.		Drill hole, 1,137 ft.	Coal, 1 ft. 2 in. Parting, 3½ in. Coal, 1 ft. 8 in.	Hartshorne.	Arkansas Anthracite Coal Co.	

		15, SE. ¼ SW. ¼.		Drill hole, 433 ft.	Coal, 3 ft. 8 in.	Hartshorne.	Arkansas Anthracite Coal Co.	
		17, SE. ¼ SE. ¼.		Drill hole, 670 ft.	Coal, 2 ft. 2 in. Shaly coal, 3 ft. 2 in.	Hartshorne.	Arkansas Anthracite Coal Co.	
		17, NE. ¼ NE. ¼.		Drill hole, 924 ft.	Coal, 1 ft. 4 in.	Hartshorne.	Arkansas Anthracite Coal Co.	
		20, NW. ¼ SE. ¼.		Drill hole, 413 ft.	Coal, 2 ft. 2 in. Shaly coal, 3 ft.	Hartshorne.	Arkansas Anthracite Coal Co.	Coal is shaly at the base.
8	24	21, SW. ¼ SE. ¼.		Drill hole, 86 ft.	Coal, 3 ft.	Hartshorne.	Arkansas Anthracite Coal Co.	
		21, SE. ¼ SE. ¼.		Drill hole, 42 ft.	Coal, 3 ft.	Hartshorne.	Arkansas Anthracite Coal Co.	
		22, NE. ¼ SW. ¼.		Drill hole, 80 ft.	Coal, 3 ft. 4 in.	Hartshorne.	Arkansas Anthracite Coal Co.	
		22, SW. ¼ NE. ¼.		Drill hole, 215 ft.	Coal, 1 ft. 6 in. Shaly coal, 1 ft. 9 in.	Hartshorne.	Arkansas Anthracite Coal Co.	125 ft. below is another bed.
		23, near center.		Shaft, 54 ft.	Coal, 3 ft. 2 in.	Hartshorne.	Citizen.	
		23, NE. ¼.		Drill hole, 278 ft.	Coal, 3 ft.	Hartshorne.	C., R. I. & P. Railroad.	
		24, SE. ¼ NW. ¼.		Drill hole, 65 ft.	Coal, 1 ft. 2 in.	Hartshorne.	Arkansas Anthracite Coal Co.	
		24, SW. ¼ NE. ¼.		Drill hole, 88 ft.	Coal, 11 in.	Hartshorne.		
		24, NE. ¼ NE. ¼.		Drill hole, 403 ft.	Coal.	Hartshorne.	Arkansas Anthracite Coal Co.	"Thin bed."

Table of mines, openings, and exposures of coal—Continued.

Location.		Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
R. W.	Section.						
24	28, NW. ¼ NW. ¼.		Drill hole, 168 ft.	Coal, 2 ft. 10 in.	Hartshorne.	Arkansas Anthracite Coal Co.	
23	9, SW. ¼.		Crop.	Coal.	Hartshorne.	Arkansas Anthracite Coal Co.	Blossom.
	10, SW. ¼.		Crop.	Coal, 1 ft. 2 in.	Hartshorne.	Citizen.	
	17, N. ½.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.
	20, NW. ¼.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.
	21, SE. ¼.		Crop.	Coal, 1 ft. 3 in.	Hartshorne.	U. S. Geol. Survey.	
	27, SW. ¼ SW. ¼.	Mason.	Slope.	Sandstone roof. Coal, 1 ft. 9 in. Shale floor.	Hartshorne.	E. L. Mason.	
	34, NE. ¼.		Old strip.	Coal, 1 ft. 3 in.	Hartshorne.	Citizen.	
	6, N. ½.		Drill hole.	Coal.	Hartshorne.	Citizen.	Reported at 300 ft. and at 500 ft.
	11, NE. ¼.		Drill hole, 646 ft.	Coal.	Hartshorne.	Garner.	
	11, SW. ¼.		Crop.	Coal, 8 in.	600 ft. above Hartshorne.	U. S. Geol. Survey.	

		16, SW. ¼.	Union Anthracite Coal Co.	Shaft, 150 ft.	Shale roof. Coal, 3 ft. Parting, 3 in.	Hartshorne.	Higgins.	
9	23	17.	Brooks Mine, Western Anthracite Coal Co.	Shaft, 240 ft.	Shale roof. Coal, 1 ft. 7 in. Shale, 2 in. Coal, 1 ft. 1 in.	Hartshorne.	U. S. Geol. Survey.	
		17.	Clarksville Anthracite Coal Co.	Shaft, 112 ft.	Coal, 3 ft. 6 in. Parting ?.	Hartshorne.	Rafter.	
		18, SE. ¼.		Old workings.	Coal; no record.	Hartshorne.	U. S. Geol. Survey.	
		28, SW. ¼ SW. ¼.		Drill hole, 437 ft.	Coal, 3 ft. 10 in. Parting, 4 in.	Hartshorne.	Arkansas Anthracite Coal Co.	
		30, NE. ¼ NE. ¼.		Drill hole, 270 ft.	Coal, 3 ft. 4 in. Parting, 2 in.	Hartshorne.		
		31, NE. ¼ SW. ¼.		Drill hole, 518 ft.	Coal, 1 ft. 7 in. Parting, 4½ in. Coal, 1 ft. 11½ in.	Hartshorne.	Arkansas Anthracite Coal Co.	
		20, NW. ¼ NW. ¼.		Drill hole, 533 ft.	Coal.	Hartshorne.	Arkansas Anthracite Coal Co.	Thin coals at 488 ft. and at 533 ft.
8	23	21, NE. ¼ SE. ¼.		Drill hole, 525 ft.	Coal.	Hartshorne.	Arkansas Anthracite Coal Co.	Thin coal at 525 ft.
		28, SE. ¼ NW. ¼.		Drill hole, 114 ft.	Coal.	Hartshorne.	Arkansas Anthracite Coal Co.	Thin coal at 114 ft.

Table of mines, openings, and exposures of coal—Continued.

Location.		Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
R. W.	Section.						
23	4, W. ½.		Drill hole, 470 ft.	Shaly coal, 1 ft.	Hartshorne.	H. H. Jackman.	Coal at 35 ft.
	4, W. ½.		Drill hole, 470 ft.	Shaly coal, 3 ft.	435 ft. below Hartshorne.	H. H. Jackman.	Coal at 470 ft.; same hole as above.
	6, W. ½.		Drill hole, 584 ft.	Shaly coal, 1 ft.	Hartshorne.	H. H. Jackman.	Coal at 71 ft.
	6, W. ½.		Drill hole, 584 ft.	Coal, 1 ft. Shaly coal, 7 in. Coal, 1 ft. 6 in.	451 ft. below Hartshorne.	H. H. Jackman.	Coal at 522 ft.; same hole as above.
22	29, NW. ¼ NW. ¼.	Mose Pearson.	Old working.	Sandstone roof. Coal, 1 ft. 2 in. to 1 ft. 6 in.	Hartshorne.	U. S. Geol. Survey.	
	1, NW. ¼.		Crop.	Coal, 6 in.	Hartshorne sandstone.	U. S. Geol. Survey.	
	5, NW. ¼.		Old working.	Coal, 1 ft. 6 in. to 1 ft. 8 in.	Hartshorne.	Citizen.	
	6, SW. ¼.	Madison mine.	Shaft, 21 ft.	Coal, 1 ft. 8 in. Parting, 7 in. Coal, 8 in.	Hartshorne.	Madison.	
	7, NW. ¼.	Garner.	Shaft.	Coal, 2 ft. 1 in. Parting. Coal, 1 ft.	Hartshorne.	Garner.	

9	22	8, E. ½.		Crop.	Coal, 9 in. Shale, 5 in. Coal, 7 in.	Hartshorne.	U. S. Geol. Survey.	
		9, SW. ¼.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.
		16, NW. ¼.		Prospect.	Coal, 5 in. Bony coal, 2 ft. 1 in. Sandstone, 5 in. Bone, 1 ft.	Hartshorne.	U. S. Geol. Survey.	
		20, SE. ¼ NE. ¼.		Prospect.	Coal; no record.	Charleston.	U. S. Geol. Survey.	
		25, W. ½.		Prospect.	Coal; no record.	Charleston.	Citizen.	
		30, NE. ¼.		Crop.	Coal, 10 in.	Charleston.	U. S. Geol. Survey.	
8	22	36, S. ½.		Well.	Coal; no record.	Hartshorne.	Citizen.	
9	21	22, SW. ¼.		Crop.	Coal.	About 1,000 ft. below Hartshorne.	U. S. Geol. Survey.	Blossom.
8	21	SE. part of township.			Coal.		Citizen.	Reported on Joe Loss's place.
		15, SW. ¼.		Well.	Coal; no record.	About 1,000 ft. below Hartshorne.	Citizen.	
6	21	27, NW. ¼.		Well.	Coal; no record.	About 1,000 ft. below Hartshorne.	Citizen.	
		33, SE. ¼.		Well.	Coal; no record.	About 1,000 ft. below Hartshorne.	Citizen.	

Table of mines, openings, and exposures of coal—Continued.

Location.		Name of opening.	Kind of exposure.	Section of coal bed.	Stratigraphic horizon.	Examined or reported by—	Remarks.
R. W.	Section.						
21	34, E. ½.		Crop.	Coal, 1 ft. 6 in. to 1 ft. 8 in.	About 1,000 ft. below Hartshorne.	U. S. Geol. Survey.	
	35, NW. ¼ NW. ¼.		Drill hole, 300 ft.	Coal, 8 in. Shale, 2 in. Coal, 1 ft. 8 in.	About 1,000 ft. below Hartshorne.	Citizen.	
	35, W. ½.		Drill hole, 80 ft.	Coal, 8 in. Shale, 2 in. Coal, 1 ft. 8 in.	About 1,000 ft. below Hartshorne.	Citizen.	
20	20 SW. ¼.		Old drift.	Coal; no record.	Hartshorne.	U. S. Geol. Survey.	
	28, NW. ¼.	Humphrey-Smith Coal Co.	Shaft, 38 ft.	Shale roof. Coal, 2 ft. 4 in.	Hartshorne.	Humphrey.	
	29 NW. ¼.		Prospect.	Coal; no record.	Hartshorne.	U. S. Geol. Survey.	
	30.		15 or 20 openings.	Coal; no record.	Hartshorne.	U. S. Geol. Survey.	Coal is shallow.
	30 SW. ¼.	Ouita Coal Co.	Shaft.	Coal, 2 ft. 2 in.	Hartshorne.	U. S. Geol. Survey.	
	17, SW. ¼.		Old shaft, 60 ft.	Coal; no record.	Hartshorne.	U. S. Geol. Survey.	
	18, SE. ¼.		Old slope.	Coal; no record.	Hartshorne.	U. S. Geol. Survey.	

		21, N. ½.	Southern Anthracite Coal Co.	Slope.	Shale roof. Coal, 8 in. to 10 in. Parting, 6 in. to 10 in. Coal, 1 ft. 10 in. to 2 ft. 2 in. Sandstone floor.	Hartshorne.	U. S. Geol. Survey.	
		21, SW. ¼ NE. ¼.	Southern Anthracite Coal Co.	Shaft, 480 ft.	Section same as next above.	Hartshorne.	U. S. Geol. Survey.	
7	20	22, NW. ¼.	Russellville Anthracite Coal Co.	Shaft, 70 ft.	Shale roof. Coal, 8 in. to 10 in. Parting, 6 in. to 10 in. Coal, 1 ft. 10 in. to 2 ft. 2 in. Sandstone floor.	Hartshorne.	U. S. Geol. Survey.	
		22, E. ½.	Russellville Anthracite Coal Co.	Slope.	Same section as next above.	Hartshorne.		
		25, SE. ¼.		Old shaft.	Coal; no record.	Below Hartshorne.	Citizen.	
		27, SW. ¼.		Crop.	Coal.		Citizen.	Blossom.
		28, NE. ¼.		Crop.	Coal.	Hartshorne.	U. S. Geol. Survey.	Blossom.
		29, SE. ¼.		Crop.	Coal.	Below Hartshorne.	Citizen.	Blossom.
		35, SW. ¼.		Crop.	Coal.		Citizen.	Blossom.
		36, SW. ¼.		Prospect.	Coal, 1 ft.	Below Hartshorne.	U. S. Geol. Survey.	

INDEX.

A. Page.

Acknowledgments to those aiding..... 2–4
Aclis stevensana, occurrence of 34
Alabama coals, boiler tests of 103
Alethopteris ambigua, occurrence of..... 31
sesili, occurrence of. 25,26,27,29,30,31
var missouriensis, occurrence of... 29
Allerisma terminale, occurrence of..... 34
Alma, coal near 65,68,77,79,83
coal near, analysis of..... 88
Alma district. *See* Van Buren and Alma district.
Aloiopteris winslovii, occurrence of 27,29
Alston, coal near, analysis of..... 88
Altus, coal near 66,83
coal near, analysis of..... 98
description of 94
fossils near 29
Altus fault, description of..... 45
Androstachys sp., occurrence of..... 28
Annularia radiata, occurrence of..... 25,30
sphenophylloides, occurrence of..... 25, 26,27,29,30,31
stellata, occurrence of..... 26,31
sp., occurrence of 27
Anticlines, description of 37–39
Aphlebia hirsuta, occurrence of..... 25,27,30
Area of region..... 4–5
Arkansas coal No. 1, analyses of..... 96
boiler tests of..... 103
coking tests of..... 99
description of..... 89
No. A, analysis of..... 96
description of. 89
No. B, analysis of..... 96
description of. 89
No. 1 C, analysis of..... 96
description of 89
No. 2, analyses of..... 99
boiler tests of 103
coking tests of 99
description of 89
No. 2 A, analysis of..... 97
description of. 89
No. 2 B, analysis of..... 97
description of. 89
No. 2 C, analysis of 97
description of. 89
No. 3, analysis of..... 97
boiler tests of..... 103
description of..... 89
No. 3 A, analysis of..... 97
description of..... 89–90

Page.

Arkansas coal No. 3 B, analysis of..... 97
description of..... 90
No. 3 C, analysis of..... 97
description of..... 90
No. 4, description of..... 90
No. 5, description of..... 90
No. 5 A, analysis of..... 98
description of 90
No. 5 B, analysis of..... 98
description of 90
No. 5 C, analysis of..... 98
description of 90
No. 6, analysis of 97
description of 90
Arkansas Geological Survey, analyses by... 87–88
Arkansas River, description of..... 8
flood plains of..... 22
Arkansas Valley, description of..... 9–10
faults in..... 36
structure of..... 36
Artesian wells, failure of..... 47
Asolanus camptotænia, occurrence of 26
Astartella concentrica, occurrence of..... 33,34
vera, occurrence of..... 32
varica, occurrence of..... 32,33,34
sp., occurrence of 33
Asterophyllites equisetiformis, occurrence of..... 28,30
Atkins, coal near..... 82
Atoka formation, coals in 81–83
correlation of..... 12
fossils in..... 15
gas in..... 15
occurrence and character of.... 11,13–15,38,45
sections of, figures showing..... 14
structure in, plate showing..... 20
Auburn, coal at..... 59,65,78
coal at, analysis of..... 98
section of, figure showing..... 20
section at, figure showing..... 20
Avicula acosta, occurrence of..... 33
Aviculipecten coxanus, occurrence of..... 34
germanus, occurrence of..... 34
whitei, occurrence of..... 31,32,33
sp., occurrence of..... 32,33
Aviculipinna americana, occurrence of..... 34

B.

Backbone Ridge, coal in and near..... 51,56,57,81
geology of..... 14,51–52
Backbone Ridge fault, description of..... 41
section of, figure showing..... 41

Page.

Backbone syncline, description of 37
Bates, coal near 62
coal near, analyses of 96
description of 95
Bates and Coaldale district, coal of 62-63
coal of, analyses of 96
calorific value of, figure showing 87
composition of, figure showing 85
description of 95
sections of, figure showing 63
Bellerophon harrodi, occurrence of 34
sp., occurrence of 33
Big Creek, coal at 78
coal at, section of, figure showing 77
Big Danger fault, description of 43
Big Danger Hill, coal at 70, 71
geology of 19, 43
Biswell Hill, geology near 52
Biswell Hill anticline, description of 37-38
Bloomer, geology near 19
Boggy shale, correlation of 12
occurrence and character of 11
Boiler tests, description and results of ... 101-103
Bonanza, coal at and near 51-54
coal at and near, analyses of 97
boiler tests of 103
coking of 99
section at, figure showing 54
geology at 12, 15
Bonanza and Jenny Lind district, coals of .. 51-55, 78-79
coals of, analyses of 97-98
calorific value of, figure showing 87
composition of, figure showing 85
sections of, figures showing 54, 55
Booneville, coal near 81
coal near, analysis of 88
Boston Mountains, description of 9
structure of 35-36
Brackett, R. N., analyses by 88
Branch, coal near 64
Branner, J. C., work of 2
Briquetting tests, description of 100-101
Burma, coal near 17, 57, 61
coal near, analyses of 96
calorific value of, figure showing 87
composition of, figure showing 85
description of 91-92
sections of, figure showing 60
fossils near 26, 33
geology at and near 16, 17, 57
Burrows, J. S., sampling by 90

C.

Cabin Creek, building stone at 20
coal near 80
geology near 70
sandstone jointing near, view of 20
Cabin Creek syncline, description of 40
Calamites ramosus, occurrence of 29
suckowii, occurrence of 28
sp., occurrence of 29
Calamostachys sp., occurrence of 25
Callipteridium insequale, occurrence of 30

Page.

Campbell, M. R., on formation of folds 4
on natural mounds 22-2
sampling by 8
work of 1
Carboniferous rocks, occurrence and character of 11-2
Cardiocarpon bicuspidatum, occurrence of .. 2
branneri, occurrence of 3
circulare, occurrence of 26, 3
Catholic Hill, geology at 1
Cauksville, coal near 64, 65, 77,
fossils near 27,
Caulksville fault, description of 4
Center Cross, coal at, description of 1
Central, coal at 53, 77
coal at, analysis of 9
section of, figure showing 7
Central syncline, description of 3
Charleston, coal near 63-64, 77-7
coal near, description of 9
sections of, figure showing 7
fossils near 2
geology near 1
Charleston and Paris district, coal of 6
coal of, calorific value of, figure showing .. 8
Charleston coal, character and description of 77-80, 9
composition of, figure showing 8
description of, name of 7
fossils of 27
occurrence of 65
openings on 117, 119, 130-134, 137, 140,
samples of, description of 92
sections of 119, 130,
figure showing 1
See also Coal Ridge coal.
Charleston district, coals of 77
coals of, analysis of 9
description of 92
Cheilanthites pluckenetti, occurrence of 2
squamosus, occurrence of 25, 26, 29,
trifoliatus, occurrence of 25,
Chickalah, coal near 1
Chismville, section at, figure showing 1
Clarksville, coal near 70
coal near, analysis of 9
description of 9
geology near 19
Clarksville fault, description of 42
section of, figure showing 4
Classification of coals 84
Coal, analyses of 87
character of 83
classification of 84
composition of, figure showing 8
developments of 112-
distribution of 49
efficiency of 86
mining of, methods of 105-
openings on 112-
preparation of 106-
production of 103-
tests of 99-
Coal-bearing rocks, age of 1

Page.

Coal-bearing rocks, occurrence and character of ... 12–13
section of ... 13
Coal beds, description of ... 50–83
development of ... 103–112
distribution of ... 49–50
formation of ... 49
geologic position of ... 4–5
mines and openings on ... 112–149
minor structure of, figure showing ... 48
openings on ... 112–149
sections of ... 113–149
thickness of ... 106
Coal Hill, coal near ... 68
coal near, analysis of ... 88, 98
boiler tests of ... 103
description of ... 93–94
See also Arkansas coal, No. 5.
fossils near ... 25, 26
structure of ... 66
Coal Hill and Denning district, coal of ... 65, 66–86
coal of, analyses of ... 98
briquettes of ... 101
calorific value of, figure showing ... 87
character of ... 86
composition of, figure showing ... 85
sections of, figure showing ... 68
fault in ... 65
map of ... 67
structure of, figure showing ... 67
Coal Hill anticline, description of ... 39, 66
Coal Hill coal, correlation of ... 24
fossils of ... 25–26
Coal Hill district, coal of ... 65, 82
Coal Hill fault, description of ... 45
Coal Ridge, coal at ... 78
coal at, section of, figure showing ... 77
geology at ... 78
Coal Ridge coal, character and distribution of ... 77–80
correlation of ... 24
fossils of ... 24, 27
See also Charleston coal.
Coaldale, coal near ... 63
fossils from ... 33
Coaldale district. *See* Bates and Coaldale district.
Coking tests, results of ... 99–100
Collier, A. J., fossils collected by ... 24
sampling by ... 91, 94
Columnar section, plate showing ... 12
Commercial relations, account of ... 7–8
Composita subtilita, occurrence of ... 32, 33, 34
Coops Prairie, gas at ... 38
Cordaianthus fluitans, occurrence of ... 30
ovatus, occurrence of ... 31
Cordaites communis, occurrence of ... 27
principalis, occurrence of ... 30
sp., occurrence of ... 30
Correlation, details of ... 10–13
Crania sp., occurrence of ... 32
Crinoidal fragments, occurrence of ... 32, 33, 34
Crossotheca ophioglassoides, occurrence of ... 29, 30
Cypricardinia carbonaria, occurrence of ... 34

D.

Page.

Dardanelle, coal near ... 82, 83
section at, figure showing ... 14
Deltopecten occidentalis, occurrence of ... 32, 33, 34
texanum, occurrence of ... 33
Denning, coal near ... 83
coal near, analyses of ... 88, 98
character of ... 68
description of ... 90
See also Arkansas coal No. 4.
fossils near ... 26
sections at, figures showing ... 14, 16, 68
Denning coal. *See* Arkansas coal No. 5.
Denning district. *See* Coal Hill and Denning district.
Derbya crassa, occurrence of ... 33, 34
sp., occurrence of ... 32, 33
Development, conditions of ... 103–112
Devils Backbone Ridge, coal in ... 56, 59, 64
geology at ... 15, 16
Devils Backbone Ridge fault, description of ... 42
Dicks Branch, coal on ... 76
Dielasma bovidens, occurrence of ... 34
sp., occurrence of ... 32, 33
Dolerophyllum angularis, occurrence of ... 25
Drainage, description of ... 8–9
Drainage, mine, methods of ... 106

E.

Economic geology, description of ... 49–149
Edmondia mortonana, occurrence of ... 34
nebraskensis, occurrence of ... 32
subtruncata, occurrence of ... 32
sp., occurrence of ... 32
Elevations, description of ... 9–10
Ellsworth, coal near ... 82
Eremopteris lincolniana, occurrence of ... 27
spinosa, occurrence of ... 27
Euconospira sp., occurrence of ... 34
Euomphalus catilloides, occurrence of ... 33
Euphemus nodicarinatus, occurrence of ... 32, 33
Excelsior, coal near ... 58, 59
Explosions, rarity of ... 106

F.

Fairchild, H. L., and White, David, fossils determined by ... 23
Faults:
local use of term of ... 40
loss of vein through ... 41
occurrence and description of ... 35–36, 40–41
types of ... 35–36, 40–47
Fidelity Fuel Co., mine of, syncline in, figure showing ... 48
Fistulipora sp., occurrence of ... 33, 34
Fletcher Creek, coal on ... 81
Folds, miniature, description of ... 48–49
figure showing ... 48
Formations, correlation of ... 10–13
description of ... 13–23
Fort Smith, artesian wells at, failure of ... 47
building stone at ... 20
coal at and near ... 55, 77, 79
analysis of ... 98
section of, figure showing ... 20

Page.

Fort Smith, gas at 15
geology at 19
fossils near 33
population and situation of 7
section at, figure showing 20
Fort Smith coal, openings on 113, 119, 127, 130
sections of 113, 119
Fort Smith formation, building stone from 20
coals in 19, 77
sections of, figures showing 20
correlation of 12
fossils in 20
occurrence and description of 13, 18–20, 46
sections of, figure showing 20
Fort Smith syncline, description of 39
Frazer, Persiflor, on coal classification 85
Fuel-testing plant, coal samples of 88–95
coal samples of, analyses of 95–99
boiler tests of 101–103
briquetting tests of 100–101
coking tests of 19, 100

G.

Galla Rock, coal near 82
Game Hill anticline, description of 38
Gas, occurrence of 38
Geography, description of 4–10
Geologic map and section ..... Pocket
Geology, description of 10–49
See also Paleontology; Stratigraphy; Structure.
Geology, economic, description of 49–149
Girty, G. H., fossils determined by 23
report of, on Arkansas fossils 31–35
Grand Prairie, coal on 64
Grand Ridge, geology at 78
Greenwood, coals at and near 39, 59–60
coals at and near, analyses of 88, 97
calorific value of, figure showing 87
composition of, figure showing 85
description of 92
geology near 19, 52
Greenwood and Huntington district, coal of 56–62
coal of, analyses of 96–97
character of 56–57
depths to 62
distribution of 57–62
location and extent of 56
sections of, figure showing 58
Greenwood syncline, coal in 56
description of 39
Griffithides sp., occurrence of 33
Groves, J. W., sampling by 89–90

H.

Hackett, coals at and near 39, 56–59, 81
coals at and near, analyses of 88, 97
calorific value of, figure showing 87
composition of, figure showing 85
description of 92
sections of, figure showing 58
geology at 12, 15, 52

Page.

Hartford, coal near 56, 61–62
coal near, analyses of 88, 96
description of 95
fossils near 29
Hartford anticline, description of 38
Hartman, coal near 67
fossils near 27
Hartman fault, description of 44–45
Hartshorne coals, character and distribution of 50–51, 57, 89–93
description of 51–77, 89–92
distribution of, map showing 51
name of 49
occurrence of 11, 16–17, 38–39
openings on 113–131, 133–136, 138–149
sections of 113–129, 134–136, 138–149
Hartshorne sandstone, correlation of 12
exposure of, views of 16, 18
occurrence and character of 11–13, 15–17, 37–38, 42–46, 50–51, 57, 66, 74, 76–77
sections of, figures showing 16
structure in, view of 18
Haulage, methods of 106
Hawlea cristata, occurrence of 27
Huntington, coal at and near 56, 61–62, 79
coal at and near, analysis of 88
boiler tests of 103
briquetting of 100
calorific value of, figure showing 87
coking of 99
composition of, figure showing 85
sections of, figure showing 61
gas at 15
section near, figure showing 14
Huntington coal, calorific value of, figure showing 87
composition of, figure showing 85
description of 89
occurrence of 12
See also Arkansas coal No. 1.
Huntington district. *See* Greenwood and Huntington district.
Hustedia mormoni, occurrence of 32, 33, 34

I.

Illinois coals, boiler tests of 103
briquetting tests of 101
Indian Territory, coal-bearing rocks in 16
coal-bearing rocks in, description of 11
section of 11
coals of, boiler tests of 103
Investigation of field, need of 1
prosecution of 1–4

J.

Jenny Lind, coal at and near 52–55
coal at and near, analyses of 88, 97–98
boiler tests of 103
briquetting of 100
coking of 99
description of 89–90, 92
sections of, figures showing 52, 53, 54, 55

Page.
Jenny Lind, sections at and near, figures showing 14, 16, 52, 53
Jenny Lind coal. *See* Arkansas coal No. 3.
Jenny Lind district. *See* Bonanza and Jenny Lind district.
Joints, description of 47–48

K.

Kansas coals, boiler tests of 103

L.

Labor, conditions governing 107–112
Lamar, building stone at 20
coal at 20, 71
sections of, figures showing 20
section at, figure showing 20
See also Cabin Creek.
Leda bellistriata, occurrence of 34
nasuta, occurrence of 32, 33
sp., occurrence of 32, 33
Lepidocystis vesicularis, occurrence of 27
Lepidodendron oblongifolium, occurrence of 29
sp., occurrence of 29
Lepidophloios scoticus, occurrence of 26
Lepidophyllum lanceolatum, occurrence of 27, 28
missouriense, occurrence of 26
ovatifolium, occurrence of 27
Lepidostrobus sp., occurrence of 28
Lima retifera, occurrence of 33, 34
Lingulidiscina convera, occurrence of 34
Linopteris münsteri, occurrence of 27, 28, 31
squarrosa, occurrence of 25, 27
Little Piney Creek, fossils from 32
Little Short Mountain, geology at 21
Little Vache Grasse Creek, coal at 79
Location, description of 4
London basin, coal in 74
description of 40
Long Prairie, coal at 52
section at, figure showing 52
Lophophyllum profundum, occurrence of 32, 33, 34
Loxonema sp., occurrence of 33

M.

McAlester coal, recurrence of 11
McAlester group, coals in 11
correlation of 12
occurrence and character of 11, 13
Macrodon obsoletus, occurrence of 32, 33
Magazine Mountain, coal at and near 76, 81
geology at 20, 21
Mansfield, gas near 15
geology at 14
Map of Arkansas coal field 5, 6
of Arkansas coal field, description of 5–7
of Hartshorne coal 51
Map, structure, of Arkansas coal field 36
Map and sections, geologic, of Arkansas field ..... Pocket.
Marginifera ingrata, occurrence of 33, 34
muricata, occurrence of 32, 33
sp., occurrence of 33
Mariopteris incompleta, occurrence of 26, 29, 30, 31
Mariopteris latifolia, occurrence of 25
muricata, occurrence of 26
nervosa, occurrence of 25, 26, 29, 30
occidentalis, occurrence of 25, 26, 29, 30, 31
sphenopteroides, occurrence of ... 27, 29, 30, 31
sp., occurrence of 27, 31
Market, preparation of coal for 106
Mason coal, correlation of 72
Massard fault, description of 46
Massard Prairie, coal at 52, 55
coal at, description of 94
section at, figure showing 52
geology at 16, 52
sections at and near, figures showing 14, 52
Massard Prairie anticline, description of 38
gas in 38
Mesler, R. D., sampling by 93–94
work of 1–2
Michelinia sp., occurrence of 33
Midland, coal near 57, 61
coal near, analyses of 96
calorific value of, figure showing 87
composition of, figure showing 85
description of 90
sections of, figure showing 60
Mill Creek fault, description of 45–46
Mill Creek Ridge anticline, coal on 64
description of 38
Mines, abandonment of, owing to faulting 41
list of 113–149
Mining, conditions of 103–112
methods of 105–106
Minnow Creek, coal on 76
Mississippian rocks, occurrence and character of 11
Missouri coals, boiler tests of 103
Modiola subelliptica, occurrence of 33
Monilipora sp., occurrence of 33
Montana, coal near 71
Montreal, coal near 17, 56, 57, 60
coal near, analysis of 97
calorific value of, figure showing 87
composition of, figure showing 85
description of 91
sections of, figure showing 60
geology near 57
Montreal syncline, description of 38
Moores Rock, coal at 79
Mounds, natural, occurrence and explanation of 23
Mulberry, coal near 65
Mulberry fault 46–47
Mulberry Mountain, coal at 80
Murchisonia sp., occurrence of 32
Myalina aviculoides, occurrence of 34
perattenuata, occurrence of 34
perniformis, occurrence of 32, 34

N.

Naticopsis nana, occurrence of 32
sp., occurrence of 32
Nautilus sp., occurrence of 32, 33, 34
Nebo Mountain, coal near 82
geology at 76–77
Neuropteris capitata, occurrence of 25, 26, 27
clarksoni, occurrence of 29, 30

Page.

Neuropteris fimbriata, occurrence of 30
harrisi, occurrence of 25,26
jenneyi, occurrence of 27
missouriensis, occurrence of. 25,26,27,29,30,31
ovata, occurrence of 26,27,29,30
rarinervis, occurrence of 27,29,30
rogersii, occurrence of 25
scheuchzeri, occurrence of 25,
26,27,28,29,30,31
tenuifolia, occurrence of 25,26
Nucula ventricosa, occurrence of 32,33

O.

Oak Valley, coal near 53
analysis of 88
Odontopteris bradleyi, occurrence of 29,30
Orthoceras cribrosum, occurrence of 34
sp., occurrence of 32
Ostracoda sp., occurrence of 32
Ouachita Mountains, description of 10
structure of 35
Ouita basin, coal in 74–75
coal in, section of, figure showing 16
description of 40,74–75
section in, figure showing 16
Ozark, coal near 83
coal near, analyses of 88
section of, figure showing 77
geology near 83

P.

Pachypteris gracillima, occurrence of 29
Paige, Sidney, sampling by 92
work of 1
Paleontology, conclusions from 23–24
description of 23–35
Parallelodon tenuistriatus, occurrence of 34
Paris, coal at and near 40,63,80
coal at and near, analyses of 88,98
description of 93
fossils near 28,33
geology at and near 20,21
Paris coal, age of 24
calorific value of, figure showing 87
character and distribution of 80–81
composition of, figure showing 85
correlation of 49
description of 93
fossils of 28
occurrence of 21
openings on 136–137
sections of 136–137
Paris district, coal of 79
coal of, analysis of 98
character of 86
description of 93
See also Charleston and Paris district.
Paris shale, correlation of 12
fossils of 21
occurrence and character of 13,20–21
sections of, figure showing 21
Paris syncline, description of 40
Patellostium marcouanum, occurrence of 34
sp., occurrence of 32

Page.

Pecopteris dentata, occurrence of 29,30
emarginata, occurrence of 26
jenneyi, occurrence of 29
oreopteridia, occurrence of 27,31
(Scolecopteris) miltoni, occurrence of 25,27
plumosa, occurrence of 25
robusta, occurrence of 26,30,31
vestita, occurrence of 25–30,31
villosa, occurrence of 27,29,30
sp., occurrence of 25
Pennsylvanian rocks, occurrence and character of 11–22
Personnel of investigation 1–2
Petit Jean Mountain, geology at 76–77
Phillipsia cliftonensis, occurrence of 34
Philpott coal, correlation of 50,92
Philpott district, coal of 75–76,80
coal at, section of 76
Phyllotheca sp., occurrence of 26
Pickartz coal, correlation of 50,76
description of 76
Pine Ridge, coal on 64
Pine Ridge fault, description of 42
Piney Creek, coal near 72
sandstone near, view of 18
Platyceras nebraskense, occurrence of 32
Pleasant Hill, fossils near 29
Pleurophorus angulatus, occurrence of 32
immaturus, occurrence of 32,34
oblongus, occurrence of 32
subcostatus, occurrence of 31,32,33
tropidophorus, occurrence of 34
sp., occurrence of 34
Pleurotomaria brazoensis, occurrence of 33
giffordi, occurrence of 34
subconstricta, occurrence of 34
tenuicincta, occurrence of 34
sp., occurrence of 32
Plymouth, fossils from 33
Polypora sp., occurrence of 33
Potato Hill, coal at and near 39,64,81
geology at 20,21
section at, figure showing 21
view of 16
Poteau Mountain, coal near 57,62–63,79,81
coal near, character of 86
description of 94
sections of, figure showing 63
fossils from 34,35
geology at 12,20,22
Poteau River, description of 8–9
Poteau syncline, description of 39–40
Prairie View, coal at and near 65,72
coal at and near, analysis of 88
section of, figure showing 20
section at, figure showing 20
Prairie View anticline, description of 38–39
Prairie View district, coal of 72–74,79
coal of, sections of, figure showing 73
structure of, figure showing 69
Prairie View fault, description of 42
Prairie View syncline, description of 40
Prismopora sp., occurrence of 32
Production, statistics of 103–105

Page.

Productus, sp., occurrence of 32
Pseudomonotis sp., occurrence of..... 34
Pseudopecopteris macilenta, occurrence of... 25, 27
Pteria ohioensis, occurrence of 33, 34
Pugnax osagensis, occurrence of 34
Purdue, A. H., fault determined by 42
on Arkansas coal field 12
work of 2, 3

R.

Railroads, description of 8
Renaultia sp., occurrence of 27
Rhabdocarpus sulcatus, occurrence of 25, 26
sp., occurrence of 26, 30
Rhombopora lepidodendroides, occurrence of 34
sp., occurrence of 32, 33
Rich Mountain, coal at 82
Rolls, figure showing 53
occurrence and character of 49
Russellville, coal near 74–75, 76, 83
coal near, analysis of 88, 99
description of 93
fossils near..... 25
geology at..... 16
Russellville anticline, description of 39
Russellville district, coal of..... 74–75
coal of, analyes of..... 99
calorific value of, figure showing.... 87
composition of, figure showing..... 85

S.

Sallisaw quadrangle, fossils from..... 31
Samples, description of..... 89–95
taking of, method of..... 89
Savanna formation, coal in..... 11, 22
correlation of..... 12
occurrence and character of..... 11, 13, 21–22
Schizodus affinis, occurrence of..... 34
compressus, occurrence of..... 34
sp., occurrence of..... 32, 33
Scolecopteris miltoni..... 25
Scranton Anthracite Co., breaker of, view of. 106
Septopora biserialis, occurrence of..... 34
Shinn basin, coal in 74–75, 82
coal in, description of..... 93
section of, figure showing..... 16
description of..... 40, 75
section in, figure showing..... 16
Shoal Creek, coal near..... 82
Short Mountain, geology at..... 21
section at, figure showing..... 21
Sigillaria discophora, occurrence of..... 28
Sigillariostrobus quadrangularis, occurrence of..... 25, 26, 27
Sixmile, fossils from..... 32, 34–35
Sixmile Creek, fossils from..... 31
Slack, use of..... 107
Smith, Carl P., sampling by..... 91–95
work of..... 1, 2
Smith, J. P., analyses by..... 88
fossils determined by..... 23
Soleniscus klipparti, occurrence of..... 32

Page.

Solenomya sp., occurrence of..... 34
Spadra, coal near..... 70–72
coal near, analyses of..... 88, 99
description of..... 93, 94
fossils from..... 31
geology near..... 70
section of..... 137
Spadra coal, calorific value of, figure showing..... 87
composition of, figure showing..... 85
description of..... 93, 94
occurrence and character of..... 70, 72
Spadra district, coal of..... 68–72, 80
coal of, analyses of 99
sections of, figure showing 71
faults in..... 70
structure of. 69–70
figure showing..... 69
Spadra fault, description of..... 44, 70
Spadra shale, coals in..... 17
coals in, sections of, figures showing ... 18
correlation of..... 12
fossils of..... 18, 26–27
name of..... 18
occurrence and character of..... 13, 17–18, 45
sections of, figures showing..... 18
Sphaerodoma sp., occurrence of..... 34
Sphenophyllum emarginatum, occurrence of..... 25, 26, 27, 29, 30, 31
emarginatum var. minor, occurrence of..... 25, 27, 29
fasciculatum, occurrence of 27, 29, 30, 31
majus, occurrence of..... 26, 27, 29
suspectum, occurrence of..... 25, 26
thorii, occurrence of..... 31
Sphenopteris (Hawlea) cristata, occurrence of..... 27, 81
illinoisensis, occurrence of..... 27
mixta, occurrence of..... 30, 31
pinnatifida, occurrence of..... 29, 31
sp., occurrence of..... 26, 27, 28, 29
Spielville, building stone at..... 20
Spirifer cameratus, occurrence of..... 33, 34
rockymontanus, occurrence of..... 32, 33, 34
sp., occurrence of..... 33
Spiriferina kentuckyensis, occurrence of.... 33
Spring Mountain, coal near..... 82
geology at..... 76–77
Squamularia perplexa, occurrence of..... 32
Stenopora sp., occurrence of..... 34
Stratigraphy, correlation of..... 10–13
description of..... 13–23
Structure, description of..... 35–49
map showing..... 36
topography and, relation of, figure showing..... 52
Sub Rosa, coal near..... 64
Sugarloaf Mountain, coal at..... 57, 79, 81
geology at..... 20, 22
Sugarloaf syncline, coal at..... 39
description of..... 39
Surficial deposits, character of..... 22–23
Synclines, coal in..... 36
description of..... 39–40

T.

Page.

Taff, J. A., fault located by 41
on Arkansas coal field 12
work of 3
Tennessee Ridge, geology of 19
Tennessee sandstone, correlation of 19
Topography, description of 9-10
structure and, relation of 52
Towns, list of 8

U.

Unions, labor, contracts with 107-112

V.

Vache Grasse Creek, coal in 59
Van Buren, coal near 66, 79, 83
fossils near 32
Van Buren, section near, figure showing ... 14
Van Buren and Alma district, coal of ... 65-66, 79
Van Buren coal, fossils of 30

Page.

Ventilation, methods of 106
Vesta, coal at 64

W.

Washing, use of 107
West Virginia coals, boiler tests of 103
White, David, fossils determined by 23
report of, on Arkansas fossils 24-31
White, David, and Fairchild, H. L., fossils determined by 23
Whiteoak Mountain, coal near 62-63
Winslow, Arthur, work of 2
Winslow formation, correlation of 12
occurrence and character of 11, 47, 65, 83
structure in, plate showing 20
Witteville, Ind. T., fossils from 30
Witteville coal, occurrence, of 11

Y.

Yoldia carbonaria, occurrence of 32

CLASSIFICATION OF THE PUBLICATIONS OF THE UNITED STATES GEOLOGICAL SURVEY.

[Bulletin No. 326.]

The publications of the United States Geological Survey consist of (1) Annual Reports, (2) Monographs, (3) Professional Papers, (4) Bulletins, (5) Mineral Resources, (6) Water-Supply and Irrigation Papers, (7) Topographic Atlas of United States—folios and separate sheets thereof, (8) Geologic Atlas of the United States—folios thereof. The classes numbered 2, 7, and 8 are sold at cost of publication; the others are distributed free. A circular giving complete lists can be had on application.

Most of the above publications can be obtained or consulted in the following ways:

1. A limited number are delivered to the Director of the Survey, from whom they can be obtained, free of charge (except classes 2, 7, and 8), on application.

2. A certain number are delivered to Senators and Representatives in Congress for distribution.

3. Other copies are deposited with the Superintendent of Documents, Washington, D. C., from whom they can be had at prices slightly above cost.

4. Copies of all Government publications are furnished to the principal public libraries in the large cities throughout the United States, where they can be consulted by those interested.

The Professional Papers, Bulletins, and Water-Supply Papers treat of a variety of subjects, and the total number issued is large. They have therefore been classified into the following series: A, Economic geology; B, Descriptive geology; C, Systematic geology and paleontology; D, Petrography and mineralogy; E, Chemistry and physics; F, Geography; G, Miscellaneous; H, Forestry; I, Irrigation; J, Water storage; K, Pumping water; L, Quality of Water; M, General hydrographic investigations; N, Water power; O, Underground waters; P, Hydrographic progress reports; Q, Fuels; R, Structural materials. This paper is the one hundred and fourth in Series A and the one hundred and twenty-eighth in Series B, the complete lists of which follow (PP=Professional Paper; B=Bulletin; WS=Water-Supply Paper):

SERIES A, ECONOMIC GEOLOGY.

B 21. Lignites of Great Sioux Reservation: Report on region between Grand and Moreau rivers, Dakota, by Bailey Willis. 1885. 16 pp., 5 pls. (Out of stock.)

B 46. Nature and origin of deposits of phosphate of lime, by R. A. F. Penrose, jr., with introduction by N. S. Shaler. 1888. 143 pp. (Out of stock.)

B 63. Stratigraphy of the bituminous coal field of Pennsylvania, Ohio, and West Virginia, by I. C. White. 1891. 212 pp., 11 pls. (Out of stock.)

B 111. Geology of Big Stone Gap coal field of Virginia and Kentucky, by M. R. Campbell. 1893. 106 pp., 6 pls. (Out of stock.)

B 132. The disseminated lead ores of southeastern Missouri, by Arthur Winslow. 1896. 31 pp. (Out of stock.)

B 138. Artesian-well prospects in Atlantic Coastal Plain region, by N. H. Darton. 1896. 228 pp. 19 pls.

B 139. Geology of Castle Mountain mining district, Montana, by W. H. Weed and L. V. Pirsson. 1896. 164 pp., 17 pls.

B 143. Bibliography of clays and the ceramic arts, by J. C. Branner. 1896. 114 pp.

B 164. Reconnaissance on the Rio Grande coal fields of Texas, by T. W. Vaughan, including a report on igneous rocks from the San Carlos coal field, by E. C. E. Lord. 1900. 100 pp 11 pls. (Out of stock.)

B 178. El Paso tin deposits, by W. H. Weed. 1901. 15 pp., 1 pl.

B 180. Occurrence and distribution of corundum in United States, by J. H. Pratt. 1901. 98 pp., 14 pls. (Out of stock; see No. 269.)
B 182. A report on the economic geology of the Silverton quadrangle, Colorado, by F. L. Ransome. 1901. 266 pp., 16 pls. (Out of stock.)
B 184. Oil and gas fields of the western interior and northern Texas Coal Measures and of the Upper Cretaceous and Tertiary of the western Gulf coast, by G. I. Adams. 1901. 64 pp., 10 pls. (Out of stock.)
B 193. The geological relations and distribution of platinum and associated metals, by J. F. Kemp. 1902. 95 pp., 6 pls.
B 198. The Berea grit oil sand in the Cadiz quadrangle, Ohio, by W. T. Griswold. 1902. 43 pp., 1 pl. (Out of stock.)
PP 1. Preliminary report on the Ketchikan mining district, Alaska, with an introductory sketch of the geology of southeastern Alaska, by A. H. Brooks. 1902. 120 pp., 2 pls.
B 200. Reconnaissance of the borax deposits of Death Valley and Mohave Desert, by M. R. Campbell. 1902. 23 pp., 1 pl. (Out of stock.)
B 202. Tests for gold and silver in shales from western Kansas, by Waldemar Lindgren. 1902. 21 pp. (Out of stock.)
PP 2. Reconnaissance of the northwestern portion of Seward Peninsula, Alaska, by A. J. Collier. 1902. 70 pp., 11 pls.
PP 10. Reconnaissance from Fort Hamlin to Kotzebue Sound, Alaska, by way of Dall, Kanuti, Allen, and Kowak rivers, by W. C. Mendenhall. 1902. 68 pp., 10 pls.
PP 11. Clays of the United States east of the Mississippi River, by Heinrich Ries. 1903. 298 pp., 9 pls. (Out of stock.)
PP 12. Geology of the Globe copper district, Arizona, by F. L. Ransome. 1903. 168 pp., 27 pls.
B 212. Oil fields of the Texas-Louisiana Gulf Coastal Plain, by C. W. Hayes and William Kennedy. 1903. 174 pp., 11 pls. (Out of stock.)
B 213. Contributions to economic geology, 1902; S. F. Emmons and C. W. Hayes, geologists in charge. 1903. 449 pp. (Out of stock.)
PP 15. The mineral resources of the Mount Wrangell district, Alaska, by W. C. Mendenhall and F. C. Schrader. 1903. 71 pp., 10 pls.
B 218. Coal resources of the Yukon, Alaska, by A. J. Collier. 1903. 71 pp., 6 pls.
B 219. The ore deposits of Tonopah, Nevada (preliminary report), by J. E. Spurr. 1903. 31 pp., 1 pl. (Out of stock.)
PP 20. A reconnaissance in northern Alaska in 1901, by F. C. Schrader. 1904. 139 pp., 16 pls.
PP 21. Geology and ore deposits of the Bisbee quadrangle, Arizona, by F. L. Ransome. 1904. 168 pp. 29 pls.
B 223. Gypsum deposits in the United States, by G. I. Adams and others. 1904. 129 pp., 21 pls. (Out of stock.)
PP 24. Zinc and lead deposits of northern Arkansas, by G. I. Adams. 1904. 118 pp., 27 pls.
PP 25. Copper deposits of the Encampment district, Wyoming, by A. C. Spencer. 1904. 107 pp., 2 pls. (Out of stock.)
B 225. Contributions to economic geology, 1903, by S. F. Emmons and C. W. Hayes, geologists in charge. 1904. 527 pp., 1 pl. (Out of stock.)
PP 26. Economic resources of the northern Black Hills, by J. D. Irving, with contributions by S. F. Emmons and T. A. Jaggar, jr. 1904. 222 pp., 20 pls.
PP 27. A geological reconnaissance across the Bitterroot Range and Clearwater Mountains in Montana and Idaho, by Waldemar Lindgren. 1904. 123 pp., 15 pls.
B 229. Tin deposits of the York region, Alaska, by A. J. Collier. 1904. 61 pp., 7 pls.
B 236. The Porcupine placer district, Alaska, by C. W. Wright. 1904. 35 pp., 10 pls.
B 238. Economic geology of the Iola quadrangle, Kansas, by G. I. Adams, Erasmus Haworth, and W. R. Crane. 1904. 83 pp., 11 pls.
B 243. Cement materials and industry of the United States, by E. C. Eckel. 1905. 395 pp., 15 pls.
B 246. Zinc and lead deposits of northwestern Illinois, by H. Foster Bain. 1904. 56 pp., 5 pls.
B 247. The Fairhaven gold placers of Seward Peninsula, Alaska, by F. H. Moffit. 1905. 85 pp., 14 pls.
B 249. Limestones of southeastern Pennsylvania, by F. G. Clapp. 1905. 52 pp., 7 pls.
B 250. The petroleum fields of the Pacific coast of Alaska, with an account of the Bering River coal deposits, by G. C. Martin. 1905. 65 pp., 7 pls.
B 251. The gold placers of the Fortymile, Birch Creek, and Fairbanks regions, Alaska, by L. M. Prindle. 1905. 89 pp., 16 pls.
WS 117. The lignite of North Dakota and its relation to irrigation, by F. A. Wilder. 1905. 59 pp., 8 pls.
PP 36. The lead, zinc, and fluorspar deposits of western Kentucky, by E. O. Ulrich and W. S. T. Smith. 1905. 218 pp., 15 pls.
PP 38. Economic geology of the Bingham mining district, Utah, by J. M. Boutwell, with a chapter on areal geology, by Arthur Keith, and an introduction on general geology, by S. F. Emmons. 1905. 413 pp., 49 pls.

B 254. Report of progress in the geological resurvey of the Cripple Creek district, Colorado, by Waldemar Lindgren and F. L. Ransome. 1904. 36 pp.
B 255. The fluorspar deposits of southern Illinois, by H. Foster Bain. 1905. 75 pp., 6 pls. (Out of stock.)
B 256. Mineral resources of the Elders Ridge quadrangle, Pennsylvania, by R. W. Stone. 1905. 86 pp., 12 pls.
B 259. Report on progress of investigations of mineral resources of Alaska in 1904, by A. H. Brooks and others. 1905. 196 pp., 3 pls.
B 260. Contributions to economic geology, 1904; S. F. Emmons and C. W. Hayes, geologists in charge. 1905. 620 pp., 4 pls.
B 261. Preliminary report on the operations of the coal-testing plant of the United States Geological Survey at the Louisiana Purchase Exposition, St. Louis, Mo., 1904; E. W. Parker, J. A. Holmes, and M. R. Campbell, committee in charge. 1905. 172 pp. (Out of stock.)
B 263. Methods and cost of gravel and placer mining in Alaska, by C. W. Purington. 1905. 273 pp., 42 pls. (Out of stock.)
PP 42. Geology of the Tonopah mining district, Nevada, by J. E. Spurr. 1905. 295 pp., 24 pls.
PP 43. The copper deposits of the Clifton-Morenci district, Arizona, by Waldemar Lindgren. 1905. 375 pp., 25 pls.
B 264. Record of deep-well drilling for 1904, by M. L. Fuller, E. F. Lines, and A. C. Veatch. 1905. 106 pp.
B 265. Geology of the Boulder district, Colorado, by N. M. Fenneman. 1905. 101 pp., 5 pls.
B 267. The copper deposits of Missouri, by H. Foster Bain and E. O. Ulrich. 1905. 52 pp., 1 pl.
B 269. Corundum and its occurrence and distribution in the United States (a revised and enlarged edition of Bulletin No. 180), by J. H. Pratt. 1906. 175 pp., 18 pls.
PP 48. Report on the operations of the coal-testing plant of the United States Geological Survey at the Louisiana Purchase Exposition, St. Louis, Mo., 1904; E. W. Parker, J. A. Holmes, M. R. Campbell, committee in charge. 1906. (In 3 parts.) 1,492 pp., 13 pls.
B 275. Slate deposits and slate industry of the United States, by T. N. Dale, with sections by E. C. Eckel, W. F. Hillebrand, and A. T. Coons. 1906. 154 pp., 25 pls.
PP 49. Geology and mineral resources of part of the Cumberland Gap coal field, Kentucky, by G. H. Ashley and L. C. Glenn, in cooperation with the State Geological Department of Kentucky, C. J. Norwood, curator. 1906. 239 pp., 40 pls.
B 277. Mineral resources of Kenai Peninsula, Alaska: Gold fields of the Turnagain Arm region, by F. H. Moffit; Coal fields of the Kachemak Bay region, by R. W. Stone. 1906. 80 pp., 18 pls.
B 278. Geology and coal resources of the Cape Lisburne region, Alaska, by A. J. Collier. 1906. 54 pp., 9 pls. (Out of stock.)
B 279. Mineral resources of the Kittanning and Rural Valley quadrangles, Pennsylvania, by Charles Butts. 1906. 198 pp., 11 pls.
B 280. The Rampart gold placer region, Alaska, by L. M. Prindle and F. L. Hess. 1906. 54 pp., 7 pls. (Out of stock.)
B 282. Oil fields of the Texas-Louisiana Gulf Coastal Plain, by N. M. Fenneman. 1906. 146 pp., 11 pls.
PP 51. Geology of the Bighorn Mountains, by N. H. Darton. 1906. 129 pp., 47 pls.
B 283. Geology and mineral resources of Mississippi, by A. F. Crider. 1906. 99 pp., 4 pls.
B 284. Report on progress of investigations of the mineral resources of Alaska in 1905, by A. H. Brook and others. 1906. 169 pp., 14 pls.
B 285. Contributions to Economic Geology, 1905; S. F. Emmons and E. C. Eckel, geologists in charge. 1906. 506 pp., 13 pls. (Out of stock.)
B 286. Economic geology of the Beaver quadrangle, Pennsylvania, by L. H. Woolsey. 1906. 132 pp., 8 pls.
B 287. Juneau gold belt, Alaska, by A. C. Spencer, and A reconnaissance of Admiralty Island, Alaska, by C. W. Wright. 1906. 161 pp., 27 pls.
PP 54. The geology and gold deposits of the Cripple Creek district, Colorado, by W. Lindgren and F. L. Ransome. 1906. 516 pp., 29 pls.
PP 55. Ore deposits of the Silver Peak quadrangle, Nevada, by J. E. Spurr. 1906. 174 pp., 24 pls.
B 289. A reconnaissance of the Matanuska coal field, Alaska, in 1905, by G. C. Martin. 1906. 34 pp., 5 pls.
B 290. Preliminary report on the operations of the fuel-testing plant of the United States Geological Survey at St. Louis, Mo., 1905, by J. A. Holmes. 1906. 240 pp.
B 293. Reconnaissance of some gold and tin deposits of the southern Appalachians, by L. C. Graton, with notes on the Dahlonega mines, by W. Lindgren. 1906. 134 pp., 9 pls.
B 294. Zinc and lead deposits of the upper Mississippi Valley, by H. Foster Bain. 1906. 155 pp., 16 pls.
B 295. The Yukon-Tanana region, Alaska, description of Circle quadrangle, by L. M. Prindle. 1906. 27 pp., 1 pl.
B 296. Economic geology of the Independence quadrangle, Kansas, by Frank C. Schrader and Erasmus Haworth. 1906. 74 pp., 6 pls.
B 297. The Yampa coal field, Routt County, Colo., by N. M. Fenneman, Hoyt S. Gale, and M. R. Campbell. 1906. 96 pp., 9 pls.
B 298. Record of deep-well drilling for 1905, by Myron L. Fuller and Samuel Sanford. 1906. 299 pp.

B 300. Economic geology of the Amity quadrangle in eastern Washington County, Pa., by Frederick G. Clapp. 1907. 145 pp., 8 pls.
B 303. Preliminary account of Goldfield, Bullfrog, and other mining districts in southern Nevada, by F. L. Ransome, with notes on the Manhattan district, by G. H. Garrey and W. H. Emmons. 1906. 98 pp., 5 pls.
B 304. Oil and gas fields of Greene County, Pa., by Ralph W. Stone and Frederick G. Clapp. 1906. 110 pp., 3 pls.
PP 56. Geography and geology of a portion of southwestern Wyoming, with special reference to coal and oil, by A. C. Veatch. 1907. 178 pp., 26 pls.
B 308. A geologic reconnaissance in southwestern Nevada and eastern California, by S. H. Ball. 1907. 218 pp., 3 pls.
B 309. The Santa Clara Valley, Puente Hills, and Los Angeles oil districts, southern California, by G. H. Eldridge and Ralph Arnold. 1907. 266 pp., 41 pls.
B 312. The interaction between minerals and water solutions, with special reference to geologic phenomena, by E. C. Sullivan. 1907. 69 pp.
B 313. The granites of Maine, by T. Nelson Dale, with an introduction by G. O. Smith. 1907. 202 pp., 14 pls.
B 314. Report of progress of investigations of mineral resources of Alaska in 1906, by A. H. Brooks and others. 1907. 235 pp., 4 pls.
B 315. Contributions to economic geology, 1906, Part I: Metals and nonmetals, except fuels. S. F. Emmons and E. C. Eckel, geologists in charge. 1907. 504 pp., 4 pls.
WS 215. Geology and water resources of a portion of the Missouri River Valley in northeastern Nebraska, by G. E. Condra. 1908. — pp., 11 pls.
WS 216. Geology and water resources of the Republican River Valley in Nebraska and adjacent areas, by G. E. Condra. 1907. 71 pp., 13 pls.
B 316. Contributions to economic geology, 1906, Part II: Coal, lignite, and peat. M. R. Campbell, geologist in charge. 1907. 543 pp., 23 pls.
B 317. Preliminary report on the Santa Maria oil district, Santa Barbara County, Cal., by Ralph Arnold and Robert Anderson. 1907. 69 pp., 2 pls.
B 318. Geology of oil and gas fields in Steubenville, Burgettstown, and Claysville quadrangles, Ohio, West Virginia, and Pennsylvania, by W. T. Griswold and M. J. Munn. 1907. 196 pp., 13 pls.
B 320. The Downtown district of Leadville, Colo., by S. F. Emmons and J. D. Irving. 1907. 75 pp., 7 pls.
B 321. Geology and oil resources of the Summerland district, Santa Barbara County, Cal., by Ralph Arnold. 1907. 91 pp., 20 pls.
B 322. Geology and oil resources of the Santa Maria oil district, Santa Barbara County, Cal., by Ralph Arnold and Robert Anderson. 161 pp., 26 pls.
B 326. The Arkansas coal field, by A. J. Collier, with reports on the paleontology, by David White and G. H. Girty. 1907. 158 pp., 6 pls.

SERIES B, DESCRIPTIVE GEOLOGY.

B 23. Observations on the junction between the Eastern sandstone and the Keweenaw series on Keweenaw Point, Lake Superior, by R. D. Irving and T. C. Chamberlin. 1885. 124 pp., 17 pls. (Out of stock.)
B 33. Notes on geology of northern California, by J. S. Diller. 1886. 23 pp. (Out of stock.)
B 39. The upper beaches and deltas of Glacial Lake Agassiz, by Warren Upham. 1887. 84 pp., 1 pl. (Out of stock.)
B 40. Changes in river courses in Washington Territory due to glaciation, by Bailey Willis. 1887. 10 pp., 4 pls. (Out of stock.)
B 45. The present condition of knowledge of the geology of Texas, by R. T. Hill. 1887. 94 pp. (Out of stock.)
B 53. The geology of Nantucket, by N. S. Shaler. 1889. 55 pp., 10 pls. (Out of stock.)
B 57. A geological reconnaissance in southwestern Kansas, by Robert Hay. 1890. 49 pp., 2 pls.
B 58. The glacial boundary in western Pennsylvania, Ohio, Kentucky, Indiana, and Illinois, by G. F. Wright, with introduction by T. C. Chamberlin. 1890. 112 pp., 8 pls. (Out of stock.)
B 67. The relations of the traps of the Newark system in the New Jersey region, by N. H. Darton. 1890. 82 pp. (Out of stock.)
B 104. Glaciation of the Yellowstone Valley north of the Park, by W. H. Weed. 1893. 41 pp., 4 pls.
B. 108. A geological reconnaissance in central Washington, by I. C. Russell. 1893. 108 pp., 12 pls. (Out of stock.)
B 119. A geological reconnaissance in northwest Wyoming, by G. H. Eldridge. 1894. 72 pp., 4 pls.
B 137. The geology of the Fort Riley Military Reservation and vicinity, Kansas, by Robert Hay. 1896. 35 pp., 8 pls.
B 144. The moraines of the Missouri Coteau and their attendant deposits, by J. E. Todd. 1896. 71

B 159. The geology of eastern Berkshire County, Massachusetts, by B. K. Emerson. 1899. 139 pp., 9 pls.
B 165. Contributions to the geology of Maine, by H. S. Williams and H. E. Gregory. 1900. 212 pp., 14 pls.
WS 70. Geology and water resources of the Patrick and Goshen Hole quadrangles in eastern Wyoming and western Nebraska, by G. I. Adams. 1902. 50 pp., 11 pls.
B 199. Geology and water resources of the Snake River Plains of Idaho, by I. C. Russell. 1902. 192 pp., 25 pls.
PP 1. Preliminary report on the Ketchikan mining district, Alaska, with an introductory sketch of the geology of southeastern Alaska, by A. H. Brooks. 1902. 120 pp., 2 pls.
PP 2. Reconnaissance of the northwestern portion of Seward Peninsula, Alaska, by A. J. Collier. 1902. 70 pp., 11 pls.
PP 3. Geology and petrography of Crater Lake National Park, by J. S. Diller and H. B. Patton. 1902. 167 pp., 19 pls.
PP 10. Reconnaissance from Fort Hamlin to Kotzebue Sound, Alaska, by way of Dall, Kanuti, Allen, and Kowak rivers, by W. C. Mendenhall. 1902. 68 pp., 10 pls.
PP 11. Clays of the United States east of the Mississippi River, by Heinrich Ries. 1903. 298 pp., 9 pls. (Out of stock.)
PP 12. Geology of the Globe copper district, Arizona, by F. L. Ransome. 1903. 168 pp., 27 pls.
PP 13. Drainage modifications in southeastern Ohio and adjacent parts of West Virginia and Kentucky, by W. G. Tight. 1903. 111 pp., 17 pls. (Out of stock.)
B 208. Descriptive geology of Nevada south of the fortieth parallel and adjacent portions of California, by J. E. Spurr. 1903. 229 pp., 8 pls. (Out of stock.)
B 209. Geology of Ascutney Mountain, Vermont, by R. A. Daly. 1903. 122 pp., 7 pls.
WS 78. Preliminary report on artesian basins in southwestern Idaho and southeastern Oregon, by I. C. Russell. 1903. 51 pp., 2 pls.
PP 15. Mineral resources of the Mount Wrangell district, Alaska, by W. C. Mendenhall and F. C. Schrader. 1903. 71 pp., 10 pls.
PP 17. Preliminary report on the geology and water resources of Nebraska west of the one hundred and third meridian, by N. H. Darton. 1903. 69 pp., 43 pls.
B 217. Notes on the geology of southwestern Idaho and southeastern Oregon, by I. C. Russell. 1903. 83 pp., 18 pls.
B 219. The ore deposits of Tonopah, Nevada (preliminary report), by J. E. Spurr. 1903. 31 pp., 1 pl.
PP 20. A reconnaissance in northern Alaska in 1901, by F. C. Schrader. 1904. 139 pp., 16 pls.
PP 21. The geology and ore deposits of the Bisbee quadrangle, Arizona, by F. L. Ransome. 1904. 168 pp., 29 pls.
WS 90. Geology and water resources of part of the lower James River Valley, South Dakota, by J. E. Todd and C. M. Hall. 1904. 47 pp., 23 pls.
PP 25. The copper deposts of the Encampment district, Wyoming, by A. C. Spencer. 1904. 107 pp. 2 pls. (Out of stock.)
PP 26. Economic resources of the northern Black Hills, by J. D. Irving, with contributions by S. F. Emmons and T. A. Jaggar, jr. 1904. 222 pp., 20 pls.
PP 27. A geological reconnaissance across the Bitterroot Range and Clearwater Mountains in Montana and Idaho, by Waldemar Lindgren. 1904. 122 pp., 15 pls.
PP 31. Preliminary report on the geology of the Arbuckle and Wichita mountains in Indian Territory and Oklahoma, by J. A. Taff, with an appendix on reported ore deposits in the Wichita. Mountains, by H. F. Bain. 1904. 97 pp., 8 pls.
B 235. A geological reconnaissance across the Cascade Range near the forty-ninth parallel, by G. O. Smith and F. C. Calkins. 1904. 103 pp., 4 pls.
B 236. The Porcupine placer district, Alaska, by C. W. Wright. 1904. 35 pp., 10 pls.
B 237. Igneous rocks of the Highwood Mountains, Montana, by L. V. Pirsson. 1904. 208 pp., 7 pls.
B 238. Economic geology of the Iola quadrangle, Kansas, by G. I. Adams, Erasmus Haworth, and W. R. Crane. 1904. 83 pp., 1 pl.
PP 32. Geology and underground water resources of the central Great Plains, by N. H. Darton. 1905. 433 pp., 72 pls.
WS 110. Contributions to hydrology of eastern United States, 1904. M. L. Fuller, geologist in charge. 1905. 211 pp., 5 pls.
B 242. Geology of the Hudson Valley between the Hoosic and the Kinderhook, by T. Nelson Dale. 1904. 63 pp., 3 pls.
PP 34. The Delavan lobe of the Lake Michigan glacier of the Wisconsin stage of glaciation and associated phenomena, by W. C. Alden. 1904. 106 pp., 15 pls.
PP 35. Geology of the Perry Basin in southeastern Maine, by G. O. Smith and David White. 1905. 107 pp., 6 pls.
B 243. Cement materials and industry of the United States, by E. C. Eckel. 1905. 395 pp., 15 pls.
B 246. Zinc and lead deposits of northeastern Illinois, by H. F. Bain. 1904. 56 pp., 5 pls.
B 247. The Fairhaven gold placers of Seward Peninsula, Alaska, by F. H. Moffit. 1905. 85 pp., 14 pls.
B 249. Limestones of southwestern Pennsylvania, by F. G. Clapp. 1905. 52 pp., 7 pls.

B 250. The petroleum fields of the Pacific coast of Alaska, with an account of the Bering River coal deposit, by G. C. Martin. 1905. 65 pp., 7 pls.
B 251. The gold placers of the Fortymile, Birch Creek, and Fairbanks regions, Alaska, by L. M. Prindle. 1905. 16 pp., 16 pls.
WS 118. Geology and water resources of a portion of east-central Washington, by F. C. Calkins. 1905. 96 pp., 4 pls.
B 252. Preliminary report on the geology and water resources of central Oregon, by I. C. Russell. 1905. 138 pp., 24 pls.
PP 36. The lead, zinc, and fluorspar deposits of western Kentucky, by E. O. Ulrich and W. S. Tangier Smith. 1905. 218 pp., 15 pls.
PP 38. Economic geology of the Bingham mining district of Utah, by J. M. Boutwell, with a chapter on areal geology, by Arthur Keith, and an introduction on general geology, by S. F. Emmons. 1905. 413 pp., 49 pls.
PP 41. The geology of the central Copper River region, Alaska, by W. C. Mendenhall. 1905. 133 pp., 20 pls.
B 254. Report of progress in the geological resurvey of the Cripple Creek district, Colorado, by Waldemar Lindgren and F. L. Ransome. 1904. 36 pp.
B 255. The fluorspar deposits of southern Illinois, by H. Foster Bain. 1905. 75 pp., 6 pls. (Out of stock.)
B 256. Mineral resources of the Elders Ridge quadrangle, Pennsylvania, by R. W. Stone. 1905. 85 pp., 12 pls.
B 257. Geology and paleontology of the Judith River beds, by T. W. Stanton and J. B. Hatcher, with a chapter on the fossil plants, by F. H. Knowlton. 1905. 174 pp., 19 pls.
PP 42. Geology of the Tonopah mining district, Nevada, by J. E. Spurr. 1905. 295 pp., 24 pls.
WS 123. Geology and underground water conditions of the Jornada del Muerto, New Mexico, by C. R. Keyes. 1905. 42 pp., 9 pls. (Out of stock.)
WS 136. Underground waters of Salt River Valley, Arizona, by W. T. Lee. 1905. 194 pp., 24 pls.
PP. 43. The copper deposits of Clifton-Morenci, Arizona, by Waldemar Lindgren. 1905. 375 pp., 25 pls.
B 265. Geology of the Boulder district, Colorado, by N. M. Fenneman. 1905. 101 pp., 5 pls.
B 267. The copper deposits of Missouri, by H. F. Bain and E. O. Ulrich. 1905. 52 pp., 1 pl.
PP 44. Underground water resources of Long Island, New York, by A. C. Veatch and others. 1905. 394 pp., 34 pls.
WS 148. Geology and water resources of Oklahoma, by C. N. Gould. 1905. 178 pp., 22 pls.
B 270. The configuration of the rock floor of Greater New York, by W. H. Hobbs. 1905. 96 pp., 5 pls.
B 272. Taconic physiography, by T. M. Dale. 1905. 52 pp., 14 pls.
PP 45. The geography and geology of Alaska, a summary of existing knowledge, by A. H. Brooks, with a section on climate, by Cleveland Abbe, jr., and a topographic map and description thereof, by R. M. Goode. 1905. 327 pp., 34 pls.
B 273. The drumlins of southeastern Wisconsin (preliminary paper), by W. C. Alden. 1905. 46 pp., 9 pls.
PP 46. Geology and underground water resources of northern Louisiana and southern Arkansas, by A. C. Veatch. 1906. 422 pp., 51 pls.
PP 49. geology and mineral resources of part of the Cumberland Gap coal field, Kentucky, by G. H. Ashley and L. C. Glenn, in cooperation with the State Geological Department of Kentucky, C. J. Norwood, curator. 1906. 239 pp., 40 pls.
PP 50. The Montana lobe of the Keewatin ice sheet, by F. H. H. Calhoun. 1906. 62 pp., 7 pls.
B 277. Mineral resources of Kenai peninsula, Alaska: Gold fields of the Turnagain Arm region, by F. H. Moffit; and the coal fields of the Kachemak Bay region, by R. W. Stone. 1906. 80 pp., 18 pls.
WS 154. The geology and water resources of the eastern portion of the Panhandle of Texas, by C. N. Gould. 1906. 64 pp., 15 pls.
B 278. Geology and coal resources of the Cape Lisburne region, Alaska, by A. J. Collier. 1906. 54 pp., 9 pls. (Out of stock.)
B 279. Mineral resources of the Kittanning and Rural Valley quadrangles, Pennsylvania, by Charles Butts. 1906. 198 pp., 11 pls.
B 280. The Rampart gold placer region, Alaska, by L. M. Prindle and F. L. Hess. 1906. 54 pp., 7 pls. (Out of stock.)
B 282. Oil fields of the Texas-Louisiana Gulf Coastal Plain, by N. M. Fenneman. 1906. 146 pp., 11 pls.
WS 157. Underground water in the valleys of Utah Lake and Jordan River, Utah, by G. B. Richardson. 1906. 81 pp., 9 pls.
PP 51. Geology of the Bighorn Mountains, by N. H. Darton. 1906. 129 pp., 47 pls.
WS 158. Preliminary report on the geology and underground waters of the Roswell artesian area, New Mexico, by C. A. Fisher. 1906. 29 pp., 9 pls.
PP [illegible] Colorado, by N. H.

WS 159. Summary of underground-water resources of Mississippi, by A. F. Crider and L. C. Johnson. 1906. 86 pp., 6 pls.
PP 53. Geology and water resources of the Bighorn basin, Wyoming, by C. A. Fisher. 1906. 72 pp., 16 pls.
B 283. Geology and mineral resources of Mississippi, by A. F. Crider. 1906. 99 pp., 4 pls.
B 286. Economic geology of the Beaver quadrangle, Pennsylvania (southern Beaver and northwestern Allegheny counties), by L. H. Woolsey. 1906. 132 pp., 8 pls.
B 287. The Juneau gold belt, Alaska, by A. C. Spencer, and a reconnaissance of Admiralty Island, Alaska, by C. W. Wright. 1906. 161 pp., 37 pls.
PP 54. The geology and gold deposits of the Cripple Creek district, Colorado, by W. Lindgren and F. L. Ransome. 1906. 516 pp., 29 pls.
PP 55. Ore deposits of the Silver Peak quadrangle, Nevada, by J. E. Spurr. 1906. 174 pp., 24 pls.
B 289. A reconnaissance of the Matanuska coal field, Alaska, in 1905, by G. C. Martin. 1906. 36 pp. 5 pls.
WS 164. Underground waters of Tennessee and Kentucky west of Tennessee River and of an adjacent area in Illinois, by L. C. Glenn. 1906. 173 pp., 7 pls.
B 293. Reconnaissance of some gold and tin deposits of the southern Appalachians, by L. C. Groton, with notes on the Dahlonega mines, by W. Lindgren. 1906. 134 pp., 9 pls.
B 294. Zinc and lead deposits of the upper Mississippi Valley, by H. Foster Bain. 1906. 155 pp., 16 pls.
B 295. The Yukon-Tanana region, Alaska, description of Circle quadrangle, by L. M. Prindle. 1906. 27 pp., 1 pl.
B 296. Economic geology of the Independence quadrangle, Kansas, by Frank C. Schrader and Erasmus Haworth. 1906. 74 pp., 6 pls.
WS 181. Geology and water resources of Owens Valley, California, by Willis T. Lee. 1906. 28 pp., 6 pls.
B 297. The Yampa coal field, Routt County, Colo., by N. M. Fenneman, Hoyt S. Gale, and M. R. Campbell. 1906. 96 pp., 9 pls.
B 300. Economic geology of the Amity quadrangle in eastern Washington County, Pa., by F. G. Clapp. 1906. 145 pp., 8 pls.
B 303. Preliminary account of Goldfield, Bullfrog, and other mining districts in southern Nevada, by F. L. Ransome; with notes on Manhattan district, by G. H. Garrey and W. H. Emmons. 1907. 98 pp., 5 pls.
B 304. Oil and gas fields of Greene County, Pa., by R. W. Stone and F. G. Clapp. 1907. 110 pp., 3 pls.
WS 188. Water resources of the Rio Grande Valley in New Mexico and their development, by W. T. Lee. 1906. 59 pp., 10 pls.
B 306. Rate of recession of Niagara Falls, accompanied by a report on the survey of the crest, by W. Carvel Hall. 1906. 31 pp., 11 pls.
PP 56. Geography and geology of a portion of southwestern Wyoming, with special reference to coal and oil, by A. C. Veatch. 1907. 178 pp., 26 pls.
B 308. A geologic reconnaissance in southwestern Nevada and eastern California, by S. H. Ball. 1907. 218 pp., 3 pls.
B 309. The Santa Clara Valley, Puente Hills, and Los Angeles oil districts, southern California, by G. H. Eldridge and Ralph Arnold. 1907. 266 pp., 41 pls.
PP 57. Geology of the Marysville mining district, Montana, a study of igneous intrusion and contact metamorphism, by Joseph Barrell. 1907. 178 pp., 16 pls.
WS 191. The geology and water resources of the western portion of the Panhandle of Texas, by C. N. Gould. 1907. 70 pp., 7 pls.
B 311. The green schists and associated granites and porphyries of Rhode Island, by B. K. Emerson and J. H. Perry. 1907. 74 pp., 2 pls.
WS 195. Underground waters of Missouri, their geology and utilization, by Edward Shepard. 1907. 224 pp., 6 pls.
WS 199. Underground water in Sanpete and central Sevier valleys, Utah, by G. B. Richardson. 1907. 63 pp., 6 pls.
WS 215. Geology and water resources of a portion of the Missouri River Valley in northeastern Nebraska, by G. E. Condra. 1908. — pp., 11 pls.
WS 216. Geology and water resources of the Republican River Valley in Nebraska and adjacent areas, by G. E. Condra. 1907. 71 pp., 13 pls.
B 317. Preliminary report on the Santa Maria oil district, Santa Barbara County, Cal., by Ralph Arnold and Robert Anderson. 1907. 69 pp., 2 pls.
B 318. Geology of oil and gas fields in Steubenville, Burgettstown, and Claysville quadrangles, Ohio, West Virginia, and Pennsylvania, by W. T. Griswold and M. J. Munn. 1907. 196 pp., 13 pls.
B 319. Summary of controlling factors of artesian flows, by M. L. Fuller. 1908. — pp., 7 pls.
B 320. The Downtown district of Leadville, Colo., by S. F. Emmons and J. D. Irving. 1907. 75 pp., 7 pls.
B 321. Geology and oil resources of the Summerland district, Santa Barbara County, Cal., by Ralph Arnold. 1907. 91 pp., 20 pls.

B 322. Geology and oil resources of the Santa Maria oil district, Santa Barbara Count
Arnold and Robert Anderson. 1907. 161 pp., 26 pls.
B 326. The Arkansas coal field, by A. J. Collier, with reports on the paleontology,
and G. H. Girty. 1907. 158 pp., 6 pls.

Correspondence should be addressed to

THE DIRECTOR,
UNITED STATES GEOLOGICAL S
DECEMBER, 1907. WASHIN

O

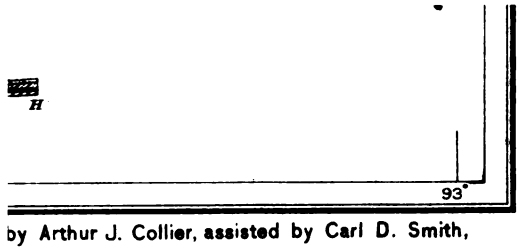

by Arthur J. Collier, assisted by Carl D. Smith,
e, and R. D. Mesler

WS 159. Summary of underground-water resources of Mississippi, by A. F. Crider and L. C. Johnson. 1906. 86 pp., 6 pls.

PP 53. Geology and water resources of the Bighorn basin, Wyoming, by C. A. Fisher. 1906. 72 pp., 16 pls.

B 283. Geology and mineral resources of Mississippi, by A. F. Crider. 1906. 99 pp., 4 pls.

B 286. Economic geology of the Beaver quadrangle, Pennsylvania (southern Beaver and northwestern Allegheny counties), by L. H. Woolsey. 1906. 182 pp., 8 pls.

B 287. The Juneau gold belt, Alaska, by A. C. Spencer, and a reconnaissance of Admiralty Island, Alaska, by C. W. Wright. 1906. 161 pp., 37 pls.

PP 54. The geology and gold deposits of the Cripple Creek district, Colorado, by W. Lindgren and F. L. Ransome. 1906. 516 pp., 29 pls.

PP 55. Ore deposits of the Silver Peak quadrangle, Nevada, by J. E. Spurr. 1906. 174 pp., 24 pls.

B 289. A reconnaissance of the Matanuska coal field, Alaska, in 1905, by G. C. Martin. 1906. 36 pp. 5 pls.

WS 164. Underground waters of Tennessee and Kentucky west of Tennessee River and of an adjacent area in Illinois, by L. C. Glenn. 1906. 173 pp., 7 pls.

B 293. Reconnaissance of some gold and tin deposits of the southern Appalachians, by L. C. Groton, with notes on the Dahlonega mines, by W. Lindgren. 1906. 134 pp., 9 pls.

B 294. Zinc and lead deposits of the upper Mississippi Valley, by H. Foster Bain. 1906. 155 pp., 16 pls.

B 295. The Yukon-Tanana region, Alaska, description of Circle quadrangle, by L. M. Prindle. 1906. 27 pp., 1 pl.

B 296. Economic geology of the Independence quadrangle, Kansas, by Frank C. Schrader and Erasmus Haworth. 1906. 74 pp., 6 pls.

WS 181. Geology and water resources of Owens Valley, California, by Willis T. Lee. 1906. 28 pp., 6 pls.

B 297. The Yampa coal field, Routt County, Colo., by N. M. Fenneman, Hoyt S. Gale, and M. R. Campbell. 1906. 96 pp., 9 pls.

B 300. Economic geology of the Amity quadrangle in eastern Washington County, Pa., by F. G. Clapp. 1906. 145 pp., 8 pls.

B 303. Preliminary account of Goldfield, Bullfrog, and other mining districts in southern Nevada, by F. L. Ransome; with notes on Manhattan district, by G. H. Garrey and W. H. Emmons. 1907. 98 pp., 5 pls.

B 304. Oil and gas fields of Greene County, Pa., by R. W. Stone and F. G. Clapp. 1907. 110 pp., 3 pls.

WS 188. Water resources of the Rio Grande Valley in New Mexico and their development, by W. T. Lee. 1906. 59 pp., 10 pls.

B 306. Rate of recession of Niagara Falls, accompanied by a report on the survey of the crest, by W. Carvel Hall. 1906. 31 pp., 11 pls.

PP 56. Geography and geology of a portion of southwestern Wyoming, with special reference to coal and oil, by A. C. Veatch. 1907. 178 pp., 26 pls.

B 308. A geologic reconnaissance in southwestern Nevada and eastern California, by S. H. Ball. 1907. 218 pp., 3 pls.

B 309. The Santa Clara Valley, Puente Hills, and Los Angeles oil districts, southern California, by G. H. Eldridge and Ralph Arnold. 1907. 266 pp., 41 pls.

PP 57. Geology of the Marysville mining district, Montana, a study of igneous intrusion and contact metamorphism, by Joseph Barrell. 1907. 178 pp., 16 pls.

WS 191. The geology and water resources of the western portion of the Panhandle of Texas, by C. N. Gould. 1907. 70 pp., 7 pls.

B 311. The green schists and associated granites and porphyries of Rhode Island, by B. K. Emerson and J. H. Perry. 1907. 74 pp., 2 pls.

WS 195. Underground waters of Missouri, their geology and utilization, by Edward Shepard. 1907. 224 pp., 6 pls.

WS 199. Underground water in Sanpete and central Sevier valleys, Utah, by G. B. Richardson. 1907. 63 pp., 6 pls.

WS 215. Geology and water resources of a portion of the Missouri River Valley in northeastern Nebraska, by G. E. Condra. 1908. — pp., 11 pls.

WS 216. Geology and water resources of the Republican River Valley in Nebraska and adjacent areas, by G. E. Condra. 1907. 71 pp., 13 pls.

B 317. Preliminary report on the Santa Maria oil district, Santa Barbara County, Cal., by Ralph Arnold and Robert Anderson. 1907. 69 pp., 2 pls.

B 318. Geology of oil and gas fields in Steubenville, Burgettstown, and Claysville quadrangles, Ohio, West Virginia, and Pennsylvania, by W. T. Griswold and M. J. Munn. 1907. 196 pp., 13 pls.

B 319. Summary of controlling factors of artesian flows, by M. L. Fuller. 1908. — pp., 7 pls.

B 320. The Downtown district of Leadville, Colo., by S. F. Emmons and J. D. Irving. 1907. 75 pp., 7 pls.

B 321. Geology and oil resources of the Summerland district, Santa Barbara County, Cal., by Ralph Arnold. 1907. 91 pp., 20 pls.

gy by Arthur J. Collier, assisted by Carl D. Smith,
Paige, and R. D. Mesler

Bulletin No. 327

Series { A, Economic Geology, 105
B, Descriptive Geology, 129

DEPARTMENT OF THE INTERIOR

UNITED STATES GEOLOGICAL SURVEY

GEORGE OTIS SMITH, DIRECTOR

GEOLOGIC RECONNAISSANCE

IN THE

MATANUSKA AND TALKEETNA BASINS ALASKA

BY

SIDNEY PAIGE AND ADOLPH KNOPF

WASHINGTON

GOVERNMENT PRINTING OFFICE

1907

[redacted]

CONTENTS.

	Page.
Introduction	5
Geography	6
Geology	9
Outline	9
Mica schists	10
Undifferentiated metamorphics	11
Slates and schists of the lower Talkeetna River	11
Graywackes and slates of the Knik River region	12
Distribution and character	12
Age and correlation	15
Igneous phenomena	16
Lower Middle Jurassic rocks	16
Distribution and character	16
Structure	18
Fossils and age	18
Quartz diorite	19
Distribution	19
Age	20
Upper Jurassic rocks	20
Distribution and character	20
Fossils and age	22
Stratigraphic relations	23
Lower Cretaceous rocks	24
Tertiary	24
Eocene	24
Distribution	24
Character	25
Fossils and age	26
Stratigraphy	27
Igneous phenomena	27
Comparison with adjoining regions	28
Post-Eocene	29
Quaternary deposits	30
Geologic history	31
Pre-Quaternary	31
Glaciation	33
Present	33
Past	35
Physiographic development	37
Matanuska Valley	37
Talkeetna Mountains	38
Copper River basin	39

	Page.
Mineral resources	40
Coal	40
Areal distribution	40
Matanuska field	41
Extent	41
Structure	41
Description of the coal	42
Eastern district	42
Western district	49
Anthracite Ridge field	52
Geology	52
Description of the coal	54
Northeastern field	56
Adjacent coal fields	57
Analyses and tests	59
Chemical and calorimetric tests	59
Coking qualities	63
Mining conditions	63
Gold	64
Distribution of gold-bearing rocks	64
Description of localities	65
Willow Creek	65
Nelchina River	67
Knik River	67
Copper	67
Knik River	67
Kashwitna River	68
Index	69

ILLUSTRATIONS.

		Page.
PLATE	I. Topographic map of Matanuska and Talkeetna basins	(pocket)
	II. Geologic map of Matanuska and Talkeetna basins	(pocket)
	III. *A*, Conglomerate Mountain, between Tsadaka and Eska creeks; *B*, Stratified breccias and tuffs east of Chickaloon Creek; *C*, Vertical-walled canyons in conglomerate on Chickaloon Creek; *D*, Intercalated breccias and flows east of Chickaloon Creek	16
	IV. *A*, Lake in fault block, Conglomerate Mountain; *B*, Limestone at headwaters of Billy Creek; *C*, Rugged topography due to alpine glaciation; *D*, Recession of tributary from trunk glacier	42
FIG.	1. Section across Matanuska River at Conglomerate Mountain	41
	2. Sketch showing location of Chickaloon tunnels	45

GEOLOGIC RECONNAISSANCE IN THE MATANUSKA AND TALKEETNA BASINS, ALASKA.

By SIDNEY PAIGE and ADOLPH KNOPF.

INTRODUCTION.

The following report treats of the general geography, geology, and mineral resources of an approximately quadrangular area lying immediately northeast of the head of Cook Inlet. The region includes principally the Talkeetna Mountains and the Matanuska Valley, which separates these mountains from the Chugach Range on the south (Pl. I, pocket). The data for this report were gathered by the writers while they were attached to topographic parties engaged in mapping this region during the summer of 1906. The territory represented by the accompanying map embraces about 7,000 square miles. Necessarily much of the geology of so large an area must be generalized from the observations actually gathered along the line of travel.

The principal resource of the region thus far developed is coal. As a portion of this coal is of high grade, comparing favorably with Pennsylvania bituminous coal, and, as anthracite of good quality also occurs in the region, the investigation of 1906 was directed to determining the boundaries of the various coal fields and to differentiating the ages of the various coal horizons. Attention was also paid to such metalliferous deposits as were encountered. A summary of the results has already been published in the progress report [a] for 1906.

The region considered was explored by the army expeditions of 1898. Portions of it have been investigated by members of the United States Geological Survey: Mendenhall [b] explored Matanuska Valley in 1898; Eldridge [c] explored Susitna Valley in the same year;

[a] Paige, S., and Knopf, A., Reconnaissance in the Matanuska and Talkeetna basins, with notes on the placers of the adjacent region: Bull U. S. Geol. Survey No. 314, 1907, pp. 104–125.

[b] Mendenhall, W. C., A reconnaissance from Resurrection Bay to Tanana River, Alaska, in 1898: Twentieth Ann. Rept. U. S. Geol. Survey, pt. 7, 1900, pp. 265–340.

[c] Eldridge, G. H., A reconnaissance in the Susitna basin and adjacent territory, Alaska, in 1898: Twentieth Ann. Rept. U. S. Geol. Survey, pt. 7, 1900, pp. 7–29.

and Martin[a] made a reconnaissance of the Matanuska coal field in 1905. In the preparation of the following report, the work of these earlier investigators has been drawn on, especially that of Martin, who examined the coal resources of the lower Matanuska basin.

The field work of the season of 1906 was in charge of T. G. Gerdine, topographer, as chief of party. Landing was made at Knik, the head of steam navigation on Knik Arm of Cook Inlet, on May 29. Work was begun there on June 1. During June the region on the south side of Knik Arm was mapped; T. G. Gerdine, accompanied by Adolph Knopf as geologist, ascended Knik River to Knik Glacier, and R. H. Sargent, assistant topographer, accompanied by Sidney Paige as geologist, covered the territory south of old Knik. At the end of June Mr. Gerdine, with Mr. Knopf as geologist and a total party of 6 men and 8 horses, started for the interior by way of Matanuska Valley, Hicks Creek, Divide Creek, Caribou Creek, Billy Creek, and Nelchina River. The party returned to Knik by skirting along the western edge of Copper River basin and traveling down Matanuska Valley, arriving at Knik August 31. No great difficulties were encountered, although topographic work was often seriously hampered by rain.

In the meantime R. H. Sargent, with Sidney Paige as geologist and a total party of 6 men and 8 horses, made the circuit through the interior of the Talkeetna Mountains, by way of Chickaloon Creek and Talkeetna River, and returned to Knik along the western flank of these mountains. Some trouble was encountered in fording the numerous streams, which were swollen from continuous heavy rains. During the later part of September the topographers ran a traverse of the eastern shore of Cook Inlet from Point Possession to the mouth of Kasilof River. Tustumena Lake and Kasilof River were also traversed by Mr. Gerdine. Work was closed at Seldovia on September 27. The geologists of the party had meanwhile started overland to Seward on Resurrection Bay. They visited the placer districts of the Turnagain Arm region en route and arrived at Seward September 27.

GEOGRAPHY.

The Talkeetna Mountains occupy the larger part of the region dealt with in this report (Pl. I, pocket). They form an approximately circular mountain mass, bounded on the west and north by the wide valley of Susitna River, on the east by the Copper River basin, and on the south by Matanuska Valley. In general the Talkeetna Mountains merge gradually into the surrounding lowlands, except on the south, where they rise abruptly from the deep depres-

sion of Matanuska Valley. The interior of this mountain mass is an exceedingly rugged area, and access to it is possible only along the larger stream systems. Few of the peaks exceed 5,000 to 6,000 feet in altitude, but in the central portion some of the highest points reach altitudes of 8,000 to 9,000 feet.

The drainage of the Talkeetna area is rudely radial. The larger portion of it is tributary to Susitna River. In the southeastern portion of the area the headwaters of Susitna, Copper, and Matanuska rivers form a closely interlocking network of streams.

The Susitna is the largest river of the region. This great stream, which has a width of 2 miles near its mouth, rises in the northwestern part of the Copper River basin, and, after flowing westward around the northern flank of the Talkeetna Mountains, turns southward and empties into the northern end of Cook Inlet. The most important eastern tributary of the Susitna in the region under discussion is Talkeetna River, which heads at an altitude of about 5,000 feet in the heart of the Talkeetna Mountains. It flows northwestward for about half its length, then turns abruptly to the southwest and continues to Susitna River, which it enters about 85 miles above its mouth. The Talkeetna is about 75 miles long. Near its mouth it is a swift stream, 300 or 400 feet wide. During high water it can be crossed with a pack train only by swimming the horses and rafting the outfit. Sheep Creek is a tributary of Talkeetna River 14 miles above its mouth. It flows more slowly than the river and is, because of its depth, difficult to cross, so that rafting is necessary.

A considerable number of large streams, which, however, are smaller than the Talkeetna, drain the western flank of the Talkeetna Mountains and empty into Susitna River. They are, in order from north to south, Sunshine Creek, Montana Creek, Kashwitna River, Little Willow Creek, and Willow Creek. Little Susitna River, which is the next stream south of Willow Creek, belongs to the drainage basin of Matanuska River, but empties directly into Cook Inlet.

East of the Talkeetna Mountains lies the broad expanse of the Copper River basin, extending to the Wrangell Mountains on the east and bounded by the Alaska Range on the north and the Chugach Mountains on the south. The surface relief of this area is slight and is produced mainly by long, low gravel ridges. Innumerable ponds and lakes are the most striking features of the landscape. The southwestern portion of the basin is drained by Matanuska River, which, with its headwater tributaries, has cut gorges 300 to 400 feet deep in the underlying gravel deposits.

Matanuska Valley, which lies between the Talkeetna and Chugach mountains, opens out at its head and merges into the flats of the Copper River basin. In its upper course it is about 1 mile wide, but

it gradually widens downstream to 5 to 10 miles, and below Tsadaka Creek flares out to a width of 20 miles. In minor details the floor of the valley is decidedly irregular in relief, consisting of a succession of undulating low ridges and knolls with interspersed kettles.

Matanuska River, the second largest stream of the region, drains into the eastern end of Knik Arm, instead of into Cook Inlet proper. It heads directly against Tazlina River, of the Copper River drainage, from which it is separated by a low, almost imperceptible divide, having an altitude of 3,000 feet. The general course of the Matanuska is S. 70° W., and its length is about 100 miles. The river flows in a trough or valley sunk into the floor of the broader valley previously described. The newer valley is a mile or two wide along the lower stretches of the stream, but in places closes to a narrow box canyon 300 or 400 feet deep. The Matanuska is a swiftly flowing, silt-laden stream, with a current reaching probably 7 miles an hour. The volume of water varies with the season and is highest in June. The average width of the river is about 400 feet.

Caribou, Hicks, Chickaloon, Kings, Granite, Eska, and Tsadaka creeks are the principal streams entering Matanuska River from the north. Caribou Creek, the largest of these streams, drains a considerable area in the Talkeetna Mountains. Chickaloon Creek has a length of about 30 miles. A pass at its head, over which a pack train can easily be taken, connects its valley with that of the Talkeetna. The two valleys thus form a highway through the heart of the Talkeetna Mountains. A large number of streams enter the Matanuska from the south, draining the north flank of the Chugach Mountains, but none attain large size.

Near the head of Knik Arm, uniting irregularly with the various tidal sloughs, the Matanuska is joined by Knik River from the southeast. Knik River heads in Knik Glacier, and its length is only about 25 miles. Several small tributaries enter the Knik from both sides, the largest and most important of which is Metal Creek, emptying into the river from the east near the front of the glacier. Knik Valley is 3 to 4 miles wide, perfectly flat, and covered with gravel, through which protrude occasional hummocks of bed rock. Its course is remarkably straight throughout its entire length and it is walled in by mountains which rise steeply from the valley floor. Knik River possesses no single well-defined channel, but spreads out over its gravel plain in a number of branches, whose positions are likely to vary from year to year. Boats can be towed up the river by hand, although with some difficulty on account of bars and quicksands, to within 5 miles of the glacier.

The rugged group of mountains lying on the south side of Mata-

high and present a very inaccessible and forbidding aspect. The Chugach Mountains have a general northwesterly trend from Mount St. Elias, and constitute the high barrier between the Pacific coastal belt and the interior. At the head of Knik Arm they swing southward and continue, though with diminished altitudes, into Kenai Peninsula and Kodiak Island.

GEOLOGY.[a]

OUTLINE.

The rocks of the area investigated range in character from crystalline schists of probable pre-Silurian age to unconsolidated Quaternary stream and glacial gravels. A great central area of various granitic rocks, of middle Mesozoic age, makes up the mass of the Talkeetna Mountains. (See Pl. II, pocket.) On its southern flank this granite core is in part bounded by a narrow belt of albite and garnetiferous mica schists, which is in turn, on its southern border, bounded by a narrow band of granite similar in type to the central mass.

On its northwestern margin it is bordered by a series of slates and graywacke-slates. The latter series shows some similarity to the great series of graywackes and slates which occur on the south side of Knik Arm and strike into the Chugach Mountains.

East of Chickaloon Creek marine Jurassic strata attain an extensive development. They are divided into two unconformable series. The lower series is characterized by a volume of andesitic breccias, agglomerates, and amygdaloids of greenstone habit, exceeding 1,000 feet in thickness. These volcanics are conformably overlain by several thousand feet of sandstones, shales, and conglomerates. The younger unconformable series of Jurassic rocks consists of shales, sandstones, and conglomerates; with some interstratified tuff and arkose. The age indicated ranges from the late Middle Jurassic through the Upper Jurassic. Conformably overlying these strata is a Lower Cretaceous limestone, 300 feet thick.

Upper Eocene rocks are represented by the Kenai formation, a series of folded sandstones, shales, arkoses, and conglomerates, carrying thick beds of bituminous coal. These coal beds are limited to the lower basin of Matanuska River.

A series of post-Eocene basaltic lavas and associated pyroclastics overlie the older rocks unconformably. They attain a thickness of 1,000 feet, and form the summit topography of much of the area.

An extensive sheet of glacial gravels is the most recent deposit of the region.

[a] For an abstract of this paper see Bull. Geol. Soc. America, vol. 18, pp 325–332.

Geologic column of the Talkeetna and Matanuska basins.

Age.	Character.	Thickness.
		Feet.
Quaternary	Stream and glacial gravels	300+
Unconformity.		
Post-Eocene	Basaltic lavas, breccias, and tuffs	1,000+
Unconformity.		
Upper Eocene: Kenai formation	Coal-bearing shales, sandstones, arkoses, and conglomerates.	3,000±
Unconformity.		
Lower Cretaceous	Limestone	300
Upper Jurassic and Upper Middle Jurassic.	Shales, sandstones, conglomerates, tuff, and arkose, with coal.	2,000±
Unconformity.		
Lower Middle Jurassic	Shales, sandstone, and conglomerate, with coal	1,000±
	Andesitic greenstone, tuffs, agglomerates, and breccias; rhyolites, dacites, and tuffs.	1,000+
Unconformity?		
Pre-Jurassic:		
Sunrise "series"?	Metamorphic rocks	?
	Graywackes, slates, basaltic greenstones and tuffs, and rhyolites and tuffs, in Knik River region.	
Susitna slate?	Slates, graywacke-slates, and microcrystalline schists with intrusive granite, in lower Talkeetna region.	?
	Garnetiferous mica schists and albite zoisite schists.	

MICA SCHISTS.

A series of mica schists forms a narrow belt, not over 3 miles wide, near the head of Willow Creek. This belt has an east-and-west direction, and is known to extend not farther east than Tsadaka Creek and to disappear westward beneath the gravel floor of Susitna Valley.

The schists are thoroughly foliated rocks of medium grain, and show in general no variations in appearance. Under the microscope they are found to comprise garnetiferous mica schists and chlorite-albite schists. The garnetiferous mica schist is composed largely of quartz, which shows powerful strain shadows, muscovite in long laths, chloritized biotite, orthoclase, and garnet altered almost completely to chlorite. In the albite schist soda feldspar is the dominant constituent. The albite poikilitically incloses various other constituents, chief among which is clinozoisite in long, stout prisms, usually oriented parallel to the schistosity. In addition to the albite abundant quartz, crushed and showing strain shadows, is present in considerable amount, with some chlorite and clouds of magnetite dust. Muscovite is but an accidental constituent, and is only found

amined microscopically, shows large albites in the form of augen, quartz badly crushed and strained, muscovite of a sericitic nature, and chlorite, and is evidently a schist affected by a second period of dynamic activity.

Some serpentine and pyroxenite are included in the mica-schist series. The pyroxenite presents a pseudoporphyritic aspect under the microscope, due to crushed plates of monoclinic pyroxene lying embedded in a groundmass of serpentine. The pyroxene is noteworthy on account of the fine multiple twinning parallel to the orthopinacoid and of the slicing which has taken place along that plane. The shearing of the pyroxenite is probably to be correlated with the movement which crushed the schists.

The strike of the schistosity varies from N. 45° E. to N. 60° W. The dips average near 40°, but are inclined on both sides of the vertical. Fossils have not been obtained from this formation, nor is their occurrence in it likely. On account of its thoroughly metamorphic character, which considerably exceeds that of any of the terranes presently to be described, this formation is regarded as representing the oldest rocks of the region. Its members show a petrographic similarity to the mica schists of the Yukon-Tanana region, and a possible correlation with the pre-Silurian of that district is suggested.

UNDIFFERENTIATED METAMORPHICS.

Metamorphic rocks, which, because of lack of fossil and other stratigraphic criteria, can not be placed definitely in the stratigraphic column, occur in the lower portion of Talkeetna Valley—in the extreme northwestern part of the region traversed—and in the Knik River region—in the southern portion.

SLATES AND SCHISTS OF THE LOWER TALKEETNA VALLEY.

A series of metamorphic rocks outcropping along the upper course of Susitna River and the headwaters of the Cantwell was named the Susitna slate by Eldridge, who describes the beds as—

> * * * essentially quartzitic, varying in coarseness of material from an extremely fine homogeneous rock to one of granular structure. In addition to quartz there are occasional orthoclase, plagioclase, biotite, muscovite, scattered grains of iron oxide, and minute fragments of slate, apparently of the same nature as the fine-grained slates of the series itself. The entire series has been extensively sheared and the sand grains crushed, so as to produce the partial schistose or slaty structure that so generally prevails. Whitman Cross, of the Survey, who examined the rock microscopically, found no grains referable to igneous rocks, in spite of the impression from megascopical examination that the rocks were sheared eruptives.

A feature of the formation in localities where great crumpling of the strata has taken place is the presence of large quartz seams, half an inch to 2 feet thick, reticulating the exposed surface of the series with considerable intricacy. Such seams often show mineralization with sulphide of iron.[a]

The work of the season of 1906 showed that a series of rocks similar to the Susitna slate and schist has a considerable areal distribution along the lower course of Talkeetna River. In that region they show somewhat greater petrographic diversity than where studied by Eldridge. With the slates are associated various microcrystalline schists; that is, schists that are so fine-grained that their constituents are not recognizable by the unaided eye. Some are of aphanitic texture and display only a feeble schistosity. Examined microscopically, they prove to be composed largely of light-green hornblende in slender prismatic development. Quartz, chlorite, epidote, and biotite are the remaining constituents. Other schists, whose foliation is more apparent to the eye, consist of fine-grained aggregates of quartz and biotite, with much included carbonaceous material. In general the metamorphism of these schists has proceeded far enough to obliterate the evidence of their original clastic origin. In the lower Talkeetna River region they are associated with batholithic masses of granitic rock and locally are intimately intruded by apophyses of such masses. Much of their metamorphism may be imputed to this relation. The Susitna rocks have yielded no fossils nor are their stratigraphic relations known, so that their age must remain conjectural. The unmetamorphosed character of the Jurassic shales and sandstones of the Talkeetna Mountains indicates that the Susitna rocks are probably pre-Jurassic. The Susitna slates and schists show some lithologic resemblance to the rocks of the Sunrise "series" of the Turnagain Arm region, but appear for the most part to be somewhat more highly metamorphosed.

The microcrystalline schists are interstratified with the clay slates and, especially those containing notable amounts of hornblende, appear to represent metamorphosed bands of impure dolomites. Similar rocks are not known from the Sunrise "series." On account of these differences, which on the whole appear to outweigh the similarities, the Susitna slate is placed beneath the Sunrise formation in the geologic column.

GRAYWACKES AND SLATES OF THE KNIK RIVER REGION.

DISTRIBUTION AND CHARACTER.

The rocks on the south side of Knik Arm and in the valley of Knik River consist largely of graywackes, slates, and phyllites, with

some greenstones, rhyolites, and tuffs. The general strike of the series (N. 60° E.) tends to carry them eastward approximately parallel to the course of Matanuska River. Their distribution to the south is indicated by the fact that the moraine of the great glacier at the head of Knik Valley is composed exclusively of graywacke and slate. As the same rocks are reported by Mendenhall from along the shores at Port Wells on Prince William Sound, it is probable that this section across the Chugach Mountains consists largely of graywackes and slates.

The graywackes are highly indurated rocks, whose most conspicuous feature to the unaided eye is the unusual abundance of small angular slate fragments. They are of dark bluish-gray color and at some places are not easily distinguishable from basic volcanics. Under the microscope the graywackes prove to be of rather heterogeneous derivation. Angular fragments of quartz, containing capillary rutile, fragments of feldspar, plagioclase in part, usually altered and occasionally distinctly rounded, hornblende, augite, and fragments of slate comprise the main constituents. A little muscovite, epidote, pyrite, magnetite, and zircon are present as accessories. The binding material is a feebly polarizing aggregate flecked with chlorite. Other thin sections of the graywackes show, in addition to the slate particles, fragments of quartzite, of micropegmatite, and of a chloritized volcanic, probably an andesite. The graywackes are roughly schistose, and pass by increasing fineness of grain into graywacke slates and into highly cleaved clay slates. The slates locally assume a schistose foliation, become glossy, and pass into phyllites. At Knik Glacier they are affected by slip-strain cleavage, and are acutely crumpled and contorted. The interbedded graywacke, however, has been rendered only roughly schistose. Quartz stringers are very abundant in the slates and graywackes of the Sunrise "series," and at places form an intricate network of small veins, averaging about an inch in thickness. Mineralization of the quartz is not visible to the eye. In the Sunrise district, however, free gold is found at some places in these stringers.

Near the mouth of Knik River a great volume of greenstone tuffs, estimated as probably 1,500 feet thick, was found associated with the graywackes. They are dense, fine-grained rocks of green color, conspicuous on account of the numerous angular fragments of black slate which they inclose. The microscope shows that the rock is largely composed of opaque angular fragments of a greenish-yellow color. In places such fragments contain phenocrysts of highly altered feldspar and porphyritic augite in fine idiomorphic development. The remaining constituents of the tuff comprise fragments of brown hornblende, augite, graywacke, intersertal basalt (much altered), and

quartz diorite. Chlorite and calcite form a scanty binding material, and a little leucoxene occurs as an accessory mineral.

The massive greenstones found in the Sunrise "series" are, as a rule, nonporphyritic rocks of aphanitic texture. Secondary minerals, such as light-green hornblende, chlorite, and epidote, are strongly developed, and the feldspars are represented by aggregates of decomposition products. The former structure is thus often obscured, but remnants of ophitic or closely allied textures are sufficiently well preserved to leave no doubt as to the original character of the rock.

Rhyolites and their tuffs are associated with slates at a locality half way up Knik River. The acidic volcanics are of felsitic habit and include flow-banded types and porphyritic phases with inconspicuous quartz phenocrysts. A rude schistosity has been impressed on them, and in consequence they show a faint unctuous appearance on their foliation planes. In thin section a strongly marked eutaxitic structure is displayed, which is further emphasized by the fact that certain flow bands show a more advanced devitrification than others. Porphyritic constituents are not numerous. Of these, quartzes are most abundant. They exhibit in places some magmatic corrosion, but are usually broken and dispersed. A few orthoclase phenocrysts are present, crushed and largely converted to sericite. Epidote, replacing original femic phenocrysts, is a rare constituent. The groundmass is microcryptocrystalline and very feebly polarizing. Occasionally certain flow bands are noteworthy on account of the abundance of very minute flakes of sericite.

The tuffs accompanying the rhyolites, like the greenstone tuffs, are remarkable for the abundance of small, angular slate fragments which they include. Microscopic study indicates that the rhyolite tuffs grade into graywackes. A transitional type is represented by a rock in which glassy quartzes and white feldspars are studded in porphyritic fashion in a dense greenish matrix. In thin section about half of the slide is composed of numerous fragments of microcryptocrystalline volcanics showing fluxion phenomena. They are sparingly porphyritic, and in one section were found to contain dihexahedral quartz. These, as it were, constitute a groundmass for angular fragments of quartz and plagioclase. The microclites commonly referred to rutile are unusually well shown in the quartz fragments, as is also a little zircon. The feldspar occasionally shows rounded edges, and is usually in an advanced state of alteration. Some partially chloritized augite and a little hornblende are also present. Slate particles are numerous, and show molding around the other constituents in consequence of the shearing to which the rock has been subjected. Chloritic matter forms the binding material of the rock.

granitic area, probably, as the inclusions in the greenstone tuff show, of quartz-diorite character.

The various rock types, graywackes, greenstone tuffs, and rhyolite tuffs are characterized by the presence of numerous small, angular slate fragments. Metamorphism has not proceeded far enough to mask the clastic origin of the typical members, nor to cause a marked development of new minerals.

The cleavage of the rocks of the Sunrise "series" is parallel to the bedding. The strike, which is N. 60° E. at the mouth of Knik River, gradually swings around to the north as the Knik River is ascended, and becomes N. 10° E. at Knik Glacier. This change of strike in the strata coincides in a general way with the change in the axial trend of the Chugach Mountains, which in this region make a great bend to the south and continue into the Kenai Peninsula as the Kenai Mountains. The dips are usually high, ranging from 40° to 90°. Structurally the series presents a monoclinal succession of steeply dipping strata, which is undoubtedly due to repetition by close folding.

AGE AND CORRELATION.

The rocks on the south side of Knik Arm were included by Mendenhall[a] in the Sunrise "series," as originally defined—a name given to the metamorphic gold-bearing rocks occurring in the Sunrise mining district on Turnagain Arm. They are described by Moffit[b] as consisting principally of slates and arkoses, with very subordinate amounts of quartzite and conglomerate. The rocks of the region under discussion bear a general lithologic resemblance to those of the Turnagain Arm region and conform with them in strike. There appears, accordingly, no good reason for introducing a new formation name, and they are here discussed under the designation of Sunrise formation, although basaltic greenstones and aporhyolites have not been described from the type locality. No fossils have yet been found in the Sunrise formation, so that only tentative conclusions as to its age can be drawn. The slates and graywackes of the Sunrise "series" in the region under discussion are more highly metamorphosed than the shales and sandstones in the adjoining Matanuska region. As the latter are shown by their marine fauna to be lower Middle Jurassic, an age probably earlier than Middle Jurassic is indicated for the Sunrise "series." From a similar line of evidence in the Kachemak Bay region Moffit[c] has assigned the formation to a pre-Jurassic, probably Paleozoic, age.

---

[a] Op. cit., p. 306.

[b] Moffit, F. H., Gold fields of the Turnagain Arm region: Bull. U. S. Geol. Survey No. 277, 1906, p. 16.

[c] Op. cit., p. 19.

In the absence of definite paleontologic evidence, the correlation of the Sunrise formation with the similar graywacke-slate series of Prince William Sound must be made on purely petrographic and structural grounds. On this basis it appears that the Sunrise formation is probably the equivalent of the Valdez formation.

IGNEOUS PHENOMENA.

In addition to the greenstones, rhyolites, and accompanying pyroclastics, which form an integral portion of these rocks, other igneous rocks occur, probably as intrusives. They include quartz diorite peridotite (lherzolite), and andesite. The quartz diorites on the south side of Knik Arm form bosses, whose relation to the surrounding sedimentary rocks was not seen. They are cut by andesitic dikes of greenstone habit. A mass of peridotite composed of augite, enstatite, and partially serpentinized olivine occurs in the mountain mass southwest of Eklootna Creek.

LOWER MIDDLE JURASSIC ROCKS.

DISTRIBUTION AND CHARACTER.

The oldest rocks of determined age comprise andesitic greenstones quartz porphyries, tuffaceous sandstones, shales, and conglomerates Some coal is found in the nonvolcanic portion of this series. The greenstones constitute the most characteristic member and attain a wide distribution, especially in the interior of the Talkeetna Mountains, where only the volcanic portion of the series appears to be present.

The great bulk of the greenstones are clearly products of explosive volcanic activity. They occur largely in the form of stratified breccias (Pl. III, *B*), in which angular fragments of dark-blue porphyritic rock, varying in size from microscopic dimensions to several feet in diameter, are inclosed in a matrix of green color. This contrast of colors, which serves to emphasize the breccia character of the rock, is due to the fact that the matrix is abundantly changed into the green mineral chlorite, whereas the large angular fragments, being of a dense, fine-grained texture, have often withstood alteration more thoroughly. With the breccias are intercalated various sheets of amygdaloids, porphyries, and flow breccias. (See Pl. III, *D*.) The amygdaloids are frequently studded with numerous large amygdules, whose filling may consist of chalcedony, quartz calcite, chlorite, or zeolite.

A prominent feature of the greenstones is the great amount of shattering and slickensiding which they exhibit. Where this interna

A. CONGLOMERATE MOUNTAIN, BETWEEN MOOSE AND ESKA CREEKS.

B. STRATIFIED BRECCIAS AND TUFTS EAST OF CHICKALOON CREEK.

C. VERTICAL-WALLED CANYONS IN CONGLOMERATE, CHICKALOON CREEK.

D. INTERCALATED BRECCIAS AND FLOWS EAST OF CHICKALOON CREEK.

acter was noted at several localities, but a thin irregular seaming with calcite appears to be the most usual form of mineralization.

Petrographically the greenstones are prevailingly andesitic, usually of hyalopilitic or pilotaxitic texture, and more or less completely chloritized. Examples more basic than andesite appear to be rare and were noted only on Boulder Creek, about 7 miles from its mouth, where greenstones displaying columnar structure make up the north wall of the valley. These prove to be diabase porphyries.

The thickness of the greenstones often exceeds 1,000 feet. The tuffs locally contain fragments of lignite, and at the eastern end of Sheep Mountain, in the upper Matanuska Valley, were found to carry marine shells in a fine state of preservation.

Under the convenient field term "quartz porphyry" have been grouped various rhyolites and dacites, including their tuffs, that are associated with the greenstones. These are widely distributed in the interior of the Talkeetna Mountains. The rhyolites are generally flinty-looking rocks containing glassy phenocrysts, but also include some splendid flow-banded phases. Devitrification is common in the rhyolites. Some of the dacites resemble the rhyolites in appearance, but others possess a greenstone habit. These acidic lavas appear to have been erupted either during or soon after the period of the andesitic extrusions, as they contain included in them fragments of microlitic andesite.

During the extravasation of the rhyolites conditions were not uniform over the province. While lavas were accumulating in some portions of the region sedimentation was progressing in others. On the divide between Hicks and Boulder creeks a white stratum 20 feet thick is prominent. It proves to be a feldspathic sandstone, with some irregular thin white bands, about a quarter of an inch thick, scattered through it. The microscope shows that these bands are composed of microspherulitic particles and fragments of devitrified rhyolite, with fine flow structure, indicating that showers of rhyolitic material were prevalent during this portion of lower Middle Jurassic sedimentation.

At various points, especially in the region east of Chickaloon Creek, the greenstones are overlain conformably by a series of sandstones and shales. Some finely flow-banded volcanics, now devitrified, are in places associated with the sediments, proving that eruptive activity had not entirely ceased during their deposition. This series, by its dominantly sedimentary character, can be readily distinguished from the underlying meta-andesite accumulation.

The sandstones are usually feldspathic, and under the microscope show numerous small fragments of microlitic andesite no larger than the feldspar or quartz grains. The shales locally carry numerous

limestone nodules. At various localities the shales and sandstones associated with the greenstones are intensely shattered and crushed. This is especially notable in the gorge of Billy Creek. In this vicinity also occur several conglomerates not found elsewhere in the series. Some of these, perhaps, merit description. The conglomerate just above the head of the gorge is composed of well-rounded bowlders, up to 4 feet in diameter, of andesite porphyry and of amygdaloid. The matrix of this volcanic conglomerate has been severely slickensided. On the same stream another conglomerate 400 feet thick is revealed. It consists of various porphyries and white quartz pebbles embedded in a gritty, coherent matrix. A noteworthy feature of this conglomerate is the abundance of pebbles that show individual faulting.

STRUCTURE.

The general strike of the series is north and south (magnetic), and the dips are variable. Along one of the western tributaries of Hicks Creek a gentle synclinal folding is exposed; farther north on Hicks Creek a small steep anticline, trending N. 30° E. (magnetic), is shown. The beds are broken by numerous faults of small throw and, as is evident from the detailed description of the series, have been subjected to a large amount of internal disturbance. Detailed mapping will show the presence of a complicated system of more extensive faults.

FOSSILS AND AGE.

The fossils found in tuffs associated with the greenstones were submitted to T. W. Stanton, who reports as follows:

6 A. K. 201. Fossiliferous tuffs, associated with lavas and coarse pyroclastics, from the head of Matanuska River.

Rhynchonella.
Lima.
Pecten. Smooth species.
Pecten. Species of Vola type.
Trigonia.
Astarte?
Protocardia.
Pleuromya.
Sonninia?

The Jurassic age of this lot is clearly shown by the form of the *Trigonia* and of the ammonite (*Sonninia?*). The general aspect of the fauna is that of the lower part of the Enochkin, though it may be somewhat older than the fauna in lots 88A and 88B. With the exception of the *Vola*-like species of pecten there is nothing in it to suggest the lower Jurassic fauna of Seldovia.

According to this determination the age of the greenstones is lower Middle Jurassic.[a]

[a] Stanton, T. W., and Martin, G. C., Mesozoic section on Cook Inlet: Bull. Geol. Soc.

In general the sandstones and shales are barren of fossils, though belemnites are rather common. The following species, however, were found and were submitted to Mr. Stanton, who reports as follows:

6 A. K. 88A. Caribou Creek, tributary to Matanuska River.

Inoceramus cf. lucifer Eichwald.	Phylloceras.
Pleuromya.	Stephanoceras.
Pleurotomaria.	Oppelia?

6 A. K. 88B. Same locality as preceding, but found in float bowlder in stream bed.

Inoceramus.	Stephanoceras.
Natica.	Sonninia? (two species).
Phylloceras.	Belemnites.

The two lots are evidently from the same horizon, and nearly all the species occur in the lower part of the Enochkin at Snug Harbor.

The age of these sandstones and shales is, therefore, substantially the same as that of the greenstones—lower Middle Jurassic. The sedimentaries from which the above fossils were collected do not differ much in appearance from the Tertiary sandstones of the region. The greenstones, however, wear a more ancient aspect, and are usually more internally disturbed than the sedimentaries, probably in consequence of the volume changes which they have undergone during their metasomatic alteration.

QUARTZ DIORITE.

DISTRIBUTION.

Much of the rugged interior of the Talkeetna Mountains remains unexplored, but such evidence as is available indicates that the great central area consists wholly of granitic rocks. Extensive exposures of granular crystallines were encountered along the line of travel. The morainal material brought down by the glaciers from the remote recesses of the range and the gravels of the streams heading in the mountainous interior consist prevailingly of granitic material.

A considerable variety of rock types is found, but quartz diorites appear to predominate. A quartz diorite north of Tsadaka Creek carries the dark minerals, hornblende and biotite, and is associated with a quartz-diorite gneiss rich in hornblende. This gneiss is found also on Granite Creek and is doubtless a cataclastic phase of the massive quartz diorite. Along the middle course of Chickaloon Creek quartz-augite diorite appears, but toward the headwaters it gives place to a muscovite granite. Along the upper Talkeetna gneisses again appear, but along the lower course more quartz diorites are exposed. Along the western flank of the Talkeetna Mountains granitic rocks are exposed in great abundance almost continuously from Talkeetna River to Willow Creek and again as a narrow band

forming the southern boundary of the crystalline mica-schist area. Near Sheep Creek some uralitic gabbro is found. In the vicinity of Kashwitna River is a light-colored quartzose type, which proves to be a quartz monzonite.

The quartz diorites on the south side of Knik Arm are probably to be correlated with those making up the main mass of the Talkeetna Mountains. Similarly a small isolated boss of epidotized quartz diorite a few miles east of the mouth of Caribou Creek appears to belong to the same general mass.

AGE.

Wherever the quartz diorites come in contact with the Susitna formation a recrystallization of the sediments has taken place and finely granular hornfels has been produced. Along the upper Chickaloon the contact of the granite with the andesitic greenstones is marked by a fine-grained marginal facies. Granite porphyries of nevadite habit, containing greenstone inclusions, appear near the contact and probably represent the chilled border of the invading granite magma.

The quartz-diorite boss east of Caribou Creek, which appears to represent a satellitic intrusion attendant on the batholith of the Talkeetna Mountains, invades the andesitic greenstones of Sheep Mountain, which have been shown by their fossils to be of lower Middle Jurassic age. Accepting the correlation of this quartz-diorite mass with those of the central portion of the province, we have strong presumptive evidence that the batholithic core of the Talkeetna Mountains is later than the Middle Jurassic. From the abundance of granitic material in the coarse conglomerates of Upper Jurassic age it is inferred that the intrusion preceded the deposition of the late Jurassic strata. The granitic complex of the Talkeetna Mountains is thus contemporaneous in a general way with that great series of batholithic intrusions of late Mesozoic age which affected the entire cordilleran region from the Straits of Magellan to the Seward Peninsula of northwestern Alaska.[a]

UPPER JURASSIC ROCKS.

DISTRIBUTION AND CHARACTER.

The Upper Jurassic rocks consist largely of blue shales, locally carrying fossiliferous limestone nodules. With the shales are associated various sandstones, conglomerates, and some tuffs and arkoses. Strata of this age have a wide distribution east of Chickaloon Creek, but were not observed in the Talkeetna Mountains.

The sandstones of this series are usually ordinary yellow sandstones, which in places are conspicuous on account of the multitudes of *Aucella* contained in them, this fossil making up as much as one-half of the rock. In some places the sandstones have light-gray color. This is due to the fact that such beds are highly feldspathic and contain much finely comminuted black mica with an abundance locally of small bits of carbonaceous material.

On Billy Creek a number of interstratified tuff beds from 1 to 4 feet thick occur near the top of the series, a few hundred feet beneath the base of the Cretaceous. These tuffs differ greatly in appearance from the older Jurassic tuffs. They consist largely of fragments of glassy, striated feldspar, hornblende, and quartz with fine pyramidal terminations, set in an almost black matrix. Belemnites and lamellibranchs are embedded in these tuffs. Higher in the series arkoses, closely simulating granites in appearance, are interstratified with the sandstones. Coarser phases contain pieces of a fresh granitic rock—a hornblende-biotite-quartz monzonite. The arkose is composed largely of rounded and angular fragments of feldspar in a more or less advanced state of alteration. Quartz is notably absent. Deep-brown hornblende is somewhat common, and a few flakes of strongly pleochroic biotite are found. With these are associated fragments of hornblende andesite, highly altered, some of which were noted to contain large idiomorphic feldspar similar to those forming the bulk of the rock. The arkose thus appears to have been derived principally from the destruction of a volcanic land mass, but some of its material was possibly brought from a monzonite area, as indicated by the fragments of monzonite. Under the microscope the feldspars of these arkoses by their alteration contrast strongly with the clear, glassy feldspars of the somewhat older crystal tuffs already described.

A notable accumulation of conglomerate, stretching over several square miles, occurs in the headwater region of Susitna River, near the Nelchina River, where extensive glaciation has produced deep troughs that expose splendid sections of it. Perpendicular cirque walls reveal a thickness of not less than 1,100 feet. Occasional thin layers of sandstone show that the conglomerate is lying in horizontal attitude. It is almost exclusively composed of large well-rounded bowlders of augite andesite and quartz monzonite embedded in a tuffaceous matrix. In the upper horizons the bowlders of andesite preponderate. The bowlders of the conglomerate are ellipsoidal in shape, and many of them are as much as 2 feet in diameter. The conglomerate is lithified firmly enough to form large bowlders in the present stream wash.

Sheets of lava are occasionally intercalated in the conglomerate. The andesite bowlders are composed of rather fresh-looking rock, and thus differ in appearance from the older greenstone andesite.

The augite and feldspar are comparatively unaltered, while the hyalopilitic groundmass shows a rather strong pigmentation with iron hydrate. The quartz monzonite, which carries abundant hornblende and biotite, is also of fresh, unaltered habit. It is the same type of granitic rock that is found in the arkoses on Billy Creek.

Along Nelchina River, immediately below the junction of the north and south forks, the stream bluffs reveal an interdigitation of lenses of sandstone, shale, and coarse conglomerate. The sandstones show cross-bedding and contain remains of *Aucella*. The conglomerates are composed of well-rounded material, bowlders a foot through being common. The prevalence of granitic rocks is noteworthy. The conglomerate masses serve to emphasize the lenticular habit of the deposit. A lens 25 feet thick and 100 feet long was found completely inclosed by sandstone. Solitary waterworn bowlders have been embedded in the center of shale lenses. These various characteristics indicate a deposit formed under near-shore conditions, probably in the vicinity of the debouchure of a swift stream. In harmony with this interpretation is that fact that the *Aucella* characteristic of these rocks, though a true marine species, is often found in beds interstratified with sandstones inclosing abundant carbonaceous fragments.

FOSSILS AND AGE.

The age of these strata has been determined from the following invertebrates, identified by T. W. Stanton:

Lot 6 A. K. 156. Headwaters of Nelchina River of Copper River drainage.

Cadoceras sp. Many immature specimens.	Belemnites. Fragments.

The horizon is that of the Cadoceras zone, which forms the upper third of the Enochkin formation.

Lot 6 A. K. 185. Nelchina River.

Pleuromya.	Belemnites.
Cadoceras? Fragmentary imprint doubtfully referred to the genus.	

The horizon is probably in the upper part of the Enochkin formation.

Lot 6 A. K. 136. Billy Creek.

Aucella cf. bronni Rouiller.

The same species occurs in similar rock in the Naknek formation of Kamishak Bay.

The fossils indicate faunas of both late Middle Jurassic age and Upper Jurassic age. It is interesting to note that the Upper Jurassic rocks of this region, which are faunally allied to those of the Naknek formation on the west coast of Cook Inlet, show a certain lithologic similarity in the presence of interstratified tuffs and arkose.[a] Further-

more, an accumulation very similar to the remarkable andesite-granite conglomerate occurring on the headwaters of Susitna River is found at the base of the Naknek formation.[a]

STRATIGRAPHIC RELATIONS.

The late Jurassic rocks overlie the lower Middle Jurassic rocks unconformably. On Sheep Mountain, at the head of Matanuska River, sandstones and shales with a thin basal conglomerate were found resting on the eroded edges of the lower Middle Jurassic greenstones. The following measurements indicate the amount of this discordance: The strike of the greenstone tuffs is N. 12° W., and the dip 50° E.; the strike of the superjacent sandstones is N. 85° W., and the dip 20° N.

The thickness of the late Jurassic rocks (this term embracing the late Middle Jurassic and Upper Jurassic) is not definitely known. It certainly exceeds 2,000 feet, including a known thickness of 1,100 feet of conglomerate.

Two conglomerates have been described as occurring in the late Jurassic rocks. Of these, the andesite-quartz-monzonite conglomerate overlies a portion of the late Jurassic strata, possibly of upper Middle Jurassic age, and overlaps the greenstones of lower Middle Jurassic age.

The other conglomerate occurs interstratified with shales and sandstones, carrying *Aucella* cf. *bronni*, so that it is definitely known to be of Upper Jurassic age. The granite bowlders of this conglomerate do not, however, show the striking freshness so characteristic of the granite of the other conglomerate; hence it seems to have been derived from a granitic landmass which had been exposed for a longer period to subaerial decay. For this reason the andesite-granite conglomerate is regarded as occupying a lower position in the stratigraphic column, probably near the base of the Upper Jurassic, like its analogue on the west coast of Cook Inlet.

The unconformity between the late Jurassic and the lower Middle Jurassic rocks records an important event in the dynamic history of the area. Below this break in the stratigraphic sequence the rocks are shattered and broken and in many places are rudely schistose, and the andesites have assumed a greenstone habit and in several places have been extensively pyritized and veined by quartz and calcite seams. Above the unconformity the strata lie in comparatively undisturbed attitudes, and the intercalated andesites are fairly fresh and unaltered, differing in this respect but slightly from the Tertiary volcanics of the region.

[a] Martin, G. C., The petroleum fields of the Pacific coast of Alaska: Bull. U. S. Geol. Survey No. 250, 1905, p. 44.

LOWER CRETACEOUS ROCKS.

Rocks of Lower Cretaceous age are represented mainly by a single formation—a massively bedded limestone, 300 feet thick, which overlies the Upper Jurassic strata conformably. The limestone has a limited areal distribution and is known only from the headwaters of Billy Creek and Nelchina River, where it weathers in prominent gray cliffs encircling the hilltops. (See Pl. IV, *B*, p. 42.) The limestone is white and of very finely saccharoidal texture. On fresh fracture it emits a strong fetid odor. It is readily soluble in cold hydrochloric acid, and evolves an abundance of unpleasant hydrocarbon gases. Qualitative tests show the presence of not more than a trace of magnesia. Under the microscope the detrital organic origin of this limestone is readily apparent. It is largely composed of irregular granules of dirty-looking calcite, but with these are associated numerous prismatic sections referable to organic fragments. Rhombohedral cleavage is here and there finely developed, but the characteristic calcite twinning is notably absent. Some of the carbonate is still in the aragonite form, as is indicated by negative biaxial interference figures. Accessory constituents are limpid plagioclase, quartz with hairlike rutile, hornblende, and, more rarely, augite and apatite. The incomplete conversion of the carbonate to the stable modification, and the absence of twin lamellation in the calcite indicate the essentially static conditions in which the limestone has remained since its formation.

The age determination of this Cretaceous horizon is based on the presence of *Aucella crassicollis* Keyserling, obtained by Mendenhall[a] from a conglomeratic sandstone at the base of the limestone. This conglomerate may indicate a time break between the Lower Cretaceous rocks and the Upper Jurassic strata in conformable sequence beneath them.

TERTIARY.

EOCENE.

DISTRIBUTION.

Strata of Kenai age were found only in the basin of the Matanuska west of Hicks Creek, underlying an area of about 380 square miles. This figure represents a minimum area, as the lower Matanuska Valley is not included in the above estimate on account of the heavy gravel sheet which effectually conceals all bed rock in that part of the region. Strata of the same age are found at Tyonek, on the west side of Cook Inlet, and at various points in Susitna Valley, but they differ considerably from those of the Matanuska region in their lith-

ology and structure, in the absence of associated intrusives, and in the character of the interstratified coal seams. Rocks of Kenai age are widely distributed throughout Alaska, but usually in areas of restricted extent.

CHARACTER.

The Kenai of the Matanuska basin comprises a series of sandstones, shales, arkoses, numerous coal seams, and a large volume of conglomerate. The rocks are well indurated, and, as first noted by Mendenhall, resemble the Paleozoic coal measures of the Appalachian region. The sandstones are gray, hard, and tough, and are characterized by the presence of silvery shreds of white mica. At some localities, as in the leaf-bearing strata in the Kings Creek coal measures, the sandstones contain shale fragments. The shales show no unusual features; they are dark-bluish, fissile, and interstratified with the sandstones in very regular beds. The arkoses were noted only on the ridge north of Tsadaka Creek, abutting against the quartz-diorite mass. They are composed of feldspar, quartz, and chlorite, and locally contain granite pebbles. Certain strata are fine examples of regenerated granites.

Conglomerate is found at Castle Mountain, between Kings and Chickaloon creeks, and at Conglomerate Mountain, between Tsadaka and Eska creeks. (See Pl. III, A, p. 16.) At both places the deposit is at least 1,000 feet thick. Thin sandstone beds, not exceeding a few feet in thickness, are intercalated with the conglomerate and pinch out along the dip. The pebbles of the conglomerate are well worn and possess a well-defined shingling. Their diameter averages 4 inches and ranges up to 8 inches. Greenstone porphyries form the principal material of the conglomerate, with some quartz porphyry and very rarely some granite and vein quartz. The matrix of the pebbles is a grit.

Mendenhall[a] describes the conglomerate of Castle Mountain as follows:

> This bed is probably not less than 1,000 feet thick, 600 feet of it having been measured, and the estimated height of the cliff above me at the time of the measurement being 300 to 400 feet. The heavy conglomerate plates, which together make up the mountain, are separated by thin sandy shale sheets, which constitute but an insignificant quantity of the mass. The pebbles of the conglomerate contain a great variety of rocks, among them many igneous types. They are rounded and vary in size up to a foot in diameter. Overlying the Castle Mountain bed is a body of soft shales with a cap of red sandstone.

Heavy beds of conglomerate dipping to the north can be seen on the east side of Chickaloon Creek. They are part of a great series of

[a] Mendenhall, W. C., A reconnaissance from Resurrection Bay to the Tanana River, Alaska, in 1898: Twentieth Ann. Rept. U. S. Geol. Survey, 1898–99, pt. 7, p. 308.

sandstones, shales, and conglomerates, probably not less than 3,000 feet thick, which are overlain by basaltic porphyries at an elevation of about 4,700 feet. Canyons cut through this series of rocks have nearly vertical walls and give to the mountains a massive castellated form. (See Pl. III, *C*, p. 16.)

The coal of the Kenai of the Matanuska basin is bituminous except where modified by igneous rocks. The seams vary in thickness up to a maximum of 17 feet.

FOSSILS AND AGE.

The age of these beds has been determined from their fossil plants. These have been submitted to F. H. Knowlton, who reports as follows:

This material, consisting of six small lots, is in the main very poorly preserved and insufficient in quantity to make the report of fullest value. The various localities and the forms detected at each are as follows:

Tsadaka Creek, 25 feet above 11-foot coal seam. Age, Kenai.

Sequoia langsdorfii (Brgt.) Heer.
Ficus? grönlandica? Heer.
Magnolia inglefeldi Heer.
Fragments of other dicotyledons.

Kings Creek coal. Age, apparently Kenai.

Ficus? grönlandica Heer.
Populus arctica? Heer.
Rhamnus eridani Heer.
Viburnum sp., cf. V. nordenskiöldi Heer.

Arkose Ridge, north of Tsadaka Creek. Age, apparently Kenai.

Taxodium distichum miocenum Heer.
Taxodium tinajorum Heer.
Populus sp.?
Ficus? grönlandica? Heer.
Paliurus colombi Heer.
Fruits, cf. Leguminosites sp.

Chickaloon coal strata, Watson's camp. The age indicated is Kenai.

Sequoia langsdorfii (Brgt.) Heer.

In addition to this form Martin collected:

Taxodium distichum miocenum (Brgt.) Heer.
Salix varians Heer.
Populus arctica Heer.
Corylus macquarii (Forbes) Heer.
Juglans nigella Heer.

In addition to the plant remains, shells have been found by Martin in the thin ironstone (No. 17) in the section on page 12 of his report.[a] Stanton says:

This lot (No. 3316) consists entirely of fresh-water gasteropods, of which all but one specimen belong to a single species of *Viviparus* of a type that occurs in both the upper Cretaceous and the Tertiary. The other specimen is a more slender form, too imperfect for generic determination. These fossils are apparently an undescribed species—at least they are new to Alaska—and they do not fix the horizon more closely than is above indicated.

The evidence from the flora of these beds shows, therefore, that they belong to the Kenai, which is regarded as of upper Eocene age. The evidence from the fossil gasteropods is valuable in confirming the fresh-water origin of this thick series of strata and, in a general way, their late Cretaceous or Tertiary age.

STRATIGRAPHY.

The thickness of the Kenai in this field is not definitely known, but is over 3,000 feet, of which 1,000 feet, near the top of the series, consists of the conglomerate.

The stratigraphic relations of these Tertiary strata to the older rocks are complex. North of Tsadaka Creek, where arkoses come in contact with granitic rocks, simple erosional unconformity is suggested. West of the Little Susitna there is evidence that the position of the sandstone beds against the crystalline rocks is due to faulting. At one locality the beds overlie at a considerable angle crystalline mica shists, while a mile or two farther west a granite similar in type to the central granite mass has taken the place of the sandstone beds against the schists, and the sandstones lie farther south, against the granite. (See Pl. II, pocket.) Along the south flank of Anthracite Ridge the Kenai has been faulted against Jurassic beds.

The Kenai beds have been folded and faulted since they were laid down. The folding is at some places of a sharp, asymmetric character. On account of the presence of coal beds in the Kenai, it is thought best to present the main discussion of its structure in the description of the coal fields.

IGNEOUS PHENOMENA.

Dikes and sills of diabase are numerous in the Kenai rocks of the Matanuska region, especially in the region east of Chickaloon Creek, where they form prominent "trap ridges." The thickness of the intrusives ranges from several feet up to several hundred. Equally noticeable variations in grain, ranging from extremely fine-grained to coarse ophitic textures, are easily recognized by even the naked eye. At Anthracite Ridge one of these dikes, 75 feet thick, composed of augite and labradorite, has exerted strong contact metamorphism on the adjoining shales, baking them into a porcelanite zone 8 inches thick.

The igneous sheet overlying the shales on Kings Creek at the coal prospects differs petrographically from the prevailing diabase intrusives of the region. It carries porphyritic feldspars in a light-colored granular groundmass and has been determined microscopically to be a monzonite porphyry.

The effect of these dikes and sills on the coal is of particular interest. Wherever they cut the coal or come close to it they have converted it

to a hard, dense coke. Besides this local effect the presence of thick sills in the coal-bearing rocks appears to have raised the grade or fuel value of the coal. As will be shown under the discussion of the mineral resources, the Matanuska coal field can be divided into two districts, of which one, the western, contains low-grade bituminous coal, approaching lignites in composition, while the other, the eastern, contains high-grade bituminous coal. The difference in character of the coals can not be explained as due to difference in intensity of folding in the two districts. Igneous intrusives are absent from the western district, but are prevalent in the eastern. This association of high-grade coal with abundant intrusives is at least suggestive. Furthermore, it is probable that the anthracitic character of the coal of Anthracite Ridge is due to the presence of unusually thick and abundant dikes in rocks of Kenai age.

COMPARISON WITH ADJOINING REGIONS.

The Kenai rocks of Matanuska Valley differ markedly from those of the type section of the Kenai as exposed on Kachemak Bay, on Cook Inlet,[a] where the sandstones are soft and incoherent, the shales are plastic when wet, and the lignite seams form the resistant members. The beds on Kachemak Bay lie at low angles in undisturbed attitudes. The lignite is in general hard and glossy, but in the higher seams becomes dull and shows a more woody fiber. The lower seams have been buried under a depth of nearly 10,000 feet of strata.

If the Kenai of Matanuska Valley be compared with the Kenai exposed at Tyonek, the contrast is even greater, though Tyonek is nearer than Kachemak Bay. The Kenai at Tyonek consists "of alternating beds of clay, sand which has hardened to sandstone in huge nodules, and lignite."[b] According to Eldridge, the lignite in places hardly appears to be more than a compressed mass of carbonized wood. The strata are tilted at angles ranging from 35° to 60°. Though more sharply deformed, the coal is of lower grade than that of Kachemak Bay.

From the foregoing comparisons it appears that the Kenai of Matanuska Valley differs considerably from that of the adjacent regions in its higher degree of induration and in the superior quality of its coal seams. The conclusion can be drawn that the higher character of the Matanuska coal is due not to conditions of deeper burial or sharper folding, but to the prevalence of intrusives in the coal-bearing strata.

[a] Stone, R. W., Coal fields of the Kachemak Bay region: Bull. U. S. Geol. Survey No. 277, 1906, p. 58.

POST-EOCENE.

Overlying the older rocks unconformably is a series of nearly horizontal basalt flows, which, with their intercalated pyroclastics, attain a thickness of 1,000 feet. They have an extensive distribution throughout the Talkeetna Mountains and compose many of the peaks and summits of the region. They weather in tints of red and break down in characteristic erosional forms which lend a picturesque castellated appearance to the mountain crest lines.

The basalt flows with their interbedded tuffs and breccias present a stratified appearance. The surface upon which these volcanics were accumulated appears to have been one of gentle relief, cut across the upturned edges of the older rocks. The discordance with which the nearly horizontal basalts rest upon the underlying strata varies from 10° to 90°. About the headwaters of Chickaloon Creek this surface slopes gently northward. East of Chickaloon Creek its altitude is about 5,000 feet. It is somewhat broken by small faults, the maximum displacement noted being 50 feet. At many places the basalts rest upon a conglomerate occupying broad channels in the Lower Cretaceous limestone. The basal portion of the volcanic series here consists of 100 feet of tuffs and amygdaloid breccias, which interleave with the sandstone beds in the upper portion of the conglomerate. The conglomerate consists of rather coarse wash embedded in a gravelly matrix. The pebbles are well rounded, though poorly sorted and shingled, and cobbles up to a foot or more in diameter are common. The material is largely of volcanic origin, consisting principally of greenstone amygdaloids and eutaxitic rhyolites—extrusives of Jurassic age. Some irregular lenticular beds of sandstone are included in the conglomerate. It is 200 feet thick, and in the vicinity of Billy Creek fills a channel 1,000 feet wide, cut in the Cretaceous limestone and partly in the underlying sandstones. The arclike line of contact is finely exposed in the deep canyons tributary to Billy Creek. This conglomerate, whose fluviatile origin is thus apparent, has a very limited distribution and has been preserved only where buried under the covering of basaltic lavas. This conglomerate is later than Lower Cretaceous, but further than that its age is not known. Lithologic similarity suggests its correlation with the great mass of conglomerate occurring in the upper horizons of the Kenai in Matanuska Valley.

Locally the conglomerate is capped by an angular wash consisting of fragments of sandstone and cellular lavas, upon which rests the stratiform series of basalts and pyroclastics. At one point a breccia of unusual constitution was found near the base of the volcanic series. This breccia consists of large angular blocks of highly amygdaloidal

lava, blocks of sandstone containing *Aucella*, and a few blocks of the Cretaceous limestone characteristic of the region. A basalt block 8 by 10 feet was the largest noted. The matrix in which this angular material is embedded is composed of small, well-rounded gravel. These features are interpreted as indicating a volcanic mud flow occupying an ancient stream course.

The overlying basalts display a wide variation in habit and texture. Highly glassy types, amygdaloids, porphyries, and dolerites are variously represented. They belong to the acidic end of the basalt family and are in general non-olivinitic. The coarse-grained basalts consist of doleritic aggregates of labradorite (Ab_2An_3) and augite. Plagioclase is the dominant constituent, and is in only a few specimens poikilitically inclosed in the augite. The basalt glass from the head of Chickaloon Creek, in spite of its holohyaline aspect, is found to contain sporadic phenocrysts of plagioclase (Ab_2An_3) and augite, and some small, irregularly shaped doleritic aggregates of labradorite and augite. The glassy base is of a deep, clear, brown color, and contains numerous augite and very minute feldspar microlites, the latter usually having forked terminations.

The basalts overlie a conglomerate of post–Lower Cretaceous origin and of probably late Kenai age. Their petrography suggests that they are the effusive equivalents of the diabase dikes and sills that are so common in the Kenai of the Matanuska basin. These volcanics of the Talkeetna Mountains can be correlated with the great series of Tertiary volcanics of the upper Nizina basin, described by Schrader and Spencer, and with an important volcanic series on Nabesna River, described by Brooks. Both these series are described as comprising andesites, rhyolites, and pyroclastics, and were deposited unconformably upon a general uniform surface. The volcanics of the Talkeetna region, however, show a greater petrographic uniformity and consist exclusively of basalts and their fragmental accumulations. In this respect they show a closer resemblance to the late Tertiary lavas of the Alaska Peninsula and the Aleutian Islands, which have been described by Spurr [a] as andesitic basalts.

QUATERNARY DEPOSITS.

Extensive deposits of glacial and fluvioglacial gravels are prevalent. They extend entirely around the head of Cook Inlet, forming bluffs 50 to 100 feet high. Below Knik the gravel consists largely of subangular to rounded pebbles of hornblende-biotite granite and graywacke, with occasional muscovite-biotite granite, pyroxenite, and andesitic porphyries. Enormous angular blocks are frequently in-

cluded in this stream-worn material. Many of these have smooth, polished surfaces several feet square, much scratched and grooved. The gravel sheet at Tyonek, on the west side of Cook Inlet, with its extension up Susitna Valley as far as Chulitna River, has been recognized as divisible into an older and a younger formation. The older apparently consists of the ground moraine of an advancing ice stream,[a] and the younger includes fluvioglacial gravels deposited upon the earlier sheet during the recession of the ice. These distinctions can not be drawn in the Matanuska region. The gravel sheet in Matanuska Valley is of considerable areal extent and mantles the old valley floor, especially in the region west of Chickaloon Creek. The gravels near the mouth of Kings Creek have a maximum thickness of about 300 feet. They are greatly waterworn, and the ice-rafted bowlders so conspicuous in the vicinity of Knik Arm were not observed. However, the fact that the bluff near this exposure in Matanuska Valley is composed of shales shows that gravels were deposited on a surface of irregular relief, or possibly in channels. This is also shown by the fact that the walls of the Matanuska gorge are in places composed of bed rock, and in other places of gravel.

In its upper course Matanuska River has cut a V-shaped gorge in the deposits underlying the southwest corner of the Copper River Plateau. The gravels here consist of angular blocks, scratched and striated, inclosed in a blue, clayey-sandy matrix. The river has cut down 300 to 400 feet in this glacial till, but does not yet reveal bed rock. Farther north, in the Copper River Plateau, stream bluffs on a tributary of the Nelchina show coarse gravels of subangular to well-rounded character. With this stream-worn material are associated numerous glacially scored bowlders and occasional angular blocks up to 10 feet in size. The gravel shows considerable variety in its petrographic charcter, including numerous fragments of granite, gabbro, gneiss, schist, slate, graywacke, and vein quartz. None of these rocks are found in the drainage area of this stream, so that the fragments appear to have come from the Alaska Range.

GEOLOGIC HISTORY.

PRE-QUATERNARY.

The oldest records of the geologic history of the region are preserved by the albite and garnetiferous mica schists. They appear to represent a series of calcareous argillites and plagioclase arkoses, recrystallized under conditions of deep burial. Subsequent to their metamorphism they have been uplifted, intruded by pyroxenite dikes, and subjected to a second period of dynamic activity. The dikes

[a] Spurr, J. E., op. cit., p. 102.

were thus sheared and the component minerals of the schists were crushed. The highly crystalline character of the schists and their isolated occurrence as a single narrow belt indicate the completeness of the geologic revolution which the region has undergone since their formation. On the basis of petrographic similarity these schists are correlated with those of the Yukon-Tanana region and assigned to a pre-Silurian age.

The time interval between the deposition of these oldest rocks and that of the Susitna slate is not known, but appears to have been of considerable duration, as is indicated by the far less advanced metamorphism of the latter. The Susitna comprises fissile slates, foliated graywackes, and microcrystalline hornblende and biotite schists. The possibility, however, that they may be contemporaneous in origin with the rocks of the Sunrise " series " is not excluded.

In late Paleozoic or early Mesozoic time sedimentary conditions prevailed over the region now occupied by the Chugach Mountains, and an extensive series of shales, arkose, and ferromagnesian sandstones derived from the destruction of a quartz-diorite land mass were laid down. Volcanic activity interrupted the normal sedimentary sequence and caused the accumulation of greenstone tuffs, associated with some massive basaltic greenstones. Rhyolitic lavas were also poured out, and the accompanying fragmental material was mingled with the sediments derived from the erosion of the granitic land area. Subsequently these deposits were closely folded and metamorphosed to graywackes, slates, and, locally, to phyllitic schists.

At the beginning of Middle Jurassic time marine conditions were inaugurated. Eruptive activity was then widespread throughout the region of the Talkeetna Mountains, and andesitic greenstone breccias with intercalated amygdaloids were accumulated to a thickness of 1,000 feet. The relations of land and sea appear to have been unstable during this period, and a portion of the volcanics were doubtless extruded upon uplifted land areas. The exceedingly coarse volcanic conglomerates show the effectiveness of erosional agents, and the composition of the succeeding sandstones indicates their derivation from an andesitic land area.

Toward the close of the Middle Jurassic, quartz diorites forming the core of the Talkeetna Mountains were intruded and the Talkneeta area was uplifted. A vigorous denudation ensued, the sedimentary roof arching over the plutonic rocks was stripped off, and the granolites were uncovered.

By the beginning of the Upper Jurassic the granitic land mass thus laid bare furnished large amounts of material to the conglomerates then accumulating. Some andesitic eruptions occurred at this time.

occasional arkoses and crystal tuffs. Marine conditions persisted uninterruptedly until the close of Lower Cretaceous time. The final stages were marked by the deposition of a heavy limestone, now largely removed by erosion.

The revolution at the close of the Lower Cretaceous, as in adjacent regions, was of a gentle character. The strata involved were uplifted with but slight deformation and without folding. After this upheaval there came a long period of erosion and planation. In the Matanuska region, however, diastrophic movements produced a trough of fresh-water sedimentation in late Eocene time, and a thick series of arkoses, shales, and sandstones, with numerous coal beds were laid down. The arkoses, occurring probably at the base of the formation, indicate strong relief in the adjacent land mass at the beginning of Kenai time. During the progress of sedimentation erosion of the Talkeetna area continued and furnished the material for the Kenai deposits. At the close of the Eocene the strata were uplifted and sharply folded. Peneplanation, however, was far advanced in the Talkeetna area, especially on the flanks of the region. Broad rivers, whose beds were filled with well-rounded gravels, flowed over its surface.

This period of quiescence was finally closed, shortly after the folding of the Kenai, by a great outburst of volcanic activity. Drainage conditions were destroyed, lavas flooded the stream channels, and the fluviatile accumulations were buried to a depth of 1,000 feet under a succession of basalt flows and tuffs. While this extravasation of volcanic material occurred throughout the Talkeetna area an extensive series of diabase dikes and sills were injected into the Kenai strata of the Matanuska basin.

With the cessation of volcanic activity a new cycle of erosion was begun, initiating the modern history of the region.

GLACIATION.

PRESENT GLACIATION.

A considerable number of glaciers still remain in the higher portions of the Talkeetna Mountains (see Pl. I, pocket), but all appear to be rapidly receding. Chickaloon Creek and many of its tributaries are fed by glaciers at their sources. Of these Chickaloon Glacier, at the head of the stream of that name, is the largest, having a length of 9 miles and a width of 2,000 feet at its terminal end. In general, however, the ice streams do not descend far from the irregular névé fields occupying the higher recesses of the range. Several such masses lie on the Talkeetna side of the Chickaloon-Talkeetna divide and discharge their waters into that stream.

Evidence is plentiful that the glaciers are rapidly retreating. Lateral morainic material perched 150 feet above the sides of Chickaloon Glacier indicates a recent dwindling in the size of that glacier. Some of the small glaciers no longer join the trunk ice stream, but have become independent glaciers, whose troughs are elevated above the surface of the main glacier. (See Pl. IV, *D*, p. 42.) After the recession of the ice a growth of moss encroaches on the canyon walls which confine the glaciers. Where recent retreat has taken place a considerable interval of bare wall intervenes between the present position of the glacier and its former position, as indicated by the moss-grown profiles on the rock walls.

In addition to the glaciers at the head of Chickaloon Creek, a small glacier occurs at the head of Kings Creek and another at the head of Little Susitna River. Of the glaciers on the south side of Matanuska Valley, Mendenhall says:[a]

> Along the middle course of the river several small ice streams are to be seen at the heads of the canyons which furrow the southern valley wall, but the largest glacier of the valley is the Matanuska Glacier with a frontage of 3 miles along the river. The course of this stream can be traced from the top of Glacier Point for 25 or 30 miles to the southeast. Its source here is probably in the névé which follows the crest of the Chugach Range to the east, and gives rise to the various glaciers which flow down to Prince William Sound on the the south and to the Tazlina and Klutina rivers on the north. While its east front is buried under moraine which supports a considerable spruce forest, the west front is clear of débris to the edge. A well-marked medial moraine divides the main stream into two parts, representing branches which unite near the source. Local conditions of precipitation controlling the rate of flow of these tributaries seem to be slightly different, so that the western branch is somewhat more active than the eastern one.
>
> Within 10 miles of its source the Matanuska River receives the waters from another glacier, smaller than that just described and more actively retreating. Its front has now receded several miles from the river and the draining stream flows through a gravel-filled valley with a very high gradient.

At the head of Knik River lies the Knik Glacier, whose width is 2¾ miles. It is not much smaller than the Matanuska Glacier. Knik Glacier forks a few miles back from its terminal end, one fork extending eastward about 20 or 25 miles, probably to the same ice field that is drained by the Matanuska Glacier, the other fork extending southwestward. The latter fork again divides. In its western prong is a large lake 5 miles long and 1½ miles wide, whose waters are apparently impounded by the extension of the lateral moraine of the eastern prong across the mouth of the trough of the western prong. Bergs were seen floating in the lake. According to local report the breaking of this morainal dam was the cause of the disastrous flood which swept down Knik River some years ago.

The front of Knik Glacier rests upon a gravel plain covered with well-rounded stream wash. Irregular heaps and ridges of this gravel 12 feet high lie in front of the glacier for 400 feet. Pits and kettle holes 6 to 8 feet deep are common. On the western side of the glacier an accumulation of large angular blocks of graywacke and slate, constituting the dump of the superglacial material, forms a narrow peripheral moraine nearly a mile long. In profile as exposed on its extreme western edge the glacier can be seen resting upon bed rock, which here begins to rise rather steeply from under the gravel covering of Knik Valley. The recent history of the Knik Glacier, as interpreted from the above features, shows a recession from a temporary advance over the gravel deposit of the valley.

PAST GLACIATION.

The existing glaciers are the shrunken remnants of a system of ice streams which had a vastly greater extent in the recent past. At the time of its maximum expansion this mighty system included the enormous piedmont glacier [a] of the Copper River basin, and the trunk glaciers occupying Matanuska, Knik, and Susitna valleys, which were probably confluent at the head of Cook Inlet.

During the occupancy of the lowlands by these great ice streams, the Talkeetna Mountains were subjected to severe alpine glaciation, to which the ruggedness of the present topography is largely due. (See Pl. IV, *C*, p. 42.) In higher portions of the range the glacial erosion has often proceeded to its most destructive lengths. Knife-edged divides are numerous throughout the region, and instances of the obliteration of divides and the coalescence of opposing cirques are frequent. All the existing glaciers occupy the heads of U-shaped troughs. The finest example of such troughs is that along the upper course of Talkeetna River, which is perfectly straight for 18 miles.

The former presence of a great glacier once filling Matanuska Valley is indicated by abundant evidence. At the head of the valley the morainal ridges of the Copper River basin curve round into Matanuska Valley. An isolated hill about 500 feet high, projecting above the lake-covered flat at the head of the valley, shows an abrupt stoss side toward the Copper River basin, and a long, smooth lee slope toward Matanuska Valley. Along the upper course of the valley on the flank of Sheep Mountain glacial gravels of various exotic types are found at an elevation 1,500 feet above the valley floor. These facts indicate that the ice of the southwestern portion of the Copper River basin drained into Matanuska Valley in a stream not less than 1,500 feet thick. Passing farther westward we find that

[a] Mendenhall, W. C., Geology of the central Copper River region, Alaska; Prof. Paper U. S. Geol. Survey No. 41, 1905, p. 72.

the summit of the irruptive boss on the west side of Kings Creek is smoothed and glacially scored; and that between Eska and Granite creeks on the flanks of the valley a heavy lateral moraine, consisting of large angular bowlders of various granitic rocks, rests 2,400 feet above the river. Near tide water the buttes in the middle of the gravel plain of Matanuska Valley are striated and strongly fluted on their summit, 700 feet high.

This evidence is supplemented by that furnished by the physiography. A marked feature of Matanuska Valley, as seen from Knik Arm, is the appearance of triangular faceting cut on the left wall of the valley. This feature is due to the truncation of the projecting ridges between the streams tributary to the main valley, whereby the spurs have been replaced by steeply sloping planes with triangular outlines. This feature, it may be mentioned, has been developed in almost geometric perfection in the region of Turnagain Arm on Kenai Peninsula, but nowhere on the same large scale as in lower Matanuska Valley.

The evidence is equally strong that Knik Valley was formerly occupied by a large ice stream. Along its middle course glaciated surfaces are found 1,500 feet above the gravel floor of the valley. A minimum estimate is thus fixed for the thickness of the glacier.

On the Susitna side of the Talkeetna Mountains evidence of glacial action even more pronounced than that on the eastern side visible on every hand. The mountains are bordered by a more or less irregular bench several miles wide, approximating 2,500 feet in elevation. Its surface is noticeably glaciated, rounded hillocks, smoothed outcrops, glacial débris, and numerous undrained lakes characterize its topography. Streams entering the Susitna pass the mountain borders through beautiful glacial U-shaped valleys, their smaller tributaries entering these valleys through sharply incised, vertical-walled canyons, an evidence of recent cutting. The rise from this broad bench to the mountains eastward, when compared with the gentle slope of the bench to the Susitna, is steep.

It is probable that an ice sheet that occupied the entire Susitna Valley and was fed from the surrounding mountains once moved southward to Cook Inlet. The tributaries from the Talkeetna Mountains to Susitna River all present clear evidence of having been occupied by ice streams. Glacial U-shaped valleys and erratics occupying positions no longer within the reach of ice movements are traces of the mantle that covered much at least of the present drainage system.

It is probable that after the recession of the huge ice mass occu-

cial U-shapes on the western slope of the Talkeetna Mountains are considerably lower than the broad ice-sculptured bench 2,500 feet high.

PHYSIOGRAPHIC DEVELOPMENT.

The region under discussion falls naturally into three physiographic provinces: Matanuska Valley, Talkeetna Mountains, and Copper River basin.

MATANUSKA VALLEY.

According to Mendenhall, Matanuska Valley is probably due to simple erosion somewhat modified by ice action.[a] In a subsequent report he has suggested that the southern edge of the Copper River basin is probably a fault or a sharp flexure.[b] The westward prolongation of this fault would coincide with the southern wall of Matanuska Valley. Martin[c] remarks that the Matanuska Valley suggests a "graben" or sunken area within parallel faults, but notes that this appearance may be due to the more resistant character of the rocks bounding the valley. The exact mode of origin of Matanuska Valley can not yet be regarded as established. It is beyond question true, however, that if of tectonic origin the valley has subsequently been largely modified by stream erosion. In proof of this is the fact that it possesses the form of a normal stream-wrought valley, narrow in its upper course and broad in its lower. From a width of 1 mile at the Copper River basin Matanuska Valley widens to 20 miles near Cook Inlet. Knik Arm appears to represent a slight drowning of lower Matanuska Valley, from which the region is at present recovering.

There is some evidence available that recent movement has taken place along the northern side of the valley. Along its upper course Sheep Mountain presents a steep, rugged front facing the river. At the base of the ridge the strata are shattered and an extensive disruption of the injected dikes has taken place. Extensive alluvial breccia cones spread out into the valley for a mile or more from the mouths of the ravines. The steep slope of these cones (6° to 10°) and their symmetrical development make them noteworthy features of the topography. The formation of such detrital cones is held by workers in the Western States to be due to a sudden break in the stream profile at the point of deposition, usually by recent faulting, rather than to arid conditions, which was first invoked in their explanation.

The present Matanuska River occupies a wide trench sunk into an older, broader valley averaging 5 miles or more in width. The

[a] Op. cit., p. 239.
[b] Mendenhall, W. C., Geology of the central Copper River region, Alaska: Prof. Paper U. S. Geol. Survey No. 41, 1905, p. 87.
[c] Op. cit., p. 17.

trenching of the old valley appears to have begun in preglacial time, but was interrupted by the glacial advance. The ice occupancy effected some erosion, notably on the south side of Knik Arm, but left pronounced irregularities of relief in the floor of the valley, such as Glacier Point and the bed-rock bosses at the mouth of the Matanuska. On the recession of the ice a heavy mantle of gravel was laid down. A succession of slight uplifts followed, as expressed in the finely terraced character of the affluents of the Matanuska, and the streams began to remove the gravels from their channels and to deepen their trenches. The excavation of the gravels has been incomplete along the Matanuska, where long stretches of stream bluffs consist of gravel banks. These features suggest that either the preglacial drainage had begun to swing in its course or that glacial erosion has modified the valley floor, and that the irregular bed-rock relief thus produced has been obliterated by the gravel deposits subsequently laid down. The former supposition is regarded as the more probable, and the great bend of the Matanuska appears to be an incised meander inherited from the preglacial drainage. The present overloaded condition of the Matanuska is due to the vigorous trenching of the deep glacial gravels at its headwaters.

TALKEETNA MOUNTAINS.

The internal structure of the Talkeetna Mountains suggests that they belong to a province geologically distinct from that of the Chugach Mountains. The latter, as shown by Schrader, Spencer, and others, represent a belt of intense crustal shortening. In the Talkeetna Mountains, however, the strata are comparatively undisturbed. The younger rocks especially have been but gently affected by orogenic movements. The faulting is normal, implying a stretching of the earth's crust.

The early Tertiary history of the Talkeetna area has already been sketched. It was shown that, coeval with the deposition of the Kenai, a peneplain of considerable perfection was developed over the region of the Talkeetna Mountains. The older age limit of this planation is fixed by the fact that the surface is in part cut across a Lower Cretaceous limestone. The later limit is determined by the fact that the fluviatile conglomerates, resting upon the peneplain, appear to represent the similar conglomerates occurring at the top of Kenai or in the Matanuska basin. According to this view the conglomerates at the top of the Kenai represent the period at the close of lacustrine conditions, and the conglomerates in the Talkeetna area are the fluviatile accumulations of the rivers which transported the

mass doubtless stood at a lower level relative to the sea. Some time after the flooding of the region with basaltic lavas, a domal uplift of the area was inaugurated, probably accompanied by faulting along the north side of Matanuska Valley. North of Talkeetna River the old surface, buried beneath the basalts, can be seen dipping gently northward. Eastward, from an altitude of about 5,200 feet, it appears to merge gradually into the flats of the Copper River basin at 3,000 feet. This arching demanded a stretching of the earth's crust, and as a result the numerous small dislocations of the basement upon which the volcanics rest were produced. The domal character of the uplift is expressed in the general radial drainage, the main streams flowing from the center of the region. The shortness of the streams tributary to the Matanuska, in comparison with those flowing to the Susitna, appears to indicate an obsequent origin for this portion of the drainage.

Along the western flank of the Talkeetna Mountains a broad bench several miles wide parallels Susitna River at an altitude of about 2,500 feet. The surface of this bench has been considerably modified by glacial erosion, and a mammillated topography has been impressed upon it but does not obscure its terrace character. Tributaries of the Susitna have cut normal stream valleys across it, many displaying marked evidence of a position at base-level in their recent history by the intricate and beautiful systems of oxbows developed at an elevation of about 500 feet. Below these stretches of oxbows the streams enter sharply incised canyons, whose small amount of recession indicates the comparative recency of the latest uplift of the region. It appears probable that the stage of the oxbows represents a halt in the greater uplift which has given the broad bench its present elevated position.

COPPER RIVER BASIN.

The Copper River basin has been discussed in some detail by Mendenhall, who advanced the hypothesis, as one most consistent with the facts, that it is of tectonic origin, representing a depressed area between the Alaska Range on the north and the Chugach Range on the south.[a] The relation of the Talkeetna Mountains to the basin was not discussed. Certain facts in the region under consideration appear to favor Mendenhall's hypothesis.

On the western edge of the basin, near the head of Matanuska River, the hills rise abruptly from the plateau. Their summits form a gently rolling surface at an average altitude of 5,000 feet and evidently constitute a remnant of the ancient peneplain upon which,

[a] Prof. Paper U. S. Geol. Survey No. 41, 1905, p. 88.

farther west, at an altitude of 5,200 feet, were found the river channels buried beneath lava. These features strongly suggest faulting along the base of the hills, the old plain being broken off along this line and its eastward extension buried beneath the glacial débris of the Copper River basin. Farther northwest, however, the Talkeetna Mountains gradually merge into the lowlands of the Copper River basin—a fact indicating, perhaps, that faulting gives way in this direction to warping of the crust.

MINERAL RESOURCES.

COAL.

AREAL DISTRIBUTION.

Coal outcrops have been examined on Tsadaka, Eska, Kings and its tributaries, Chickaloon, Coal, Hicks, and Billy creeks, and the north fork of Nelchina River; along the southern flank of Anthracite Ridge; and in the banks of Matanuska River, about 3 miles above the mouth of Chickaloon Creek. In addition, coal float has been found close to its source on Glacier Creek, and as far north as the south fork of the Tyonek. Coal has also been reported from Little Susitna River, Willow Creek, the Kashwitna, and the Chunilna, and from a creek on the south side of the Matanuska, 9 miles above Coal Creek.

The field work of 1906 extended the known area of Tertiary coal-bearing rocks approximately 18 miles up Chickaloon Creek, though no outcrops of coal were observed. The discovery of an area of Mesozoic rocks in Matanuska Valley extends the field also in that direction, as is indicated on the map, though all the coal that outcrops north of Anthracite Ridge between Hicks and Boulder creeks is lignitic.

So far as known the Tertiary coal-bearing rocks in the Matanuska cover an area of about 380 square miles. The known coal-bearing rocks of Mesozoic age in the upper Matanuska basin cover approximately 500 square miles. The areal extent of the divisions is shown on the map (Pl. II, pocket), and the character of the beds has been described on page 25. The mapping of the coal-bearing rocks must in no sense be taken to mean that areas so mapped are underlain by workable coal. So far as known the actual area underlain by coal from Moose Creek to Hicks Creek, inclusive, approximates 70 square miles. Localities where coal of commercial importance has been observed will be described.

The area of coal-bearing rocks can be subdivided from an economic standpoint into three fields:

(1) The Matanuska field, comprising the valley floor of Matanuska

series of Tertiary strata containing bituminous coals of various grades.

(2) The Anthracite Ridge field, forming a limited area along the southern flank of the Talkeetna Mountains between Boulder and Hicks creeks. The coal here is an anthracite, the age of which has not yet been determined with certainty.

(3) The northeastern field, comprising the area drained by the headwaters of Matanuska River and the adjacent areas in the Copper and Susitna drainages. The coal, which is of Jurassic age, is generally lignitic, but locally is semianthracitic.

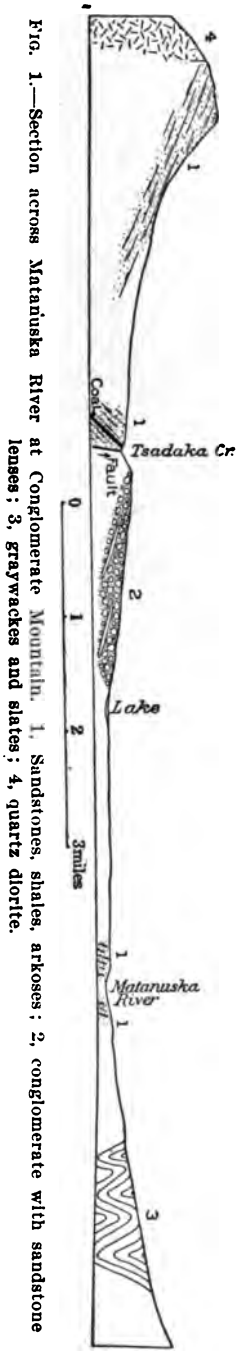

FIG. 1.—Section across Matanuska River at Conglomerate Mountain. 1, Sandstones, shales, arkoses; 2, conglomerate with sandstone lenses; 3, graywackes and slates; 4, quartz diorite.

MATANUSKA FIELD.

EXTENT.

The area of Tertiary coal-bearing rocks found in the Matanuska basin is approximately 380 square miles, of which 70 square miles are actually underlain by coal, according to a most conservative estimate.

STRUCTURE.

The coal-bearing rocks have a strike in general parallel to the easterly trend of Matanuska Valley. The dips are variable, with a tendency toward steep angles. East of Tsadaka Creek, where the gorge of Matanuska River exposes a voluminous succession of sandstones and shales, the strata stand on edge. The folding is open, although locally, as in the anticline on Chickaloon Creek, the deformation may be quite sharp. The strata are affected by a large number of faults of small throw. One extensive fault involving a probable displacement of several thousand feet is indicated, mainly on physiographic evidence. The range of hills rising within Matanuska Valley and extending in an east-west direction from Kings to Tsadaka Creek represents an upheaved fault block. Between Tsadaka and Eska creeks this range consists of a great mass of conglomerate, 1,000 feet thick, with a gentle dip slope toward Matanuska River and a steep scarp toward the north (see fig. 1). During the

uplifting of this block, differential movement has taken place within it, producing a series of nearly parallel faults, and the southern slope of the range descends to the level of the valley by a succession of steplike scarps. On the very brink of the northward-facing scarp of the range the differential movement has produced small fault troughs, within which lie small inclosed lakelets. (See Pl. IV, *A*.) These features are shown with great clearness on the topographic map. The recognition of this fault is of some economic importance, in that it indicates the limit of the available coal.

DESCRIPTION OF THE COAL.

The bituminous coal field of lower Matanuska Valley may be divided into two districts, the eastern and the western. Under the first may be included the coals of Kings and Chickaloon creeks and those on both sides of Matanuska River in the vicinity of Chickaloon Creek; under the second, the coals of Tsadaka and Eska creeks.

EASTERN DISTRICT.

Martin[a] reports in regard to the eastern district:

> The coal in this area all possesses about the same physical characteristics, and, as will be seen by the analyses, the variation in chemical composition is not great and supports this grouping. It has the ordinary properties of most bituminous coal. It is soft and fragile, but often without any well-defined planes of fracture. It burns with a short flame and a small amount of smoke and possesses distinct coking properties. The seams generally contain a large amount of impurities, both in the form of thick partings of shale and as thin bands of shale and bone. Many of these can be separated in mining. The coal is soft and friable, and much of it will not stand severe handling without crushing. Pyrite is present both as balls and as scales, but not abundant. The friable character of the coal is not a great detriment when it is considered that much of it will probably have to be crushed and washed (especially for coke making), and that the coal when used for steam or heating will cake as soon as put in the furnace, so that there will consequently be little or no loss through the grates.

[a] Op. cit., p. 19.

A. LAKE IN FAULT BLOCK. CONGLOMERATE MOUNTAIN.

B. LIMESTONE AT HEADWATERS OF BILLY CREEK (NOTE FAULT).

C. RUGGED TOPOGRAPHY DUE TO ALPINE GLACIATION.

D. TRIBUTARY RECEDING FROM TRUNK GLACIER.

The following sections were obtained by Martin on the south side of the Matanuska near the mouth of Chickaloon Creek:

Section of coal beds on south bank of Matanuska River, 3 miles above the mouth of Chickaloon Creek.

	Ft.	in.	Ft.	in.
Gray shale			10	
Coal		6		
Shale		1	7	7
Coal [a]	7			
Gray shale with ironstone bands			42	
Coal		6		
Shale	1	6	7	
Coal	5			
Gray shale			7	
Coal		6		6
Shale			4	6
Coal		8		
Shale		1	6	5
Coal	5	8		
Soft gray shale			20	
Concealed to river.				
Strike N. 36° E. (magnetic), dip 44° SE.				

Section on north bank of Coal Creek; elevation, 1,010 feet.

	Ft.	in.	Ft.	in.
Soft dark shale			10	
Coal [b]	2	2		
Parting.				
Coal [b]	1	5	5	
Sandstone		2–6		
Coal [b]	1			
Soft shale			16+	
Strike N. 64° E., dip 70° SE.				

Section on north bank of Coal Creek, 500 feet upstream from section given above.

	Ft.	in.	Ft.	in.
Intrusive sheet and coke			12	
Coke	5		5	
Intrusive sheet with coke			14	
Shale			10	
Coal [c]	6	3		
Shale		2		
Coal [c]		6	8	7
Shale		11		
Coal		9		
Soft shale floor.				
Strike and dip as above.				

A section on Coal Creek, one-half mile above the lower coal, shows coal about 6 feet thick, with a strike N. 60° E. and a dip of 55° NW.

[a] Included in samples Nos. 7 and 8; see analyses, p. 60.
[b] Included in samples Nos. 9 and 10; see analyses, pp. 60, 62.
[c] Included in samples Nos. 11 and 12; see analyses, p. 60.

The following sections were measured on Chickaloon Creek:

Condensed section of coal-bearing rocks on Chickaloon Creek.

		Ft.
1.	Shale with many thin iron-ore bands	180
2.	Coal with some bone and shale (see below)	5
3.	Shale	4
4.	Coal with some shale (see below)	4
5.	Shale and sandstone (horse)	10
6.	Coal with some shale (see below)	8
7.	Shale and sandstone	37
8.	Coal, impure and somewhat coked	5
9.	Shale and sandstone	20
10.	Diabase sill with local occurrence of natural coke on top	11
11.	Coal and coke with impurities in an irregular distorted mass	15
12.	Concealed	not over 100
13.	Shale	10
14.	Coal with some shale	9
15.	Shale	9
16.	Coal with some shale	2
17.	Shale and sandstone	88
18.	Coal with bone and shale	10
19.	Shale	41
20.	Coal (varies from 1 ft. 8 in. to 3 ft. 7 in.)	2
21.	Shale with some sandstone, iron ore, and volcanic beds, and a few thin beds of coal and coke	180

Section at bend of Chickaloon Creek, one-half mile above Watson's camp, showing details of beds 2 to 6 in condensed section.

	Ft.	in.	Ft.
Black shale			1
Coal		7	
Coal, bony		4	
Shale		5	
Coal		6	5
Shale, black	1	6	
Coal	2		
Concealed			1
Shale			3
Coal		7	
Shale		8	
Coal		10	4
Shale		6	
Coal	2	3	
Shale and sandstone (horse)			10
Coal		6	
Shale, with coal stringers	1		
Coal		10	
Shale		4	
Coal		2	8
Shale	1		
Coal		6	

In addition to the sections measured by Martin on Chickaloon Creek the following measurements were made in the tunnels opened at Watson's camp (fig. 2).

The sections are from the face outward; the thicknesses are recalculated for dip. The change in direction of dip which is evident between tunnel D and those farther east (C, 3, 2; B, and A) may possibly be explained by the presence of an anticlinal axis that passes westward from the anticlinal fold at tunnel No. 1, or possibly by irregularities in beds representing the south side of such an anticline.

It has been difficult to correlate the several beds within these tunnels because of striking irregularities in their thickness. The bed 16 feet 7 inches thick in tunnel A is undoubtedly the same as the bed 17 feet 3 inches thick in tunnel B.

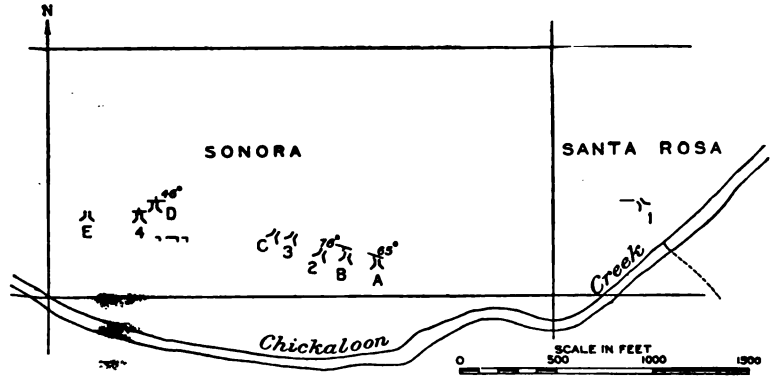

Fig. 2.—Sketch showing location of Chickaloon tunnels.

A drift from tunnel B has been run to tunnel 2, which correlates the outermost seams of tunnel B with those at the face in tunnel 2.

The apparent lack of continuity in a number of the smaller seams in these tunnels may be explained either by local pinching out or by faults of small throw. The rocks in the near vicinity are closely folded, and faulting, with the added difficulties of mining which it incurs, should be expected.

Section in tunnel A, Chickaloon Creek.

	Ft.	in.	Ft.	in.
Coal	1	2		
Bone and coal		9	16	7
Coal	14	8		
Shale	12			
Coal		8		
Bone and shale		5	1	9
Coal		8		
Shale	12			
Coal	3			
Shale and sandstone	77			

Strike N. 70° W., dip 65°.

Section in tunnel B, Chickaloon Creek.

	Ft.	in.	Ft.	in.
Shale	7	8		
Coal	1	3		
Bone		4	2	1
Coal		6		
Sandstone	5	9		
Coal	1	9		
Bone	1			
Coal	9	8	17	3
Streak of bone				
Coal	4	10		
Sandstone	10	8		
Shaly coal		7		
Sandstone	1	6		
Bony coal	2	5		
Sandstone	1	1		
Coal, with streaks of bone	4			
Sandstone	13	1		
Coal	2	4		
Sandstone	9	5		
Crusted shaly coal	3			
Coal	3	6	7	6
Bone	1			
Shale	6			
Coal		10		
Bone		3	5	1
Coal	4			
Sheared shale	2			
Coal	3		3	7
Bone		7		
Sandstone and shale	65			

Strike N. 75° W., dip 76° S.

Section in tunnel No. 2, Chickaloon Creek.

	Ft.	in.	Ft.	in.
Coal		9		
Bone		5		
Coal	3	6		
Bony coal		10		
Coal		8		
Bony coal		8	12	11
Shale	1	6		
Coal and bone mixed	1			
Coal	1	7		
Bone		6		
Coal	1	6		
Shale	18			
Coal and bone		7		
Coal	3	4		
Shale and sandstone	30			

Section in tunnel No. 3, Chickaloon Creek.

	Ft.	in.	Ft.	in.
Coal	2	2		
Bone		5		
Coal	1	1	7	10
Shale	2			
Coal	2	2		
Shale	16			
Coal	1	10		
Bony coal	2	5	6	2
Coal	1	11		
Sandstone and shale	45			
Coal	2			
Bone		2		
Coal	1		4	1
Shale		1		
Coal		10		
Sandstone and shale	20			

Section in tunnel C, Chickaloon Creek.

Coal	2	4	
Shale and coal	2		
Sandstone and shale	41		

Section in tunnel D, Chickaloon Creek.

	Ft.	in.
Crushed coal	2	6
Sandstone and shale	49	7
Crushed coal	2	6
Sandstone and shale	11	

Dip 46° N.

Section in tunnel E, Chickaloon Creek.

	Ft.	in.	Ft.	in.
Coal	1	5		
Bone		6		
Coal	1	10		
Bone		11	10	11
Coal	2	7		
Crushed shale and coal	2	10		
Coal		10		
Sandstone and shale	18			

On Kings Creek, 7½ miles above its junction with the Matanuska, coal seams are cut by the creek. They were measured on both sides by Martin and the writers.

Section in tunnel on east bank of Kings Creek, 100 yards above upper bridg

	Ft.	in.	Ft.
Dense, impure coke	5		5
Bony shale			1
Coal	1		
Shale		1	
Coal		8	
Bone		1	6
Coal	1	2	
Bony coal		9	
Coal	2	6	
Hard shale.			

Section in open cut, 10 feet south of last opening.

	Ft.
Coal (no cover)	3
Shale	
Coal	1
Soft impure coal	
Coal	1
Shale	
Coal	
Shale and coal	
Coal	2
Hard shale floor.	
	9

Section on Kings Creek at the upper bridge, west side.

	Ft.	in.	Ft.
Bone and coal		7	2
Clean coal	1	7	
Shale	4	6	
Concealed short distance.			
Crushed coal with lenses of bone	5	7	
Shale	1	7	
Sandy shale	4		
Coal	2	10	
Bone		4	
Coal	2	10	
Coal and bone		8	10
Coal		11	
Bone		½	
Coal	2	5	

Strike N. 42° W. (magnetic), dip 42° NE.

Except the upper 2 feet 2 inches of coal, the section corresponds t
that of Martin.

A short distance upstream from the exposure on the east side th
sandstone beds are considerably disturbed. Folding or faulting, o
possibly both, have occurred.

The writers were not able to visit the coal on Young Creek. Martin says:

The coal on Young Creek is of intermediate character between that on Kings and Chickaloon creeks and south of the Matanuska and that in the west end of the field on Eska and Tsadaka creeks. It is reported that one or more seams of workable thickness have been found, but the following is all that was seen by the writer:

Section on west bank of Young Creek; elevation, 1,585 feet.

	Ft.	in.	Ft.	in.
Shale			10	
Sandstone			2	
Shale			4	
Sandstone			1	
Shale			4	
Coal [a]	1		1	
Shale			15	
Coal		6		6
Shale with sandstone bands			15	
Sandstone			1	
Shale			10	

Strike N. 15° E. (magnetic), dip 20° NW.

WESTERN DISTRICT.

The coal of what has been termed the western district—that occurring on Tsadaka and Eska creeks—is a bituminous coal of low grade. Its physical properties are much the same as those of the coals farther east. Most of it is bright and hard, though dull, shaly bands are numerous. On Eska Creek the following sections were measured:

Section on west bank of Eska Creek; elevation, 875 feet.

	Ft.	in.	Ft.	in
Shale and sandstone			10	
Coal [b]	1	3		
Shale		1		
Coal [b]	1	4		
Shale		1		
Coal, bony	1	3	7	8½
Shale		½		
Coal, bony	1	1		
Shale		1		
Coal with some shale and bone	2	6		
Shale				6
Coaly shale			2	

Strike N. 30° E. (magnetic), dip 44° NW.

[a] Included in sample No. 17; see analysis, p. 60.
[b] Included in sample No. 18; see analyses, pp. 60, 62.

Section on west bank of Eska Creek, about 300 feet farther up.

	Ft. in
Shale roof.	
Coal[a]	3
Shale	
Coal	
Shale	
Coal	
Shale	
Coal	
Shale	
Coal	
Soft black shale.	
Dip NW.	7

Section on Eska Creek, about 600 feet above lower section.

	Ft. in
Shale and sandstone.	
Coal	2
Dirty coal	1+
Dip 32° SE.	

Section in bluff on west bank of Eska Creek; elevation, 1,030 feet.

	Ft.	in.	Ft.
Sandstone			15
Coal	2		2
Shale			15
Coal	3		3
Shale			3
Coal	3		3
Concretionary shale			6
Black shale			5
Coaly shale			1
Coal, shaly		6	11
Coal		9	
Shale with some coal		8	
Coal	2	1	
Shale	1		
Coal	1	4	
Shale	1		
Coal	1		
Shale	2		
Coal	1		
Shale			12
Coal	1		4
Shale	2		
Coal	1		
Shale			10

Strike N. 40° W. (magnetic), dip 40° SW.

A fault cuts the bluff in which this section was measured. Th coal was measured above it. Below it the strike is northeast and di

On Tsadaka Creek a section near the upper end of the gorge at an elevation of 700 feet showed the following:

Section of coal near upper end of Tsadaka Creek gorge; elevation, 700 feet.

	Ft.	in.	Ft.	in.
Fissile black shale			1	
Carbonaceous shale				6
Sandstone				2
Coal		2		
Sandstone		1		
Bright coal	2	4		
Shale		6		
Bright coal	2		8	1
Dull coal	1	2		
Shale		4		
Dull coal	1	6		
Shale			1	
Massive sandstone			6	

Strike N. 20° W. (magnetic), dip 24° NE.

About 100 yards below the upper cabin the following section was exposed:

Section 100 yards below upper cabin, Tsadaka Creek.

	Ft.	in.	Ft.	in.
Coal	4			
Dirt		2		
Coal	1			
Dirt		1	11	2
Coal	1	6		
Parting				
Coal	4	5		

Shale floor.

The seam strikes N. 80° E. and dips 45° N. A strike fault dipping 80° S. can be seen crossing the bed, with a throw of about 5 feet. An eighth of a mile downstream from this exposure a sharp syncline crosses the creek, with axis striking about S. 70° E. and pitching steeply to the west.

A short distance farther downstream coal beds are exposed, striking N. 70° E. and dipping 60° N. At this locality the following section was measured:

Section one-eighth of a mile below upper cabin, Tsadaka Creek.

Shale and sandstone roof:	Ft.	in.	Ft.	in.
Dirty coal		7		7
Shale	3		3	
Sandstone nodules	1		1	
Bone and coal	1	3		
Bone		1	1	7
Coal		3		

	Ft.	in.	Ft.	in.
Bone and shale	3		3	
Coal	1	3		
Bone		1	1	9
Coal		5		
Shale	1		1	
Shale and sandstone	3	6	3	6
Coal		8		8
Shale	1		1	
Shale and sandstone	3	4	3	4
Coal		8		8
Shale and bone	1	6		
Shale	25±		25±	
Clear coal	3	6	3	6
Slide:				
Coal		8		8

Up Tsadaka Creek and along the ridge on its southern side sandstones may be observed dipping southeast, which is a direction opposite to that of the beds just described. Still farther east conglomerate beds dip to the southwest. These conglomerate beds seem to owe their elevated position to a series of block faults passing in a general northeast and southwest direction, and the Tsadaka Creek coal is probably cut off to the east. It seems probable that Eska Creek coal is separated by these faults from that of Tsadaka Creek.

It will be noted that faulting or folding is present at nearly all the localities above described. Such conditions will make the cost of mining higher than it would be if the beds were less disturbed.

ANTHRACITE RIDGE FIELD.

GEOLOGY.

The most promising exposures of anthracite examined during the season were seen along the southern flank of Anthracite Ridge, between Boulder and Hicks creeks. The geology of this locality is somewhat complex. The western extremity of the ridge is formed by a large mass of augite dacite and brown porphyry. This latter appears to be intrusive into a series of interstratified sandstones and shales striking N. 35° E. (magnetic) and dipping vertically. Associated with them is a large accumulation of andesitic amygdaloids and pyroclastics, of somewhat chloritized aspect. At the base of the ridge along the trail, however, cross-bedded gritty sandstones, apparently belonging to the Kenai formation, are exposed, striking N. 75° E. and dipping 15° S. Some sills of coarse ophitic diabase, 50 feet and more in thickness, are intercalated between them. These observations indicate that the western extremity of the ridge is marked by a line of faulting along its base. And as marine fossils

assumed by Martin that an eastward extension of this fault determines the boundary between the Kenai and the Mesozoic rocks. Martin obtained a few fragmentary fossils, partly from the summit and partly from an elevation of 3,450 feet on the southern flank of the ridge. These indicated a horizon as low as the Middle Jurassic or as high as Upper Cretaceous. From the northern flank the writer obtained a single form, concerning which Stanton reports: "*Inoceramus* cf. *lucifer* Eichwald. This species occurs in the lowest part of the Enochkin formation (Middle Jurassic) at Snug Harbor." It is thus plain from the faunal and lithologic evidence that lower Middle Jurassic rocks are present on Anthracite Ridge, especially in the western end as approached from the Boulder Creek side.

Farther east, along the numerous small creeks which rise on Anthracite Ridge, it is found that the dip of the strata, which is nearly horizontal in the floor of the valley, gradually steepens as the flank of the ridge is approached. The beds become folded into anticlines and synclines, which are more closely crowded together toward the summit of the ridge. Locally the limbs of the anticlines have been doubled together. Thick sills of coarsely crystalline diabase are prevalent, especially along the middle portion of the ridge, and heavy dikes, attaining a maximum thickness of 500 feet, cut across the strata. Their energetic contact action in baking the adjoining shales has already been referred to. Moreover, their presence seems to be favorable to the anthracitic character of the coal. On a creek a few miles east of Purinton Creek, at an altitude of 3,100 feet, the stream banks show a 50-foot sill of diabase, about 10 feet stratigraphically above a coal bed. The sandstone between the coal and the diabase, though elsewhere yellow, is black with material coating the cement between the quartz grains and in some places even invading the grains themselves. This suggests an impregnation of the sandstone during the distillation of the coal by the heat of the intrusive. The coal of this exposure is a fine lustrous anthracite. Higher up the same creek, near the summit of the ridge, a number of coal beds of bituminous character are exposed.[a] No diabase intrusives are present in the immediate vicinity, but folding of a closely appressed character has affected the strata.

In the roof of an anthracite bed exposed in a creek somewhat west of Purinton Creek a few fragments of netted-veined leaves were found. Knowlton reports on these as follows: "6 A. K. 244. Matanuska Valley. *Juglans nigella?* Heer, no margin preserved. It looks like a Kenai dicotyledon, and not like any Cretaceous species known to me."

[a] See analysis No. 22, p. 62.

The evidence from these plant remains shows, then, that at least this portion of the anthracite is probably of Kenai age, and that it does not occur in rocks of Middle Jurassic age, which are known from their marine fauna to be present in close vicinity and possibly to be infolded to some extent with the Kenai rocks, or irregularly faulted against them.

From a consideration of the structural and floral evidence it appears to the writer that the coal of this field is chiefly of Kenai age, and that its anthracitic character is due to the large amount of heat furnished by the unusually abundant diabase intrusions. The Anthracite Ridge field represents, according to this view, a portion of the Tertiary coal-bearing area which has been more highly affected by the heat of eruptive rocks. The amount of anthracite appears to be limited, and will not warrant an extensive outlay of capital for its exploitation. In addition, the complex folding of the strata and the presence of massive diabase injections will seriously increase the difficulties of mining.

DESCRIPTION OF THE COAL.

Martin has described the coal as follows:

> This coal has the ordinary physical characteristics of most good coal of this kind. It is heavy, firm, hard, and not much fractured for surface coal, and has a high luster. Pyrite was noticed. The seams are not much broken by small partings of shale and bone.

Two sections were measured by Martin: One at an elevation of 3,410 feet on the south bank of Purinton Creek showed 38 feet of clean, solid coal, both roof and floor being concealed (see analysis No. 1, pp. 60, 62, which represents the entire thickness as measured). Martin says:

> At this point the strike is N. 40° E. (magnetic) and the dip is 10° NW., or into the mountain. The rocks in the vicinity are chiefly graywacke and sandstone and show considerable variation of strike and dip. A short distance downstream is a good-sized mass of diabase occupying the axis of an anticline, which is in other places restricted by a fault. The anthracite is probably restricted to a zone along the face and in the mountains which is cut off from the valley plateau by a fault following the base of the mountains. Black streaks that are probably coal could be seen high up on the face of the mountain and could be followed by the eye for several miles. * * *

About a mile northeast of the locality above described, at an elevation of 3,460 feet, a coal section gave the following measurements:

Section of coal on slope of Talkeetna Mountains.

	Ft.	Ft.
Flaggy sandstone.		
Coal and shale	3	10
Coal	7	
Shale		4
Coal	1	1
Shale		3
Coal	2	2
Shale		2
Coal	7	7
		29

Strike N. 60° E. (magnetic), dip 55° SE.

Of the extent of this field Martin says:

> The area of anthracite was not estimated by the writer, and the amount available for economic mining and shipment may possibly not be sufficient to justify the necessary expenditures.

In addition to the sections of coal measured by G. C. Martin on Anthracite Ridge, the following sections were obtained somewhat farther east:

Section of coal on Anthracite Ridge, altitude 3,100 feet.

	Ft.	In.
Diabase	50±	
Sandstone and shale	10±	
Coal and shale	6	
Coal		2
Shale		1
Coal		10
Shale	2	
Sandstone	7	

Strike N. 70° W. (magnetic), dip 40° S.

Section of coal on Anthracite Ridge, altitude 3,600 feet.

	Ft.	In.
Sandstone.		
Coal	2	6
Coal and shale		4
Coal		6
Coal and ferruginous clay		2
Coal [a]		10
Shale		6
Coal		4
Shale	12	
Coal	1	3
Shale	5	
Sandstone	1	
Shale	1	6
Clay ironstone nodules		6
Shale	1	6

[a] See analysis No. 22 in table of ultimate analyses, p. 62.

	Ft.	In.
Clay ironstone nodules		6
Highly carbonaceous shale	5	
Coal	1	5
Shale	9	
Sandstone	4	
Shale	15	
Coal		10
Shale	4	
Coal	2	2
Shale	4	
Coal		10
Shale	2	6
Coal and shale		6

Shale foot wall.

Strike N. 80° E. (magnetic), dip 34° S.

A syncline of coal 3 feet thick, cut off by a heavy diabase dike, is exposed in a small creek west of Purinton Creek (as shown in fig. 3).

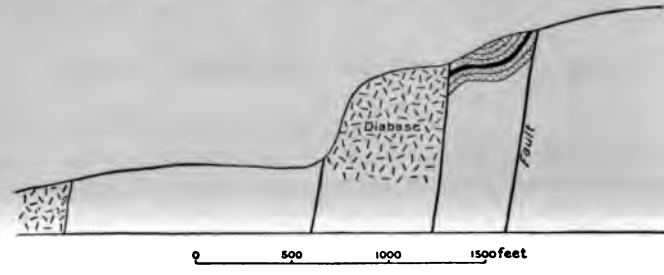

FIG. 3.—Cross section showing relation of anthracite to intrusive diabase near Purinton Creek.

NORTHEASTERN FIELD.

The coal-bearing rocks of this field include an area of about 500 square miles. Coal is found at various localities, but never in thick beds, the best discovered having a thickness of 3 feet. The rocks are of Jurassic age and from fossil evidence are divided into a Middle and an Upper Jurassic series. The character of the coal appears in a general way to be in accordance with this separation, i. e., the older rocks carry bituminous coal, and the younger, coal of a lignitic character.

The Middle Jurassic rocks generally are severely shattered and crushed, or sheared and slickensided, and as a rule present a decidedly unfavorable appearance for the presence of workable seams of coal. Locally the strata are closely folded, as on Billy Creek (see fig. 4), where the coal has developed a strong cleavage and has assumed a semianthracitic character. That the high-grade coal is re-

the fact that the rocks in the less disturbed areas are found to contain only fragments of carbonized wood and small stringers of lignite.

The Upper Jurassic strata lie in comparatively undisturbed attitudes, with prevailing low dips. Minor dislocations of the beds are of widespread occurrence. More extensive faulting is occasionally met with, as on Billy Creek, where faults of several hundred feet throw are revealed with diagrammatic clearness. Coal was seen at only two localities, on the head of Billy Creek and on the south fork of the Tyonek. At these localities the outcrops were obscured by mud and slide material, but the amount of coal represented was probably small. The coal found is a black lignite which checks on drying. Mendenhall reports thin beds of coal interstratified with the shales and sandstones along the south fork of the Nelchina.

ADJACENT COAL FIELDS.

Coal fragments are reported from Willow Creek. From Kashwitna River, at two points half a mile apart, and from Canoe Creek,

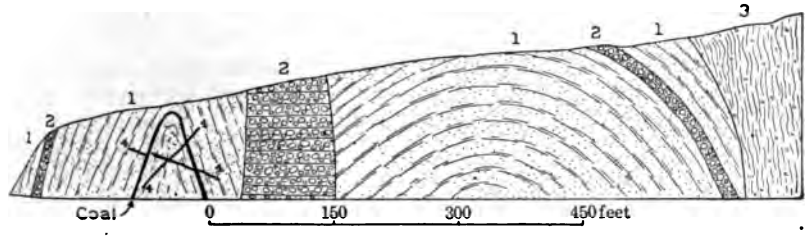

FIG. 4.—Section on Billy Creek. 1, Sandstone and shale; 2, conglomerate; 3, greenstone amygdaloids; 4, basalt dikes.

7 miles north, a bed of lignite 7 or 8 feet thick is reported. This bed lies nearly horizontal and slopes very gently to the west. This appears to be an extension of the field of which Martin has compiled the following information:[a]

There appears to be a considerable area of coal or lignite in the Susitna Valley, in the vicinity of the mouth of the Talkeetna. Some of the exposures were seen by Eldridge,[b] who describes them as follows:

"The third coal field along the main river, 4 to 10 miles above the Chulitna, appears in outcrops for a distance of 6 or 7 miles and is perhaps the exposed portion of an extensive area. The strata form bluffs 100 to 300 feet high, and consist of clays and sandstones—the former predominating—with coal seams from 6 inches to 6 feet thick. There are perhaps ten or fifteen coal beds exposed in the entire length of the outcrop. Their general dip is 5° to 10° SSE., with undulations. The thickness of the series exposed is perhaps 500 feet."

[a] Op. cit., p. 26.

[b] Eldridge, G. H., A reconnaissance in the Susitna basin and adjacent territory in 1898: Twentieth Ann. Rept. U. S. Geol. Survey, pt. 7, 1900, p. 22.

Other exposures in the same general district were described by Lieutenant Learned, who said:[a]

"As the party under my charge proceeded up the Susitna River, specimens of coal were found on the sand bars from time to time, but more plentifully as the forks were approached. On the way down the river an outcropping of coal was seen on the east fork of the Susitna River, about 2 miles south of the fork. The vein could not be measured, but as near as could be determined it was about 6 feet thick and of a poor quality.

"Upon entering the Talkeetna River coal was seen on the bars and banks, and the same coal was found in the Chunilna River. It was the main fuel used at the camp on the Chunilna River for about two months. The coal found there was a brown lignite of about the same grade as the best found in the vicinity of Tyonek. The vein was located first by Sergeant Yanert, and is noted on his map. It is about 6 miles above the mouth of the Chunilna, at the base of a cut gravel bank about 100 feet high. When seen by Sergent Yanert the water was clear and the vein could be traced across the river to the east bank. When I visited the vein the river was flooded and therefore very muddy. As near as could be determined by me the vein was 6 feet out of and fully as much more under the water, making it 12 feet thick, but Private Gamble, who had seen it in clear water, said it was at least 15 feet thick and perhaps much more, as it extended across the river, forming its bed, and there was no way of determining the thickness of that part forming the bed of the river. The vein is only slightly tilted, and comparatively easy to work if occasion should ever render it valuable. * * * All of the coal found, when consumed, gave a fair amount of heat, but left a large amount of ashes. * * * Sergeant Yanert reported that he found another large coal vein on the Chulitna River of about the same grade as the Tyonek coal. It is doubtful if the coal found will ever have any commercial value, except such value as it possesses for fuel in the vicinity, and even that will be small, because of the timber found in the same localities. Enough was ascertained to show that there is plenty of coal of an inferior grade along the Susitna River."

The Cook Inlet coal fields have already been described by various authors. All existing information was summarized in 1902 by Brooks,[b] who gave complete references to the earlier publications.

There seems little doubt that lignitic coal-bearing strata border the western base of the Talkeetna Mountains from Cook Inlet at least as far as Chunilna River, as is indicated by the successive float and outcrops reported from Willow Creek, Canoe Creek, Kashwitna River, and Chunilna River. It seems probable that these exposures are of sediments of Eocene age and of the same series of beds that were seen at other localities by Eldridge.[c]

[a] Learned, Lieut. H. G., Reports of explorations in the Territory of Alaska, War Dept., Adjutant-General's Office, No. 25, 1899, pp. 162–163.

[b] Brooks, A. H., The coal resources of Alaska: Twenty-second Ann. Rept. U. S. Geol. Survey, pt. 3, 1902, pp. 543–546.

[c] Op. cit.

ANALYSES AND TESTS.

CHEMICAL AND CALORIMETRIC TESTS.

The samples collected by Martin were (with the exception of No. 3) all taken in a uniform manner. They were obtained by making a cut across a fresh face of the coal from roof to floor, cutting down only the coal which would probably be loaded and leaving out such impurities as could be separated in the ordinary practices of actual mining. They are thus supposed to represent the quality of the coal which would be mined from these seams. The parts of each seam which went into the sample are indicated in the local sections. No. 3 was taken from only the best parts of the seam and impurities were rejected which could be separated in practice only by very careful treatment, such as in "screened and hand-picked" coal, or possibly by some mechanical process, or by washing. The object of this section was to show, by a comparison of analyses Nos. 2 and 3, what could probably be gained in practice by such careful separation of impurities.

The samples that Martin collected were all analyzed by F. M. Stanton at the United States Geological Survey coal-testing plant at St. Louis, Mo. The methods of analysis are described in the reports of this plant.[a]

The other analyses were gathered from a variety of sources. Nos. 4, 8, 10, 12, and 14 are based on duplicates of samples taken by Martin. The others are of varied character, some being fair representations of the seams and some random selections of the best coal.

The anthracite coal is represented by a single analysis (No. 1), which shows it (so far as this one outcrop is concerned) to compare favorably with some of the Pennsylvania anthracite.

Comparison of Matanuska and Pennsylvania anthracite.

Coal.	Moisture.	Volatile matter.	Fixed carbon.	Ash.	Sulphur.	Fuel ratio.
Matanuska	2.55	7.08	84.32	6.05	0.57	11.91
Pennsylvania (average of 9)[a]	3.39	3.81	83.79	8.42	.59	22.33

[a] Ashburner, C. A., Ann. Rept. Geol. Survey Pennsylvania, 1885, p. 313.

A sample from Anthracite Ridge taken by the writers during the season of 1906 is here of special interest. (See No. 22 in table of ultimate analyses.) It will be seen that the coal has a fuel ratio of only 1.90, which places it in the bituminous class. The difference in

[a] Preliminary report on the operations of the coal-testing plant of the United States Geological Survey at the Louisiana Purchase Exposition, St. Louis, Mo., 1904: Bull. U. S. Geol. Survey No. 261, 1905, pp. 30–31. Report on the operations of the coal-testing plant of the United States Geological Survey at the Louisiana Purchase Exposition, St. Louis, Mo., 1904: Prof. Paper U. S. Geol. Survey No. 48, 1906, pp. 174–192.

Proximate analyses of Matanuska coals.

Locality.	Thickness of coal seam in feet.	Moisture in air-dried sample.	Total moisture.	Volatile matter.	Fixed carbon.	Ash.	Sulphur.	Calories per pound of coal.	Recalculated. Fuel elements. Volatile matter.	Recalculated. Fuel elements. Fixed carbon.	Recalculated. Fuel ratio.
Between Boulder and Hicks creeks	38.0	(c)	2.55	7.08	84.32	6.05	0.57	7,613	7.75	92.25	11.90
Chickaloon Creek, tunnel No. 2	12.3	0.98	2.58	19.14	67.46	10.82	.57	.....	22.10	77.90	3.52
Chickaloon Creek, tunnel No. 2 (selected)	5.2	(c)	.90	19.60	74.60	4.90	.60	8,260	20.81	79.19	3.81
.....do	.....	(c)	1.06	12.76	78.96	6.28	.90	.....	13.91	86.09	6.19
Chickaloon Creek, tunnel No. 3	7.0	1.46	2.46	17.01	53.23	27.30	.84	.....	24.22	75.78	3.13
Chickaloon Creek, tunnel No. 5	7.9	1.00	2.90	17.47	56.15	23.48	.46	.....	23.73	76.27	3.21
Average of analyses 2–6	.....	.....	1.98	17.20	66.08	14.56	.67	.....	20.95	79.05	3.77
Matanuska River, south side, 3 miles above Chickaloon Creek	7.0	2.76	4.36	18.92	61.19	15.53	.37	.....	23.62	76.38	3.23
.....do	7.0	(c)	4.15	20.63	59.62	15.60	.34	.....	25.71	74.29	2.89
Coal Creek, ¼ mile above mouth	5.0	1.44	2.24	23.08	70.21	4.47	.50	.....	24.74	75.26	3.04
.....do	5.0	(c)	1.88	22.51	71.65	3.96	.44	.....	23.91	76.09	3.18
Coal Creek, ½ mile above mouth	8.6	2.64	6.74	14.96	65.83	12.47	.44	6,649	18.52	81.48	4.40
.....do	8.6	(c)	5.83	18.24	63.03	12.90	.47	.....	22.44	77.56	3.46
Average of analyses 7–12	.....	.....	4.20	19.72	65.26	10.82	.42	.....	23.14	76.86	3.32
Kings Creek, west bank, upper bridge	9.9	1.13	2.93	21.85	63.09	12.13	.59	7,419	25.72	74.28	2.89
.....do	9.9	(c)	1.22	24.15	62.65	11.98	.52	.....	27.82	72.18	2.59
Kings Creek	.....	(c)	1.15	23.09	69.34	6.42	.89	.....	24.98	75.02	3.00
.....do	.....	(c)	.50	22.00	70.50	7.00	.....	.....	23.78	76.22	3.20
Average of analyses 13–16	.....	.....	1.45	22.77	66.40	9.38	.67	.....	25.57	74.43	2.91
Young Creek, 3 miles above trail	1.0	(c)	2.50	28.32	58.82	10.36	.58	.....	32.50	67.50	2.08
Average of analyses 2–17	.....	.....	2.71	20.23	65.39	11.60	.57	.....	23.65	76.35	3.23
Eska Creek, 3 miles above trail	2.6	(c)	5.56	36.52	51.32	6.60	.42	.....	41.58	58.42	1.41
.....do	3.3	(c)	6.60	34.30	48.23	10.87	.41	6,299	41.56	58.44	1.41
Average of analyses 18–19	.....	.....	6.08	35.41	49.78	8.23	.42	.....	41.57	58.43	1.41

20	Tsadaka Creek, 4 miles above trail	6.0	(c)	4.03	34.84	49.31	11.82	.38	.....	41.40	58.60	1.42
21	Tsadaka Creek, 4½ miles above trail	11.7	6.45	10.05	36.05	48.90	5.00	.25	.....	42.44	57.56	1.36
	Average of analyses 20–21	.....	.....	7.04	35.45	49.10	8.41	.32	.....	41.92	58.08	1.39
	Average of analyses 18–21	.....	.....	6.56	35.43	49.44	8.32	.37	.....	41.74	58.26	1.40

[a] Determined by drying in the open air until weight becomes constant.
[b] A calorie is the amount of heat necessary to raise the temperature of 1 pound of water 1° C. It is equal to 1.8 British thermal units.
[c] Not determined.

1–3, 5–7, 9, 11, 13, 17–21. Sampled by G. C. Martin. Analyses by F. M. Stanton, U. S. Geological Survey coal-testing plant, St. Louis, Mo.
8, 10, 12, and 14. Sampled by William Griffith and G. C. Martin. Analyses by A. S. McCreath, Harrisburg, Pa.
15. Sampled by George Jamme. Analysis by C. C. Bogardus, Seattle, Wash. Published in Bull. U. S. Geol. Survey No. 259, 1905, p. 170.
16. Sampled by Frank Watson. Analysis by William H. Stowell & Co. Seattle, Wash.

the quality of the coal is regarded as dependent on the presence of neighboring igneous rocks.

Analyses[a] of Matanuska River coals.

Sample No.	Thickness of coal in feet.	Proximate analysis.				Ultimate analysis.						Calorific value.	
		Loss on air-drying.	Total moisture.	Volatile combustible.	Fixed carbon.	Ash.	Sulphur.	Hydrogen.	Carbon.	Nitrogen.	Oxygen.	Calories.	British thermal units.
1	38.0	(b)	2.60	5.26	86.15	5.99	0.57	3.07	84.30	1.13	4.94	7,586	13,655
2	12.3	1.60	2.55	16.66	69.72	11.07	.57	4.19	76.58	1.37	6.22	7,545	13,581
3	5.2	(b)	.99	19.03	75.19	4.79	.60	4.71	83.90	1.48	4.52	8,205	14,769
9	5.0	.80	1.97	18.58	75.19	4.26	.50	4.80	82.77	1.79	5.88	8,146	14,663
13	9.9	1.80	2.68	20.69	64.72	11.91	.59	4.68	74.38	.87	7.57	7,422	13,360
18	2.6	(b)	4.74	34.79	54.06	6.41	.42	5.54	71.06	1.60	14.97	6,985	12,573
19	3.3	(b)	5.00	33.90	50.65	10.45	.41	4.77	63.59	1.38	19.40	6,338	11,408
20	6.0	(b)	4.75	32.64	50.63	11.98	.38	4.76	64.09	1.09	17.70	6,428	11,570
21	11.7	4.60	9.49	33.63	51.71	5.17	.25	5.52	65.85	1.20	22.01	6,445	11,601
22	.9	(b)	2.18	30.60	50.06	9.16	.70	4.83	71.43	1.50	12.38	7,303	13,145

[a] These analyses were made by F. M. Stanton on the same samples as those with corresponding numbers on pp. 60, 61. The differences in proximate analyses are due to the fact that the samples dried somewhat in the months which elapsed between analyses, and that somewhat different methods of analysis were used (see Bull. U. S. Geol. Survey No. 290, 1906, pp. 29–30).

[b] Not determined.

The coals represented by analyses 2 to 17 are near the border line between semibituminous steam coals (as the name is generally used in the trade, but not according to Frazer's definition[a]) and bituminous coking coals. They are rather high in ash, but are otherwise of good quality. Analyses 5 and 6 bring the average ash abnormally high, but even aside from these most of the seams are so impure that mechanical separators or washing should be used to remove part of the impurities. The purer of these coals correspond very closely to the Crows Nest Pass (British Columbia) coal,[b] which is the standard coking coal of western North America, and approximately to some of the coking coal of the East.

The bituminous coal of lower grade on Eska and Tsadaka creeks, which the analyses show to be intermediate between first-class bituminous coal and the lignite coals, should probably be called bituminous rather than lignite, its usual designation in the region. It is of about the same composition as the Franklyn, Black Diamond, and Renton (Washington) coal. It probably will not make good coke, but should serve well under stationary boilers, and possibly as a locomotive fuel and for other local uses. It should be especially well adapted to the generation of power by the use of producer gas in a gas engine.

[a] Rept. Geol. Survey Pennsylvania, vol. MM, 1879, pp. 144–145.

[b] Martin, G. C., Markets for Alaska coal: Bull. U. S. Geol. Survey No. 284, 1906, p. 29.

COKING QUALITIES.

A rough test of the coking qualities of the coal from tunnel No. 2 on Chickaloon Creek (see p. 46) was made, during the summer of 1905, by coking a large pile of coal under a covering of stones and dirt. The resulting coke was hard and firm and had a good ring and a good texture. The test showed conclusively that a satisfactory grade of coke can be produced.

MINING CONDITIONS.

No serious difficulties prevent the mining of these coals. The dips are so steep (10° to 60° on the anthracite, 18° to 85° in the east end of the bituminous area, and 20° to 44° in the west end of the bituminous area) that some method of stoping must be used. Miners who are accustomed to the steep dips in some of the coal mines of Washington and British Columbia will have no difficulty in this field. Drifts can be run from the level of some of the main streams, and enough coal found above drainage to supply the mines for some time. It will ultimately be necessary to resort to slope or shaft mining. These methods, or tunnels across the measures from the upper floor of Matanuska Valley, will probably have to be used on the anthracite very soon. But no operations should be undertaken in the anthracite area without thoroughly investigating the amount of workable coal, both by carefully exploring the surrounding country in search of outcrops and by testing the thickness and continuity of the seams by boring or other underground work. There is an abundant local supply of wood for building and mine timbering.

It will be necessary to wash or otherwise clean the coal from some of the seams. The percentage of ash can be reduced by washing from 10, 12, 15, 23, and 27 per cent to less than half and probably in some cases to a quarter of these figures. By washing tests at the coal-testing plant of the United States Geological Survey [a] the percentage of ash was reduced as follows:

Percentage of ash in raw and washed coal.

Test No.	Raw coal.	Washed coal.
1	22.44	9.42
2	13.40	7.16
3	28.39	7.59
4	13.81	6.22
5	10.59	5.86
6	9.99	6.33
7	7.75	7.49
8	25.05	8.14
9	16.00	10.25
10	15.22	10.28

[a] Preliminary report on the operations of the coal-testing plant of the United States Geological Survey at the Louisiana Purchase Exposition, St. Louis, Mo., 1904: Bull. U. S. Geol. Survey No. 261, 1905, pp. 60–73.

GOLD.

DISTRIBUTION OF GOLD-BEARING ROCKS.

Gold-bearing rocks are found over considerable areas in the region adjacent to Cook Inlet. A series of graywackes and slates, cut by small quartz stringers, occupies the eastern part of the Kenai Peninsula, forming the bed rock of the Sunrise mining district, extends across Turnagain Arm, and may be seen in the valley of Knik River still farther north. The search for placer gold in rocks of this type is warranted, and discoveries of commercial value may possibly be made.

North of Matanuska River, on the southern margin of a granite mass, occurs a band of highly crystalline mica schist. It is closely folded and infiltrated with fine quartz stringers. The only productive placer thus far developed within the region is situated on this belt of schists. It is noteworthy that the igneous rocks, granitic and volcanic, to which this series of mica schists gives place on the north and east, have so far proved barren of workable placers.

Farther northwest, near the mouth of Talkeetna River, a slate-schist series, folded, intruded by granite, and containing abundant quartz stringers, again represents the gold-bearing series. The same rocks are also found just north of the Susitna-Cantwell divide. The bars of streams heading in this formation have for many years been worked with more or less success, and in 1898 were the scene of some local excitement. Several miles of claims were staked that year along the Chunilna, a tributary of the Talkeetna from the north. The gold-bearing gravels of the newly discovered Yentna district are reported to have a slate bed rock, indicating the presence of metamorphic rocks to the west.

Though there is still question as to the relative ages of these series of rocks, there is little doubt but that their economic importance is due to the mineralization which has taken place during their infiltration by abundant quartz stringers. The concentration of gold values incident upon their wearing away by stream work has been the direct means of the formation of the placers.

The Pleistocene gravels at the head of Matanuska River are not likely to be gold bearing or of economic importance. Their glacial origin is distinctly unfavorable to the production of placer deposits. Their rapid mode of accumulation means a lack of sorting and concentration necessary for the formation of workable placers.

The present stream gravels are largely derived from reworking these older gravel sheets. Even with this partial reconcentration the

engaged in concentrating a metamorphic bed rock locally bearing gold, usually in the form of small mineralized quartz stringers.

Though placers have not been found within the areas of older volcanic rocks, mineralization has occurred. West of Hicks Creek a large cropping of gossan about 100 feet wide was found. This red capping is due to the oxidation of finely divided pyrite disseminated through a quartz porphyry. A sample selected for assay showed a trace of gold and no silver.

For several miles the whole southern flank of Sheep Mountain at the head of Matanuska River is colored a strong red from the oxidation of pyrite in the greenstones. At some points the sulphuric acid formed during the oxidation of the pyrite has bleached the greenstones to a pure white color. The rugged range thus tinted in vividly contrasting colors presents a marked scenic effect. Certain streams emerging from the range are so highly charged with iron salts as to color their gravels red with oxide. The pyritization of the greenstones, which are here roughly schistose, has affected a great thickness of rocks, but is of a diffused character. An assay of a sample selected as showing the maximum mineralization yielded only a trace of gold and no silver.

DESCRIPTION OF LOCALITIES.

WILLOW CREEK.

Placer gold is being mined in commercial quantities at only one locality within the area covered during the season, i. e., on Grubstake Gulch, a southern tributary of Willow Creek, which enters Susitna River about 30 miles above its mouth. Willow Creek proper was staked by M. J. Morris and L. Herndon is 1898, and it is reported that they extracted about $4,000. In 1899 A. Gilbert staked Grubstake Gulch, and in 1900 sold his interest to O. G. Herning, who manages the property for the Klondike Boston Mining Company, of Boston, Mass.

The valley of Willow Creek and the valleys of the small tributary gulches show clearly the results of ice action, the side streams occupying hanging valleys with steep gradients or falls where the smaller streams join the main water courses. Grubstake Gulch is an example of such conditions. Near its mouth a rim of bed rock crosses the channel and is cut through by the present stream, which falls precipitously for about 150 feet in a very short distance and enters Willow Creek at a low gradient. An excellent dump for hydraulicking is thus afforded. Bed rock is a mica schist penetrated by small veinlets and augen of quartz. The schistosity at this point is N. 60° E., with a steep dip 40° to the north. The direction and inclination of the beds across the stream and the dip downstream are especially

favorable for the collection of any gold that might be concentrated from the rocks in the process of erosion which the valley has undergone.

In the last three years, 1904–1906, during which hydraulic methods have been in use, 900 feet of the creek has been worked out. Pay averages 200 feet in width with a depth from 2½ to 3 feet. The gold is coarse and rough, and assays at the mint $16.58 per ounce. Very little black sand is found. The greater part of the gold occurs close to or in crevices of the bed rock, but it is not deemed necessary to clean up by hand, the hydraulic giant being relied on to sweep all gold into the boxes.

The wash, which is practically all confined to the gulch bed, there being no well-defined bench, is coarse, ill assorted, and not greatly waterworn. The many large bowlders make it necessary to employ at least two men in breaking up and removing oversize and add materially to the cost of extraction. Three Hendy giants are installed on the property, two No. 2 and one No. 1. Only one is used at a time, however. Seven hundred inches of water with a head of 180 feet is brought three-fourths of a mile down the gulch. A 24-inch pipe at the intake dam is reduced to 9 inches at the giant, to which is fitted a 3-inch nozzle.

The 900 feet of sluice boxes used are built entirely of whipsawed lumber. Bottom boards are 1½ inches thick, side boards 1 inch thick, and the frames are 3-inch square timbers. The flume is 27 feet wide and 30 feet deep by inside measurements. Block riffles are used. A grade of 5¼ inches to 12½ feet is maintained. The gravel is piped downstream into the boxes. Very little gold is caught below the fourth box, the greater part being retained in the second. Mercury is placed in the third, fourth, and fifth boxes.

The origin of the gold may be ascribed with certainty to the abundant quartz stringers in the mica schists. The coarseness and roughness of the grains suggest a near source of supply. It is very probable that the discovery of placer gold in commercial quantities in this region will be in the areas where mica schist is the dominant formation or where streams have eroded rocks of that type. The fact that placer gold has not been found in paying quantities where streams have headed in granitic or other crystalline rocks bears out this statement.

Recent prospecting has developed the fact that a well-defined bench about 75 feet above the bed of Willow Creek carries gold in commercial quantities. It is planned to install during the coming winter a hydraulic plant on the south side of Willow Creek, near the mouth of Wet Gulch, 2 miles below Grubstake Gulch, for their exploi-

cient pressure, suggest a commercial proposition well worth investigation. The possession of the creek claims as dumping ground will be necessary. Such bench claims lend themselves particularly to exploitation by hydraulic methods and may be worked at far lower cost than gravels situated at the level of present stream drainage.

NELCHINA RIVER.

Two prospectors from Copper Center, who were met in the headwater country of the Nelchina and Tyonek rivers, reported that gold was present in all the stream gravels, but in very small quantities. The gold obtained on the Tyonek is almost exclusively in the form of small round plates, worth about a cent apiece. Occasional small shotty nuggets occur, not exceeding 5 or 10 cents in value.

It is reported that the hard conglomerate interstratified with Jurassic shales and sandstones, when panned, failed to yield colors. Yet in view of the unaltered and unmineralized character of the prevailing sandstones and shales, and in view of the comparative coarseness of the gold, it is nevertheless probable that the meager gold content of the present stream channels has been derived by a concentration of the ancient conglomerates.

KNIK RIVER.

It is reported that on Metal Creek, a tributary of Knik River, prospectors discovered pay dirt which yielded $7 or $8 a day to the shovel.

COPPER.

KNIK RIVER.

In August, 1906, prospectors reported the discovery of copper in the high mountains between Knik and Matanuska rivers, but this locality was not visited. The ore shown to the writer is chalcopyrite (sulphide of copper and iron), and is associated with pyrrhotite (magnetic iron pyrites). The ledge is reported to be nearly vertical and to have been traced through four claims. No actual development work has been done. The ore body is said to be 3 feet thick, consisting of 18 inches of solid chalcopyrite and 18 inches of quartz irregularly cut by stringers of ore. Graphitic gouge matter occurs near the ledge. From the foregoing description it appears probable that the deposit occupies a mineralized shear zone, similar to those found in the Prince William Sound region both in its manner of occurrence and in the bed rock with which it is associated. The mountains between Knik and Matanuska rivers, though difficult of access, are thought worthy of prospecting.

KASHWITNA RIVER.

The occurrence of bornite in the mountains east of the Susitna w reported as early as 1898.[a] During the summer of 1906 assessme work was done on copper claims near the head of the north fork Kashwitna River, a tributary of the Susitna from the Talkeet Mountains. Samples of bornite said to occur in a granite were see The claim is about 120 miles from Knik and is situated 10 miles fro timber.

[a] Explorations in Alaska, Adjutant-General's Office, p. 167.

INDEX.

Page.

Anthracite Ridge coal field, coal of, description of 54–56
geology of 52–54
sections in 55–56
Arkose Ridge, fossils on 26
Ash in coal, percentage of 63
Astarte, occurrence of 18
Aucella, occurrence of 21, 22, 30
bronni Rouiller 22, 23
crassicollis Keyserling 24
Belemnites, occurrence of 19, 22
Billy Creek, coal on 57
fault on, view of 16
rocks on 21, 24, 29
section on, figure showing 57
Boulder Creek, coal near, analyses of 60
Cadoceras sp., occurrence of 22
Canoe Creek, coal on 57
Cantwell River, rocks on 11
Caribou Creek, description of 8
fossils on 19
Castle Mountain, rocks of 25
Chickaloon Creek, coal on, analyses of 60
coal on, coking of 63
sections of 44–48
description of 8
fossils on 26
rocks near 9, 19, 20, 25, 29, 30
tunnels at, locations of, figure showing .. 45
tunnels at, sections of 45–48
views near 42
Chickaloon Glacier, description of 33–34
Chugach Mountains, character of 8–9
Chunilna River, coal on 58
gold on 64
Coal, analyses and tests of 59–63
distribution and description of 5, 28, 40–59
mining of, conditions of 63
metamorphism of 27–28
occurrence of 5, 28, 40–41
Coal Creek, coal on, analyses of 60
coal on, sections of 43
Coking test, results of 63
Conglomerate Mountain, lake near, view of. 16
rocks on 25
section at, figure showing 41
view of 42
Copper, occurrence and description of 67–68
Copper River basin, description of 7, 39–40
development of 39–40
Corylus macquarri (Forbes) Heer 26

Page.

Cretaceous rocks, character and occurrence of 10, 24
Eldridge, G. H., on Susitna slate 11–12
on Tyonek coals 28
Eocene rocks, age of 26–27
fossils of 26
occurrence and character of 10, 24–28
stratigraphy of 27
Eska Creek, coal on, analyses of 60
coal on, sections of 49–50
view near 42
Explorations, list of 5–6
Fault block, lake in, view of 16
Ficus grönlandica Heer 26
Field work, outline of 6
Geography, outline of 6–9
Geologic history, outline of 31–40
Geologic map of region ..... Pocket
Geology, description of 9–40
outline of 9–10
Gerdine, T. G., work of 6
Glaciation, description of 33–37
view of 16
Glaciers, recession of, view of 16
Gold, distribution of 64–65
occurrences of, description of 65–67
origin of 66
Granite Creek, rocks on 19
Gravels, character and distribution of 30–31
gold in 64–65, 66–67
Graywackes, occurrence and description of . 12–16
Greenstone tuffs, occurrence and description of 13–14
Greenstones, occurrence and description of .. 16–17
Grubstake Gulch, gold in 65–66
Hicks Creek, coal near, analysis of 60
folds on 18
rocks near 24, 65
Historical geology, outline of 31–40
Igneous rocks, intrusion of 32
occurrence and character of 16, 27–28
Inoceramus 19
lucifer Edward, occurrence of 19, 53
Juglans nigella Heer 26, 53
Jurassic rocks, age of 19, 22–23
character and distribution of .. 10, 16–18, 20–22
fossils of 18–19, 22–23
plate showing 16
stratigraphic relations of 23
structure of 18
Kachemak Bay, lignites on, character of ... 28

Page.

Kashwitna River, coal on ... 37
copper on ... 68
rocks near ... 39
Kenai formation, age of ... 26-27
coal in ... 26
fossils of ... 26
occurrence and character of ... 9, 10, 25-26, 27-30
stratigraphy of ... 27
Kings Creek, coal on, analyses of ... 60
coal on, sections of ... 46
fossils on ... 26
glacier on ... 34
gravels near ... 31
rocks on ... 25
Kings Creek coal, fossils in ... 26
Knik, gravels near ... 30-31
Knik Arm, rocks near ... 9, 12, 39
Knik River, copper on ... 67
description of ... 8
glacier on ... 34-35
gold on ... 67
rocks near ... 13-15
Knopf, Adolph, work of ... 6
Knowlton, F. H., fossils determined by ... 26, 32
Learned, H. G., on Susitna Valley coal ... 58
Leguminosites sp ... 26
Lima, occurrence of ... 18
Little Susitna River, glacier on ... 34
Magnolia inglefeldi Heer ... 26
Map of region ... Pocket
Map, geologic, of region ... Pocket
Martin, G. C., coal samples collected by ... 39
fossils found by ... 26
on Anthracite Ridge coal ... 54-55
on Kenai fossils ... 26
on Matanuska coal ... 42-49
on Matanuska Valley ... 37
on Susitna Valley coal ... 57
sections by ... 43, 48, 49
Matanuska coal field, coal of, description of ... 41-52
description of ... 40-41
extent of ... 41
sections of ... 43-51
structure of ... 41-42
Matanuska River, coal on, analyses of ... 60, 61
coal on, section of ... 43
description of ... 8, 37-38
fossils on ... 18
glaciers on ... 34
gravels on ... 31
section at, figure showing ... 41
Matanuska Valley, description of ... 7-8
development of ... 37-38
glacier in ... 35-36
gravels in ... 31
rocks in ... 28, 64
Mendenhall, W. C., on conglomerate of Castle Mountain ... 25
on Copper River basin ... 39
on Matanuska glaciers ... 34
on Matanuska Valley ... 37
Metamorphic rocks, occurrence and character of ... 11-16
Mica schists, occurrence and character of ... 10-11

Page.

Nelchina River, fossils on ...
gold on ...
gravels on ...
rocks along ... 2
Northeastern field, coal of, description of ... 5
extent of ...
faulting in ...
structure of ... 5
Oppelia, occurrence of ...
Paige, Sidney, work of ...
Pallivena colombi Heer ...
Peten, occurrence of ...
Phylloceras, occurrence of ...
Physiographic development, outline of ... 2
Piedmont glacier, description of ...
Pleuronya, occurrence of ... 18, 1
Pleurotomaria, occurrence of ...
Populus arctica Heer, occurrence of ...
sp, occurrence of ...
Protexanites, occurrence of ...
Purinton Creek, coal at, description of ...
section on, figure showing ...
Quartz diorite, age of ... 2
occurrence and character of ... 1
Quartz porphyry, occurrence and description of ...
Quaternary deposits, character and distribution of ... 10, 2
Quaternary history, outline of ... 2
Rhamnus eridani Heer ...
Rhynchonella, occurrence of ...
Rhyolites, occurrence and description of ...
Salix varians Heer ...
Sargent, R. H., work of ...
Schists, occurrence and character of ... 1
Sequoia langsdorfii (Brgt.) Heer, occurrence of ...
Sheep Creek, character of ...
rocks near ...
Sheep Mountain, rocks of ...
Slates, occurrence and character of ... 1
Sonninia, occurrence of ... 1
Stanton, F. M., analyses by ... 5
Stanton, T. W., fossils determined by ... 1
Stephanoceras, occurrence of ...
Stratigraphy, description of ...
Sunrise "series," age of ...
character of ...
correlation of ...
occurrence and character of ...
Susitna River, description of ...
rocks on ...
valley of, coal in ...
glacier in ...
Susitna slate, character and occurrence of ... 11—
Talkeetna Mountains, coal in, section of ...
development of ...
drainage of ...
geography of ...
geology of ... 9, 17, 2
glaciers on ...
topography of ...
Talkeetna River, description of ...

	Page.
distichum miocenum Heer	26
um Heer	26
›cks, age of	26–27
of	26
›nce and character of	10, 24–28, 29–30
raphy of	27
›ccurrence of	18
reek, coal on, analyses of	60
, sections of	51–52
on	26
›n	19, 25
rrence and description of	13–14, 21
avels at	31
Tyonek, lignites at, character of	28
Tyonek River, coal on	57
gold on	67
Viburnum nordenskioldi Heer	26
Viviparus, occurrence of	26
Vola, occurrence of	18
Watson's camp, coal at, sections of	45–48
Willow Creek, coal on	57
gold on	65–67
rocks near	10
Yentna gold district, rocks of	64
Young Creek, coal on, analyses of	60
coal on, section of	49

CLASSIFICATION OF THE PUBLICATIONS OF THE UNITED STATES GEOLOGICAL SURVEY.

[Bulletin No. 327.]

The publications of the United States Geological Survey consist of (1) Annual Reports, (2) Monographs, (3) Professional Papers, (4) Bulletins, (5) Mineral Resources, (6) Water-Supply and Irrigation Papers, (7) Topographic Atlas of United States—folios and separate sheets thereof, (8) Geologic Atlas of United States—folios thereof. The classes numbered 2, 7, and 8 are sold at cost of publication; the others are distributed free. A circular giving complete lists can be had on application.

Most of the above publications can be obtained or consulted in the following ways:

1. A limited number are delivered to the Director of the Survey, from whom they can be obtained, free of charge (except classes 2, 7, and 8), on application.

2. A certain number are delivered to Senators and Representatives in Congress for distribution.

3. Other copies are deposited with the Superintendent of Documents, Washington, D. C., from whom they can be had at prices slightly above cost.

4. Copies of all Government publications are furnished to the principal public libraries in the large cities throughout the United States, where they can be consulted by those interested.

The Professional Papers, Bulletins, and Water-Supply Papers treat of a variety of subjects, and the total number issued is large. They have therefore been classified into the following series: A, Economic geology; B, Descriptive geology; C, Systematic geology and paleontology; D, Petrography and mineralogy; E, Chemistry and physics; F, Geography; G, Miscellaneous; H, Forestry; I, Irrigation; J, Water storage; K, Pumping water; L, Quality of water; M, General hydrographic investigations; N, Water power; O, Underground waters; P, Hydrographic progress reports; Q, Fuels; R, Structural materials. This paper is the one hundred and fifth in Series A and the one hundred and twenty-ninth in Series B, the complete lists of which follow (PP=Professional Paper; B=Bulletin; WS=Water-Supply Paper):

SERIES A, ECONOMIC GEOLOGY.

B 21. Lignites of Great Sioux Reservation: Report on region between Grand and Moreau rivers, Dakota, by Bailey Willis. 1885. 16 pp., 5 pls. (Out of stock.)

B 46. Nature and origin of deposits of phosphate of lime, by R. A. F. Penrose, jr., with introduction by N. S. Shaler. 1888. 143 pp. (Out of stock.)

B 65. Stratigraphy of the bituminous coal field of Pennsylvania, Ohio, and West Virginia, by I. C White. 1891. 212 pp., 11 pls. (Out of stock.)

B 111. Geology of Big Stone Gap coal field of Virginia and Kentucky, by M. R. Campbell. 1893. 106 pp., 6 pls. (Out of stock.)

B 132. The disseminated lead ores of southeastern Missouri, by Arthur Winslow. 1896. 31 pp. (Out of stock.)

B 138. Artesian-well prospects in Atlantic Coastal Plain region, by N. H. Darton. 1896. 228 pp., 19 pls.

B 139. Geology of Castle Mountain mining district, Montana, by W. H. Weed and L. V. Pirsson. 1896. 164 pp., 17 pls.

B 143. Bibliography of clays and the ceramic arts, by J. C. Branner. 1896. 114 pp.

B 164. Reconnaissance on the Rio Grande coal fields of Texas, by T. W. Vaughan, including a report on igneous rocks from the San Carlos coal field, by E. C. E. Lord. 1900. 100 pp., 11 pls. (Out of stock.)

B 178. El Paso tin deposits, by W. H. Weed. 1901. 15 pp., 1 pl.

[redacted]

CLASSIFICATION OF THE PUBLICATIONS OF THE UNITED STATES GEOLOGICAL SURVEY.

[Bulletin No. 327.]

The publications of the United States Geological Survey consist of (1) Annual Reports, (2) Monographs, (3) Professional Papers, (4) Bulletins, (5) Mineral Resources, (6) Water-Supply and Irrigation Papers, (7) Topographic Atlas of United States—folios and separate sheets thereof, (8) Geologic Atlas of United States—folios thereof. The classes numbered 2, 7, and 8 are sold at cost of publication; the others are distributed free. A circular giving complete lists can be had on application.

Most of the above publications can be obtained or consulted in the following ways:

1. A limited number are delivered to the Director of the Survey, from whom they can be obtained, free of charge (except classes 2, 7, and 8), on application.

2. A certain number are delivered to Senators and Representatives in Congress for distribution.

3. Other copies are deposited with the Superintendent of Documents, Washington, D. C., from whom they can be had at prices slightly above cost.

4. Copies of all Government publications are furnished to the principal public libraries in the large cities throughout the United States, where they can be consulted by those interested.

The Professional Papers, Bulletins, and Water-Supply Papers treat of a variety of subjects, and the total number issued is large. They have therefore been classified into the following series: A, Economic geology; B, Descriptive geology; C, Systematic geology and paleontology; D, Petrography and mineralogy; E, Chemistry and physics; F, Geography; G, Miscellaneous; H, Forestry; I, Irrigation; J, Water storage; K, Pumping water; L, Quality of water; M, General hydrographic investigations; N, Water power; O, Underground waters; P, Hydrographic progress reports; Q, Fuels; R, Structural materials. This paper is the one hundred and fifth in Series A and the one hundred and twenty-ninth in Series B, the complete lists of which follow (PP=Professional Paper; B=Bulletin; WS=Water-Supply Paper):

SERIES A, ECONOMIC GEOLOGY.

B 21. Lignites of Great Sioux Reservation: Report on region between Grand and Moreau rivers, Dakota, by Bailey Willis. 1885. 16 pp., 5 pls. (Out of stock.)

B 46. Nature and origin of deposits of phosphate of lime, by R. A. F. Penrose, jr., with introduction by N. S. Shaler. 1888. 143 pp. (Out of stock.)

B 65. Stratigraphy of the bituminous coal field of Pennsylvania, Ohio, and West Virginia, by I. C White. 1891. 212 pp., 11 pls. (Out of stock.)

B 111. Geology of Big Stone Gap coal field of Virginia and Kentucky, by M. R. Campbell. 1893. 106 pp., 6 pls. (Out of stock.)

B 132. The disseminated lead ores of southeastern Missouri, by Arthur Winslow. 1896. 31 pp. (Out of stock.)

B 138. Artesian-well prospects in Atlantic Coastal Plain region, by N. H. Darton. 1896. 228 pp., 19 pls.

B 139. Geology of Castle Mountain mining district, Montana, by W. H. Weed and L. V. Pirsson. 1896. 164 pp., 17 pls.

B 143. Bibliography of clays and the ceramic arts, by J. C. Branner. 1896. 114 pp.

B 164. Reconnaissance on the Rio Grande coal fields of Texas, by T. W. Vaughan, including a report on igneous rocks from the San Carlos coal field, by E. C. E. Lord. 1900. 100 pp., 11 pls. (Out of stock.)

B 178. El Paso tin deposits, by W. H. Weed. 1901. 15 pp., 1 pl.

B 180. Occurrence and distribution of corundum in United States, by J. H. Pratt. 1901. 98 pp., 14 pls. (Out of stock; see No. 269.)
B 182. A report on the economic geology of the Silverton quadrangle, Colorado, by F. L. Ransome. 1901. 266 pp., 16 pls. (Out of stock.)
B 184. Oil and gas fields of the western interior and northern Texas Coal Measures and of the Upper Cretaceous and Tertiary of the western Gulf coast, by G. I. Adams. 1901. 64 pp., 10 pls. (Out of stock.)
B 193. The geological relations and distribution of platinum and associated metals, by J. F. Kemp. 1902. 95 pp., 6 pls.
B 198. The Berea grit oil sand in the Cadiz quadrangle, Ohio, by W. T. Griswold. 1902. 43 pp., 1 pl. (Out of stock.)
PP 1. Preliminary report on the Ketchikan mining district, Alaska, with an introductory sketch of the geology of southeastern Alaska, by A. H. Brooks. 1902. 120 pp., 2 pls.
B 200. Reconnaissance of the borax deposits of Death Valley and Mohave Desert, by M. R. Campbell. 1902. 23 pp., 1 pl. (Out of stock.)
B 202. Tests for gold and silver in shales from western Kansas, by Waldemar Lindgren. 1902. 21 pp. (Out of stock.)
PP 2. Reconnaissance of the northwestern portion of Seward Peninsula, Alaska, by A. J. Collier. 1902. 70 pp., 11 pls.
PP 10. Reconnaissance from Fort Hamlin to Kotzebue Sound, Alaska, by way of Dall, Kanuti, Allen, and Kowak rivers, by W. C. Mendenhall. 1902. 68 pp., 10 pls.
PP 11. Clays of the United States east of the Mississippi River, by Heinrich Ries. 1903. 298 pp., 9 pls. (Out of stock.)
PP 12. Geology of the Globe copper district, Arizona, by F. L. Ransome. 1903. 168 pp., 27 pls.
B 212. Oil fields of the Texas-Louisiana Gulf Coastal Plain, by C. W. Hayes and William Kennedy. 1903. 174 pp., 11 pls. (Out of stock.)
B 213. Contributions to economic geology, 1902; S. F. Emmons and C. W. Hayes, geologists in charge. 1903. 449 pp. (Out of stock.)
PP 15. The mineral resources of the Mount Wrangell district, Alaska, by W. C. Mendenhall and F. C. Schrader. 1903. 71 pp., 10 pls.
B 218. Coal resources of the Yukon, Alaska, by A. J. Collier. 1903. 71 pp., 6 pls.
B 219. The ore deposits of Tonopah, Nevada (preliminary report), by J. E. Spurr. 1903. 31 pp., 1 pl. (Out of stock.)
PP 20. A reconnaissance in northern Alaska in 1901, by F. C. Schrader. 1904. 139 pp., 16 pls.
PP 21. Geology and ore deposits of the Bisbee quadrangle, Arizona, by F. L. Ransome. 1904. 168 pp., 29 pls.
B 223. Gypsum deposits in the United States, by G. I. Adams and others. 1904. 129 pp., 21 pls. (Out of stock.)
PP 24. Zinc and lead deposits of northern Arkansas, by G. I. Adams. 1904. 118 pp., 27 pls.
PP 25. Copper deposits of the Encampment district, Wyoming, by A. C. Spencer. 1904. 107 pp., 2 pls. (Out of stock.)
B 225. Contributions to economic geology, 1903, by S. F. Emmons and C. W. Hayes, geologists in charge. 1904. 527 pp., 1 pl. (Out of stock.)
PP 26. Economic resources of the northern Black Hills, by J. D. Irving, with contributions by S. F. Emmons and T. A. Jaggar, jr. 1904. 222 pp., 20 pls.
PP 27. A geological reconnaissance across the Bitterroot Range and Clearwater Mountains in Montana and Idaho, by Waldemar Lindgren. 1904. 123 pp., 15 pls.
B 229. Tin deposits of the York region, Alaska, by A. J. Collier. 1904. 61 pp., 7 pls.
B 236. The Porcupine placer district, Alaska, by C. W. Wright. 1904. 35 pp., 10 pls.
B 238. Economic geology of the Iola quadrangle, Kansas, by G. I. Adams, Erasmus Haworth, and W. R. Crane. 1904. 83 pp., 11 pls.
B 243. Cement materials and industry of the United States, by E. C. Eckel. 1905. 395 pp., 15 pls.
B 246. Zinc and lead deposits of northwestern Illinois, by H. Foster Bain. 1904. 56 pp., 5 pls.
B 247. The Fairhaven gold placers of Seward Peninsula, Alaska, by F. H. Moffit. 1905. 85 pp., 14 pls.
B 249. Limestones of southeastern Pennsylvania, by F. G. Clapp. 1905. 52 pp., 7 pls.
B 250. The petroleum fields of the Pacific coast of Alaska, with an account of the Bering River coal deposits, by G. C. Martin. 1905. 65 pp., 7 pls.
B 251. The gold placers of the Fortymile, Birch Creek, and Fairbanks regions, Alaska, by L. M. Prindle. 1905. 89 pp., 16 pls.
WS 117. The lignite of North Dakota and its relation to irrigation, by F. A. Wilder. 1905. 59 pp., 8 pls.
PP 36. The lead, zinc, and fluorspar deposits of western Kentucky, by E. O. Ulrich and W. S. T. Smith. 1905. 218 pp., 15 pls.
PP 38. Economic geology of the Bingham mining district, Utah, by J. M. Boutwell, with a chapter on areal geology, by Arthur Keith, and an introduction on general geology, by S. F. Emmons. 1905. 413 pp., 49 pls.
PP 41. Geology of the central Copper River region, Alaska, by W. C. Mendenhall. 1905. 133 pp., 20 pls.

B 255. The fluorspar deposits of southern Illinois, by H. Foster Bain. 1905. 75 pp., 6 pls. (Out of stock.)
B 256. Mineral resources of the Elders Ridge quadrangle, Pennsylvania, by R. W. Stone. 1905. 86 pp., 12 pls.
B 259. Report on progress of investigations of mineral resources of Alaska in 1904, by A. H. Brooks and others. 1905. 196 pp., 3 pls.
B 260. Contributions to economic geology, 1904; S. F. Emmons and C. W. Hayes, geologists in charge. 1905. 620 pp., 4 pls.
B 261. Preliminary report on the operations of the coal-testing plant of the United States Geological Survey at the Louisiana Purchase Exposition, St. Louis, Mo., 1904; E. W. Parker, J. A. Holmes, and M. R. Campbell, committee in charge. 1905. 172 pp. (Out of stock.)
B 263. Methods and cost of gravel and placer mining in Alaska, by C. W. Purington. 1905. 273 pp., 42 pls. (Out of stock.)
PP 42. Geology of the Tonopah mining district, Nevada, by J. E. Spurr. 1905. 295 pp., 21 pls.
PP 43. The copper deposits of the Clifton-Morenci district, Arizona, by Waldemar Lindgren. 1905. 375 pp., 25 pls.
B 264. Record of deep-well drilling for 1904, by M. L. Fuller, E. F. Lines, and A. C. Veatch. 1905. 106 pp.
B 265. Geology of the Boulder district, Colorado, by N. M. Fenneman. 1905. 101 pp., 5 pls.
B 267. The copper deposits of Missouri, by H. Foster Bain and E. O. Ulrich. 1905. 52 pp., 1 pl.
B 269. Corundum and its occurrence and distribution in the United States (a revised and enlarged edition of Bulletin No. 180), by J. H. Pratt. 1906. 175 pp., 18 pls.
PP 48. Report on the operations of the coal-testing plant of the United States Geological Survey at the Louisiana Purchase Exposition, St. Louis, Mo., 1904; E. W. Parker, J. A. Holmes, M. R. Campbell, committee in charge. 1906. (In three parts.) 1,492 pp., 13 pls.
B 275. Slate deposits and slate industry of the United States, by T. N. Dale, with sections by E. C. Eckel, W. F. Hillebrand, and A. T. Coons. 1906. 154 pp., 25 pls.
PP 49. Geology and mineral resources of part of the Cumberland Gap coal field, Kentucky, by G. H. Ashley and L. C. Glenn, in cooperation with the State Geological Department of Kentucky, C. J. Norwood, curator. 1906. 239 pp., 40 pls.
B 277. Mineral resources of Kenai Peninsula, Alaska: Gold fields of the Turnagain Arm region, by F. H. Moffit; Coal fields of the Kachemak Bay region, by R. W. Stone. 1906. 80 pp., 18 pls.
B 278. Geology and coal resources of the Cape Lisburne region, Alaska, by A. J. Collier. 1906. 54 pp., 9 pls. (Out of stock.)
B 279. Mineral resources of the Kittanning and Rural Valley quadrangles, Pennsylvania, by Charles Butts. 1906. 198 pp., 11 pls.
B 280. The Rampart gold placer region, Alaska, by L. M. Prindle and F. L. Hess. 1906. 54 pp., 7 pls. (Out of stock.)
B 282. Oil fields of the Texas-Louisiana Gulf Coastal Plain, by N. M. Fenneman. 1906. 146 pp., 11 pls.
PP 51. Geology of the Bighorn Mountains, by N. H. Darton. 1906. 129 pp., 47 pls.
B 283. Geology and mineral resources of Mississippi, by A. F. Crider. 1906. 99 pp., 4 pls.
B 284. Report on progress of investigations of the mineral resources of Alaska in 1905, by A. H. Brooks and others. 1906. 169 pp., 14 pls.
B 285. Contributions to economic geology, 1905; S. F. Emmons and E. C. Eckel, geologists in charge. 1906. 506 pp., 13 pls. (Out of stock.)
B 286. Economic geology of the Beaver quadrangle, Pennsylvania, by L. H. Woolsey. 1906. 132 pp., 8 pls.
B 287. Juneau gold belt, Alaska, by A. C. Spencer, and A reconnaissance of Admiralty Island, Alaska, by C. W. Wright. 1906. 161 pp., 27 pls.
PP 54. The geology and gold deposits of the Cripple Creek district, Colorado, by W. Lindgren and F. L. Ransome. 1906. 516 pp., 29 pls.
PP 55. Ore deposits of the Silver Peak quadrangle, Nevada, by J. E. Spurr. 1906. 174 pp., 24 pls.
B 289. A reconnaissance of the Matanuska coal field, Alaska, in 1905, by G. C. Martin. 1906. 34 pp., 5 pls.
B 290. Preliminary report on the operations of the fuel-testing plant of the United States Geological Survey at St. Louis, Mo., 1905, by J. A. Holmes. 1906. 240 pp.
B 293. Reconnaissance of some gold and tin deposits of the southern Appalachians, by L. C. Graton, with notes on the Dahlonega mines, by W. Lindgren. 1906. 134 pp., 9 pls.
B 294. Zinc and lead deposits of the upper Mississippi Valley, by H. Foster Bain. 1906. 155 pp., 16 pls.
B 295. The Yukon-Tanana region, Alaska, description of Circle quadrangle, by L. M. Prindle. 1906. 27 pp., 1 pl.
B 296. Economic geology of the Independence quadrangle, Kansas, by Frank C. Schrader and Erasmus Haworth. 1906. 74 pp., 6 pls.
B 297. The Yampa coal field, Routt County, Colo., by N. M. Fenneman, Hoyt S. Gale, and M. R. Campbell. 1906. 96 pp., 9 pls.
B 298. Record of deep-well drilling for 1905, by Myron L. Fuller and Samuel Sanford. 1906. 299 pp.
B 300. Economic geology of the Amity quadrangle in eastern Washington County, Pa., by Frederick G. Clapp. 1907. 145 pp., 8 pls.

B 303. Preliminary account of Goldfield, Bullfrog, and other mining districts in southern Nevada, by F. L. Ransome, with notes on the Manhattan district, by G. H. Garrey and W. H. Emmons. 1906. 98 pp., 5 pls.

B 304. Oil and gas fields of Greene County, Pa., by Ralph W. Stone and Frederick G. Clapp. 1906. 110 pp., 3 pls.

PP 56. Geography and geology of a portion of southwestern Wyoming, with special reference to coal and oil, by A. C. Veatch. 1907. 178 pp., 26 pls.

B 308. A geologic reconnaissance in southwestern Nevada and eastern California, by S. H. Ball. 1907. 218 pp., 3 pls.

B 309. The Santa Clara Valley, Puente Hills, and Los Angeles oil districts, southern California, by G. H. Eldridge and Ralph Arnold. 1907. 266 pp., 41 pls.

B 312. The interaction between minerals and water solutions, with special reference to geologic phenomena, by E. C. Sullivan. 1907. 69 pp.

B 313. The granites of Maine, by T. Nelson Dale, with an introduction by G. O. Smith. 1907. 202 pp., 14 pls.

B 314. Report of progress of investigations of mineral resources of Alaska in 1906, by A. H. Brooks and others. 1907. 235 pp., 4 pls.

B 315. Contributions to economic geology, 1906, Part I: Metals and nonmetals, except fuels; S. F. Emmons and E. C. Eckel, geologists in charge. 1907. 504 pp., 4 pls.

WS 215. Geology and water resources of a portion of the Missouri River Valley in northeastern Nebraska, by G. E. Condra. 1908. — pp., 11 pls.

WS 216. Geology and water resources of the Republican River Valley in Nebraska and adjacent areas, by G. E. Condra. 1907. 71 pp., 13 pls.

B 316. Contributions to economic geology, 1906, Part II: Coal, lignite, and peat. M. R. Campbell, geologist in charge. 1907. 543 pp., 23 pls.

B 317. Preliminary report on the Santa Maria oil district, Santa Barbara County, Cal., by Ralph Arnold and Robert Anderson. 1907. 69 pp., 2 pls.

B 318. Geology of oil and gas fields in Steubenville, Burgettstown, and Claysville quadrangles, Ohio, West Virginia, and Pennsylvania, by W. T. Griswold and M. J. Munn. 1907. 196 pp., 13 pls.

B 320. The Downtown district of Leadville, Colo., by S. F. Emmons and J. D. Irving. 1907. 75 pp., 7 pls.

B 321. Geology and oil resources of the Summerland district, Santa Barbara County, Cal., by Ralph Arnold. 1907. 91 pp., 20 pls.

B 322. Geology and oil resources of the Santa Maria oil district, Santa Barbara County, Cal., by Ralph Arnold and Robert Anderson. 1907. 161 pp., 26 pls.

B. 326. The Arkansas coal field, by A. J. Collier, with reports on the paleontology, by David White and G. H. Girty. 1907. — pp., 6 pls.

B. 327. Geologic reconnaissance in Matanuska and Talkeetna basins, by Sidney Paige and Adolph Knopf. 1907. 71 pp., 4 pls.

SERIES B, DESCRIPTIVE GEOLOGY.

B 23. Observations on the junction between the Eastern sandstone and the Keweenaw series on Keweenaw Point, Lake Superior, by R. D. Irving and T. C. Chamberlin. 1885. 124 pp., 17 pls. (Out of stock.)

B 33. Notes on geology of northern California, by J. S. Diller. 1886. 23 pp. (Out of stock.)

B 39. The upper beaches and deltas of Glacial Lake Agassiz, by Warren Upham. 1887. 84 pp., 1 pl. (Out of stock.)

B 40. Changes in river courses in Washington Territory due to glaciation, by Bailey Willis. 1887. 10 pp., 4 pls. (Out of stock.)

B 45. The present condition of knowledge of the geology of Texas, by R. T. Hill. 1887. 94 pp. (Out of stock.)

B 53. The geology of Nantucket, by N. S. Shaler. 1889. 55 pp., 10 pls. (Out of stock.)

B 57. A geological reconnaissance in southwestern Kansas, by Robert Hay. 1890. 49 pp., 2 pls.

B 58. The glacial boundary in western Pennsylvania, Ohio, Kentucky, Indiana, and Illinois, by G. F. Wright, with introduction by T. C. Chamberlin. 1890. 112 pp., 8 pls. (Out of stock.)

B 67. The relations of the traps of the Newark system in the New Jersey region, by N. H. Darton. 1890. 82 pp. (Out of stock.)

B 104. Glaciation of the Yellowstone Valley north of the Park, by W. H. Weed. 1893. 41 pp., 4 pls.

B 108. A geological reconnaissance in central Washington, by I. C. Russell. 1893. 108 pp., 12 pls. (Out of stock.)

B 119. A geological reconnaissance in northwest Wyoming, by G. H. Eldridge. 1894. 72 pp., 4 pls.

B 137. The geology of the Fort Riley Military Reservation and vicinity, Kansas, by Robert Hay. 1896. 35 pp., 8 pls.

B 144. The moraines of the Missouri Coteau and their attendant deposits, by J. E. Todd. 1896. 71 pp., 21 pls.

B 158. The moraines of southeastern South Dakota and their attendant deposits, by J. E. Todd. 1899.

B 165. Contributions to the geology of Maine, by H. S. Williams and H. E. Gregory. 1900. 212 pp., 14 pls.

WS 70. Geology and water resources of the Patrick and Goshen Hole quadrangles in eastern Wyoming and western Nebraska, by G. I. Adams. 1902. 50 pp., 11 pls.

B 199. Geology and water resources of the Snake River Plains of Idaho, by I. C. Russell. 1902. 192 pp., 25 pls.

PP 1. Preliminary report on the Ketchikan mining district, Alaska, with an introductory sketch of the geology of southeastern Alaska, by A. H. Brooks. 1902. 120 pp., 2 pls.

PP 2. Reconnaissance of the northwestern portion of Seward Peninsula, Alaska, by A. J. Collier. 1902. 70 pp., 11 pls.

PP 3. Geology and petrography of Crater Lake National Park, by J. S. Diller and H. B. Patton. 1902. 167 pp., 19 pls.

PP 10. Reconnaissance from Fort Hamlin to Kotzebue Sound, Alaska, by way of Dall, Kanuti, Allen, and Kowak rivers, by W. C. Mendenhall. 1902. 68 pp., 10 pls.

PP 11. Clays of the United States east of the Mississippi River, by Heinrich Ries. 1903. 298 pp., 9 pls. (Out of stock.)

PP 12. Geology of the Globe copper district, Arizona, by F. L. Ransome. 1903. 168 pp., 27 pls.

PP 13. Drainage modifications in southeastern Ohio and adjacent parts of West Virginia and Kentucky, by W. G. Tight. 1903. 111 pp., 17 pls. (Out of stock.)

B 208. Descriptive geology of Nevada south of the fortieth parallel and adjacent portions of California, by J. E. Spurr. 1903. 229 pp., 8 pls. (Out of stock.)

B 209. Geology of Ascutney Mountain, Vermont, by R. A. Daly. 1903. 122 pp., 7 pls.

WS 78. Preliminary report on artesian basins in southwestern Idaho and southeastern Oregon, by I. C. Russell. 1903. 51 pp., 2 pls.

PP 15. Mineral resources of the Mount Wrangell district, Alaska, by W. C. Mendenhall and F. C. Schrader. 1903. 71 pp., 10 pls.

PP 17. Preliminary report on the geology and water resources of Nebraska west of the one hundred and third meridian, by N. H. Darton. 1903. 69 pp., 43 pls.

B 217. Notes on the geology of southwestern Idaho and southeastern Oregon, by I. C. Russell. 1903. 83 pp., 18 pls.

B 219. The ore deposits of Tonopah, Nevada (preliminary report), by J. E. Spurr. 1903. 31 pp., 1 pl.

PP 20. A reconnaissance in northern Alaska in 1901, by F. C. Schrader. 1904. 139 pp., 16 pls.

PP 21. The geology and ore deposits of the Bisbee quadrangle, Arizona, by F. L. Ransome. 1904. 168 pp., 29 pls.

WS 90. Geology and water resources of part of the lower James River Valley, South Dakota, by J. E. Todd and C. M. Hall. 1904. 47 pp., 23 pls.

PP 25. The copper deposits of the Encampment district, Wyoming, by A. C. Spencer. 1904. 107 pp., 2 pls. (Out of stock.)

PP 26. Economic resources of the northern Black Hills, by J. D. Irving, with contributions by S. F. Emmons and T. A. Jaggar, jr. 1904. 222 pp., 20 pls.

PP 27. A geological reconnaissance across the Bitterroot Range and Clearwater Mountains in Montana and Idaho, by Waldemar Lindgren. 1904. 122 pp., 15 pls.

PP 31. Preliminary report on the geology of the Arbuckle and Wichita mountains in Indian Territory and Oklahoma, by J. A. Taff, with an appendix on reported ore deposits in the Wichita Mountains, by H. F. Bain. 1904. 97 pp., 8 pls.

B 235. A geological reconnaissance across the Cascade Range near the forty-ninth parallel, by G. O. Smith and F. C. Calkins. 1904. 103 pp., 4 pls.

B 236. The Porcupine placer district, Alaska, by C. W. Wright. 1904. 35 pp., 10 pls.

B 237. Igneous rocks of the Highwood Mountains, Montana, by L. V. Pirsson. 1904. 208 pp., 7 pls.

B 238. Economic geology of the Iola quadrangle, Kansas, by G. I. Adams, Erasmus Haworth, and W. R. Crane. 1904. 83 pp., 1 pl.

PP 32. Geology and underground water resources of the central Great Plains, by N. H. Darton. 1905. 433 pp., 72 pls.

WS 110. Contributions to hydrology of eastern United States, 1904; M. L. Fuller, geologist in charge, 1905. 211 pp., 5 pls.

B 242. Geology of the Hudson Valley between the Hoosic and the Kinderhook, by T. Nelson Dale, 1904. 63 pp., 3 pls.

PP 34. The Delavan lobe of the Lake Michigan glacier of the Wisconsin stage of glaciation and associated phenomena, by W. C. Alden. 1904. 106 pp., 15 pls.

PP 35. Geology of the Perry Basin in southeastern Maine, by G. O. Smith and David White. 1905. 107 pp., 6 pls.

B 243. Cement materials and industry of the United States, by E. C. Eckel. 1905. 395 pp., 15 pls.

B 246. Zinc and lead deposits of northeastern Illinois, by H. F. Bain. 1904. 56 pp., 5 pls.

B 247. The Fairhaven gold placers of Seward Peninsula, Alaska, by F. H. Moffit. 1905. 85 pp., 14 pls.

B 249. Limestones of southwestern Pennsylvania, by F. G. Clapp. 1905. 52 pp., 7 pls.

B 250. The petroleum fields of the Pacific coast of Alaska, with an account of the Bering River coal deposit, by G. C. Martin. 1905. 65 pp., 7 pls.

B 251. The gold placers of the Fortymile, Birch Creek, and Fairbanks regions, Alaska, by L. M. Prindle. 1905. 16 pp., 16 pls.

WS 118. Geology and water resources of a portion of east-central Washington, by F. C. Calkins. 1905. 96 pp., 4 pls.
B 252. Preliminary report on the geology and water resources of central Oregon, by I. C. Russell. 1905. 138 pp., 24 pls.
PP 36. The lead, zinc, and fluorspar deposits of western Kentucky, by E. O. Ulrich and W. S. Tangier Smith. 1905. 218 pp., 15 pls.
PP 38. Economic geology of the Bingham mining district of Utah, by J. M. Boutwell, with a chapter on areal geology, by Arthur Keith, and an introduction on general geology, by S. F. Emmons. 1905. 413 pp., 49 pls.
PP 41. The geology of the central Copper River region, Alaska, by W. C. Mendenhall. 1905. 133 pp., 20 pls.
B 254. Report of progress in the geological resurvey of the Cripple Creek district, Colorado, by Waldemar Lindgren and F. L. Ransome. 1904. 36 pp.
B 255. The fluorspar deposits of southern Illinois, by H. Foster Bain. 1905. 75 pp., 6 pls. (Out of stock.)
B 256. Mineral resources of the Elders Ridge quadrangle, Pennsylvania, by R. W. Stone. 1905. 85 pp., 12 pls.
B 257. Geology and paleontology of the Judith River beds, by T. W. Stanton and J. B. Hatcher, with a chapter on the fossil plants, by F. H. Knowlton. 1905. 174 pp., 19 pls.
PP 42. Geology of the Tonopah mining district, Nevada, by J. E. Spurr. 1905. 295 pp., 24 pls.
WS 123. Geology and underground water conditions of the Jornada del Muerto, New Mexico, by C. R. Keyes. 1905. 42 pp., 9 pls. (Out of stock.)
WS 136. Underground waters of Salt River Valley, Arizona, by W. T. Lee. 1905. 194 pp., 24 pls.
PP 43. The copper deposits of Clifton-Morenci, Arizona, by Waldemar Lindgren. 1905. 375 pp., 25 pls.
B 265. Geology of the Boulder district, Colorado, by N. M. Fenneman. 1905. 101 pp., 5 pls.
B 267. The copper deposits of Missouri, by H. F. Bain and E. O. Ulrich. 1905. 52 pp., 1 pl.
PP 44. Underground water resources of Long Island, New York, by A. C. Veatch and others. 1905. 394 pp., 34 pls.
WS 148. Geology and water resources of Oklahoma, by C. N. Gould. 1905. 178 pp., 22 pls.
B 270. The configuration of the rock floor of Greater New York, by W. H. Hobbs. 1905. 96 pp., 5 pls.
B 272. Taconic physiography, by T. M. Dale. 1905. 52 pp., 14 pls.
PP 45. The geography and geology of Alaska, a summary of existing knowledge, by A. H. Brooks, with a section on climate, by Cleveland Abbe, jr., and a topographic map and description thereof, by R. M. Goode. 1905. 327 pp., 34 pls.
B 273. The drumlins of southeastern Wisconsin (preliminary paper), by W. C. Alden. 1905. 46 pp., 9 pls.
PP 46. Geology and underground water resources of northern Louisiana and southern Arkansas, by A. C. Veatch. 1906. 422 pp., 51 pls.
PP 49. Geology and mineral resources of part of the Cumberland Gap coal field, Kentucky, by G. H. Ashley and L. C. Glenn, in cooperation with the State Geological Department of Kentucky, C. J. Norwood, curator. 1906. 239 pp., 40 pls.
PP 50. The Montana lobe of the Keewatin ice sheet, by F. H. H. Calhoun. 1906. 62 pp., 7 pls.
B 277. Mineral resources of Kenai peninsula, Alaska: Gold fields of the Turnagain Arm region, by F. H. Moffit; and the coal fields of the Kachemak Bay region, by R. W. Stone. 1906. 80 pp., 18 pls.
WS 154. The geology and water resources of the eastern portion of the Panhandle of Texas, by C. N. Gould. 1906. 64 pp., 15 pls.
B 278. Geology and coal resources of the Cape Lisburne region, Alaska, by A. J. Collier. 1906. 54 pp., 9 pls. (Out of stock.)
B 279. Mineral resources of the Kittanning and Rural Valley quadrangles, Pennsylvania, by Charles Butts. 1906. 198 pp., 11 pls.
B 280. The Rampart gold-placer region, Alaska, by L. M. Prindle and F. L. Hess. 1906. 54 pp., 7 pls. (Out of stock.)
B 282. Oil fields of the Texas-Louisiana Gulf Coastal Plain, by N. M. Fenneman. 1906. 146 pp., 11 pls.
WS 157. Underground water in the valleys of Utah Lake and Jordan River, Utah, by G. B. Richardson. 1906. 81 pp., 9 pls.
PP 51. Geology of the Bighorn Mountains, by N. H. Darton. 1906. 129 pp., 47 pls.
WS 158. Preliminary report on the geology and underground waters of the Roswell artesian area, New Mexico, by C. A. Fisher. 1906. 29 pp., 9 pls.
PP 52. Geology and underground waters of the Arkansas Valley in eastern Colorado, by N. H. Darton. 1906. 90 pp., 28 pls.
WS 159. Summary of underground-water resources of Mississippi, by A. F. Crider and L. C. Johnson. 1906. 86 pp., 6 pls.
PP 53. Geology and water resources of the Bighorn basin, Wyoming, by C. A. Fisher. 1906. 72 pp. 16 pls.
B 283. Geology and mineral resources of Mississippi, by A. F. Crider. 1906. 99 pp., 4 pls.
B 286. Economic geology of the Beaver quadrangle, Pennsylvania (southern Beaver and northwest-

PP 54. The geology and gold deposits of the Cripple Creek district, Colorado, by W. Lindgren and F. L. Ransome. 1906. 516 pp., 29 pls.

PP 55. Ore deposits of the Silver Peak quadrangle, Nevada, by J. E. Spurr. 1906. 174 pp., 24 pls.

B 289. A reconnaissance of the Matanuska coal field, Alaska, in 1905, by G. C. Martin. 1906. 36 pp., 5 pls.

WS 164. Underground waters of Tennessee and Kentucky west of Tennessee River and of an adjacent area in Illinois, by L. C. Glenn. 1906. 173 pp., 7 pls.

B 293. Reconnaissance of some gold and tin deposits of the southern Appalachians, by L. C. Groton, with notes on the Dahlonega mines, by W. Lindgren. 1906. 134 pp., 9 pls.

B 294. Zinc and lead deposits of the upper Mississippi Valley, by H. Foster Bain. 1906. 155 pp., 16 pls.

B 295. The Yukon-Tanana region, Alaska, description of Circle quadrangle, by L. M. Prindle. 1906. 27 pp., 1 pl.

B 296. Economic geology of the Independence quadrangle, Kansas, by Frank C. Schrader and Erasmus Haworth. 1906. 74 pp., 6 pls.

WS 181. Geology and water resources of Owens Valley, California, by Willis T. Lee. 1906. 28 pp., 6 pls.

B 297. The Yampa coal field, Routt County, Colo., by N. M. Fenneman, Hoyt S. Gale, and M. R. Campbell. 1906. 93 pp., 9 pls.

B 330. Economic geology of the Amity quadrangle in eastern Washington County, Pa., by F. G. Clapp. 1906. 145 pp., 8 pls.

B 303. Preliminary account of Goldfield, Bullfrog, and other mining districts in southern Nevada, by F. L. Ransome; with notes on Manhattan district, by G. H. Garrey and W. H. Emmons. 1907. 98 pp., 5 pls.

B 304. Oil and gas fields of Greene County, Pa., by R. W. Stone and F. G. Clapp. 1907. 110 pp., 3 pls.

WS 188. Water resources of the Rio Grande Valley in New Mexico and their development, by W. T. Lee. 1906. 59 pp., 10 pls.

B 306. Rate of recession of Niagara Falls, accompanied by a report on the survey of the crest, by W. Carvel Hall. 1906. 31 pp., 11 pls.

PP 56. Geography and geology of a portion of southwestern Wyoming, with special reference to coal and oil, by A. C. Veatch. 1907. 178 pp., 26 pls.

B 308. A geologic reconnaissance in southwestern Nevada and eastern California, by S. H. Ball. 1907. 218 pp., 3 pls.

B 309. The Santa Clara Valley, Puente Hills, and Los Angeles oil districts, southern California, by G. H. Eldridge and Ralph Arnold. 1907. 266 pp., 41 pls.

PP 57. Geology of the Marysville mining district, Montana, a study of igneous intrusion and contact metamorphism, by Joseph Barrell. 1907. 178 pp., 16 pls.

WS 191. The geology and water resources of the western portion of the Panhandle of Texas, by C. N. Gould. 1907. 70 pp., 7 pls.

B 311. The green schists and associated granites and porphyries of Rhode Island, by B. K. Emerson and J. H. Perry. 1907. 74 pp., 2 pls.

WS 195. Underground waters of Missouri, their geology and utilization, by Edward Shepard. 1907. 224 pp., 6 pls.

WS 199. Underground water in Sanpete and central Sevier valleys, Utah, by G. B. Richardson. 1907. 63 pp., 6 pls.

WS 215. Geology and water resources of a portion of the Missouri River Valley in northeastern Nebraska, by G. E. Condra. 1908. — pp., 11 pls.

WS 216. Geology and water resources of the Republican River Valley in Nebraska and adjacent areas, by G. E. Condra. 1907. 71 pp., 13 pls.

B 317. Preliminary report on the Santa Maria Oil district, Santa Barbara County, Cal., by Ralph Arnold and Robert Anderson. 1907. 69 pp., 2 pls.

B 318. Geology of oil and gas fields in Steubenville, Burgettstown, and Claysville quadrangles, Ohio, West Virginia, and Pennsylvania, by W. T. Griswold and M. J. Munn. 1907. 196 pp., 13 pls.

B 319. Summary of controlling factors of artesian flows, by M. L. Fuller. 1908. — pp., 7 pls.

B 320. The Downtown district of Leadville, Colo., by S. F. Emmons and J. D. Irving. 1907. 75 pp., 7 pls.

B 321. Geology and oil resources of the Summerland district, Santa Barbara County, Cal., by Ralph Arnold. 1907. 91 pp., 20 pls.

B 322. Geology and oil resources of the Santa Maria oil district, Santa Barbara County, Cal., by Ralph Arnold and Robert Anderson. 1907. 161 pp., 26 pls.

B 326. The Arkansas coal field, by A. J. Collier, with reports on the paleontology, by David White and G. H. Girty. 1907. — pp., 6 pls.

B 327. Geologic reconnaissance in the Matanuska and Talkeetna basins, by Sidney Paige and Adolph Knopf. 1907. 71 pp., 4 pls.

Correspondence should be addressed to

THE DIRECTOR,
UNITED STATES GEOLOGICAL SURVEY,
WASHINGTON, D. C.

DECEMBER, 1907.

GEOLOGICAL SURVEY PUBLICATIONS ON ALASKA.

1891.

RUSSELL, I. C. Account of an expedition to the Yukon Valley in 1889. In Eleve
Ann. Rept., pt. 1, 1891, pp. 57–58. Extract from Professor Russell's c
plete report in Bull. Geol. Soc. America, vol. 1, 1890, pp. 99–162. (Ou
stock.)

——— Account of an expedition to the vicinity of Mount St. Elias in 1890.
Twelfth Ann. Rept., pt. 1, 1891, pp. 59–61. A full report of this exp
tion was published in Nat. Geog. Mag., vol. 3, 1892, pp. 53–203. (Ou
stock.)

1892.

DALL, W. H., and HARRIS, G. D. Summary of knowledge of Neocene geology
Alaska. In correlation Papers—Neocene: Bull. No. 84, 1892, pp. 232–2

HAYES, C. W. Account of expedition through the Yukon district. In Thirtee
Ann. Rept., pt. 1, 1892, pp. 91–94. A complete report was published
Nat. Geog. Mag., vol. 4, 1892, pp. 117–162. (Out of stock.)

1893.

RUSSELL, I. C. Second expedition to Mount St. Elias in 1891. In Thirteenth A
Rept., pt. 2, 1893, pp. 1–91. (Out of stock.)

1896.

DALL, W. H. Report on coal and lignite of Alaska. In Seventeenth Ann. Re
pt. 1, 1896, pp. 763–906. (Out of stock.)

REID, H. F. Glacier Bay and its glaciers. In Sixteenth Ann. Rept., pt. 1, 1
pp. 415–461. (Out of stock.)

WALCOTT, C. D., *Director*. Account of an investigation of the gold and coal depo
of southern Alaska. In Seventeenth Ann. Rept., pt. 1, 1896, pp. 56-
(Out of stock.)

1897.

WALCOTT, C. D., *Director*. Account of a reconnaissance of the gold district of
Yukon region. In Eighteenth Ann. Rept., pt. 1, 1897, pp. 52–54.

1898.

BECKER, G. F. Reconnaissance of the gold fields of southern Alaska, with so
notes on general geology. In Eighteenth Ann. Rept., pt. 3, 1898, pp. 1-

SPURR, J. E., and GOODRICH, H. B. Geology of the Yukon gold district, Alaska,
Josiah Edward Spurr; with an introductory chapter on the history and c
dition of the district to 1897, by Harold Beach Goodrich. In Eighteer
Ann. Rept., pt. 3, 1898, pp. 87–392.

WALCOTT, C. D., *Director*. Account of operations in Alaska in 1898. In Ninetee
Ann. Rept., pt. 1, 1898, pp. 20, 53, 116–117. (Out of stock.)

Map of Alaska, showing known gold-bearing rocks, with descriptive text contain
sketches of the geography, geology, and gold deposits and routes to
gold fields. Prepared in accordance with Public Resolution No. 3 of
Fifty-fifth Congress, second session, approved January 20, 1898. Prin
in the engraving and printing division of the United States Geological S
vey, Washington, D. C., 1898. 44 pp., 1 map. A special publicati
The data were brought together by S. F. Emmons, aided by W. H. I
and F. C. Schrader. (Out of stock.)

1899.

WALCOTT, C. D., *Director*. Account of operations in Alaska in 1898–99. In Twenti
Ann. Rept., pt. 1, 1899, pp. 12, 52–53, 97, 126–134. (Out of stock.)

Maps and descriptions of routes of exploration in Alaska in 1898, with general in
mation concerning the Territory. (Ten maps in accompanying envelop
Prepared in accordance with Public Resolution No. 25 of the Fifty-fi
Congress, third session, approved March 1, 1899. Printed in the engr
ing and printing division of the United States Geological Survey, Wa
ington, D. C., 1899. 138 pp., 10 maps in accompanying envelope.
special publication. Contributors: G. H. Eldridge, Robert Muldr
J. E. Spurr, W. S. Post, W. C. Mendenhall, F. C. Schrader, W. J. Pet

1900.

BAKER, MARCUS. Alaskan geographic names. In Twenty-first Ann. Rept., pt. 2, 1900, pp. 487–508.

BROOKS, A. H. A reconnaissance from Pyramid Harbor to Eagle City, Alaska, including a description of the copper deposits of the upper White and Tanana rivers. In Twenty-first Ann. Rept., pt. 2, 1900, pp. 331–391.

—— A reconnaissance in the Tanana and White River basins, Alaska, in 1898. In Twentieth Ann. Rept., pt. 7, 1900, pp. 425–494. Out of stock.

ELDRIDGE, G. H. A reconnaissance in the Susitna basin and adjacent territory, Alaska, in 1898. In Twentieth Ann. Rept., pt. 7, 1900, pp. 1–29.

GANNETT, HENRY. Altitudes in Alaska. Bull. No. 169, 1900, 13 pp.

MENDENHALL, W. C. A reconnaissance from Resurrection Bay to the Tanana River, Alaska, in 1898. In Twentieth Ann. Rept., pt. 7, 1900, pp. 265–340.

ROHN, OSCAR. A reconnaissance of the Chitina River and the Skolai Mountains, Alaska. In Twenty-first Ann. Rept., pt. 2, 1900, pp. 393–340. Out of stock.

SCHRADER, F. C. A reconnaissance of a part of Prince William Sound and the Copper River district, Alaska, in 1898. In Twentieth Ann. Rept., pt. 7, 1900, pp. 341–423. (Out of stock.

—— Preliminary report on a reconnaissance along the Chandlar and Koyukuk rivers, Alaska, in 1899. In Twenty-first Ann. Rept., pt. 2, 1900, pp. 441–486.

—— and BROOKS, A. H. Preliminary report on the Cape Nome gold region, Alaska, with maps and illustrations. Washington, Government Printing Office, 1900. 56 pp., 3 maps, and 19 pls. A special publication.

SPURR, J. E. A reconnaissance in southwestern Alaska in 1898. In Twentieth Ann. Rept., pt. 7, 1900, pp. 31–264.

WALCOTT, C. D., *Director*. Account of operations in Alaska in 1898–1900. In Twenty-first Ann. Rept., pt. 1, 1900, pp. 27–28, 86, 145–149.

1901.

BROOKS, A. H. An occurrence of stream tin in the York region, Alaska. In Mineral Resources of the U. S. for 1900, 1901, pp. 267–271. Published also as a separate. Washington, Government Printing Office, 1901, cover and pp. 1–5.

—— The coal resources of Alaska. In Twenty-second Ann. Rept., pt. 3, 1901, pp. 515–571.

——, RICHARDSON, G. B., and COLLIER, A. J. A reconnaissance of the Cape Nome and adjacent gold fields of Seward Peninsula, Alaska, in 1900. In a special publication entitled "Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900." Washington, Government Printing Office, 1901, pp. 1–180.

MENDENHALL, W. C. A reconnaissance in the Norton Bay region, Alaska, in 1900. In a special publication entitled "Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900." Washington, Government Printing Office, 1901, pp. 181–218.

SCHRADER, F. C., and SPENCER, A. C. The geology and mineral resources of a portion of the Copper River district, Alaska. A special publication. Washington, Government Printing Office, 1901, pp. 1–94.

WALCOTT, C. D., *Director*. Account of operations in Alaska in 1900–1901. In Twenty-second Ann. Rept., pt. 1, 1901, pp. 35, 95–99, 144, 166–170.

1902.

BROOKS, A. H. Preliminary report on the Ketchikan mining district, Alaska, with an introductory sketch of the geology of southeastern Alaska. Prof. Paper No. 1, 1902, pp. 1–120.

COLLIER, A. J. A reconnaissance of the northwestern portion of Seward Peninsula, Alaska. Prof. Paper No. 2, 1902, pp. 1–70.

MENDENHALL, W. C. A reconnaissance from Fort Hamlin to Kotzebue Sound, Alaska, by way of Dall, Kanuti, Allen, and Kowak rivers. Prof. Paper No. 10, 1902, pp. 1–68.

WALCOTT, C. D., *Director*. Account of operations in Alaska in 1901–2. In Twenty-third Ann. Rept., 1902, pp. 20, 21, 57, 71–82, 161.

1903.

BAKER, MARCUS. Geographic dictionary of Alaska. Bull. No. 187, 1902, pp. 1–446.

BROOKS, A. H. Placer gold mining in Alaska in 1902. In Bull. No. 213, 1903, pp. 41–48. (Out of stock.)

—— Stream tin in Alaska. In Bull. No. 213, 1903, pp. 92–93. (Out of stock.)

COLLIER, A. J. Coal resources of the Yukon basin, Alaska. In Bull. No. 213, 1903, pp. 276–283. (Out of stock.)
——— The coal resources of the Yukon, Alaska. Bull. No. 218, 1903, pp. 1–71.
——— The Glenn Creek gold mining district, Alaska. In Bull. No. 213, 1903, pp. 49–56. (Out of stock.)
MENDENHALL, W. C. The Chistochina gold field, Alaska. In Bull. No. 213, 1903, pp. 71–75. (Out of stock.)
——— and SCHRADER, F. C. Copper deposits of Mount Wrangell region, Alaska. In Bull. No. 213, 1903, pp. 141–148. (Out of stock.)
——— The mineral resources of the Mount Wrangell district, Alaska. Prof. Paper No. 15, 1903, pp. 1–71.
WALCOTT, C. D., *Director*. Account of operations in Alaska in 1902–3. In Twenty-fourth Ann. Rept., 1903, pp. 78–107, 167, 256.

1904.

BROOKS, A. H. Placer gold mining in Alaska in 1903. In Bull. No. 225, 1904, pp. 43–59.
COLLIER, A. J. Tin deposits of the York region, Alaska. In Bull. No. 225, 1904, pp. 154–167.
——— Tin deposits of the York region, Alaska. Bull. No. 229.
MARTIN, G. C. Petroleum fields of Alaska and the Bering River coal field. In Bull. No. 225, 1904, pp. 365–382.
MOFFIT, F. H. The Kotzebue placer gold field of Seward Peninsula, Alaska. In Bull. No. 225, 1904, pp. 74–80.
PRINDLE, L. M. Gold placers of the Fairbanks district, Alaska. In Bull. No. 225, 1904, pp. 64–73.
SCHRADER, F. C., and PETERS, W. J. A reconnaissance in northern Alaska, across the Rocky Mountains, along the Koyukuk, John, Anaktuvuk, and Colville rivers, and the Arctic coast to Cape Lisburne, in 1901. Prof. Paper No. 20, 1904, pp. 1–139.
SPENCER, A. C. The Juneau gold belt, Alaska. In Bull. No. 225, 1904, pp. 28–42.
WALCOTT, C. D., *Director*. Account of operations in Alaska in 1903–4. In Twenty-fifth Ann. Rept., 1904, pp. 68–85, 346, 348, 352, 354.
WRIGHT, C. W. The Porcupine placer mining district, Alaska. In Bull. No. 225, 1904, pp. 60–63.
——— The Porcupine placer district, Alaska. Bull. No. 236, 1904, pp. 1–35.

1905.

BROOKS, A. H. Administrative report. In Report on progress of investigations of mineral resources of Alaska in 1904: Bull. U. S. Geol. Survey No. 259, 1905, pp. 13–17.
——— Placer mining in Alaska in 1904. In Bull. No. 259, 1905, pp. 18–31.
COLLIER, A. J. Coal fields of the Cape Lisburne region. In Bull. No. 259, 1905, pp. 172–185.
——— Gold mine on Unalaska Island. In Bull. No. 259, 1905, pp. 102–103.
——— Recent developments of Alaskan tin deposits. In Bull. No. 259, 1905, pp. 120–127.
MARTIN, G. C. Bering River coal field. In Bull. No. 259, 1905, pp. 140–150.
——— Cape Yaktag placers. In Bull. No. 259, 1905, pp. 88–89.
——— Gold deposits of the Shumagin Islands. In Bull. No. 259, 1905, pp. 100–101.
——— Notes on the petroleum fields of Alaska. In Bull. No. 259, 1905, pp. 128–139.
——— The petroleum fields of the Pacific coast of Alaska, with an account of the Bering River coal deposits. Bull. No. 250, 1905, pp. 1–64.
MENDENHALL, W. C. Geology of the central Copper River region, Alaska. Prof. Paper No. 41, 1905, pp. 1–133.
MOFFIT, F. H. Gold placers of Turnagain Arm, Cook Inlet. In Bull. No. 259, 1905, pp. 90–99.
——— The Fairhaven gold placers of Seward Peninsula. Bull. No. 247, pp. 1–85.
PRINDLE, L. M. The gold placers of the Fortymile, Birch Creek, and Fairbanks regions. Bull. No. 251, 1905, pp. 1–89.
——— and HESS, F. L. Rampart placer region. In Bull. No. 259, 1905, pp. 104–119.
PURINGTON, C. W. Methods and costs of gravel and placer mining in Alaska. Bull. No. 263, 1905, pp. 1–273. Also in Bull. No. 259, 1905, pp. 39–46.

WALCOTT, C. D., *Director*. Account of operations in Alaska in 1904–5. In Twenty-sixth Ann. Rept., 1905, pp. 73–80.
WRIGHT, F. E. and C. W. Economic developments in southeastern Alaska. In Bull. No. 259, 1905, pp. 47–68.

1906.

BAKER, M., and MCCORMICK, J. C. Geographic dictionary of Alaska, second edition. Bull. No. 299, 1906, pp. 1–690.
BROOKS, A. H. The geography and geology of Alaska, a summary of existing knowledge, with a section on climate, by Cleveland Abbe, jr., and a topographic map and description thereof, by R. U. Goode. Prof. Paper No. 45, 1906, pp. 1–327.
—— Administrative report. In Report on progress of investigations of mineral resources of Alaska in 1905: Bull. U. S. Geol. Survey No. 284, 1906, pp. 1–3.
—— The mining industry in 1905. In Bull. No. 284, 1906, pp. 4–9.
—— Railway routes. In Bull. No. 284, 1906, pp. 10–17.
COLLIER, A. J. Geology and coal resources of Cape Lisburne region, Alaska. Bull. No. 278, 1906, pp. 1–54.
GRANT, U. S. Copper and other mineral resources of Prince William Sound. In Bull. No. 284, 1906, pp. 78–87.
HESS, F. L. The York tin region. In Bull. No. 284, 1906, pp. 145–157.
MARTIN, G. C. Markets for Alaska coal. In Bull. No. 284, 1906, pp. 18–27.
—— Distribution and character of the Bering River coal. In Bull. No. 284, 1906, pp. 65–76.
—— Preliminary statement on the Matanuska coal field. In Bull. No. 284, 1906, pp. 88–100.
—— Reconnaissance of the Matanuska coal field, Alaska, in 1905. Bull. No. 289, 1906, pp. 1–36.
MOFFIT, F. H. Gold mining on Seward Peninsula. In Bull. No. 284, 1906, pp. 132–141.
—— and STONE, R. W. Mineral resources of the Kenai Peninsula; Gold fields of the Turnagain Arm region, by F. H. Moffit, pp. 1–52; Coal fields of the Kachemak Bay region, by R. W. Stone, pp. 53–73. Bull. No. 277, 1906, pp. 1–80.
PAIGE, SIDNEY. The Herendeen Bay coal field. In Bull. No. 284, 1906, pp. 101–108.
PRINDLE, L. M. Yukon placer fields. In Bull. No. 284, 1906, pp. 109–127.
—— The Yukon-Tanana region, Alaska; description of Circle quadrangle. Bull. No. 295, 1906, pp. 1–27.
—— and HESS, F. L. The Rampart gold placer region, Alaska. Bull. No. 280, 1906, pp. 1–54.
SPENCER, A. C., and WRIGHT, C. W. The Juneau gold belt, Alaska, by A. C. Spencer, pp. 1–137; and A reconnaissance of Admiralty Island, Alaska, by C. W. Wright, pp. 138–154. Bull. No. 287, 1906, pp. 1–161.
STONE, R. W. Reconnaissance from Circle to Fort Hamlin. In Bull. No. 284, 1906, pp. 128–131.
TARR, R. S. The Yakutat Bay region. In Bull. No. 284, 1906, pp. 61–64.
WALCOTT, C. D., *Director*. Account of operations in Alaska in 1905–6. In Twenty-seventh Ann. Rept., 1906, pp. 25–27.
WRIGHT, C. W. Nonmetallic deposits of southeastern Alaska. In Bull. No. 284, 1906, pp. 55–60.
WRIGHT, F. E. and C. W. Lode mining in southeastern Alaska. In Bull. No. 284, 1906, pp. 30–53.

1907.

BLACKWELDER, ELIOT. Reconnaissance on the Pacific coast from Yakutat to Alsek River. In Bull. No. 314, 1907, pp. 82–88.
BROOKS, A. H. Administrative report: In Report on progress of investigations of mineral resources of Alaska in 1906: Bull. U. S. Geol. Survey No. 314, 1907, pp. 11–18.
—— The mining industry in 1906. In Bull. No. 314, 1907, pp. 19–39.
—— The Kougarok region. In Bull. No. 314, 1907, pp. 164–181.
—— The Circle precinct. In Bull. No. 314, 1907, pp. 187–204.
HOYT, J. C., and HENSHAW, F. F. Water supply of Nome region, Seward Peninsula, Alaska, 1906. Water-Supply Paper No. 196, 1907, pp. 1–52.
—— —— Water supply of Nome region, Seward Peninsula, 1906. In Bull. No. 314, 1907, pp. 182–186.
MARTIN, G. C. The Alaska coal fields. In Bull. No. 314, 1907, pp. 40–46.
—— Petroleum at Controller Bay. In Bull. No. 314, 1907, pp. 89–103.

MOFFIT, F. H. The Nome region. In Bull. 314, 1907, pp. 126–145.
PAIGE, S., and KNOPF, A. Geologic reconnaissance in the Matanuska and Talkee basins. Bull. No. 327, 1907, pp. 1–71.
——— Reconnaissance in the Matanuska and Talkeetna basins. In Bull. No. 3 1907, pp. 104–125.
PRINDLE, L. M. The Bonnifield and Kantishna regions. In Bull. No. 314, 19 pp. 205–226.
SMITH, P. S. Gold fields of the Solomon and Niukluk river basins. In Bull. 314, 1907, pp. 146–156.
——— Geology and mineral resources of Iron Creek. In Bull. No. 314, 1907, 157–163.
WRIGHT, C. W. Lode mining in southeastern Alaska. In Bull. No. 314, 1907, 47–72.
——— Nonmetalliferous mineral resources of southeastern Alaska. In Bull. 314, 1907, pp. 73–81.

PAPERS ON ALASKA IN PREPARATION.

BROOKS, A. H., and PRINDLE, L. M. An exploration in the Mount McKinley regi
COLLIER, A. J., HESS, F. L., and BROOKS, A. H. The gold placers of a part of Seward Peninsula, Alaska. Bull. No. 328, 1907, pp. 1–
GRANT, U. S. The geology and mineral resources of the Prince William Sou region.
MARTIN, G. C. Geology and mineral resources of Controller Bay region.
MOFFIT, F. H. The Chitina copper belt.
———, HESS, F. L., and SMITH, P. S. Geology of the area represented on Nome and Grand Central special maps.
PRINDLE, L. M. The Yukon-Tanana region, Alaska; description of the Fairba and Rampart quadrangles.
SMITH, P. S. Geology and mineral resources of the areas represented by the S mon and Casadepaga quadrangles.
TARR, R. S. Geologic reconnaissance of the Yakutat Bay region.
WRIGHT, F. E. and C. W. Mineral resources of the Wrangell and Ketchikan min districts, Alaska.

TOPOGRAPHIC MAPS OF ALASKA.

The following maps are for sale at 5 cents a copy, or $3 per hundred:

Casadepaga quadrangle, Seward Peninsula; scale, 1:62500. T. G. Gerdine.
Fortymile quadrangle; scale, 1:250000. E. C. Barnard.
Grand Central Special, Seward Peninsula; scale, 1:62500. T. G. Gerdine.
Juneau Special quadrangle; scale, 1:62500. W. J. Peters.
Nome Special, Seward Peninsula; scale, 1:62500. T. G. Gerdine.
Solomon Special, Seward Peninsula; scale, 1:62500. T. G. Gerdine.

The following maps are for sale at 15 cents a copy, or $9 per hundred:

Reconnaissance map of southern part of Seward Peninsula; scale, 1:250000. E. Barnard and T. G. Gerdine.
Reconnaissance map of northwestern part of Seward Peninsula; scale, 1:2500 T. G. Gerdine and D. C. Witherspoon.
Reconnaissance map of northeastern part of Seward Peninsula; scale, 1:2500 D. C. Witherspoon.

The following maps are included as illustrations of published reports, but have been issued separately. They can be obtained only by securing the report.

Alaska, topographic map of; scale, 1:2500000. Preliminary edition. Contained "The geography and geology of Alaska, a summary of existing knowledge, et Prof. Paper No. 45. R. U. Goode.
Cape Nome and adjacent gold fields; scale, 1:250000. Contained in a special publi tion of the United States Geological Survey, entitled "Reconnaissances in Cape Nome and Norton Bay regions, Alaska," 1900. Washington. Gove ment Printing Office, 1901. E. C. Barnard.
Chitina and lower Copper River region; scale, 1:250000. Contained in a special p lication of the United States Geological Survey, entitled "The geology and m eral resources of a portion of the Copper River district, Alaska." Washingt Government Printing Office, 1901. T. G. Gerdine and D. C. Witherspoon.
Circle quadrangle Yukon-Tanana region; scale 1:250000. Contained in "The Yuk

Cook Inlet, head of, to the Tanana via Matanuska and Delta rivers, also part of Kenai Peninsula; scale, 1:625000. Contained in "A reconnaissance from Resurrection Bay to Tanana River, Alaska, in 1898." Twentieth Ann. Rept., pt. 7, 1900, pp. 265–340. W. C. Mendenhall.

Cook Inlet, region from head of, to Kuskokwim River and down the Kuskokwim to Bering Sea, Bristol Bay, and a part of Alaska Peninsula; scale 1:625000. Published in sections in "A reconnaissance in southwestern Alaska, in 1898." Twentieth Ann. Rept., pt. 7, 1900, pp. 31–264. W. S. Post.

Cook Inlet placer fields; scale 1:250000. Contained in "Mineral Resources of Kenai Peninsula, Alaska." Bull. No. 277. E. G. Hamilton.

Copper and upper Chistochina rivers; scale, 1:250000. Contained in "Geology of the central Copper River region, Alaska." Prof. Paper No. 41. T. G. Gerdine.

Copper, Nabesna, and Chisana rivers, headwaters of; scale, 1:250000. Contained in "Geology of the central Copper River region, Alaska." Prof. Paper No. 41. D. C. Witherspoon.

Copper River region; scale, 1:376000. Contained in "A reconnaissance of a part of Prince William Sound and the Copper River district, Alaska, in 1898." Twentieth Ann. Rept., pt. 7, 1900, pp. 341–423. P. G. Lowe, Emil Mahlo, and F. C. Schrader. (Out of stock.)

Fairbanks and Birch Creek districts, reconnaissance maps of; scale, 1:250000. Contained in "The gold placers of the Fortymile, Birch Creek, and Fairbanks regions." Bull. No. 251, 1905. T. G. Gerdine.

Fort Yukon to Kotzebue Sound, reconnaissance map of; scale, 1:625000. Contained in "Reconnaissance from Fort Hamlin to Kotzebue Sound, Alaska, by way of Dall, Kanuti, Allen, and Kowak rivers." Prof. Paper No. 10, 1902. D. L. Reaburn.

Koyukuk River to mouth of Colville River, including John River; scale, 1:625000. Contained in "A reconnaissance in northern Alaska across the Rocky Mountains, along Koyukuk, John, Anaktuvuk, and Colville rivers, and the Arctic coast to Cape Lisburne, in 1901." Prof. Paper No. 20. W. J. Peters.

Koyukuk and Chandlar rivers, portions of; scale, 1:625000. Contained in "Preliminary report of a reconnaissance along the Chandlar and Koyukuk rivers, Alaska, in 1899." Twenty-first Ann. Rept., pt. 2, 1900. T. G. Gerdine.

Lynn canal, routes from, via headwaters of White and Tanana rivers to Eagle City; scale, 1:625000. Contained in "A reconnaissance from Pyramid Harbor to Eagle City, Alaska." Twenty-first Ann. Rept., pt. 2, 1900, pp. 331–391. W. J. Peters.

Mount McKinley region; scale, 1:625000. Contained in "The geography and geology of Alaska, a summary of existing knowledge, etc." Prof. Paper No. 45. D. L. Reaburn.

Norton Bay region; scale, 1:625000. Contained in a special publication of the United States Geological Survey, entitled "Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900." Washington. Government Printing Office, 1901. W. J. Peters.

Porcupine placer region; scale, 1 inch=3½ miles. Contained in "The Porcupine placer district, Alaska." Bull. No. 236. C. W. Wright.

Prince William Sound, sketch map of; scale 1:376000. Contained in a special publication of the United States Geological Survey, entitled "The geology and mineral resources of a portion of the Copper River district, Alaska." Washington. Government Printing Office, 1901. Emil Mahlo and F. C. Schrader.

Seward Peninsula, northeastern portion of, topographic reconnaissance of; scale, 1:250000. Contained in "The Fairhaven gold placers, Seward Peninsula, Alaska." Bull. No. 247, 1905. D. C. Witherspoon.

Seward Peninsula, northwestern part of; scale, 1:250000. Contained in "A reconnaissance of the northwestern portion of Seward Peninsula, Alaska." Prof. Paper No. 2, 1902. T. G. Gerdine.

Sushitna River and adjacent territory; scale, 1:625000. Contained in "A reconnaissance in the Sushitna basin and adjacent territory, Alaska, in 1898." Twentieth Ann. Rept., pt. 7, 1900, pp. 1–29. Robert Muldrow.

Tanana and White rivers, portions of; scale, 1:625000. Contained in "A reconnaissance in the Tanana and White River basins, Alaska, in 1898." Twentieth Ann. Rept., pt. 7, 1900, pp. 425–494. W. J. Peters.

York region; scale, 1:250000. Contained in "The tin deposits of the York region, Alaska." Bull. No. 229. T. G. Gerdine.

York and Kugruk regions, sketch maps of. Contained in a special publicati of the United States Geological Survey, entitled "Reconnaissances in Cape No and Norton Bay regions, Alaska, in 1900." Washington. Government Print Office, 1901. A. H. Brooks.

Yukon-Tanana region, reconnaissance map of; scale, 1:625000. Contained in "T gold placers of the Fortymile, Birch Creek, and Fairbanks regions, Alaska." B No. 251. T. G. Gerdine.

TOPOGRAPHIC MAPS OF ALASKA IN PREPARATION.

Berners Bay Special; scale, 1:62500. R. B. Oliver.
Chitina quadrangle; scale, 1:250000. T. G. Gerdine and D. C. Witherspoon.
Controller Bay region Special; scale, 1:62500. E. G. Hamilton.
Fairbanks Special; scale, 1:62500. T. G. Gerdine and R. H. Sargent.
Fairbanks quadrangle; scale, 1:250000. D. C. Witherspoon.
Kasaan Peninsula Special; scale, 1:62500. D. C. Witherspoon and J. W. Bagley.
Rampart quadrangle; scale, 1:250000. D. C. Witherspoon.
Reconnaissance map of Matanuska River region; scale, 1:250000. T. G. Gerd and R. H. Sargent.

O



York and Kugruk regions, sketch maps of. Contained in a special p of the United States Geological Survey, entitled "Reconnaissances in C and Norton Bay regions, Alaska, in 1900." Washington. Governmen Office, 1901. A. H. Brooks.

Yukon-Tanana region, reconnaissance map of; scale, 1:625000. Containe gold placers of the Fortymile, Birch Creek, and Fairbanks regions, Alask No. 251. T. G. Gerdine.

TOPOGRAPHIC MAPS OF ALASKA IN PREPARATION.

Berners Bay Special; scale, 1:62500. R. B. Oliver.
Chitina quadrangle; scale, 1:250000. T. G. Gerdine and D. C. Witherspo
Controller Bay region Special; scale, 1:62500. E. G. Hamilton.
Fairbanks Special; scale, 1:62500. T. G. Gerdine and R. H. Sargent.
Fairbanks quadrangle; scale, 1:250000. D. C. Witherspoon.
Kasaan Peninsula Special; scale, 1:62500. D. C. Witherspoon and J. W.
Rampart quadrangle; scale, 1:250000. D. C. Witherspoon.
Reconnaissance map of Matanuska River region; scale, 1:250000. T. G and R. H. Sargent.

O

Bulletin No. 328

Series { A, Economic Geology, 106
B, Descriptive Geology, 130

DEPARTMENT OF THE INTERIOR
UNITED STATES GEOLOGICAL SURVEY
GEORGE OTIS SMITH, DIRECTOR

THE GOLD PLACERS OF PARTS OF SEWARD PENINSULA, ALASKA

INCLUDING THE

NOME, COUNCIL, KOUGAROK, PORT CLARENCE, AND GOODHOPE PRECINCTS

BY

ARTHUR J. COLLIER, FRANK L. HESS, PHILIP S. SMITH, AND ALFRED H. BROOKS

WASHINGTON
GOVERNMENT PRINTING OFFICE
1908

CONTENTS.

	Page.
PREFACE, BY ALFRED H. BROOKS	7
DEVELOPMENT OF THE MINING INDUSTRY, BY ALFRED H. BROOKS	10
Foreword	10
Discovery of gold	13
The first year of mining	19
The rush of 1900	24
Progress in 1901	28
Growth of mining from 1902 to 1904	31
Mining developments in 1905–6	36
Summary	38
GEOGRAPHY AND GEOLOGY, BY ARTHUR J. COLLIER	40
Introduction	40
Geography	41
General outline	41
Shore line	42
Relief	44
Drainage	48
Climate	50
Geographic location	50
Observations	51
Temperature	51
Precipitation	52
Storms	53
River and harbor ice	53
Vegetable and animal life	54
Vegetation	54
Fish and game	56
Commercial features	57
General geology	60
Introduction	60
Description of geologic maps	63
Metamorphic rocks	66
Kigluaik group	66
Kuzitrin formation	69
Nome group	70
General description	70
Port Clarence limestone	73
Undifferentiated schists of Fairhaven precinct	79
Slates in the York region	79
Limestone near Palazruk	81
Summary of the metamorphic formations	82
Unaltered sedimentary rocks	83
Unconsolidated deposits	85
Introduction	85
Gravel-plain deposits	86
Character and extent	86
Origin of the gravel plains	90
Age of the gravel plains	91
Alluvial deposits	92
Character and extent	92
Origin and age of the alluvium	93

GEOGRAPHY AND GEOLOGY, BY ARTHUR J. COLLIER—Continued.
General geology—Continued.
Unconsolidated deposits—Continued. Page.
High-bench deposits 93
Character and extent 93
Origin and age of the high benches 94
Glaciation and glacial deposits 94
Igneous rocks 99
Introduction 99
Greenstones 99
Basalts 101
Granitic rocks 103
Quartz veins 108
OUTLINE OF ECONOMIC GEOLOGY, BY ALFRED H. BROOKS 111
General statement 111
Genesis and classification of placers 114
Gold in bed rock 116
Introduction 116
Grouping of deposits 116
Disseminated deposits 117
Concentrated deposits 118
Cassiterite and galena bearing lodes 120
Distribution of mineralization 121
Age of mineralization 124
Separation of gold from bed rock 125
Transportation and deposition of placer gold 128
Concentration of gold on bed rock 128
Reconcentration of placer gold 130
Hints to prospectors 131
Introduction 131
Gold in bed rock 132
Gold in placers 133
Geologic maps 134
The future of the mining industry 135
DESCRIPTION OF PLACERS, BY ARTHUR J. COLLIER AND FRANK L. HESS 140
Introduction 140
Distribution of gold 140
Classification of the placers 142
Introduction 142
Gravel-plain placers 144
Creek placers 144
River-bar placers 145
Beach placers 145
Nome precinct 146
Introduction 146
Geology 147
Discovery and development 148
Nome region 149
General outline 149
Beach placers 151
Placers of the coastal plain 156
Introduction 156
Old beach lines 158
Unconcentrated gravel-plain placers 165
Reconcentrated gravel-plain placers 166
Bar, creek, and bench placers of the upland 170
Nome River basin 170
Snake River basin 182
High-bench placers 198
Introduction 198
General description 199
High-bench placers of King Mountain 199
High-bench placers north of Anvil Peak 206

DESCRIPTION OF PLACERS, ETC.—Continued.
Page.
Nome precinct—Continued.
Streams tributary to Bering Sea between Cripple and Sinuk rivers 215
Sinuk River basin 215
Region west of Sinuk River 217
Eldorado River region 221
Solomon River region 222
Council precinct 233
Introduction 233
Geology 234
Developments 235
Description of placers 236
Fish River and its eastern drainage 236
Fox River 236
Niukluk River basin 238
Notes on recent developments in the Council region, by Philip S. Smith 260
Kruzgamepa River basin 266
General description 266
Willow and Slate creeks 267
Port Clarence precinct 268
Introduction 268
Creeks tributary to Grantley Harbor from the north 270
Agiapuk River basin 271
Bluestone River basin 273
Anikovik River 281
Goodhope precinct 281
THE BLUFF REGION, BY ALFRED H. BROOKS 283
Introduction 283
Topography 284
Geology 285
The placers 288
THE KOUGAROK REGION, BY ALFRED H. BROOKS 294
Introduction 294
Topography 295
Geology 297
Bed rock 297
Alluvium 298
Recent geologic history 300
Introduction 300
Sequence of geologic events 303
Planation 303
Differential uplift 304
Stream dissection and sedimentation in local basins 304
Uplift with dissection 306
The gold placers 306
Mining development 306
Distribution of auriferous gravels 309
Southern belt 309
Northern belt 315
Conclusions 326
GEOLOGY AND MINERAL RESOURCES OF IRON CREEK, BY PHILIP S. SMITH 329
Introduction 329
Physiography 330
Stages of valley cutting 330
Evidences of glaciation 331
General geology 332
Mining developments 333
General conditions 333
Ditch construction 333
Mining on main stream 334
Mining on tributaries 335
Summary 336
INDEX 337

ILLUSTRATIONS.

Page.

PLATE I. *A*, Lightering freight at low tide, Nome; *B*, Characteristic creek valley: Thompson Creek, tributary of Stewart River 58
II. *A*, Angular gold-bearing gravels on Grass Gulch; *B*, Creviced limestone bed rock on Grass Gulch 178
III. *A*, Hydraulic elevator on Glacier Creek; *B*, Prospecting for placer gold with churn drill near Bluff 192
IV. Dredging on Solomon River 232
V. *A*, Canyon of Ophir Creek, showing part of the Wild Goose Mining Company's ditch; *B*, Placer mining with track and incline on Ophir Creek 242
VI. *A*, Rough bowlders in the pay streak of a placer mine on Crooked Creek; *B*, Mining with horses and scrapers on Goldbottom Creek 252
VII. Hydraulic mining on Daniels Creek 284
VIII. Topographic reconnaissance map of the southern part of Seward Peninsula ..... In pocket.
IX. Topographic reconnaissance map of the northwestern part of Seward Peninsula ..... In pocket.
X. Geologic reconnaissance map of the southern part of Seward Peninsula ..... In pocket.
XI. Geologic reconnaissance map of the northwestern part of Seward Peninsula ..... In pocket.

FIG. 1. Sketch maps showing relative gold-bearing areas in Seward Peninsula, California, and the Klondike region 12
2. Precinct map of Seward Peninsula 42
3. Profile of the western part of Seward Peninsula, showing old erosion levels 47
4. Sketch of the coast from Cape York to Cape Prince of Wales 47
5. Map showing distribution of vegetation in Seward Peninsula 55
6. Geologic sketch map and section of Ophir Creek region 123
7. Sketch map of part of Nome region, showing distribution of placers 150
8. Diagrammatic section of beach placers 155
9. Sketch map of second and third beach lines at Nome 161
10. Diagram showing manner in which gold is concentrated north of Nome 162
11. Diagrammatic section of Anvil Creek valley, showing bench gravels 189
12. Sketch map and profile of high-bench gravels south of King Mountain 201
13. Sketch map and section of Big Hurrah mine 229
14. Diagram of part of Ophir Creek valley, showing position of bench-placer deposits 247
15. Diagram of cliff exposure near mouth of Daniels Creek 285
16. Sketch map and section of Daniels Creek placers 287
17. Diagrammatic representation of character of impregnated zones, Bluff region 292
18. Sketch map of Kougarok region 295
19. Sketch map of Iron Creek basin 330

THE GOLD PLACERS OF PARTS OF SEWARD PENINSULA, ALASKA.

By ARTHUR J. COLLIER, FRANK L. HESS, PHILIP S. SMITH, and ALFRED H. BROOKS.

PREFACE.

By ALFRED H. BROOKS.

This paper is devoted to a discussion of the auriferous gravels of the southern and northwestern parts of Seward Peninsula. Its purpose is to meet the wants of the miner and prospector by presenting the results of the reconnaissance surveys made from 1899 to 1903, so far as they bear on the distribution and origin of the placer gold. As a necessary preliminary the geology of the peninsula will be presented in outline, but as this volume must be kept to a reasonable size, much matter not directly pertinent to the discussion of the mineral wealth will perforce have to be omitted. More extended accounts of the geology will find place in future publications, to be prepared when the more detailed surveys, already begun, permit the presentation of conclusions with more confidence.

Geologic and topographic surveys of the peninsula were begun in the fall of 1899 by F. C. Schrader[a] and the writer, who spent a few weeks in examining the auriferous gravels in the immediate vicinity of Nome, while D. C. Witherspoon made a topographic survey of the same area. The increase of public interest led to the dispatching of three parties to this field in 1900. One of these, led by W. J. Peters and W. C. Mendenhall,[b] made reconnaissance surveys of the southeastern part of the peninsula. Another party under charge of E. C.

[a] Schrader, F. C., and Brooks, A. H., Preliminary report on the Cape Nome gold region, a special publication of the U. S. Geol. Survey, 1900.

[b] Mendenhall, W. C., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 181–218.

Barnard, assisted by D. L. Reaburn, H. G. Hefty, and R. B. Robertson, made a topographic survey of the southwestern part of the peninsula, including Port Clarence to the west and Ophir Creek to the northeast. This work was materially aided by the cordial cooperation of J. F. Pratt and J. J. Gilbert, of the United States Coast and Geodetic Survey, who commanded a large force of men engaged during the same summer in charting the southern coast line of the peninsula. At the same time the geologic work in this region was intrusted to the writer,[a] who, assisted by G. B. Richardson and A. J. Collier, carried a reconnaissance over much of the southern half of the peninsula and extended it into the then newly discovered Kougarok district. In the fall of 1900 the writer also made a geologic and topographic reconnaissance survey of the York district, at the west end of the peninsula. In 1901 W. C. Mendenhall[b] and D. L. Reaburn made a hasty examination of part of the northern coast of the peninsula, after the completion of an exploration extending from the Yukon to Kotzebue Sound. The growth of the mining interests led to the extension of the reconnaissance survey over the northwestern part of the peninsula in 1901 by T. G. Gerdine and A. J. Collier.[c] The northeastern quarter of the peninsula still remained to be surveyed, and this was done in 1903 by D. C. Witherspoon and F. H. Moffit.[d]

The reports on these surveys included an account of practically every gold-producing creek in the peninsula, but the rapid progress of mining not only led to the discovery of many new placers, but also revealed many new facts bearing on the occurrence and distribution of the auriferous gravels. This made it desirable to supplement these investigations, and to this task A. J. Collier, assisted by F. L. Hess, was assigned in 1903. In the fall of 1904 Mr. Collier was able to spend a few weeks in the peninsula to collect some additional data. The writer's own investigations in 1899 and 1900 have been referred to; in addition to these he has made brief examinations of some of the mining districts along the southern coast in 1903, 1904, and 1905.

The results here set forth are based (1) on the studies of Mr. Collier and Mr. Hess in 1903, and (2) on the earlier work in this province. In some cases this fact is plainly brought out by direct quotations from the published reports, but in many others there has been so gradual an evolution of opinion as to make it impossible to give the proper credit. Although not all the subjects treated in the

[a] Brooks, A. H., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 1–180.

[b] Mendenhall, W. C., Reconnaissance from Fort Hamlin to Kotzebue Sound by way of Dall, Kanuti, Allen, and Kowak rivers: Prof. Paper U. S. Geol. Survey No. 10, 1902.

[c] Collier, A. J., A reconnaissance of the northeastern portion of Seward Peninsula

earlier publications are here again considered, yet in a large measure this volume is in fact to be regarded as a revised edition of the report of 1900.

As this manuscript goes to press it has been possible to incorporate in it a part of the results of the surveys of 1906. P. S. Smith, who made a hasty study of some of the placers of the Solomon, Casadepaga, and Council regions, has incorporated some of his results with Mr. Collier's and Mr. Hess's descriptions of these districts. Mr. Smith has also prepared the account of the Iron Creek basin here included. The description of the Nome region has had the critical reading of F. H. Moffit, who has been for two years engaged in a detailed geologic study of the areas covered by the Nome and Grand Central special maps. It is not intended, however, to set forth here anything but a general account of this district. For the details the reader is referred to Mr. Moffit's report[a] now in preparation.

In 1906 the writer made a reexamination of a part of the Kougarok district, and his report is included in this volume.

The composite authorship of this report is indicated in above account of its preparation. It should be added that the manuscript submitted by Mr. Collier was revised by Mr. Hess, who utilized as far as possible the data collected by the later investigations. No attempt has been made to revise the geologic descriptions except so far as it has been necessary to make them consistent with the results of the later investigations.

The unfortunate delay in the completion of this volume has been in a large measure due to the fact that the time of the authors has been perforce devoted to other work, but also because each season's field work accumulated many new facts, which it seemed desirable to incorporate.

It is a matter of deep gratification to the writer that these investigations have received much cordial support and help on the part of the residents of the peninsula. If this work serves to aid those who are engaged in exploiting the mineral resources of the district, the purpose of its publication will be accomplished.

[a] Moffit, F. H., Hess, F. L., and Smith, P. S., Geology of the Nome and Grand Central areas, Seward Peninsula, Alaska.

THE DEVELOPMENT OF THE MINING INDUSTRY.

By ALFRED H. BROOKS.

FOREWORD.

The large peninsula thrust out from northwestern Alaska, dividing the Bering Sea from the Polar Sea, was, up to a few years ago, unnamed[a] and almost unknown. This peninsula, bordered by the Arctic Circle, affords a striking example of the rapid industrial changes that may be wrought in an isolated province by the exploitation of rich gold placers. A decade ago Seward Peninsula was little more than a barren waste, unpeopled except for a few hundred Eskimos and a score of white men, whereas it is now the scene of intense commercial activity, supporting a permanent population of 3,000 or 4,000 people, which in summer is more than doubled. Then the igloo of the Eskimos and a mission were the only permanent habitations; now a well-built town with all the adjuncts of civilization looks out on Bering Sea, and a dozen smaller settlements are scattered through the peninsula. This region, which then produced nothing except a few furs, now increases the wealth of the world annually by nearly $8,000,000. A decade ago the only communication with the civilized world was through the annual visit of the Arctic whaling fleet and the revenue cutter; now a score of ocean liners ply between Nome and Puget Sound during the summer months, and even in winter a weekly mail service is maintained by dog teams. Moreover, military telegraph lines, cables, and wireless systems, and a private telephone system keep all parts of the peninsula in close touch with the outer world. Railways connecting some of the inland mining centers with tide water traverse regions which a few years ago were almost unknown to white men.

This industrial improvement is, as has been stated, the result of the discovery and exploitation of the gold deposits. As there has been

[a] The name Seward Peninsula, given in honor of William H. Seward, was first published in "Preliminary report on the Cape Nome gold region," by F. C. Schrader and A. H. Brooks, U. S. Geol. Survey, 1900. W. H. Dall had as long ago as 1870 suggested

only one successful attempt at auriferous lode mining, practically all of the gold production has been taken from the placers. Lode and placer tin have been found in the peninsula, but their exploitation has not yet been brought to the profitable stage, though a few tons of tin are annually exported. The tin deposits have, however, added to the commercial prosperity of the peninsula by helping to focus public attention on its mineral resources.

The following figures of the output of the placer mines are based on the best estimates obtainable, but it should be borne in mind that there are no accurate statistics to be had. The limit of error in the total production since 1898, as shown in the table, is believed to be about $500,000.

Approximate value of placer-gold production of Seward Peninsula, Alaska.[a]

1898	$75,000	1904	$4,164,600
1899	2,800,000	1905	4,800,000
1900	4,750,000	1906	7,500,000
1901	4,130,000		
1902	4,561,800		37,247,000
1903	4,465,600		

The total production of $37,000,000 for nine years is small compared with the output from the California placers, which in two years (1851 to 1853) are estimated to have yielded $62,000,000.[b] It is also small compared with the production of the Klondike placers, whose output in the first decade is valued at $118,000,000.[c]

Fig. 1 illustrates approximately the relative size of the gold-bearing regions of Seward Peninsula, California, and the Klondike. The auriferous gravels of California, roughly outlined, probably cover an area about equal to that occupied by the auriferous gravels of the Seward Peninsula, but the Klondike gold field is probably less than one-tenth as large. The California placers are not only ideally located for economic exploitation, but their gold content averaged no less than that of the Seward Peninsula gravels. Moreover, the high gravels of California are far more extensive than those of the Alaska

[a] Brooks, A. H., Report on progress of investigation of mineral resources of Alaska: Bull. U. S. Geol. Survey No. 314, 1907, p. 21.

[b] Whitney, J. D., The auriferous gravels of the Sierra Nevada of California: Mem. Mus. Comp. Zoology, Cambridge, Mass., vol. 6, No. 1, 1880, p. 367.

[c] The estimates of the annual output of placer gold in the Klondike since its discovery are as follows:

1896	$300,000	1903	$12,250,000
1897	2,500,000	1904	10,000,000
1898	10,000,000	1905	7,300,000
1899	16,000,000	1906	5,600,000
1900	22,275,000		
1901	18,000,000		118,725,000
1902	14,500,000		

field. With abundant water supply, steep stream gradients, heavy gravel deposits, accessibility, and salubrious climate, it is no wonder that the California placers far outstripped the northern field in the first years of production.

The Klondike, on the other hand, is less favorably situated than Seward Peninsula, and its water supply available for mining is much less. It appears, however, that the placers of such creeks as Eldorado and Bonanza in the Klondike averaged richer than any deposits of similar extent yet found in the peninsula. It was the exploitation of these almost fabulously rich and relatively shallow gravels that brought the Klondike gold output up with a bound, and it is their

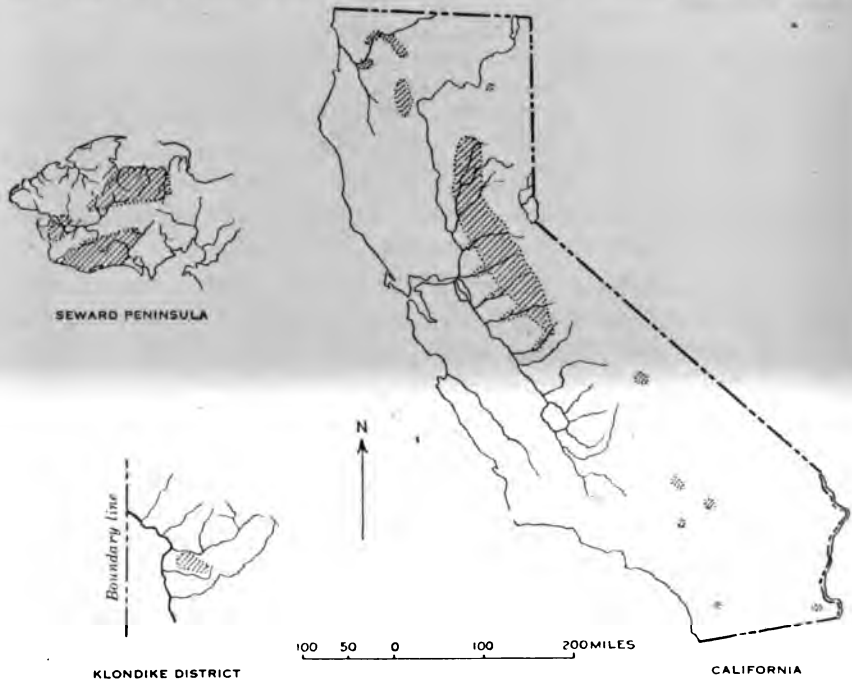

FIG. 1.—Sketch maps showing relative gold-bearing areas in Seward Peninsula, California, and the Klondike region, drawn to the same scale.

quick exhaustion that has caused an almost equally rapid decline of the annual yield. There are still extensive bodies of lower-grade gravels to mine in the Klondike, but these can be developed only by means of extensive water conduits or by dredging. Mining in the Klondike has passed its zenith, whereas in Seward Peninsula the maximum yearly output is still to be reached.

In the comparison of the Seward Peninsula placer fields with others, it must be borne in mind that probably three-fourths of its

gold-bearing area is large, yet only a few square miles have been extensively exploited. In other words, only a few of the creeks (but probably the richest ones of Seward Peninsula) have been exploited, and it is probable that it will be some time before the maximum annual yield will be attained. The future of the placers receives further consideration in the section devoted to economic geology (pp. 135–139), and the annual gold product is discussed in detail where the growth of the mining industry is sketched.

DISCOVERY OF GOLD.

The position of Seward Peninsula, whose western point is less than 60[a] miles from the Siberian coast, made it the first part of Alaska to be known to the Russians. The continent lying beyond Bering Strait was reported by the natives to the Russians as early as 1709; but so far as known the first landing on its borders was not until 1731, and then from a vessel which had been blown out of her course. Certain it is that the first survey of the coast line was made by Capt. James Cook in 1778. During the succeeding century of the Russian occupation, though the entire coast line was explored,[b] but little was learned of the interior of the peninsula. In 1822 the Russian Captain Kromchenko, commanding the *Golofnin*, surveyed Norton Sound and Golofnin Bay. It was not until 1835 that a trading post was established on St. Michael Island, the first Russian settlement north of the Aleutian Islands. From this point, trade was carried on with the natives to the north. The stories current that the Russians mined placer gold near Nome are utterly without foundation in fact, for the Russians had absolutely no knowledge of the mineral resources of the peninsula and never had a permanent settlement within its borders.

Probably the first important inland exploration was that made in 1865–66 by a party led by Baron Otto von Bendeleben, who, while seeking a route for a telegraph line, ascended the Niukluk and crossed the portage to the Kruzgamepa and thence continued to Port Clarence. This survey was made in the interests of the great transcontinental telegraph route which was planned to connect Europe and America. Von Bendeleben's party actually constructed a few miles of telegraph line, and thus were the first to start a commercial enterprise on Seward Peninsula. Of greater interest is the fact that Von Bendeleben is said to have found alluvial gold on Niukluk River.[c] If such was the case placer gold was found here earlier than in any other part of Alaska except at Cook Inlet, where Doroshin, a

[a] Chart T, U. S. Coast and Geodetic Survey.

[b] For an account of the Russian explorations, see Brooks, A. H., Geography and geology of Alaska: Prof. Paper U. S. Geol. Survey No. 45, 1906, pp. 104–132.

[c] W. H. Libby, a member of Von Bendeleben's party, is authority for this statement.

mining engineer sent out by the Russian Government, discovered gold in 1854. The telegraphic construction was discontinued after the successful laying of the Atlantic cable, Von Bendeleben's party disbanded, and a third of a century passed before any of its members found their way back to the scene of the gold discovery. It seems probable, therefore, that no one attached any importance to this occurrence of placer gold.

The peninsula continued to be regarded as a barren waste for many years after Alaska passed into the hands of the United States. The whalers had a rendezvous at Port Clarence, where they anchored in the early summer while waiting for the polar ice cap to break. Occasionally a trader came from the nearest permanent posts, Unalaklik or St. Michael, and bartered with the natives, but otherwise conditions were as primitive as during the Russian occupation.

Galena was discovered in the eastern part of the peninsula by the natives, who used it for making bullets, and brought it to the attention of traders at least as early as 1880. In 1881 a party under the leadership of John C. Green, with the help of the natives, located the source of this galena on what he named Fish River, tributary to Golofnin Bay. This was one of the first lode locations made in Alaska, being antedated only by those made near Sitka in 1877 and possibly by some of those at Juneau, where gold placers were found in 1880. Green and his party organized the Fish River mining district in July, 1881, and began the exploitation of this deposit under the corporate title, The Alaska Gold and Silver Mining, Milling, and Trading Company.

It was undoubtedly some of those connected with this company who first made public the occurrence of alluvial gold in Seward Peninsula.[a] It has been elsewhere suggested[b] that the discovery and first mining of alluvial gold is to be credited to the natives. This now seems to be an error, for the natives appear never to have had any knowledge of gold or methods of extracting it.

The operations of the Alaska Gold and Silver Mining, Milling, and Trading Company, later called the Russian-American Mining and Exploration Company, were continued up to about 1891 at Omalik, but though some ore was shipped, the mine never actually reached a paying stage. This enterprise, however, led to a better knowledge of the region and to the establishment of a trading post on Golofnin Bay by John Dexter, an employee of the company.

Dexter's post was long the only white settlement, but about 1890 a Congregational mission was established at Cape Prince of Wales, and later a Swedish Evangelical mission was founded on Port Clarence,

and another on Golofnin Bay. About the same time the Government began the importation of reindeer from Siberia, and stations were established at various points in the peninsula.

Previous to 1897, though no doubt a few prospectors [a] had roamed over parts of the peninsula, no mineral wealth had been found, save the Omalik [b] galena deposit and a little alluvial gold in the Fish River basin. A little placer mining is said to have been done at this time. As operations at the silver mine had practically ceased, the whole population included only a few missionaries, traders, and Government reindeer herders. This region then like most of Alaska, except the Pacific seaboard, had made almost no industrial advance since the Russian occupation.

While Seward Peninsula was neglected up to 1897, the ever active prospector had penetrated the Yukon basin and discovered placers which had been productive in a small way for upward of a decade. This activity was suddenly augmented in 1896, when the Klondike placers were found, and in less than a year this isolated region became a focal point of public interest throughout the civilized world. Then the wild excitement of the California rush of half a century before was duplicated, and probably 50,000 gold seekers turned their faces northward. The popular belief that Alaska was a barren field for all except the fur hunters quickly disappeared and was replaced by the equally absurd conclusion that the entire territory was gold bearing. As a result of this erroneous opinion, expeditions were equipped to search for gold in all parts of the territory. Most of these, however, were bent on reaching the interior, and Seward Peninsula was practically overlooked.

The Kotzebue Sound region attracted about 1,500 people, and some of them, becoming discouraged at the outlook, made their way southward to Golofnin Bay. To the same point came other groups of prospectors from St. Michael who despaired of being able to ascend the Yukon. It was some of these men, whom chance rather than design had brought to the district, that made the third [c] discovery of alluvial gold in the peninsula, and they were the first to prove its commercial importance. The party which found these workable placers included Daniel B. Libby, a member of the Von Bendeleben expedition of 1866, L. S. Melsing, A. P. Mordaunt, and H. L. Blake. The first gold was discovered in the gravels of what they called Melsing Creek, in March, 1898, and a little later placers were found on an adjacent stream named Ophir Creek. In accordance with the United States mining laws and in keeping with a long-established

[a] There is a story current that a Swede named Johansen found placer gold and did a little sluicing at the mouth of the Casadepaga in 1894.

[b] Omalik is said to be the Eskimo word for high chief.

[c] As has been set forth, the first was made by the telegraph expedition, and the second probably by some of those connected with the silver-mining enterprise on Fish River.

custom, a "miners' meeting" was called, and the "Discovery district" was organized April 25, and a recorder elected. As soon as the snow had disappeared, mining was begun as systematically as the means at hand would allow. The equipment of these pioneer placer miners of the peninsula was very meager, and consequently the efforts at exploitation were crude. Fortunately the region afforded some spruce, and sluice boxes could therefore be constructed from whipsawed lumber. Such methods yielded a return during the summer variously estimated at $30,000 to $100,000.

In the summer of 1898 there were probably several hundred men in the new district, but the interest in it hardly extended beyond its borders. Even at St. Michael, only 100 miles away, which the writer visited in September of that year, hardly any attention was paid to this new camp. The reason for this apathy was twofold—first, the Alaskan public had become tired of unfounded rumors of rich discoveries, and, second, the excavations on Ophir Creek had not by any means gone far enough to prove the great richness of its gravels.

There was at least one little group of men among those in the new district who had the enterprise to extend their field of prospecting beyond the narrow limits in which the placers had been found. These men are said to have been influenced in directing their journey by the rumor of a discovery of coarse gold on Sinuk River by a Government reindeer herder. Be that as it may, a party said to have included N. C. Hultberg, J. J. Brynteson, H. L. Blake, and J. L. Haggalin sailed westward from Golofnin Bay in a small boat in July, 1898, and became stormbound near the present site of Nome. Prospecting the Snake River bars revealed some fine gold colors, and coarser gold is said to have been found, July 26 or 27, on what was afterwards called Anvil Creek. Most of the party, however, considered the prospect not encouraging and decided to continue the journey to Sinuk. As nothing was found there, the party returned to Golofnin Bay. The gold found on Snake River was, however, regarded by some as sufficiently encouraging to warrant further investigation, so Brynteson, with two companions,[a] Jafet Lindeberg and Erik O. Lindblom, returned to the scene of this discovery about the middle of September, and on the 20th they found, on what they named Anvil Creek, the rich placers which were destined to render this region famous throughout the world.[b] Though none of the party were ex-

[a] According to some accounts A. N. Kittleson, G. W. Price, and a Laplander named John Tornensis were also in this party.

[b] Since the above was written a letter has been received by Frank L. Hess from Jafet Lindeberg, which, from its interest, is quoted at length:

"DEAR SIR: As per your request, I herewith make a report concerning the discovery of gold and its development on the Seward Peninsula, which dates from 1897, and will

perienced gold prospectors, yet they could not but realize the importance of this discovery. The season was far advanced, but two crude rockers were constructed, and by using heated water about $1,800 worth of gold was extracted from the gravels of Anvil Creek and

well-known trader at Golofnin Bay, supplied several natives with gold pans and taught them how to wash out a pan of dirt. For that purpose he obtained some gold dust from St. Michael, and would sprinkle a little in a pan of beach sand at Golofnin Bay. These natives would carry the gold pans with them on their fishing and squirrel-hunting trips, and it was while out on one of these trips that Tom Guarick, a native Esquimaux, made the discovery of gold on Ophir Creek, in the Council City district, which at that time had, in all likelihood, never been visited by white man. Tom, on his return to Dexter's, reported his discovery and brought back about one-half ounce of gold dust. This was in August, 1897. One month later Daniel B. Libby, A. P. Mordaunt, L. S. Melsing, and Harry Blake, who were sent by San Francisco capitalists in the spring of 1897 to roam around that part of Alaska under a grub-stake contract, landed at Golofnin Bay, and on reaching Dexter's house saw this gold. On inquiry they were told when and how it was found, and a few days later, with Tom, the native, as a guide, they were taken to Ophir Creek, which was later named, and, on prospecting there, found that native Tom had made a discovery of gold on that creek. All through the winter of 1897 and 1898 the party, with other residents of the vicinity, prospected the different creeks, and finally in April, 1898, staked mining claims on Ophir Creek and Melsing Creek. They then organized the El Dorado mining district, elected a mining recorder, and formulated a set of mining rules. The first stakers and organizers of the district were Daniel B. Libby, A. P. Mordaunt, L. S. Melsing, H. L. Blake, Dr. A. N. Kittleson, who had been in charge of the Government reindeer station at Port Clarence; Rev. N. C. Hultberg, a missionary at Golofnin Bay; P. H. Anderson, a missionary teacher at Golofnin Bay, and John A. Dexter. This discovery was soon noised abroad, and a stampede to the new diggings followed from near-by points.

"I, Jafet Lindeberg, a native of Norway, came to this country in the spring of 1898 with Sheldon Jackson, superintendent of the Government reindeer enterprise, for the express purpose of going to Plover Bay, in eastern Siberia, to relieve Captain Kelly, who was trading at that place for reindeer for the Government. In furtherance of this agreement, I left Seattle on the steamer *Del Norte* early in 1898, taking with me a stock of provisions, and not interfering with the Government business for which I was to be assigned. On arrival at St. Michael, news was brought to Doctor Jackson that Captain Kelly had been driven away from Plover Bay by hostile natives. It was then decided that it would be unwise to send me over there, and, being left without a suitable position, Doctor Jackson gave me permission to leave the Government employ. This I did, and, taking my outfit, made for the new diggings at Council City, which had been located on the banks of the Niukluk River, near Ophir Creek.

"John Brynteson, a native of Sweden and an experienced coal and iron miner, who for seven years had worked in the mines in Michigan, determined to go to Alaska and look for coal. Arriving at St. Michael and hearing of the discoveries on Ophir Creek, he promptly left St. Michael for Council City, arriving there early in the summer of 1898.

"Erik O. Lindblom, a native of Sweden, by profession a tailor, and for years following his trade in San Francisco, while there, hearing of the fabulous reports from Kotzebue Sound, joined that mad stampede, going north on the bark *Alaska*. Arriving at Port Clarence on his way to Kotzebue Sound and hearing of the gold discovery on Ophir Creek, he left the ship and proceeded to Golofnin Bay, thence to Council City.

"We three men met by chance at Council City in August, 1898; after prospecting around in that district for some time and staking claims, formed a prospecting companionship and decided to prospect over a wider range of territory. Even at this early date the Council City district was overrun by stampeders, and staked to the mountain tops; so we proceeded to Golofnin Bay, and taking a large open boat and an outfit of provisions, on September 11, 1898, started up the coast toward Port Clarence, stopping at the various rivers to prospect on the way, in which we found signs of gold, but not in paying quantities, and finally arriving at what is now known as the town of Nome. From there we proceeded up Snake River, which we named, and camped at the mouth of Glacier Creek, prospecting as we went along. The first encouraging signs of gold we found on the banks of Snake River was at about the place where Lane's pumping plant is now located. After locating our camp as before mentioned, we proceeded to prospect along the tributaries of Snake River, which tributaries we named

Snow Gulch. Claims were also staked on Anvil and Glacier creeks, as well as on Snow Gulch and other small creeks.

On the return of this party to Golofnin Bay early in October the news quickly spread, and soon all within its reach started for Anvil Creek. On October 18, at a miners' meeting, the Cape Nome mining district was formed, and A. N. Kittleson was elected recorder.

---

as follows: Anvil Creek (taking the name from an anvil-shaped rock which stands on the mountain on the east side of the creek), Snow Gulch, Glacier Creek, Rock Creek, and Dry Creek, in all of which we found gold in paying quantities, and proceeded to locate claims, first on Anvil Creek, because we found better prospects in that creek than in the others, and where we located the "discovery claim" in the name of us three jointly. In addition to this, each man staked a separate claim in his own name on the creek. This was the universal custom in Alaska, as it was conceded that the discoverer was entitled to a discovery claim and one other. After locating on Anvil Creek, claims were staked on Snow Gulch, Dry Creek, and Rock Creek, after which we returned to Golofnin Bay and reported the discovery.

"It was then decided to form a mining district, so we three original discoverers organized a party, taking with us Dr. A. N. Kittleson, G. W. Price, P. H. Anderson, and a few others, again proceeded to Nome in a small schooner which we chartered at Golofnin Bay, purchasing as many provisions as we could carry on the boat, and on our arrival the Cape Nome mining district was organized, and Dr. A. N. Kittleson elected the first recorder. Rules were formulated, after which the party prospected and staked claims, finally returning to Golofnin Bay for winter quarters. The news spread like wildfire, and soon a wild stampede was made to the new diggings from Council City, St. Michael, and the far-off Yukon.

"At this period very few mining men were in the country, the newcomers in many instances being from every trade known. The consequence of this was soon well known; a few men with a smattering of education gave their own interpretation to the mining laws, hence jumping mining claims soon became an active industry. Especially from Council City came the jumpers, who were the original men John Dexter, by an Esquimaux, had guided to the first discovery of gold on the Seward Peninsula. They were angry to think that they had not been taken in at the beginning, so a few of them promptly jumped nearly every claim on Anvil Creek, although there was an abundance of vacant and unlocated ground left which has since proved to be more valuable than the original claims located by us and our second party who helped us to form the district. This jumping, or relocating of claims by the parties above named, poisoned the minds of all the newcomers against every original locator of mining claims, and as a consequence every original claim was relocated by from one to a dozen different parties.

"At that time L. B. Shepard was United States commissioner at St. Michael, and in no case did a jumper have a chance to profit by his villainy, if Judge Shepard could prevent it. Another strong factor for good government at St. Michael and vicinity was Capt. E. S. Walker, of the United States Army. With exceptionally good judgment and a fearless attitude he held the lawless element in check, and great credit should be given him.

"In the early months of 1899 we hauled supplies to the creeks, and as soon as the thaw came began active mining on Snow Gulch and on Anvil Creek. Soon a large crowd flocked to Nome, which was then known as Anvil City. Among this crowd was a large element of lawless men who soon joined forces with the Council City jumpers, and every effort was made by them to create trouble. Secret meetings were held and a plan formulated whereby arrangements were made to call a mass meeting of miners, and at this meeting declare all the acts of the original miners' meeting that organized the district invalid, and to throw open all claims for relocation. This nefarious scheme leaked out, and word was sent to Captain Walker at St. Michael, who promptly dispatched Lieutenant Spaulding with a detachment of troops to Nome. A few days after their arrival the projected mass meeting was called. Here the agreed-on resolutions were offered, which, if passed, would have created bloody riot. Lieutenant Spaulding dispersed the meeting, receiving the thanks of the entire mass of law-abiding citizens of Nome and vicinity for this act, * * * and had it not been for the military, who proved themselves to be the true men to the American Government, much riot and bloodshed would have resulted from the conduct of the aforementioned parties.

Though it was now too late to do any mining, or even prospecting, there was abundant opportunity to stake claims, and of this all took advantage. Each man filed locations on as many claims for himself and his friends as he thought by any chance he could retain in his possession. To such an extent was the right of staking by power of attorney abused that no less than 7,000 acres were filed on by not more than 40 men. Here, as elsewhere in Alaska, the preemption under the mineral laws of many claims in one district by individuals under power of attorney or otherwise, which under a strict interpretation of the statutes would appear to be illegal, has discouraged legitimate prospecting and retarded the development of mining interests.

THE FIRST YEAR OF MINING.

When the Nome mining district was organized, Seward Peninsula was practically cut off from communication with the outside world, for the nearest post-office was St. Michael, 100 miles away, and that received mail only during the open season. However, rumors of the discovery of these rich placers gradually reached other parts of Alaska, and during the fall and winter of 1898–99 many men came from St. Michael and even from the Yukon. By the middle of May, 1899, Nome, then called Anvil City, probably had a population of 250. Meanwhile, before the ice broke, the news had been carried up the Yukon to Dawson, and thence to the outer world. This caused a general movement toward Nome among Yukon miners, but the world at large was far from being convinced of the authenticity of the published statements, for it had come to regard with considerable skepticism the wild tales emanating from the northland during the Klondike excitement. Late in June several vessels reached Nome from Puget Sound and found a population of about 400 living in tents and in a score of driftwood cabins. Mining began June 20, and the steamers returning to Seattle brought confirmatory news of placer gold in this new camp. It was not until then that people began to take the rumors seriously and that any real excitement arose about the new district. As a result, several steamers sailing for St. Michael touched at Nome to discharge passengers and freight. These newcomers, together with those that found their way down the Yukon from Dawson and other points, swelled the population of Nome to nearly 3,000. By the late fall of 1899 a veritable frenzy seized the people of the Yukon, and not a few settlements were almost depopulated as a result of the rush to Nome.

Meanwhile, in the early summer, there was anything but a contented community at Nome. The newcomers had found the whole region covered with location notices and very little mining being done. The professional claim stakers had followed their usual prac-

tice of blanketing the creeks with location notices, under powers of attorney, and then holding many claims without doing any prospecting, in the hope of being able to take advantage of any discoveries made by the labors of others. In the early part of July probably less than seven hundred men were actually engaged in mining, while upward of a thousand were idle, with neither prospect of employment as miners nor opportunity to prospect in the district. It should be remembered that at that time gold had been found in only a very small area adjacent to Anvil Creek. These idle men believed that many of the locations were illegal, as they unquestionably were under a strict interpretation of the statutes, for as the law requires an actual discovery of gold on each claim it is obvious that a man who staked twenty to thirty claims in a few days could not have determined the presence of gold in them. It was also charged that many claims had been located by aliens and were therefore not legal preemptions. Under these conditions it is not to be wondered that an era of "claim jumping" began, during which practically every property of any prospective value was restaked. It was then not uncommon to find a claim corner marked by half a dozen stakes, each of which represented a different claimant.

The nearest United States commissioner was at St. Michael, and there was therefore practically no means of enforcing civil law. In fact, there were no representatives of the Government at Nome except an officer and a small detachment of soldiers which had been sent over from the army post at St. Michael in the spring. On the commandant of this handful of soldiers rested the responsibility of maintaining law and order among a thousand discouraged and angry men, a task made all the more difficult because he was without any actual legal authority. He deserves credit for meeting the situation as far as it lay in his power by patrolling property to which there were rival claimants and by attempting to settle the constantly rising disputes. Discontent was rife, and matters went from bad to worse. July 10 a so-called "miners' meeting" was called for the purpose of discussing the situation, and a resolution was there presented[a] setting forth the grievances of those who believed that the claim locations had not been made in accordance with the United States statutes. While it must be admitted that the unlimited staking was undoubtedly illegal, yet this meeting was mainly attended by those who, for one reason or another, had not succeeded in getting hold of placer claims. Had these discontented men spent less time in protesting and airing their grievances and more in prospecting they would have been better off, as subsequent operations have shown that there remained much valuable placer

no doubt tending to increase the dissatisfaction, was entirely within the legal rights of the individuals who believed that they had been wronged. Therefore the peremptory dispersing of the crowd attendant at the meeting[a] by the commandant of the troops was a high-handed proceeding, entirely unwarranted either in law or equity. The tension grew day by day, and conflicts between rival claim owners became not infrequent. To rectify matters, the military promulgated the following order on July 13:

To put an end to apparent misunderstandings, the following statement is published:

All disputed titles, whether to mining claims or town lots, shall at once be brought before the civil authorities for settlement. So long as the civil authorities can handle such matters the military authorities will take no action. In case it becomes necessary for the military authorities to act, the claim or lot will be held in its condition at the time, neither party being allowed to do any work to change the condition of the same.

While there exists no objection to the holding of orderly meetings for the discussion of ordinary business affairs, in any meeting held for the purpose of acting in district affairs no person is entitled to participate excepting claim holders. Any attempt so to participate by other persons is illegal, and the proper steps will be taken to prevent it.

Decisions and orders of the civil courts will be supported by the entire power and authority of the United States troops.

No persons will be allowed to carry firearms, revolvers, or pistols. Anyone violating this order will have said firearms confiscated.

---

[a] Another version of this affair is contained in the following note furnished by Mr. Hess:

"The statement of Dr. A. N. Kittleson about this miners' meeting as he made it to me this last summer (1905), as nearly as I can give it from memory, was as follows:

"In the summer of 1899 he and the other original stakers on Anvil Creek who were then attempting to work their claims practically had to stand over them with guns all the time to keep from being overrun by parties of gamblers, professional jumpers, and other riffraff. Circumstances became so bad that Doctor Kittleson went over to St. Michael and asked that a detachment of soldiers be sent to Nome for the protection of property. This was done, and a great deal of hard feeling followed, especially toward Doctor Kittleson, but it seemed to be the only way in which the original stakers could hold their property. The 'outsider' had at first held that the original claims, which had been laid out 1,320 by 660 feet, according to the statute, should be reduced to 500 feet in length, and this it was proposed to do by force. Shortly after this the other parties who had been attempting to force the original stakers off their claims called a 'miners' meeting,' before doing which they conspired to offer a resolution declaring all existing locations void. Meanwhile men had been stationed upon Anvil Mountain with instructions that on the passing of the resolution a bonfire should be started in Nome, at which signal the men were to hurry down from the mountain and restake the claims on Anvil Creek, thus getting ahead of the rush which would follow from Nome. A rumor of this intended action had come to Doctor Kittleson, who communicated with the military authorities, and a lieutenant with two or three men went to the meeting and took places on the platform. When the resolution was introduced, declaring all the locations void and the land open for relocation, the lieutenant ordered that the resolution be withdrawn within two minutes, stating that he considered it not for the good of the community, and that if it was not withdrawn he would clear the hall. The men tried to argue with the lieutenant, but he was firm and at the end of the two minutes ordered the sergeant accompanying him to clear the hall, which was done. Later the claims were jumped and long litigation followed. One man told me that the company with which he was connected had alone spent over $200,000 in lawyers' and court fees in holding its property."

This order, though undoubtedly intended to relieve the situation, was far from having this effect. The ownership of practically every placer claim which had been exploited was rightfully or wrongfully disputed, and had this order been strictly enforced mining at Nome would have ceased. Such an eventuality would have worked great hardship on many bona fide property owners who depended on the summer yield of their mines for capital to make more extensive development in the following season. To meet this condition, a modification of the order was made, as follows:

> The instructions contained in the order of July 13, 1899, posted at Anvil City [Nome], will be amended so as to permit original locators at work on their claims to continue their work in the event that anyone jumps the claim. The matter can afterwards be settled by the civil authorities.

The situation was suddenly relieved in an unexpected manner. It was accidentally discovered that the beach sands were rich in gold. It appears that the beach placers were found almost simultaneously by a soldier of the barracks and John Hummel,[a] an old Idaho prospector who was too sick to leave the coast. Within a few days the mutterings of discontent were almost silenced because it was found that good wages could be made with rockers on the beach. All the idle men went to work as fast as they could obtain implements. As it gradually became known that the beach sands for several miles were gold bearing and could be made to yield from $20 to $100 a day to the man, a veritable frenzy seized the people of Nome. A large part of the population went to work with shovels and rockers. During the height of the excitement it is estimated that there were 2,000 men engaged in beach mining. The yield of the beach placers is estimated at more than $1,000,000, and this was practically all taken out with hand rockers in less than two months.

There was one legal complication relative to beach mining which threatened to be serious, but ended rather ludicrously. Previous to the discovery of the beach gold many so-called "tundra claims" had been staked, which stretched inland from the ocean. A group of these, including the richest beach deposits, has been segregated and passed into the control of one company. When beach mining began this company claimed that it owned the beach and warned off all trespassers unless they paid a royalty of 50 cents a day for the privilege of mining along the water front. Most of the miners, however, contended that a 60-foot strip from high water was public property and paid no heed to the warning against trespassing. The company thereupon appealed to the commandant of the troops, and he warned off all beach miners. The order was not obeyed, and he finally arrested about three hundred men. At this time the situation

reached the point of absurdity. There being no civil magistrate at hand before whom these men could be tried, no building in which they could be confined, nor any funds from which they could be supported while awaiting trial, the perplexed officer was forced to discharge all his prisoners, who all promptly returned to their rockers on the beach. Later decisions of the Land Office have not upheld the claims of this company to the gold in the beach, for a 60-foot strip of the beach has remained open for mining to all comers.

During this same summer a few enterprising men struck out to seek new fields. Some went eastward and found gold on a number of southward-flowing streams, including Bonanza and Solomon rivers, but were unable to prove its presence in commercial quantities. Others went westward and named and staked Cripple and Penny rivers. Gold was also found during this season in the gravels of some streams near Cape York, and the York mining district was organized.

In the fall of 1899 Nome's [a] population of more than 3,000 was sheltered in a few score of frame and galvanized-iron buildings and in several hundred tents and low driftwood cabins. These were irregularly distributed along both sides of a muddy thoroughfare, a mile in length, which extended close to the edge of the tundra. Late in September, when the writer first visited this region, the aspect of the town and its environment was anything but attractive. Back of the settlement stretched the bleak tundra, and the front was bounded by the surf-swept beach.

The yield of the beach placers gave the settlement great prosperity. Prices were high, as there was a scarcity of nearly everything except gold. Before the last outgoing steamer, lumber cost from $100 to $150 a thousand and coal from $50 to $100 a ton. Fresh meat, mostly reindeer brought from Siberia, commanded $1 a pound and eggs $3 to $4 a dozen. The cost of meals varied from $1 to $2.50. Small cabins, on lots staked on the tundra back of the town with nothing but squatter's title, found ready market at $600 to $700, while corner lots, also with uncertain titles, on the main street sold as high as $10,000. The Nome News, the first newspaper, began publication early in October. By fall a mayor and town council had been elected, and, though without any legal standing, made and enforced city ordinances by common consent. Of more importance was the organization of a fire department and police force. Meanwhile the Federal Government had taken cognizance of the new settlement by establishing a post-office and appointing a United States commissioner. Wages were $10 a day, but at times rose to $2 an hour. The abundance of gold was reflected in the thriving business carried on day and night by a score of saloons and gambling rooms. Many a man spent his days in work-

[a] The name Anvil City had been changed to Nome during the summer of 1899.

ing beach sands and his nights in losing his gains at the roulette table. On the whole, the town was very orderly, for the first comers embraced but few of the criminal class. The greatest need was a hospital, as the surface waters of the tundra (universally used in the town) had become infected with typhoid germs and there was an epidemic of that disease. It is estimated that there were as many as 200 cases at one time, and as there was only one small army hospital it was impossible to give the patients proper care. and hence there was a large mortality.

The results of this first season of mining were as follows: Up to January 10, 1900, about 4,500 claims were recorded in the Cape Nome district, but probably not more than 50 claims were developed and not more than 100 even prospected. These 50 claims probably yielded over $1,500,000 in gold. The beach-mining operations described above were more of a dramatic incident in the history of the region than of permanent commercial significance, for the richest part of the Nome beach was worked out the first year. The only other district of Seward Peninsula in which any mining was done in 1899 was on Ophir Creek, where gold variously estimated at $50,000 to $100,000 in value was taken out. Surface prospects were also found in the Solomon River region and near Cape York. A result of far greater importance than the actual mining was that some knowledge of the character of the deposits and the condition of operations had been gained. Although this information availed little to the more inexperienced men who were to invade the peninsula during the following year, yet it was of great practical benefit to those who did the actual mining in 1900.

THE RUSH OF 1900.

With the return of the steamers in the fall of 1899, bringing probably 1,000 people from Nome, began the excitement which was to culminate in the following spring. It was not until the summer's output of gold of about $3,000,000 was brought from Nome that the outside world realized the importance of this new placer field. During the following winter interest in Nome grew rapidly, and it was evident that a rush comparable to that of the Klondike two years before would begin with the breaking of the ice.

Professional promoters and stock jobbers were not backward in taking advantage of this excitement, and there was the usual crop of flamboyant prospectuses. Scores of companies were incorporated to mine gold at Nome and much stock was sold. Though not a few of

suitable methods of mining, and general commercial conditions. Beach-mining enterprises were the favorite because of the supposed richness of the placers, and especially because no capital was required to purchase claims. The almost incredible record of the first year's beach mining appealed to the popular mind, and its interest was maintained through the newspapers and through transportation and mining companies' circulars, which published the most preposterous statements. Not a few so-called mining experts asserted that the gold in the beach was inexhaustible because the supply was constantly renewed by the waves from the ocean bottom. It was easy to maintain that if a man with a rocker could make $20 a day on the beach that a plant which could handle twenty times as much material would yield untold wealth. There was a flood of gold-saving devices, varying from a patent gold pan hung on a pivot and turned by a crank to complex aggregates of wheels, pumps, sieves, and belts, which required a 100-horsepower engine for their operation. "The golden sands of Nome" was the slogan which inspired thousands to engage passage for the El Dorado months in advance of the sailings. Reaching Nome was far easier than going to the Klondike, for the gold seeker could be landed at his destination from an ocean steamer. Here there was no winnowing of the persevering and enterprising from the shiftless and indolent as at the Chilkoot Pass (the gateway of the Klondike). In consequence, the crowd of men that reached Nome were less well fitted for frontier life than those who went to Dawson.

In 1900 the ice on Bering Sea broke early, and some small vessels skirting the shoreward side of the ice floes dropped anchor at Nome the latter part of May, but the large steamers did not arrive until the middle of June. By July 1 upward of 50 vessels had discharged passengers and freight on the beach. It is estimated that the first and second sailings brought over 20,000 people to the peninsula. There was then a solid row of tents stretching along 5 miles of the beach, and the water front was piled high with freight of all kinds. The newcomers found little to encourage them. Those that had wintered in the peninsula had industriously extended their stakes so that a man could travel for days and hardly be out of sight of a location notice. To add to the discouragement and confusion, smallpox was introduced from one of the vessels, and had it not been for the prompt action of Capt. D. H. Jarvis, of the Revenue-Cutter Service, it would have become a serious epidemic. The inexperienced men who landed at Nome, not finding the El Dorado their fancies had painted, were loud in their denunciation of the region. Many in the course of a few days' tramping of the beach became self-styled experts on placer mining and strenuously announced that the auriferous gravels of the peninsula had practically been exhausted.

During the month of July every conceivable kind of gold-saving appliance was installed on the shore, but few except those of simplest design paid even running expenses. Nevertheless there can be no question that a strong company controlling a considerable strip of the beach could by the use of steam shovels have profitably extracted what gold had been left in the sands. But under the conditions of public ownership of the beach, if values were found in any given locality, men swarmed in with rockers and quickly worked it out. This made it impossible to extract the beach gold at a profit by other than light equipments readily movable from one rich spot to another.

Probably the most ill-conceived enterprises were those planned to dredge gold under the sea. Though the upper layer of these sands is more or less auriferous, the difficulties of excavation are such as to make it improbable that it can be profitably mined. The severe storms and lack of shelter prevent the use of dredges, except possibly during one month in the year. Many of these dredging schemes were based on a theory (held by some who were entirely ignorant of the origin of the beach gold and who refused to be instructed) that the auriferous sands are swept in from the sea. The fallacy of this conclusion had already been pointed out in a report[a] which had a wide circulation. On August 9 a severe southwesterly storm practically demolished the more elaborate appliances for gold saving and strewed the beach for miles with débris. This ended beach mining for that year except where the simplest apparatus was in use.

In 1899 the complaint had been made at Nome that, there being no civil court, important enterprises were retarded because of the impossibility of having disputes about ownership of mining property settled by law. During the winter this had been brought to the attention of Congress, and a statute was passed forming a new judicial district which included Seward Peninsula. A newly appointed judge and other court officials reached Nome in the early summer. It appears that from that time on, the district was abundantly provided with court decisions, even though the legality and justice of many of them could be brought into question.[b] Among many charges brought against the court were those asserting that receivers had been placed on valuable mining property from which they extracted gold, in spite of the fact that they were without bond and that the rightful owners had no check on the amount of gold being taken out. Excitement over these cases ran high, and at one time bloodshed was narrowly averted by military intervention. One of these receivers was ejected from a rich

[a] Schrader, F. C., and Brooks, A. H., Preliminary report on the Cape Nome gold re-

mine which he was working by the decision of a higher Federal court. It is impossible to recount here the legal strife in which practically all the rich claims were involved, but it will suffice to state that there was hardly one which had not to run the gamut of lawsuits.

During the winter of 1899–1900 some mining had been carried on in the tundra and also some through the ice on the beach. The phenominally rich beach at the mouth of Daniels Creek, 50 miles east of Nome, had been discovered and its yield of $600,000 had practically been taken out before the newcomers had landed. A very significant discovery of 1900 was that of the rich placers on a high bench between Anvil and Dexter Creeks. It had been pointed out by the Geological Survey [a] the previous year that these high gravels were likely to be gold bearing, and such proved to be the case. The presence of an older drainage system, of which these high gravels bear witness, has an important bearing on the future of placer mining in this field.

During this season Anvil, Dexter, and Glacier creeks were very large producers. Their exploitation was hastened by a narrow-gage railway constructed by Charles D. Lane from Nome to Anvil. On Ophir Creek the installation of larger plants had been begun, but the output was about the same as in the previous season. Considerable gold was taken out from the lower course of Daniels Creek, but all this mining was very crude.

Though but a small percentage of the newcomers left the Nome beach, there was in the aggregate considerably more prospecting than in the previous year. Productive placers were developed on Casadepaga River, as well as on a number of smaller tributaries of the Niukluk. The same holds true of the Solomon and Cripple river valleys. The discovery of gold in 1900 in the Bluestone and Kougarok valleys showed that the auriferous area was much larger than had been previously supposed.

An excellent example of the ineffective character of the search for gold is to be found in the discovery of gold in the Kougarok placers. In March, 1900, there was a wild rush to the Kougarok River region, which was duplicated in August, but in neither were placer values found. While the last straggler was returning to Nome after the second fruitless chase, a few more experienced men opened up some good placer ground. The York gold placers, discovered the previous year, proved of small extent, but the discovery of stream tin in this district by the Geological Survey [b] gave new hopes to the prospectors.

During the height of the excitement there was a good deal of lawlessness at Nome and life and property were none too secure. For a time it appeared as if the authorities would not be able to cope with

[a] Preliminary report on the Cape Nome gold region, 1900, p. 20.

[b] Brooks, A. H., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 136.

the great multitude which was crowded together at Nome, especially as it included a large number of professional criminals. Conditions gradually improved as the crowd thinned out toward fall, when the last steamer was packed with disappointed men. Not a few of the indigents were shipped out either through public or private charity. On the whole, considering the inexperience of the mass of the people who came to Nome in 1900, progress was better than could be anticipated. The following table, taken from a previous report,[a] gives an estimate of the gold production of the individual creeks in 1900:

Esimated output of placer gold from Seward Peninsula, 1900.

Anvil Creek	$1,750,000
Glacier Creek, including Snow Gulch	750,000
Dexter Creek	300,000
Extra Dry Creek	15,000
Dry Creek	25,000
Newton Gulch	10,000
Bourbon Creek	5,000
Saturday Creek	10,000
High bench placers near Nome	145,000
Nome beach	350,000
Oregon, Hungry, and Mountain creeks	50,000
Solomon River	10,000
Topkok beach	600,000
Daniels Creek	200,000
Ophir and Sweetcake creeks	100,000
Crooked Creek	25,000
Elkhorn Creek	30,000
Goldbottom Creek	10,000
Casadepaga River	15,000
Kougarok district	50,000
Bluestone River	75,000
York River	1,500
Miscellaneous and undetermined, about	200,000
	4,726,500

Later information led to the raising of this estimate to $4,750,000.

PROGRESS IN 1901.

The fact that thousands returned from Nome in the fall of 1900 discouraged and disgusted with this mining field gave assurance that the rush of 1900 would not be again repeated, and this was a decided advantage to the district. Unfortunately, however, the judiciary was generally regarded as corrupt and this no doubt deterred capitalists who would gladly have taken a part in establishing large min-

laws. Besides these conditions, mining was also retarded because a late spring and dry weather interfered with placer operations. The arrival of a new judge in September restored confidence, but it was then too late to undertake any large enterprises.

During the previous winter some of the high-bench and tundra placers had been exploited successfully by drifting. Though their output was not large, yet their operation was important in proving the feasibility of winter mining. The completion of a railway from the head of navigation on the Niukluk to Ophir Creek during the summer of 1901 did much to promote commercial interests in that district. At Daniels Creek work was suspended during this season because of the lack of water. Considerable prospecting was also carried on in the Solomon River region, but there was little actual mining. In the Bluestone and Kougarok districts primitive methods of extraction still held sway and the yield of gold was small.

Probably the most noteworthy event of this season was the discovery of gold placers in the northeastern part of Seward Peninsula. Prospecting had in 1900 established the fact that the gravels of the several rivers tributary to Kotzebue Sound were auriferous, but it was not until 1901[a] that any actual mining was done. This proved that the gold-bearing area of Seward Peninsula was much larger than had been previously supposed. The construction of the Miocene ditch was also of great importance, as this was the first long water conduit in the whole field. Some experienced placer miners, after attaining great familiarity with the local conditions, came to recognize that the primitive "pick and shovel" methods then almost universally employed were applicable only to very rich placers. An improvement of methods demanded a larger water supply. Though there are here no great water resources like those of the Sierra Nevada, which made California placer mining the cheapest in the world, yet some water is to be had in the Kigluaik Mountains and in other highlands of the peninsula. The credit for both the conception and construction of this first ditch belongs to W. L. Leland and J. M. Davidson, who were among the earliest to obtain a broad grasp of the mining problem.

The construction of pumping plants, begun in 1901, was another, but less successful, attempt at reducing the cost of mining. By means of two extensive steam pumping plants water was delivered at high levels in the Anvil Creek region, and this made it possible to work some rich placers which formerly could only be sluiced for a few weeks in the early spring by impounded snow water. As the use of water pumped by steam power is economically possible only in a

[a] Collier, A. J., Reconnaissance of the northwestern portion of Seward Peninsula, Alaska: Prof. Paper U. S. Geol. Survey No. 2, 1902, p. 43. Moffit, F. H., The Fairhaven gold placers, Seward Peninsula, Alaska: Bull. U. S. Geol. Survey No. 247, 1904, p. 49.

region of very cheap fuel, it would appear to find no permanent place in placer mining in Alaska.

This season witnessed considerable activity in ditch construction on Ophir Creek, where large plants were being installed. Improvements in methods were also introduced in nearly all the smaller districts. A dredge was operated for a part of the season on Solomon River.

The discovery of rich placers on Candle Creek[a] in July, 1901, led to the usual rush from the near-by creeks, and hence had a retarding influence on mining in the northeastern part of the peninsula. This was particularly true of the Kougarok, whose production was far less than was anticipated. In the Bluestone region, where a few rich claims had been almost worked out in 1900, little was accomplished toward exploiting lower-grade deposits in a more systematic way. Lack of water prevented any considerable amount of mining on Daniels Creek. The fact was that during the excitement in 1900, many inexperienced men were working placers at an actual loss. By 1901 business equilibrium had been in a measure restored and such operations ceased.

In 1901 there was a decrease in the gold output of Nome. The reason for this is not far to seek. In 1900 the Nome beach placers yielded $350,000, and in 1901 not over $50,000, while the gold from the Topkok beach, which in 1900 amounted to $600,000, in 1901 was practically nothing. This reduction of nearly a million dollars in the yield of the beaches could hardly be expected to be made up by the creek placers, where there had yet been no considerable progress in methods of extraction. As the actual decrease in the total production was only $600,000, the output of the creek placers gained nearly $300,000 over that of the previous year.

In the subjoined table the gold output of the entire peninsula has been distributed among the various districts in accordance with the best data available. As there are no authentic statistics, the figures presented are only approximate.

Gold production of Seward Peninsula, 1901.

Winter drift mining (1900–1901)	$300,000
Nome district, creek placers	3,000,000
Nome district, beach placers	20,000
Council district	600,000
Kougarok district	40,000
Fairhaven district (Candle Creek, $20,000)	50,000
Bluestone, Solomon, Cripple, and other districts	120,000
	[illegible]

GROWTH OF MINING FROM 1902 TO 1904.

In the winter of 1901–2 drift mining was much increased, especially in the high benches near Anvil Creek, in the tundra, and in the Solomon River region, and also to a more limited extent in many of the smaller camps. These operations promoted prosperity by assuring employment to a certain number of men throughout the year, and to that extent cutting down the migratory population.

Before navigation opened in 1902 confidence had been restored by the just administration of the laws, and considerable capital was brought for investment in mining property and plants. This season was characterized by great activity in ditch construction. The Miocene ditch was extended, and before the end of the season about 34 miles of it were in use. A number of other ditch-building projects were inaugurated. Among the most important of these was a ditch to supply water for exploiting the rich placers of Daniels Creek, which had been practically untouched. As a result of this extensive conduit construction many new legal controversies arose regarding water rights, for it came to be recognized that the water in many localities was as valuable an asset as the gold-bearing gravel.

Though the gold in the bed of Anvil Creek was practically exhausted by 1902, the discovery of a parallel channel led to a continuation of mining in the valley. Several ditches and two pumping plants now furnished water for exploiting the auriferous gravels of the Anvil, Glacier, and Dexter creek basins. Outside of this district Ophir Creek was the only large producer. Mining operations on this stream had progressed steadily, but it was not until 1902 that it came to be recognized as one of the richest creeks in the whole peninsula. It is estimated that in 1902 its production reached $1,000,000.[a]

No considerable advance was made in the Kougarok and Bluestone regions, both of which produced only a small amount of gold. In the Fairhaven district the Candle Creek placers were the only considerable producers. Placers were found on Iron Creek and on a number of other smaller tributaries of Kruzgamepa River, but they were too inaccessible to permit the exploitation of any but the richest deposits.

In spite of the improvements which had been made in mining methods, the increase in gold production for this season was only about $400,000, and most of this came from Ophir Creek. The production of Anvil Creek had become less, and in none of the other districts had any improved methods been introduced. With the increase in the number of gold-producing creeks, the distribution of the output among the different districts becomes increasingly difficult and multi-

[a] Brooks, A. H., Placer-gold mining in Alaska in 1902: Bull. U. S. Geol. Survey No. 213, 1903, p. 40.

plies the chance for error. The following figures can therefore be considered only an approximation:

Gold production of Seward Peninsula, 1902.

Winter drift mining, 1901–2	$350,000
Nome district	2,800,000
Council district	1,000,000
Kougarok district	50,000
Fairhaven district	150,000
All other districts	210,000
	4,560,000

In the winter of 1902–3 there was a decided increase in the number of claims worked by drifting. It is estimated that more than $500,000 was taken out of the winter accumulation of gravel. The amount of ocean freight bore witness to the commercial prosperity in Seward Peninsula. Twenty-seven steam and seven sailing vessels landed about 75,000 tons of cargo on the peninsula, most of it consigned to Nome. The Council City and Solomon River Railroad was among the important enterprises inaugurated in the summer of 1903, and before the close of the season about 9 miles of standard-gage track had been laid. The Nome Arctic Railway (now called the Seward Peninsula Railway), running to Anvil Creek, was extended to the head of Dexter Creek. A few roads were built connecting with these railways, but most of them are little more than wagon tracks. During dry weather, however, it is possible to drive over the tundra, which in a wet season becomes almost impassable.[a]

As in the previous year, ditch construction was actively pushed during the summer of 1903. The Miocene ditch was extended to the head of Nome River and a branch was carried to Snake River. In the Cripple, Solomon, and Ophir regions extensive ditches were laid out and in part completed, and a number of shorter conduits were constructed in other districts.

It appears that the matter of ditch building is overdone in Seward Peninsula. The striking success of several long ditches has led less conservative and less experienced operators to lose sight of the fact that certain classes of placers can be mined at lower cost by other methods. When thousands of dollars are invested in water conduits to exploit shallow placers, as has been the case in many localities which might have been much more cheaply mined, it is time to call a halt to the injudicious construction of ditches. No one who has watched the maturing of the mining industry in this field will deny the important part which the ditches have played and will

play, but it is equally patent that there have been many misapplications of this method of exploitation. This is because the less experienced operators have come to regard the ditch as a panacea for all difficulties in placer mining.

In 1903 hydraulic lifts were installed on Glacier, Anvil, and Ophir creeks. One steam shovel and one dredger were operated for a short time on Niukluk River, and two dredges were used in the bed of Solomon River for most of the season. On many other creeks steam hoists, scrapers, and other mechanical appliances for cheap mining were installed. Extensive prospecting with churn drills was carried on in the tundra belt lying between Nome and the mountains. (Pl. II, *B*, p. 178.) As expected, the returns indicated extensive deposits of auriferous gravels.[a] Considerable work was done on an old line of beach deposits near Nome, whose discovery had been anticipated by the geologic investigations.[b] In the Topkok region 12 miles of ditch were completed, and before the close of the season some hydraulic mining was done. Prospecting in the Kougarok region showed much more extensive placers than had been previously supposed, but little actual mining was done. Nearly all the developments except in the older districts were in the nature of dead work.

The quartz mine, in operation since 1903 in the Solomon River region, is a significant feature of the gold-mining industry. Auriferous quartz veins are not uncommon in the peninsula, but in only this one instance has a lode mine actually been developed. It should be said, however, that prospectors have thus far paid small heed to lodes except in the way of location notices. In hardly half a dozen localities has any attempt been made to search systematically and intelligently for auriferous veins. Another important feature of the season's work was the finding of lode tin in the York region[c] by Mr. Collier and Mr. Hess, under the guidance of Charles Randt, Leslie Crim, and W. J. O'Brien, who had found float ore from the ledge. In this field the tin-bearing gravel had received considerable attention since 1900, and some lode-tin deposits had been reported by prospectors, but these reports were not verified until 1903.

The net results of all these operations (though possibly disappointing to those who had not a personal familiarity with the conditions) were as good as could be expected. The production was practically the same as in the previous year, though the estimates presented show

[a] Brooks, A. H., Placer mining in Alaska in 1903: Bull. U. S. Geol. Survey No. 225, 1904, pp. 48–55.

[b] Preliminary report on the Cape Nome gold region, U. S. Geol. Survey, 1900, p. 23; A reconnaissance of the Cape Nome and adjacent gold fields, U. S. Geol. Survey, 1901, pp. 150–151.

[c] Collier, A. J., Tin deposits of the York region, Alaska: Bull. U. S. Geol. Survey No. 229, 1904.

a falling off of $100,000, an amount which is probably less than the errors in the figures. In view of the great amount of dead work accomplished and the fact that some of the richest shallow placers had been exhausted, while the newer districts had not reached a productive stage, no increase in the total production was to be expected. Though there are no accurate statistics available, it seems probable that there was a considerable falling off in the Nome district proper, and that the output of practically all the other districts was higher than in previous years. It is on this basis that the following distribution of the totals has been made:

Gold production of Seward Peninsula, 1903.

Winter drift mining, 1902–3	$500,000
Nome district	2,400,000
Council district	1,000,000
Kougarok district	75,000
Fairhaven district	200,000
All other districts	290,000
	4,465,000

Drift mining[a] during the winter of 1903–4 was more extensive than ever before, and the yield probably was nearly $1,000,000. Of this amount about half was taken from the high bench deposits near Nome. Some low-lying gravels near the base of the hills were also exploited, as were the ancient beach placers in the tundra. In the Solomon River region probably $200,000 was taken out during the winter, and Ophir Creek yielded about $100,000. Several of the other districts yielded smaller amounts as the result of the winter's work.

The summer season opened very inauspiciously. Up to July 10 more than half the mines were idle because of lack of water due to dry weather. Fortunately heavy rains came early in July, and mining began. The summer's sluicing was, however, practically confined to two months, and even during this short period there was a considerable shortage of water in many districts. Ditch building continued, notably in the Nome, Cripple, Flambeau, and Solomon river valleys. Much of the work in these localities was directed toward the installation of plants and conduit construction, and the summer's output of gold was comparatively small. On Anvil Creek a steam shovel was successfully operated. On Glacier and adjacent creeks hydraulic elevators continued to be used. A sensational discovery of rich placers on Little Creek near the base of the highland back of Nome was significant because it proved that the limit of dis-

coveries had not yet been reached, even in the best-known parts of the peninsula.

The Council City and Solomon River Railway extended its road about 10 miles. The Topkok Ditch Company operated its hydraulic plant on Daniels Creek throughout the season. This well-managed enterprise is among the most successful operations of this class and has clearly demonstrated that with a sufficient water supply and enough grade for the disposal of tailings it is possible to hydraulic even frozen gravels. Ophir Creek continued to be the heaviest producer. One ditch was completed in the Kougarok region, and several more were planned or in construction.

Little was done in the northeastern part of the peninsula except some rather primitive mining. Though the presence of workable placers in this region has been demonstrated, yet with the present difficulties and expense of transportation capital has been chary of entering the field. There are, however, some enterprises on foot for ditch building in this district.

The general and healthy growth in the commercial interests continued. There were fewer legal complications and less promotion of "wild-cat" mining schemes. This community has, however, still to learn the necessity of intrusting large enterprises to the hands of well-trained men rather than to promoters. Probably two-thirds of the incorporated companies have made failures or achieved only partial success because of poor management. As has been stated, much of the activity was directed toward dead work, and the output of the placer mines was probably no greater than in the season before. This is what might have been expected, and it will be several years before any very great increase in the gold output is likely.

In distributing the totals shown in the following table it has been considered that there has probably been a considerable decrease in the production of the Nome district proper outside of the high-bench placers. This progressive decrease will probably continue until some systematic exploitation of the high-bench and tundra gravels has been introduced, when Nome should again lead all the other camps of the peninsula.

Gold production of Seward Peninsula, 1904.

Winter drift mining, 1903–4	$900,000
Nome district	2,000,000
Council district	1,000,000
Kougarok district	75,000
Fairhaven district	125,000
All other districts	400,000
	4,500,000

MINING DEVELOPMENTS IN 1905–6.

During the winter of 1904–5 much mining was done near Nome along the so-called "second beach line," which was traced from Hastings to Bourbon Creek, stretching parallel to the present coast. What appears to be an extension of the same deposit was discovered at Jess Creek, 10 miles west of Nome. These elevated beach placers are comparatively shallow, and, though not as rich as some described in succeeding paragraphs, yielded handsome profits.

In the fall of 1904 considerable excitement had been caused by the discovery of some rich placers in the tundra gravels near Little Creek. A group of claims in this locality proved to carry enormous values, yielding, it is said, more than $1,500,000 in gold during the first twelve months that they were operated. Although these proved to be only the forerunners of still more important discoveries, they were of the utmost importance, first, because they showed that the limits of new discoveries in the best-known parts of Seward Peninsula had not been reached, and second, because they stimulated the prospecting of the tundra gravels. In addition to the mining operations on the Nome tundra and in the high gravels of the vicinity, winter mining was also carried on in other localities, notably at Candle Creek. Operations requiring fuel at the latter locality, as well as at other points in the Fairhaven district, utilized to a considerable extent the lignite coal mined at Chicago Creek.

It is estimated that the gold production of the winter of 1904–5 exceeded $1,000,000 in value, but these figures can be regarded only as an approximation.

The open season of 1905 was much shortened by a late spring and an early fall, the freeze-up coming about September 18. The most important event of the summer was the installation of a large dredge on Solomon River. Its successful operation furnished the final proof that dredges were to play an important part in the mining industry of Seward Peninsula. Other dredges had been tried with more or less success, but this was the first to be operated in a large way.

A notable advance was made in ditch construction during 1905, when thirteen ditches were either completed or building. Among the most important was the Seward ditch (37 miles long), which carries water from the head of Nome River to the Nome tundra claims. About 8 miles of the Pioneer ditch was completed, to carry water from Nome River to the south slope of Anvil Mountain. The Cedric ditch (24 miles long), which proved to be a less well-planned enterprise, was built to carry water to Arctic Creek, west of Nome. Smaller ditches were also constructed in the Osborn, Flambeau,

On the whole, a very large amount of dead work was accomplished luring the summer, and this, together with the fact that it was an dverse climatic season, made the production of $4,800,000 of gold ery considerable. This amount is approximately distributed as ollows:

Gold production of Seward Peninsula, 1905.

Nome district	$3,400,000
Council district	500,000
Kougarok district	400,000
Fairhaven district	300,000
All other districts	200,000
	4,800,000

The discovery of rich gravels at Little Creek led to great activity n prospecting the tundra, and as a result the so-called third-beach ine was discovered during the winter of 1905–6. This discovery bore ut the prediction made by the Geological Survey as early as 1899, nd established the value of its investigations.

These third-beach placers yielded so much greater profit than the reek placers, partly due to cheapness of operation and partly to igher values, that for the time being mining activity was centered n their development. During the winter so much prospecting was lone with steam thawers and hoists, requiring a large amount of uel, that Nome was threatened with a coal famine. This was voided only by drawing on the Government stores of coal at Fort Davis. The spring clean-up of the gravels mined during the winter ielded probably $2,500,000 in gold. Considerable winter work was lone in other parts of the peninsula, but the total output from these ources probably did not exceed a few hundred thousand dollars in alue.

The opening of navigation saw no abatement in tundra mining, for ork was continued on the third beach line. It was fortunate that his was so, for the extraordinarily dry summer of 1906 worked havoc ith nearly all creek mining. The operations supplied by water from Nome River were continued for the most part, but the miners on the maller streams were forced to close down throughout much of the ummer.

Dredging operations continued as in the previous year, notably at Solomon. In the aggregate there was considerable ditch building, specially in the Kougarok and Fairhaven districts. In spite of the hortage of water, there was considerable mining in the Topkok, Ophir, and Iron creek regions.

A new management took over the narrow-gage railway running to Dexter and extended it over the pass at the head of Nome River to Salmon Lake and thence to Lanes Landing, on the Kuzitrin. This ine, called the Seward Peninsula Railway, now running into the

heart of the peninsula, will accelerate the development of some of the inland districts. The Council City and Solomon River Railway was extended into the Casadepaga basin, and promoted mining activities in this field. Some wagon roads were built under the direction of the Alaska road commission.

During the summer of 1906 Nome was exceedingly prosperous. Many substantial buildings were erected and the whole town began to assume an appearance of greater permanency than it had previously shown. Business was facilitated by the improvement in steamboat connection with Puget Sound.

The estimated value of the gold production of the peninsula in 1906 is $7,500,000, of which probably nearly half was taken from the old beach line. Practically all the other districts showed a falling off in yield, due both to the insufficient water supply and to the fact that the energies of many men had been diverted from creek to tundra mining. It is impossible at the present time to distribute this total among the different districts.

Lode mining in 1905 and 1906 was still confined to the one property on Big Hurrah Creek, but considerable prospecting was done for auriferous quartz. However, until placer mining proves a less attractive field it is not to be expected that much attention will be paid to the finding of gold in bed rock. In addition to the auriferous lodes, some antimony and bismuth ores and graphite deposits have received attention. Some work has also been done on the Fish River galena deposits, which have already been referred to.

During these two years there has been great activity in the York tin district. One lode mine near Cape Prince of Wales has made some small shipments of tin ore, as have also some placer mines on Buck Creek. Most of the work in the tin district has been directed toward prospecting.

SUMMARY.

The facts presented in the foregoing pages make it evident that real progress in the industrial advancement within the peninsula has come chiefly during the last five years. The first years after the gold discovery were given over to skimming the cream from some of the richest creeks, only such placers being developed as assured immediate returns and required but a small investment of capital. Such operations, while they made for quick returns and attracted a large population, have been of little permanent benefit to the district. No placer camp whose output is derived solely from bonanzas ever has had or can have a long successful history. It has been shown that the absence of the judiciary, followed by what was

ernment have been rectified, and confidence has thereby been restored to the community.

The statistics presented on pages 30–37 show that from 1901 to 1905 the variation in the total output of gold from the peninsula was less than 10 per cent. This does not, however, indicate a uniform yield from the different districts that make up the peninsula, but rather that, by chance, when one bonanza was exhausted, another would be found. For example, by the time the beach placers had been exhausted, the creek placers at Nome had become large producers, and when in turn the richest of these had been mined out, new ones were discovered in other parts of the peninsula. As mining enterprises become better established and a larger amount of gravel is handled annually, less fluctuation is to be expected.

It was not until 1902, when at least one of the richest creeks was supposed to be nearly exhausted, that systematic effort was made to lower mining costs, for up to that time a large majority of the operators believed that only gravels of a high gold tenor could be profitably exploited. A few far-sighted and experienced men, however, realized that, by the installation of proper equipment, a reduction in costs was possible, which would make available for mining the large deposits of auriferous gravels carrying lower values, and that by such means only the life of the district could be prolonged.

The first successful enterprises looking toward this end were the construction of high-level ditches in 1901 and the installation at about the same time of various mechanical devices. The introduction of the churn drill for prospecting about this time is also worthy of note. A second great advance was made in 1904, when the first large dredge to be successfully operated was installed. The evolution of mining methods is still in progress, for many problems remain unsolved. One of the most important is the economic handling of the frozen gravels which underlie much of the tundra. It seems probable that utilization of some of the water powers not available for hydraulicking, by transforming them into electricity, will be one of the early lines of development.

As in most other mining camps, the necessity of intrusting the management of large enterprises only to men of technical training, experience, and proved ability has not by any means been fully realized. It is common knowledge that the failures of mining companies are in a large measure chargeable solely to the ignorance of the men responsible for their management. This is because the public has not been educated to the point of regarding mining as anything but a gamble, and holds in small esteem those who would put it on a sound business basis.

GEOGRAPHY AND GEOLOGY.

By Arthur J. Collier.

INTRODUCTION.

In the foregoing pages Mr. Brooks has outlined the progress of geographic and geologic surveys in Seward Peninsula. Except along the coast line the surveys began in 1899 and have been continued during every season but 1902 up to the present time. Nearly all of this work has been of a reconnaissance character[a] and much of it has been directed toward an investigation of the placer deposits. This was necessarily so, for detailed surveys must be preceded by a general knowledge of the whole province.

It is the purpose in this section to present only the salient features of the geography and geology, and especially those which bear more directly on the occurrence of placer gold. The new matter presented, as has already been stated, is based on studies carried on during three months of the summer of 1903, supplemented by some observations made during 1904, when a few weeks were devoted to a reexamination of some of the more important mining districts. The itinerary which follows shows that the writer was not by any means able to cover the entire field indicated by the title of this volume. This work could not have been completed were it not that free use has been made not only of the reports of Brooks, Mendenhall, Richardson, and Moffit, but also of their unpublished notes and manuscripts. The writer is also fortunate in having access to the notes made by C. W. Purington[b] and Sidney Paige, who investigated some of the gold placers of the peninsula in 1903. Finally, he is under deep personal obligation to the mine operators of the peninsula, who almost without exception have shown a cordial appreciation of the work of the Survey and have aided it by every means in their power.

[a] In 1904 T. G. Gerdine made detailed surveys in the vicinity of Nome and in the following year F. H. Moffit and F. L. Hess studied in detail the geology of the same region.

[b] Methods and cost of placer and gravel mining in Alaska: Bull. U. S. Geol. Survey

The party organized for the purposes of the investigation in 1903 included Frank L. Hess, assistant, and a packer and a cook. It was provided with a light camp equipment, which was carried by a pack train of six horses. The disembarkment at Nome was made on June 16. After spending a few days in the Anvil Creek region, a route was laid up the Nome River valley to the Kigluaik Mountains, thence westward and around their seaward end to the Bluestone district. From Teller an excursion was made into the York tin-bearing region by boat, the results of which have already been published.[a]

From Teller the party took a northerly course and visited the gold-bearing region of the Agiapuk and the upper Kougarok basin. Turning southward through a gap in the Bendeleben Mountains the party reached the Council district, where a study of most of the producing placers was made. Thence the party proceeded to Nome by way of the Solomon and Eldorado river valleys, whose placers were examined en route. At the close of the season about ten days were devoted to some detailed studies of the auriferous gravels near Nome, special attention being given to the high-bench deposits. The party embarked for Seattle on September 13. In the course of a journey of nearly 500 miles, occupying about one hundred days, the party had examined the placers on upward of 150 creeks, besides carrying on geologic reconnaissance mapping. It will be evident, therefore, that while there were better opportunities than had fallen to any previous investigators in this field, yet much of the work was necessarily hasty and not made in the detail desirable for an exhaustive study of the auriferous gravels.

GEOGRAPHY.

GENERAL OUTLINE.

Seward Peninsula, cut out from the mainland by Norton Sound on the south and Kotzebue Sound on the north, has an outline which suggests a crudely shaped arrowhead pointing to the west toward Cape Nuniamo, on the Siberian coast. (See fig. 2.) The total length from east to west is about 200 miles. From Norton Sound to Kotzebue Sound the distance is only 80 miles, but the width of the peninsula along a line from Cape Nome to Cape Espenberg is 150 miles. The total area is approximately 20,000 square miles. The main mass of the peninsula is included between meridians 161° and 168° west longitude and parallel 64° north latitude and the Arctic Circle.

The dominant topographic forms of the province are flat-topped uplands from 800 to 2,500 feet high, broken by broad valleys and

[a] Collier, A. J., Tin deposits of the York region: Bull. U. S. Geol. Survey No. 229, 1904.

basin lowlands (Pl. I, *B*). In the southern half of the peninsula the Kigluaik, Bendeleben, and Darby mountains form a broken range along a crescentic axis. The York Mountains and several other highland masses form isolated groups in the northern half of the peninsula. The watercourses, as a rule, follow broad valleys with gentle slopes. About one-fourth of the drainage finds its way northward to the Arctic Ocean; the rest flows southward into Bering Sea and its connecting bodies of water. The shore line is characterized by long, straight beaches with gentle slopes, broken by rocky bluffs and by

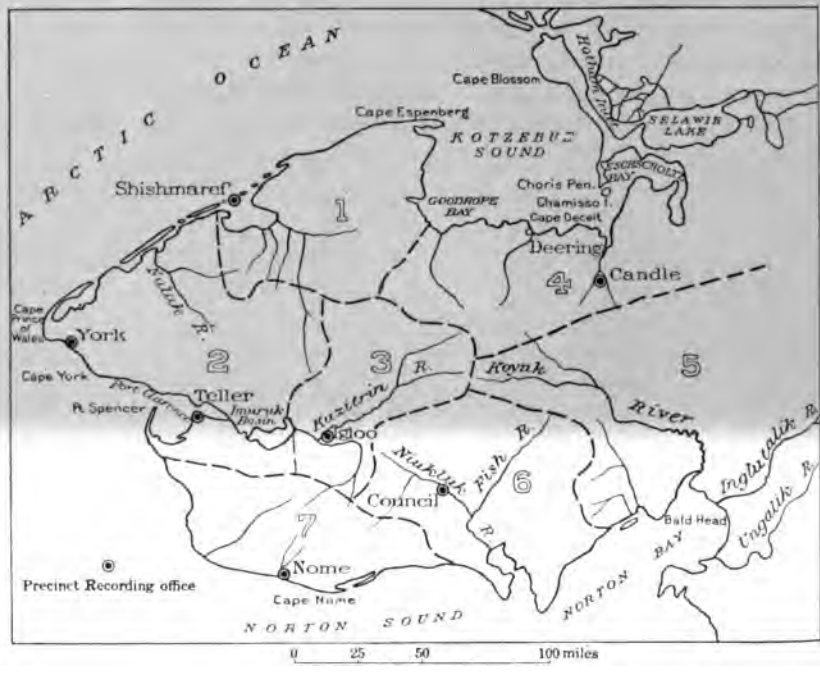

FIG. 2.—Precinct map of Seward Peninsula. 1, Goodhope; 2, Port Clarence; 3, Kougarok; 4, Fairhaven; 5, Koyuk; 6, Council; 7, Nome.

deep embayments and inlets. (See topographic maps, Pls. VIII and IX, in pocket.)

SHORE LINE.

The coast line of Seward Peninsula is remarkably even and regular as compared with that of southern Alaska. Nearly the whole peninsula is bordered by slightly curving beaches, which mark the seaward margins of coastal plains, broken by numerous headlands, but with some deep inlets. The sea floor slopes off at a very gentle angle, and at only a few places are depths of 10 fathoms found within 5

are so shallow that no soundings above 35 fathoms have been reported within 100 miles of the coast.

Golofnin Bay, which breaks the coast line 100 miles east of Nome, has a depth of more than 3½ fathoms at the entrance, but large vessels can not approach nearer than within 3 miles of the landing at the head of the bay.

Port Clarence, about 80 miles northwest of Nome, is the only harbor of the peninsula. It is nearly circular in outline, 15 miles in diameter, and cut off from the open sea by a long, low sand spit. The Coast Survey charts show a depth of 9 fathoms near the entrance, and good anchorages for large vessels can be found over much of its area. From the head of the bay Grantley Harbor, navigable for light-draft vessels, extends inland for 15 miles, and this in turn connects at its head, by way of a narrow tidal inlet called the Tuksuk Channel, with the large body of brackish water called Imuruk Basin or Salt Lake. By using these waters light-draft steamers can penetrate well into the heart of the peninsula.

Along the north coast the shore line is almost continuous from Cape Prince of Wales to Kotzebue Sound, but there are a number of shallow lagoons lying between barrier beaches and the mainland and connected with the Arctic Ocean by narrow channels. The largest of these lagoons, known as Shishmaref Inlet, can be used as a harbor by vessels of light draft.

Goodhope Bay, which breaks the northern coast line and cuts Seward Peninsula off from the mainland on the north, is about 30 miles wide. A depth of water of more than 5 fathoms can be found over much of its area, but owing to its great size it affords little more protection to seagoing vessels than does the open coast of the peninsula. There is, however, a good anchorage protected from nearly all winds south of Chamisso Island. This was used as winter quarters by some of the vessels of the Franklin relief expedition.[a]

Headlands that break the continuity of the beaches are common features of both the north and south coasts east of a line running from Rocky Point to Cape Espenberg. Rocky Point, Cape Darby, and Bald Head are notable promontories on the north shore of Norton Bay, and Cape Deceit is the most prominent of the rocky points on the south shore of Goodhope Bay. The limestone cliffs west of Cape Deceit are famous sea-bird rookeries and during the nesting season supply the town of Deering, 2 miles east of the cape, with abundance of fresh eggs. West of Rocky Point on the south coast Topkok Head and Cape Nome, the only promontories which reach the coast in a distance of 100 miles, scarcely break the continuity of the

[a] See Reconnaissances in Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 19–26.

beach line. For about 5 miles on either side of Cape York limestone cliffs rise from the sea to an elevation of 600 feet. West of these cliffs lie beaches backed by a narrow coastal plain for 15 miles to Cape Prince of Wales, where an isolated peak called Cape Mountain rises to an elevation of 2,300 feet above the sea. On its south and west sides the slopes fall off to the sea in cliffs several hundred feet high. On the north coast of the peninsula there are no headlands from Cape Prince of Wales to the south shore of Goodhope Bay. The coastal plain slopes to sea level, and through a considerable portion of the distance probably descends slightly below sea level, since the beaches are built on the seaward side of sand spits, the product of wave and current action.

RELIEF.

Although the detailed topography of the peninsula presents great irregularity, induced chiefly by the lack of uniformity of the drainage system, yet practically all the land forms belong to one of three types. These present little variation throughout the province. In order of importance they are as follows: The uplands, the lowlands, and the mountains. A fourth type, of subordinate importance in extent, yet containing the key to the evolution of the topography, consists of the rock and gravel floored terraces which occur throughout the peninsula.

In much the greater part of the peninsula the broad, flat-topped and rounded hills, here collectively called the uplands, are the dominating topographic features. The summit levels, which locally have a striking uniformity of altitude, range from a few hundred feet near tide water to 3,000 feet near the heart of the peninsula. The evolution of this topographic type will not be here discussed, but, in general terms, this upland can be considered a dissected plateau, whose summit level marks a peneplain. Attention will be drawn to a number of base-levels of lower altitude, indicating later epochs of erosion, remnants of which are preserved as minor plateaus and benches.

The lowlands embrace three types. The most extensive are the coastal plains, which nearly everywhere fringe the shore line and in places reach a width of 20 miles or more. These plains merge inland with the lower slopes of the uplands and form the typical tundra of the circumpolar province. The extensive basin lowlands are striking topographic features of the peninsula and form a second type of this group. They are in many places nearly surrounded by uplands and are drained through comparatively narrow valleys. Like the coastal plains, their floors merge with the slopes of the uplands. The third type of this group includes the valleys, which are characteristically

for by recent changes of drainage, brought about by local warpings. Valleys of still another type are those which occur in a few of the higher mountain masses and which have been formed by the erosive action of glaciers. These have the typical U form and find their sources in glacial cirques.

The third group of topographic forms embraces the mountains, which, as has been stated, include only one considerable range within the peninsula. There are, however, several other isolated mountain masses, which rise above the general summit level of the upland. The mountains are characterized by a rugged topography and sharply cut drainage channels. As will be shown, a number of them have been the scene of recent glaciation.

To speak broadly, the peninsula is divided into two topographic provinces by the range whose various parts have been called the Kigluaik, Bendeleben, and Darby mountains. South and west of these mountains is an upland region with a relief ranging from 800 to 3,000 feet in altitude. North of the mountains is a second upland region with about the same relief.

The Kigluaik, Bendeleben, and Darby mountains lie along an axial uplift, which is of a crescentic shape. This axis stretches northeastward from a point near Cape Woolley to the one hundred and sixty-third meridian, then bends toward the south, embracing within its sweep the drainage basin of Fish River, and extends southward to Cape Darby, east of Golofnin Bay. The highest peaks of the Kigluaik Mountains reach an altitude of nearly 5,000 feet; those of the adjacent Bendeleben Mountains do not exceed 3,700 feet; and the Darby Mountains are of still lesser altitude, ranging from 2,500 to 3,000 feet. Both the Kigluaik and Bendeleben ranges are rugged, with sharply cut valleys, and both include many glacial cirques. These mountains have been deeply dissected, and the valley walls rise precipitously from the floors. Within the mountains proper the stream gradients are steep and the watercourses torrential. A striking feature of the drainage system of the Kigluaik Mountains is the remarkable straightness of many of the valleys, the larger of which divide the mountains into a number of irregular masses, some of them forming subordinate ranges.

The Kigluaik Mountains are nearly everywhere separated from the uplands by extensive lowlands. On the north lie the extensive flats which surround Imuruk Basin; these flats stretch eastward and sweep around the end of the range and are continued by the valley of Kruzgamepa River. On the south the headwaters of Kruzgamepa and Stewart rivers flow in broad depressions. The west end of the Bendeleben Mountains is similarly isolated, but at the east end of the range there is a more gradual transition between the upland and the

mountains, and this is also true of the Darby Mountains, where there is in many places no sharp line of demarcation between mountains and upland.

To the south of the mountains is, as already stated, a highland mass whose summits range from 800 to 3,000 feet in elevation. The slopes of this upland are in many places broken by well-marked benches, which up to an altitude of 800 feet are plainly due to stream erosion. There are also some still higher benches whose origin has not been definitely determined. This highland area is essentially one of irregular topography, with no well-defined system of ridges. The watercourses flow in broad, deeply cut valleys, whose slopes ascend gradually to the divides. The summits are rounded, but are broken by numerous rocky knobs, many of which are carved into fantastic shapes. These castellated peaks are very characteristic features of the topography and their preservation plainly indicates the absence of regional glaciation. Their outline is determined both by the lithologic and the structural character of the rock from which they have been carved. The general trend of the larger valleys is north and south, and these block out broad ridges whose margins are scalloped by the minor tributaries. Studied in detail this feature would appear to indicate a north-south trend of the topography, but study of a larger area shows such an interpretation to be at fault. The highlands, as a rule, fall off to the coastal plain by a series of well-defined terraces.

As has been stated, the highlands do not in general fall off directly to the sea, but are separated by a coastal plain of varying width. Many of these lowlands have a general crescentic form, terminating at either end in bluffs whose bases are washed by the sea.

The Kigluaik and Bendeleben mountains are separated by lowlands on the north from the upland region which constitutes the northern two-thirds of the peninsula. This upland, like the similar one to the south, is characterized by flat-topped ridges and hills rising to altitudes ranging from 600 to 2,500 feet. Here, too, the monotony of the summit level is broken by numerous minor peaks of irregular form. Besides these there are a number of more extensive mountain masses that are comparable to the mountains to the south, though of lesser altitude and not so rugged a character. Of these subordinate ranges the York Mountains are the most extensive. These form an irregular mass near the western limit of the peninsula and reach their maximum altitude in Brooks Mountain, about 2,900 feet above the sea. The general trend of these mountains is northeastward, but their extension appears to merge with the general summit level of the upland. On the south and east they fall off to a well-marked plateau.

scribed in detail elsewhere.[a] On the north the York Mountains slope off gradually to the upland, which in turn falls off to an extensive coastal plain. The York Mountains proper are rugged and their stream valleys are sharply cut. Among the high summits evidence of some glaciation is to be found, but this is of much less extent than in the mountains to the southeast.

In the northeastern part of the peninsula there are a number of solated mountain masses, but these appear to be local elevations of he plateau.[b]

The northern upland, as has been stated, reaches an altitude of 2,900 eet. Between the summit level and the lowland there is in many



FIG. 3.—Profile of the western part of Seward Peninsula, showing old erosion levels.

olaces a series of broad benches, which represent distinct epochs of erosion. These have been described in detail elsewhere;[c] briefly stated, four epochs of erosion have been recognized, each of which narks a stage of stability during a general period of uplift. The ighest and, therefore, oldest of these plateaus is preserved in benches ying at altitudes of 2,000 to 2,700 feet. This erosion level has been ermed the Nuluk Plateau (figs. 3 and 4). A second erosion period, he result of which has been called the Kugruk Plateau, is marked by a well-preserved bench, ranging in altitude from 400 to 1,200 feet.

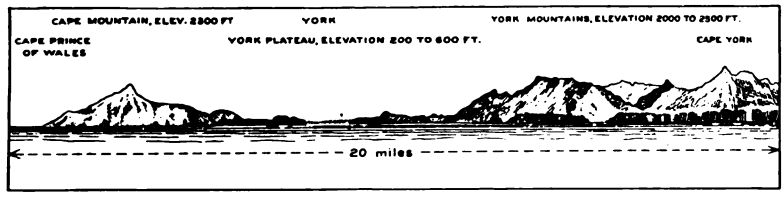
CAPE MOUNTAIN, ELEV. 2300 FT
YORK
YORK MOUNTAINS, ELEVATION 2000 TO 2500 FT.
CAPE PRINCE OF WALES
YORK PLATEAU, ELEVATION 200 TO 600 FT.
CAPE YORK
20 miles

FIG. 4.—Sketch of the coast from Cape York to Cape Prince of Wales.

The so-called York Plateau gives evidence of a third local base-level nd stands 300 to 700 feet above the sea. The extensive coastal plain s the result of the fourth and most recent epoch of erosion. While ome if not all of these base-levels are probably represented through- out the peninsula they have been correlated only in the northwestern part.

---

[a] Reconnaissance in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special ublication of the U. S. Geol. Survey, 1901, p. 52.

[b] Moffit, F. H., The Fairhaven gold placers, Seward Peninsula, Alaska: Bull. U. S. Geol. urvey No. 247, 1905, pp. 42–44.

[c] Collier, A. J., A reconnaissance of the northwestern portion of Seward Peninsula, laska: Prof. Paper U. S. Geol. Survey No. 2, 1902, pp. 35–40.

To speak broadly, the northern upland is of greater irregularity than the southern. There is, however, here the same general trend of the drainage system, which has produced ridges stretching irregularly north and south. This upland on the north falls off by a gradual slope to the broad lowland that skirts the Arctic Ocean, a plain much more extensive than any of those along the southern coast of the peninsula. The transition between the two seems to be more gradual than in the south, where numerous benches break the seaward slope of the upland. As in the southern part of the peninsula, extensive basin lowlands form important topographic types in this region.

DRAINAGE.

The following account of the drainage is quoted from a recent report by Brooks:[a]

The Bering-Arctic watershed follows a sinuous line along the longer axis of the peninsula to Cape Prince of Wales and sends the waters of over two-thirds of its area southward to the Bering Sea. The highlands consist of rolling upland 1,000 to 2,500 feet above the sea, and there are some isolated mountain masses which stand higher, but the latter in no case determine the east and west divide. The headwaters of the streams flowing into the Arctic and Bering seas interlock irregularly within the upland, throwing the watershed first north, then south, and giving it the irregularity which has been described.

The Koyuk River, one of the largest of the peninsula, enters a small tidal estuary at the head of Norton Bay. Its source is in a gravel-floored basin, which lies well toward the center of the peninsula and is bounded on the south by the Bendeleben Mountains, which rise 2,000 feet, and by highlands on the north rising 1,500 feet above its floor. The Koyuk flows in a tortuous course and with sluggish current across this basin, which it leaves through a narrow valley with a steep gradient. This canyon-valley type continues eastward for about 20 miles, to where the river enters another broad, level-floored valley which extends east and south, gradually opening out and merging into the coastal plain of Norton Bay.

The Kwik River enters Norton Bay 20 miles west of the Koyuk. It flows southward through a broad and almost featureless depression which northward is connected with the Koyuk basin by a low pass.

Eight miles west of the Kwik is a lagoon, into which flows the Tubutulik River. This stream rises in a group of low mountains 30 miles from the sea, traverses a small basin, then takes a tortuous course through the hills and enters the coastal plain 10 miles from the sea. The Kwiniuk River, which empties into the same lagoon, rises in low hills 10 miles from the coast and flows in a broad valley from which it emerges on the coastal plain.

At Cape Darby the shore line suddenly retreats inland, and to the northwest are Golofnin Bay and Golofnin Sound. At the head of the sound is the broad delta of Fish River, and the valley of the latter stretches northward for 10 miles as a broad depression, then contracts for a few miles only to open again to a second extensive lowland, which also includes the lower reaches of the Niukluk River, the principal tributary of the Fish. The Fish rises in a basin which is typical of the basins at the headwaters of many rivers of northern Alaska. These basins are level, gravel-filled depressions encircled by uplands

whose slopes often rise abruptly. Within them the streams have low grades and flow with tortuous courses, but below them flow through narrow canyon-like—often rockbound—valleys, with straight courses, steep gradients, and frequent rapids. The basin of the Fish is of rectangular outline, 30 miles long and 20 miles wide, and below it is a constricted valley which is about 10 miles long, less than a mile in width, and has abrupt walls. Within the basin the river is tortuous and has a sluggish current, while in the canyon it is comparatively straight and descends through a series of rapids.

Niukluk River, the largest confluent stream, joins Fish River about 20 miles from the sea. Near the mouth its valley has a width of about 6 miles, which gradually decreases to less than a mile near Richter Creek, while 8 miles above the stream flows for 2 miles through a steep-walled rockbound canyon 50 feet deep. Above the mouth of the Casadepaga the valley broadens out to a basin separated by only a very low divide from the Kruzgamepa, which flows into Port Clarence. The two basins connected by a sharply incised valley, are striking features. The valley of Casadepaga River, the chief tributary of the Niukluk, is broad, with gentle slopes, broken by gravel terraces up to an altitude of 600 feet. The headwaters of the Casadepaga are connected by a low, gravel-filled divide with Solomon River, which flows southward.

West of Golofnin Bay the Solomon and Eldorado rivers, as well as many smaller streams, carry the drainage southward through broad, open valleys, whose slopes are often terraced. The Eldorado and Nome rivers rise in gravel-filled basins of the type already described, which to the north are connected by broad passes with Kruzgamepa waters and to the south are succeeded in turn by a constricted valley and a broad valley whose floor merges into the coastal plain. The Snake, Penny, and Cripple river valleys merit no special description. Near the coast they are broad, and their floors are extensions of the coastal plain, above which they become constricted.

Sinuk River,[a] which empties into the sea about 30 miles west of Nome, is one of the largest rivers of the southern watershed of the Seward Peninsula, and receives the drainage from the southern slope of the Kigluaik Mountains. It emerges from the mountains in a narrow gorge and flows in a broad depression parallel to the range for about 15 miles, turns southward and reaches the sea through a broad, flat valley. Its waters, as well as the headwaters of its chief tributary, Stewart River, are connected by a broad, gravel-filled pass with the Kruzgamepa Valley.

Fairview and Feather rivers are streams of minor importance which flow westward from the southern flanks of the Kigluaik Mountains. Tisuk Creek is somewhat larger and drains the northern slopes of the Kigluaik Mountains, from which it emerges in a narrow valley which broadens out. In its lower course the current meanders sluggishly over a flat valley floor and finally empties into a lagoon of Bering Sea. A gravel-filled divide, about 200 feet high, separates the Tisuk from Canyon Creek, which flows northeastward into Imuruk Basin.

A number of small streams flow into Port Clarence and Grantley Harbor from both the north and the south, but the Bluestone River drains the larger part of the area lying between the Kigluaik Mountains and Port Clarence. Its headwaters are in a basin-shaped valley, but at the mouth of the Alder it enters a rock-cut canyon, below which it flows through a broad valley tributary to the Tuksuk Channel.

The head of Imuruk Basin is bounded by a flat, swampy area, through which meanders a broad river, sometimes called the Kaviruk, which forks about 20

[a] Locally often called the Sinrock River.

miles from the bay. The southern fork, called the Kruzgamepa, rises well within the Kigluaik Mountains, flowing southward till it leaves them; then takes a northeasterly course and encircles the east end of the range. This part of the valley lies in the same lowland that includes the upper basin of the Niukluk. The northern fork of the Kaviruk, called the Kuzitrin, has its source in a broad, flat basin in which it is joined by its chief tributary, the Kougarok. Below the basin it flows through a rather narrow valley for about 20 miles, and debouches on the plain at the head of Imuruk Basin. A third large area is drained into Imuruk Basin from the north by the Agiapuk River.

Between Port Clarence and York are several streams which have in general a southerly course, but which are insignificant in size. West of Cape York the first important river is the Kanauguk, which lies well within the York Mountains.

The Arctic drainage of the Seward Peninsula, embracing probably not over a third of its area, is all of practically the same general type. The headwater valleys are broad and open and the watersheds separating them from the valleys of the streams flowing south are often very low. The passes are broad and gravel filled and suggest recent changes in drainage. The valleys of the northward-flowing streams open out as they approach the Arctic, the gradients become less, and finally the floors merge into the coastal areas, through which the streams meander with sluggish currents. Many of the Arctic streams empty into large lagoons, which are cut off from the ocean by long barrier beaches. The streams on the Arctic coast are straighter than those flowing into Bering Sea. The easterly streams flow northeast, the westerly ones northwest. West of Cape Espenberg the Serpentine, Arctic, Kougarok, Pinguk, and Mint are the chief rivers, while the Goodhope, Cripple, Inmachuk, Kugruk, Kiwalik, and Buckland drain the northeastern part of the peninsula.

The Buckland River, which flows into Eschscholtz Bay, a part of Kotzebue Sound, through a long tidal estuary, rises about 75 miles southeast of the bay, and opposes the drainage flowing on one hand into Norton Bay and on the other into the lower Koyukuk. The lower 60 miles of this river were explored in 1849[a] by expeditions sent out from H. M. S. *Herald* and *Plover*. The reports of these parties show that dead water extends for about 30 miles from the mouth, and that there are no serious rapids for 30 miles farther upstream. There is a native settlement near the head of the river which is connected by portage trail with the Kateel River, a tributary of the Koyukuk.

CLIMATE.[b]

GEOGRAPHIC LOCATION.

The climate of Seward Peninsula is clearly under the control of its outline and location. Located between Kotzebue Sound of the Arctic Ocean and Norton Sound of Bering Sea, its summer and winter temperatures are much less extreme than those characterizing the other portions of Alaska under the same parallels. The proximity of these two water bodies also supplies more moisture to the atmosphere over the peninsula than is found farther east. The high

[a] Mendenhall, W. C., Prof. Paper U. S. Geol. Survey No. 10, 1902, p. 12.

[b] Prepared in collaboration with Cleveland Abbe, jr. Compare section on climate by

latitude of the region makes both seas almost icebound for half the year, and this reduces their equalizing influence to some extent.

OBSERVATIONS.

Very few reliable instrumental observations of the climatic elements have been made on Seward Peninsula, and none have been carried on consecutively during a considerable number of years. Most of the records are for fragments of years, or even of months, and the only ones from the interior of the region have been made by geologic exploring parties, moving camp almost daily.[a]

TEMPERATURE.

As already stated, the temperature conditions of Seward Peninsula are less severe than those experienced in the interior of Alaska, but are subject to greater extremes than those of southern Alaska. During quiet days in winter the temperature has fallen to about —50° F., but residents do not consider the usual extreme winter temperature of about —40° F. dangerous except when accompanied by high winds from the northeast. The lowest temperatures occur during January and February, and so far have been reported from points near the coast. It is probable that the interior of the peninsula is subject to lower winter temperatures, but no records are known to have been kept there during that season. It is remarkable that the coldest months are subject to sudden thaws and warm rains which open all the streams and flood them. Such winter thaws have also been accompanied by open water in Norton Sound. The summer temperatures rarely rise above 80° F. On one occasion only has there been recorded a temperature as high as 84° F., and that was in August, 1900, at a point on Fish River. Probably the maximum temperature is below 80° over most of the peninsula. In 1903 the highest temperatures experienced over the northeastern portion of the peninsula were 69° in July, 66° in August, and 62° in September; the most common temperatures lay between 45° and 60°, with extremes of 10° in September and 69° in July.

The daily minimum temperatures are 32° or lower from about the first week in September until about the middle of May. The first fall frosts occur about the middle of September, and the last frost in spring toward the middle of June.

The sea temperature of Port Clarence has been found to average 38.9° F. in September, and the waters of Kotzebue Sound averaged from 50.9° in August to 38.3° in October. Both bodies of water thus

[a] See Collier, A. J., Reconnaissances in Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901; Prof. Paper U. S. Geol. Survey No. 2, 1902. Mendenhall, W. C., Prof. Paper U. S. Geol. Survey No. 10, 1902. Moffit, F. H., Bull. U. S. Geol. Survey No. 247, 1905.

range lower than Norton Sound at St. Michael, where an average temperature of 56° in July and August and 49.6° in September has been observed.

PRECIPITATION.

The actual rain and snow fall of the peninsula is probably small. The nearest station with a good record is St. Michael, where the annual fall amounts to about 18 inches. Comparison of the records there with fragmentary records from the peninsula indicates an annual fall of about 20 inches of water over its southern portion and of perhaps 25 inches of water over the northern portion. So far as experience and observation go, the greater portion of this water falls as rain during the months from June to October. During the winter months an actually small depth of snow, perhaps 3 feet, falls, but it is so badly drifted by the frequent severe northeastern gales of this season that it has proved impossible to obtain accurate measurements of the amount. There are no known measurements of the water equivalent of the winter snowfall of the peninsula; it may be estimated at 3 inches, allowing something less than 0.1 inch water per inch of snow. The snowfall is reported sufficient to permit sledding throughout the winter, and the heavy drifts which form annually in valleys and on hill slopes remain far into the summer or even until the succeeding winter.

With so small an annual supply of rain water it is fortunate for the miner that the snowdrifts thus preserve the scanty winter fall until the season when he can use it to the best advantage—the summer. The spring thaw, however, with its attendant May freshet, due to melting drifts, is often followed by a six weeks' drought, since the rainy season does not begin until July. This rainy season is usually characterized by frequent showers rather than continued rains. Another factor which saves the rainfall for the miner is the perennially frozen condition of the gravels and bed rock throughout most of the peninsula. This circumstance gives a maximum surface run-off and a minimum loss of ground water, so that while the frozen gravels are difficult to work, yet the resources for their exploitation are for the same reason greater than they would be if the temperature were uniformly higher. The frozen ground extends to an unknown depth and embraces both gravels and fissured country rock. Large bodies of gravel deposits, however, have been found always free from ice. It seems probable that these unfrozen gravels rest upon a more porous bed rock that permits the ground water to drain away more rapidly than is possible in the surrounding frozen regions.

The rain which falls during the summer is rapidly soaked up by

summer and winter, so that the soil remains frozen to the very surface as long as covered. The absorbed rain water flows into the streams at a fairly uniform and constant rate, because of the cover, and thus the streams are less variable than they would be if vegetation were absent from the frozen soil.

STORMS.

The peninsula is subject to frequent severe north-northeast gales during the winter, in which the dry snow is blown along in blinding clouds and heaped into drifts. Such storms often continue for three or four days and are usually accompanied by only small quantities of fresh snow and temperatures between —30° and —40°. They seem to occur with some regularity at intervals of about a week from December to April, and occasionally in the other months. Records from the Teller reindeer station indicate that high winds are sometimes accompanied by very moderate temperatures. Although most of the storm winds are from the northeast to north, in September and March, there are occasionally severe storms from the south and southeast, bringing higher temperatures, and, during September, heavy rains. Such storms are found to lower the level of Norton Sound, and their winds are heavy with moisture and produce raw, uncomfortable weather.

RIVER AND HARBOR ICE.

All the streams of the peninsula freeze across in winter, and the smaller streams frequently freeze to the bottom. They close about the end of September in the vicinity of Fish River, and open about the middle of May. When a stream is not frozen to the bottom, the running water often breaks through its ice arch and flows out over the surface, where it soon freezes. Such winter overflows sometimes completely floor the valley with successive ice sheets. These ice sheets are locally known as "glaciers" and are quite distinct in character and origin from the lenticular masses of ground ice, or crystosphenes, due to the freezing of ground water, which are also colloquially known as "glaciers."

Bering Strait is rarely closed by an ice bridge, but Bering Sea is often frozen to a distance of 5 or 6 miles from land, and Arctic floe ice may reach as far south as the Pribilof Islands, which lie in the latitude of Newfoundland. The ice of Bering Sea begins to retreat northward early in the spring. St. Lawrence Island has become accessible as early as April 22. St. Michael Harbor, on Norton Sound, which closes early in November, usually is not open until June 10 to 15, or a little later, and Nome seems to be open about the same date. The shallower waters of Port Clarence keep Teller imprisoned for some time longer, as is also the case in Kotzebue Sound. Point

Hope, on the Arctic coast, is not clear of ice before July 1, or even August 1 in exceptional years, and is again icebound by November 15.

VEGETABLE AND ANIMAL LIFE.

VEGETATION.

A description of the vegetation of the peninsula has already been given by the writer in a previous report,[a] hence only a brief statement will be inserted here. In general, the vegetation is stunted and dwarfed, a condition to be expected in a subarctic climate. As shown by the sketch map (fig. 5), the greater part of the area is occupied by tundra and timberless uplands; but in proceeding from east to west the country becomes progressively more barren and desolate. In the eastern part, more especially in the region north of Norton Sound, there is a scattering growth of small spruce timber confined to the river valleys and valley slopes, the higher hills being above timber line. The largest trees are not over 16 inches in diameter and 50 feet high. Lumber for the first sluice boxes used in the peninsula was whipsawed from this timber, and a small steam sawmill at Council is still able to compete in the local market with the product of outside mills. The majority of the buildings at Council are log houses, to which use the spruce trees are well adapted. Many of the trees are of suitable size for tie timber and will doubtless be used in railroad building. The western limit of the spruce is approximately represented by a line extending from Golofnin Bay, northwestward of the headwaters of Niukluk River, and thence northeastward to the east end of Kotzebue Sound, as shown in fig. 5. Along the streams west and north of this line cottonwoods, willows, and [illegible] of alders grow in sufficient quantity to afford a scanty [illegible] of fuel, which, though it is of rather poor quality, is used for camping purposes and for thawing frozen ground, and has made possible the exploration of the region and the development of the placers. Of these trees the willows are most widely distributed, as they occur over nearly the whole peninsula. The cottonwoods are of larger size, but are confined to a few localities, reaching as far west as Kruzgamepa River. The alders form numerous tangled thickets on the valley slopes and hillsides as far west as Sinuk River. In favorable localities the larger willows attain a thickness of 6 inches and a height of 20 feet, but most of them are smaller, a large proportion being less than 2 inches in diameter and 5 feet in height.

Along creek and river bottoms and valley slopes grass is abundant and is suitable for pack animals, but most horses used for heavy team-

1900 the writer collected for identification specimens of six species of grass suitable for forage, but the collection was incomplete, and it is probable that as many as a dozen different grasses are represented in this region. Here and there are natural meadows where hay could be harvested in considerable quantity, but owing to the short season it does not mature properly and has not the strength of hay grown in the States, and as it is almost impossible to cure it, on account of rainy weather in haying time, it has not been used to any considerable extent.

The most common plants are mosses and lichens, which are present everywhere. On the lowland plains and portions of the upland where

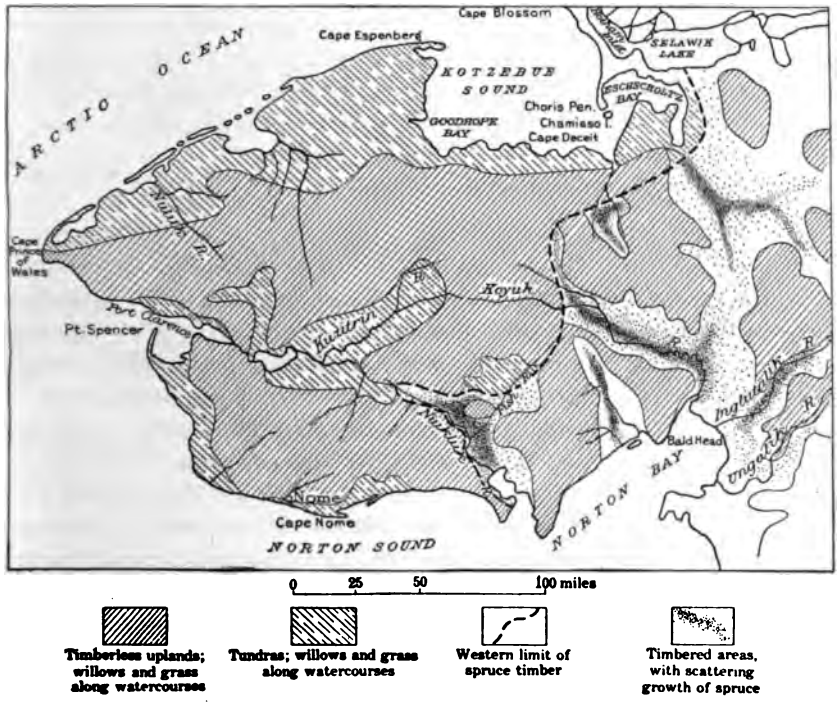

FIG. 5.—Map showing distribution of vegetation in Seward Peninsula.

drainage is imperfect a thick mat of vegetation, composed of mosses, lichens, sedges, dwarf birches, and some grass, overlying peat beds, covers the surface and forms the tundra. The underlying soil is perpetually frozen, as the mat of vegetation and peat protects it from changes of temperature, but during the open season the tundra is difficult to traverse on account of its soft, swampy surface. Good roadbeds for wagons can not be built across the tundra for less than $2,000 per mile. The larger tundra areas are shown on the sketch map (fig. 5). Over the greater part of the upland, especially along the ridges, the vegetable mat is comparatively thin, travel is easier, and fair road-

beds can be constructed at slight expense. The peat found on the tundra, although it is usually not very pure, might, by some briquetting process, be made into valuable fuel, but up to the present time it has received little attention. Reindeer moss is distributed over the whole region as an important constituent of the vegetable mat, making possible the maintenance of large deer herds. The number of domestic deer in the three herds kept on the peninsula in 1904 was estimated at 3,485.[a]

Two species of edible berries, the marsh blueberry and the "salmon berry," are fairly abundant over the whole peninsula, and often form a welcome addition to the prospectors' fare. Mushrooms, some of which are edible, are seen occasionally, but, so far as the writer knows, they are never plentiful and have not been used as food by prospectors and miners. There are also a few herbs which are sometimes used as food or medicine by the natives. With these exceptions, there are no native food plants in the region, but near the mining camps some of the hardier vegetables, such as lettuce, radishes, and turnips, have been successfully raised in small gardens.

FISH AND GAME.

In nearly all the larger streams fish are comparatively abundant and can be caught during the summer. Salmon in great numbers run up the larger rivers and die after spawning, polluting the water with their decaying carcasses. Grayling and trout can be caught with a line in nearly all the larger streams through the open season, and pike and whitefish are caught with gill nets on some of the larger rivers. In the waters along the coast, also, fish are fairly abundant. During certain seasons schools of smelt sometimes swim in the surf and wash up on the beach, where they can easily be caught in the hands. The natives have depended for food in winter on a fish called tomcod, which they catch in nets and dry during the open season, or later catch through holes in the ice.

That caribou were formerly abundant is indicated by many antlers scattered over the country and by large piles of bones found near some of the deserted villages of the interior. The wild caribou now, however, is practically extinct, though a few of them are to be seen in the northern part. As noted above, three large herds of domestic caribou, or reindeer, under Government supervision, are maintained on the peninsula.

Around the coasts polar bear are occasionally killed in winter, and brown and black bears are occasionally reported.

Of game birds ptarmigan, snipe, plover, and curlew plentiful

hill cranes, and swans abound along the rivers and lakes, more especially in the northern part of the peninsula, but they are not usually killed by prospectors unless a special hunt is made for them, as the regions frequented by them are apt to be remote from the placer-mining districts.

COMMERCIAL FEATURES.

The lines of industrial advancement and settlement in the peninsula have been less influenced by its physical advantages or disadvantages for such movements than by the distribution of the gold placers. Settlements and precincts[a] have been established with little regard to the geographic conditions which in other fields would determine their location. Indeed, except for its mineral resources, Seward Peninsula would certainly not for many decades and probably never have supported its present population. From an industrial standpoint, therefore, the distribution of mineral resources is more important than the geographic features.

For administrative purposes the peninsula is divided by arbitrary boundaries into a number of precincts or districts which have been created and modified to conform with the progress of settlement and development of mining. Their boundaries are subject to change at the discretion of the United States court, located at Nome, and although some of them have remained unchanged for several years they can not be regarded as permanent. In June, 1903, there were eight of these precincts, and since that time a number of minor changes have been made, though the general location of the precincts remains the same. These frequent changes in local boundaries are indices of the industrial progress, as they are made to meet the convenience and immediate needs of miners and prospectors. The precincts, as they existed in June, 1903, are shown in the sketch map (fig. 2, p. 42), and the descriptions of placers given on later pages are grouped according to these boundaries.

The local government of each precinct is administered by a commissioner, who is appointed by the United States district court at Nome and who is also the recorder of mining claims. These seats of local government are in general located at the more important settlements and distributing points of the mining districts.

The principal settlement and largest town in the peninsula is Nome, situated on the southern coast several miles west of Cape Nome. It has a population of about 3,000 in winter and 5,000 to 6,000 in summer. Although Nome has been in existence only about seven years,

[a] The limits of the precinct, the administrative and judicial unit in Alaska, are determined by the district judges. A precinct may be compared with a county, though the absence of all self-government in the Territory makes the similarity only a very general one.

it has many of the conveniences of a city, such as planked streets, a water-supply system, telephone lines, and banks. Though there is no harbor, nearly all supplies and passengers for the peninsula are landed at Nome. During the heavy weather in the late summer and fall all communication between the shore and the ships in the roadstead is often cut off for several days at a time. No permanent wharves or other conveniences for landing can be maintained on account of the heavy shore ice in winter and the moving ice floes in the spring, and all supplies and passengers are landed on the beach through the surf. (See Pl. I, *A*.) The Seward Peninsula Railway leads inland from Nome to the important mining district that centers at Anvil Creek, where the first discoveries of gold were made, and to Lanes Landing, in the Kougarok district. Nome is also the starting point for many overland trails and roads to other mining camps farther inland.

To the east along the shore there are several smaller towns similar to Nome in their situation on the open coast which have aspired to be its rivals. Dickson, 30 miles east of Nome, at the mouth of Solomon River, is the starting point of the Council City and Solomon River Railway, which extends into the Casadepaga Valley, as well as the center of a mining district of some importance. Bluff, a village and post-office several miles farther east, is the distributing point for a district that has been producing gold in large quantities since 1900. Council, the second town in importance of the peninsula, is the central point of the Council precinct and lies about 25 miles from the coast, on Niukluk River. In production of placer gold this precinct almost equals the Nome precinct. Supplies for the Council precinct are landed at Chenik (Golofnin post-office), a small village on Golofnin Bay. They are then taken in small steamers to White Mountain, on Fish River near the head of Golofnin Sound, where they are transferred to flat-bottomed river boats that are towed by horses up Fish and Niukluk rivers to Council. The completion of the railway from Dickson as originally planned will give more direct communication. Another means of communication would be by building a branch line to Council from the Seward Peninsula Railway near Iron Creek.

Teller, located on Port Clarence at the entrance to Grantley Harbor, is the supply point for the Bluestone and Kougarok mining regions and several others of less importance. It occupies the best town site in the peninsula, as the ground on which it is built is dry, and the harbor and landing facilities are the best. The deep water

A. LIGHTERING FREIGHT AT LOW TIDE, NOME.

B. CHARACTERISTIC CREEK VALLEY: THOMPSON CREEK, A TRIBUTARY OF STEWART RIVER.

The supplies for the mines of the Kougarok region up to 1906 were usually sent by small steamers from Teller to Igloo, a village and post-office 50 miles inland at the head of steamboat navigation on Kuzitrin River, where they were transferred to flat-bottomed river boats that were towed up Kuzitrin and Kougarok rivers. Since the completion of the Seward Peninsula Railway to Lanes Landing more direct communication with Nome has been established. The mining centers are beyond the reach of navigable waters and the railway, and the last stages of the journey are made by pack train or wagon. Sullivan, the center for the Bluestone region, is 16 miles southeast of Teller. It has a summer population of about 50, a post-office, and several roadhouses, and is connected with Teller and a landing at the mouth of Tisuk Creek by a regular line of stages.

The York region, embracing about 400 square miles in the western extremity of the peninsula, has not been productive of placer gold, but there are several small settlements maintained by prospectors engaged in a search for tin ores. These are supplied by small coasters from Nome. York, a small collection of cabins and tents at the mouth of Anikovik River, 12 miles east of Cape Prince of Wales, has been in existence since 1899. Tin City, established in 1903, is a camp at the southeast base of Cape Mountain, 10 miles west of York and about 4 miles west of the old native village Palazruk. At Cape Prince of Wales there is a large native village called Kingegan, which has been in existence since prehistoric times. The location has been a favorable one for sealing and whaling operations; and as it is the nearest point to the Siberian coast, the Kingegan natives have controlled the trade between Siberia and Alaska. The village supports a population of about 500. A Congregational mission has been maintained here for ten years or more, and a Government school was established in 1904. There is also a store and post-office. These natives have learned something of the ways of civilization. Many of them own herds of reindeer, and one of them keeps a general-merchandise store which does not differ greatly from similar stores kept by white men at Nome. The post-office here is called Wales. The town is contiguous to the tin region and is the seat of the commissioner's court for the Wales precinct and headquarters for a number of prospectors.

On Kotzebue Sound there are two thriving towns, Deering and Kiwalik, the distributing points for the Inmachuk and Candle Creek districts, both in the Fairhaven precinct. The commissioner for the precinct has headquarters at Kiwalik. Both towns are supplied from Nome by small coasting vessels.

Seward Peninsula is accessible by sea only during the months from June to November. For the remainder of the year navigation is closed, and the only communication with the outside world is by the

Yukon River route, involving a journey over the ice by dog team to Dawson for upward of 1,000 miles. Mails and a few passengers follow this route. The cost of the winter journey to Nome from Seattle by way of Skagway and Dawson is not far from $1,000, and it ordinarily consumes about three months. Telegraphic communication over the military lines, partly by a wireless system, has been maintained since 1904. The most-frequented routes of travel between points on the peninsula are along the coasts and navigable rivers, and, as a matter of course, development has been most rapid in districts thus made accessible. All the yet notable mining camps are within easy reach of such navigable waters. Wagon roads and trails lead from the railways and from the coast to the mining districts of the interior, but these are difficult for summer travel on account of the soft road beds, and freight rates are almost prohibitive. Travel over the snow is easier, however, and supplies may be sledded to the mines located inland more cheaply in winter than in summer, but for points remote from the coast the freight rate is still often too high to permit successful mining operations. Mr. Brooks[a] estimated that in 1903 the cost of summer overland transportation ranged from $10 to $16 per ton per mile, and the cost of water transportation between coastal points from 70 cents to $1.50 per ton per mile, including the embarking and disembarking. Though these costs have been somewhat lowered, yet they are still prohibitive to mining anything but high-grade placers, except in regions close to tide water. There are but few wagon roads in Seward Peninsula, but during dry weather it is possible to haul loads over the tundra and along the watercourses. Purington[b] has estimated that $3,000 to $4,000 a mile is the cost of wagon-road construction. He believes that narrow-gage railways can be built at a cost of $6,000 a mile. It is probable that the railways will be preferred for long hauls. Several short lines are already in operation, and experience has shown that narrow-gage roads with light equipment can be maintained at no very great cost. The topographic maps indicate that easy grades can be found to all parts of the peninsula.

GENERAL GEOLOGY.

INTRODUCTION.

The geologic surveys in this field have all been of a reconnaissance character, more especially directed toward a study of the gold placers. Such reconnaissances are a necessary preliminary to detailed surveys of any part of the field, because the results obtained from critical

examinations of small areas are unsatisfactory without a general knowledge of the problems presented by the whole province.[a]

When this work began practically nothing was known of the geology of northwestern Alaska, and hence the conservative policy was adopted of publishing only such general conclusions as were demanded to elucidate the economic problems. In the present treatment the same policy will be adhered to, though the accumulation of many additional data will make it possible to amplify the previous reports. The discovery of organic remains in some of the terranes has given a key to the stratigraphy that was not available when the earlier reports on the geology were prepared.

The surveys of 1900 resulted in the publication of two preliminary geologic maps covering the southern half of the peninsula—one of the southwestern part, or Nome region, by Brooks,[b] and the other of the southeastern part, or Norton Bay region, by Mendenhall.[c] Mendenhall, whose journey was rather of the nature of an exploration, did not attempt to differentiate the various groups of metamorphic sediments, but Brooks recognized three terranes, named in ascending order the "Kigluaik series," "Kuzitrin series," and "Nome series."[d]

The two lower terranes are described by Brooks as rather well defined stratigraphic units, while a great complex of metamorphic rocks which overlie them was thrown together as a cartographic unit under the name "Nome series," since the field work had not gone far enough to indicate any logical basis of subdivision.

During the following season the writer extended these subdivisions to the rocks of the northwestern portion of the peninsula, where he was able to differentiate within the Nome a massive limestone member containing fossils which were at that time considered to be of Ordovician age. This member was called the Port Clarence limestone. During the same season fossils referred to the Silurian were found in limestones and schists that more nearly resemble the rocks of the "Nome series" as exposed at Nome, and the rocks containing them were called the "Kugruk group."[e] The "Nome series" in the northern portion of the peninsula, therefore, was regarded as comprising a lower member, called the Port Clarence limestone, and an upper one, called the "Kugruk group."

In the course of the investigations in 1903 larger collections of fossils were made at a number of new localities, both in the northern

[a] In the summer of 1905 Fred H. Moffit and Frank L. Hess carried on detailed geologic mapping in the Nome region; this work was continued by Mr. Moffit, aided by Philip S. Smith, in 1906.

[b] Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, Pl. III.

[c] Idem, Pl. XXI.

[d] Idem, p. 27.

[e] The spelling of the name of the river from which this group derives its designation has since the previous report been changed by the United States Geographic Board to "Kougarok," as there is another Kugruk River in Seward Peninsula.

and southern parts of the peninsula, which have made it possible to reconsider the determinations made in 1901. Near the western extremity of the peninsula, Mississippian ("Lower Carboniferous") fossils were found in some metamorphic limestones and schists which on lithologic grounds had previously been correlated with the "Kigluaik series." All the fossils from the "Nome series," however, are now regarded as Silurian or Ordovician, but the differentiation of the Silurian from the Ordovician horizons can not be demonstrated, as some forms heretofore regarded as Ordovician are associated with forms known to be Silurian, and for this reason the limestones of the "Kugruk group" are correlated with the Port Clarence.

The more critical examinations which have been made of a section of the highly altered rocks between Nome and the Kigluaik Mountains have demonstrated that there is here a great series of schists, including some calcareous beds, overlain by an almost equally great series of beds, for the most part limestone, which may be tentatively correlated with the Port Clarence. Somewhat similar conditions exist northwest of the Kigluaik Mountains, where a broad belt of schists containing some calcareous beds intervenes between the mountains and the known area of Port Clarence limestone.

In the northeastern part of the peninsula schists of slightly different character from those near Nome overlie the Silurian limestones of the "Kugruk group," now correlated with the Port Clarence.

The "Nome series," as mapped by Brooks in 1900 and by the writer in 1901, may be provisionally regarded as comprising (1) a basal formation, composed for the most part of schists, but including some limestones; (2) a middle formation, composed mainly of massive limestones to which the name Port Clarence limestone has been applied; and (3) an upper formation, composed mainly of schists. In the following discussions and accompanying maps this so-called series will therefore be designated the Nome group.

In general it can be said of the metamorphic rocks of Seward Peninsula (1) that they comprise a complex mass of more or less altered sediments, intrusives, and eruptives, the greater part of which is probably of Paleozoic age, and (2) that with some modification the divisions made by Brooks in the southern part of the peninsula are well grounded and can be recognized over much of the adjoining region.

It must be remembered, however, that this subdivision is based largely on the lithologic character of metamorphic rocks. The degree of metamorphism changes greatly in different parts of the

material, and it is also probably true that some lithologically similar schists may be due as much to peculiar conditions of alteration as to original texture.

Here and there in the northern part of the peninsula there is evidence of a certain amount of folding before the schistosity was developed, and at such places the foliation and bedding are very divergent. As a general rule throughout the peninsula, however, the foliation and bedding seem to coincide; but inasmuch as this condition would result if, before metamorphism, the beds were closely folded and overturned, the evidence afforded by the foliation planes must be used with caution in interpreting the structure. For this reason the stratigraphic succession here outlined, where not supported by paleontologic determinations, must for the present be regarded as provisional.

Since all of the geologic investigation has been directed primarily to a study of the placer deposits, the unconsolidated Quaternary terranes containing them have naturally been examined in the most detail.

The rocks of the Nome group also have been examined more thoroughly than those of the other metamorphic terranes, first, because they are more widely distributed, and, second, because most of the gold placers have been derived from them. These formations are therefore described at some length in this section, and many specific details regarding them are given in the descriptions of localities producing placer gold. The other metamorphic rocks, on the contrary, have been examined only cursorily at a few localities, and their descriptions are necessarily brief. For this reason the general geologic discussion here presented may seem ill balanced, but this result is unavoidable under the conditions governing the investigation.

DESCRIPTION OF GEOLOGIC MAPS.

The distribution of the sedimentary and metamorphic formations and of the igneous rocks of various types is shown on the two geologic reconnaissance maps (Pls. X and XI, in pocket). Nearly all the colored areas have been examined by United States geologists, but as this examination was in the nature of a reconnaissance, the interpretation of the facts obtained as well as the boundaries mapped must be regarded as subject to revision after more thorough study. A more detailed account of the local geology of certain areas will be found in the descriptions of the placer deposits.

In addition to the metamorphic rocks, several groups of igneous rocks are differentiated: (1) Unaltered basalts and basaltic lavas in dikes, necks, and surface flows are of abundant occurrence in the northern portion of the peninsula. Most of these rocks were erupted

during Pleistocene time, and the whole group is believed to be of comparatively recent origin: (2) Altered basic rocks, here termed greenstones, in stocks, dikes, and sills, are widely distributed within the areas of metamorphic rocks in both the northern and southern parts of the peninsula. As in many places they have been affected by the same influences as the metamorphic rocks, they are believed to be nearly as old. (3) Acidic igneous rocks, including granites, pegmatites, and granitic porphyries, have their greatest development in the Kigluaik, Bendeleben, and Darby mountains, but in smaller masses appear in all of the Paleozoic formations represented. Some of these rocks were intruded previous to the final metamorphism of the Kigluaik group and have a gneissoid texture, but most of them are unaltered. It is the writer's opinion that most of these granites were intruded during Mesozoic or early Tertiary time, and reasons for this belief will be advanced. If this is true the granites are intermediate in age between the greenstones and the basalts.

The boundaries of the granite areas in the Bendeleben and Kigluaik mountains are not known in detail, as the structure of these ranges is complex and few sections have been carefully examined, but the general type of the intrusions has been determined and their representation on the map is diagrammatic. The correlation of the massive limestones and larger schist areas of the Nome group is based on lithologic resemblance and stratigraphic succession, corroborated in a few localities by paleontologic evidence. The mapping of many of the Quaternary areas has been extended beyond the limits of actual observation, on evidence offered by the topographic maps.

The stratigraphic position of the various sedimentary formations mapped is shown in the accompanying tabular statement:

Stratigraphy of Seward Peninsula.

tem.	Series.	Formation.		Lithology.
ry, in- some Pli-				Tundra deposits; peat, capped by mat of living moss and other vegetation. Alluvium in beds and flood plains of existing streams; often frozen. Glacial moraines and extramorainic bowlder beds. Frozen silts, sands, and gravels of coastal and interior basin plains. Silts, sands, gravels, and residual deposits resting on high benches and plateaus of ancient erosive cycles.
				Unconformity.
	Eocene?	Kenai formation?		Conglomerates, sandstones, clays, and coal.
				Unconformity.
rous?	Mississippian?			Massive crystalline limestones interbedded with black phyllites and schists.
				Conformity?
rous, De- or Silu-				Dark-colored, usually graphitic slates and phyllites, in many places cleaving into pencil-shaped fragments. Including some beds of earthy limestone.
				(?)
or Silu-		Nome group.	Undifferentiated schists.	Schists of the Fairhaven precinct. Differentiated from schists of the Nome precinct by stratigraphic position overlying Port Clarence limestone and by smaller percentage of chlorite.
				(?)
and Ordo-			Port Clarence limestone.	Massive limestones varying from unaltered more or less earthy limestones in the type locality to crystalline marbles and calcareous schists in more metamorphosed portions.
				Conformity?
an or pre- n.			Undifferentiated schists.	Various schists and phyllites, including quartz-chlorite schist, quartz-chlorite-albite schist, quartz-graphite schist, calcite-muscovite schist, thin limestones, etc., differentiated from Port Clarence limestone by stratigraphic position and lithologic character.
				Unconformity?
rian?			Kuzitrin formation.	Graphitic quartzites and schists, maximum thickness probably less than 2,000 feet.
				Conformity.
rian?		Kigluaik group.		1. Biotite schists and thin limestone bands. 2. Heavily bedded limestone. 3. Biotite gneiss. These are cut by granite in dikes, stocks, and sills. Total thickness over 4,000 feet. Differentiated from Nome group by stratigraphic position and by universal presence of biotite in the schists.

METAMORPHIC ROCKS.

KIGLUAIK GROUP.

At the base of the geologic column there is a group of highly crystalline rocks consisting of limestones, schists, and gneisses, which were described by Brooks under the name "Kigluaik series."[a] There is reason to believe that, with the exception of some of the gneisses whose origin is in doubt, most of these rocks are altered sediments. They differ from the overlying schists and limestones mainly in the degree and character of the metamorphism to which they have been subjected and in the nature of the resultant minerals, though it is probably also true that the beds were distinct in their original composition. The rocks of this group have been recognized only in the Kigluaik and Bendeleben mountain areas, and in both ranges they are so intimately associated with intrusions of granite, in the form of stocks, sills, and dikes, that it has been impossible to differentiate on the geologic map the igneous from the sedimentary rocks.

The limestones are in general comparatively pure and white or bluish in color. They are always highly crystalline and are in many places specked with graphite in disseminated tabular grains. The beds range in thickness from 1 to 20 feet or more. These limestones, although very prominent in some localities, seem to comprise only a minor part of the group. They are interbedded with schists, and in the few places where sections have been examined in some detail seem to occur near the base of the Kigluaik group.

The schists which comprise the greater part of this group are generally dark gray in color and consist essentially of quartz and biotite, with various accessory minerals in the different beds, such as graphite, pyrite, magnetite, garnet, staurolite, hornblende, augite, orthoclase, plagioclase, etc. In some of the beds quartz predominates to such an extent as to make the rock essentially quartzite, while in others plagioclase and orthoclase feldspar are so abundant as to give the rock a gneissoid character. Between the quartzose and gneissoid phases there seem to be all gradations. Graphite and pyrite are important accessories in many of the more siliceous beds, giving them a black color. In some beds graphite occurs to the exclusion of all other minerals. Though graphitic schists occur in some of the later formations, as will be shown, no beds of pure graphite comparable to these have been found in other formations. The presence of these graphitic members and of the limestones already described is regarded as conclusive evidence of the sedimentary origin of the greater part of the group. It is probably true, however, that some at least

of the gniesses were originally igneous and represent intrusive sills or possibly extrusive beds of acidic rocks which have been recrystallized under the same influences that produced the metamorphism of the schists and limestones. It will be shown that many of the intrusive granite masses which occur in the Kigluaik group also have gneissoid phases that are difficult to distinguish from the older metamorphosed rock, though it is believed that after a more refined geologic and petrographic examination all these later intrusives will be differentiated.

In general structure the Kigluaik and Bendeleben mountains are elliptical dome-shaped uplifts, and although this is in numerous places complicated and obscured by intrusions of granite, all the sections across these ranges thus far examined indicate anticlinal conditions. In a section across the Kigluaik Mountains along Grand Central River and a pass leading northward from its head the anticlinal structure of the range is most evident. Crystalline limestones are exposed in the heart of the range and are apparently overlain by several thousand feet of nearly black quartz-biotite schist containing sills and dikes of massive granite. The upper valley of Windy Creek, which lies in the heart of the mountains and west of this pass, is cut for several miles in a mass of granite that probably represents a great intrusive stock. The greater part of this granite mass is slightly gneissoid, but it is cut by younger dikes which have a granitoid texture. A section across the range by way of the lower part of Windy Creek and Cobblestone River, although is it broken by a great intrusion of granite, also shows the anticlinal structure with a similar stratigraphic arrangement of massive limestones and schists. In this exposure the cliffs, which are not less than 1,000 feet high, are composed of limestone interbedded with biotite schist and gneiss. At the west end of the range the biotite schists dip toward the west, indicating a dome-like termination of the mountain uplift. In this region the crystalline limestones are exposed at only a few points near the heads of some of the streams.

Along the mountain crests the many jagged outcrops of granite have given rise to the local name Sawtooth Mountains, which is descriptive not only of the Kigluaik but also of the Bendeleben Range. The prominence of these granite outcrops is due to their ability to resist erosion, and though the granite intrusives probably form considerably less than half the mass of the mountains, on hasty superficial examination they often seem to make up a much larger part.

The only section across the Bendeleben Range which has been examined by the writer is along Parantulik River and Ella Creek, between the heads of which there is a low pass. The structure here appears to be anticlinal and the prevailing rocks are dark-colored

quartz-biotite schists and gneisses similar to those of the Kigluaik Range. Sills and dikes of coarse-grained granite or pegmatite are also present. White crystalline limestones containing scattered grains of graphite occur in beds 20 feet or more in thickness interbedded with the schists, along Parantulik River from a point near its head to the edge of the Fish River lowland. Mendenhall,[1] who examined a section across this range at the head of Fish River in 1900, described the geologic condition as follows:

> About the head of Fish River the mountains are chiefly granitic, but along their flanks and sometimes extending through them in belts of varying breadth, which mark the passes, are areas of schistose sediments.
>
> About 1 mile above the camp of July 20, along the creek bed, is an outcrop of rusty and very graphitic schist associated with more calcareous phases. Five miles farther along the right bank of this same branch of Fish River is an outcrop of buff slates with very little calcareous matter, while 2 miles farther northwest, in a gap between two branches of Fish River, the series is represented by a white, coarsely crystalline marble. This narrow belt of the crystalline series, between two great intrusive granitic masses, expands to the northwest and forms a series of hills somewhat lower than the more resistant masses on either side, separating the Fish River drainage basin from a low area to the north, which is probably a part of the Kuzitrin Valley. East and west from the camp of July 20 these sediments appear as remnants on the flanks of many of the spurs running from the high mountains out toward the Fish River basin. Whether or not these outcrops form a continuous belt westward from the camp of July 20 could not be determined during the hasty reconnaissance, but eastward they seem to extend uninterruptedly to the broad belt which runs northeastward toward the basin of Tubutulik River.

From this description it is inferred that the geologic conditions here are not different from those in other parts of the Bendeleben Range except that there are few, if any, intrusions of granite exposed in this valley.

Where this range has been crossed near its west end there are few good exposures of bed rock in place. The surface is covered with tundra vegetation and residuary soil through which some masses of coarse-grained granite or pegmatite crop out in the form of pinnacles. Fragments of biotite schist and gneiss are found in the surface débris and there are a few exposures of the rock in place, but not enough to determine the structure of the whole range.

There is no direct paleontologic evidence regarding the age of these rocks. The limestone and graphite beds mentioned, which are too highly metamorphosed to retain any recognizable fossils, are the only materials found in them of possibly organic origin. Their stratigraphic relation to the rocks of the Nome group, which, as will be shown, are in part Silurian, indicates that they are either lower in the Silurian or are pre-Silurian. The apparently great thick-

ness of schists which intervenes between the known Silurian beds and the rocks of this series seem to point to the latter conclusion.

KUZITRIN FORMATION.

Overlying the biotite schists and gneisses of the Kigluaik group in some localities is what seems to be a well-defined formation, whose type rocks are graphitic quartzites or quartz schists and which was described by Brooks in 1900 under the name "Kuzitrin series." These rocks have not been reexamined in their type locality since 1901 and the following description is quoted from the report of reconnaissances in 1900:[a]

> The type rock of this series is a well-jointed graphitic quartz schist, but there are many variations from this type. Intercalated strata of graphitic slates are not uncommon, and the schists are sometimes very calcareous, approaching an impure limestone in composition. The calcareous phases are more particularly characteristic of the top of the series. Locally the Kuzitrin rocks contain beds of mica and chloritic schist whose sedimentary origin it is not always possible to prove. In many localities amphibole schists and chloritic schists are abundant in the Kuzitrin series. These are usually intruded parallel to the bedding plane and are often difficult to differentiate from the sediment; they will be discussed below in more detail. On Kuzitrin River some pegmatite dikes were found cutting the graphitic schists.
>
> Though these rocks are usually well bedded, in some localities the bedding planes are nearly obliterated by a secondary development of schistosity and jointing. In attempting to obtain a measure of their thickness several difficulties were encountered. The intercalated beds of graphitic argillites are often intensely crumpled and folded, and the inclusion of such crumpled beds in a section must necessarily introduce a large element of error. In other localities, again, the large intrusion of greenstones gives rise to another source of error. Moreover, the base of this series is not well defined, as it was not found in contact with the underlying limestone except in the York region. In view of the above facts it is clear that an estimate of thickness can be regarded only as a very rough approximation. The several sections studied would go to show that the Kuzitrin beds are between 2,000 and 3,000 feet thick.
>
> The Kuzitrin series is typically exposed in the Kigluaik Mountains, near their northern limit, where it occurs in a belt which runs parallel to the axis of the range and is cut by the northerly tributaries of Kruzgamepa River. The rocks strike about east and west, and dip with great regularity to the south. These rocks are again found on the upper portion of Ophir Creek, where they strike a little north of east and dip to the south, and their topographic relation to the Bendeleben Mountains is similar to that which the western belt bears to the Kigluaik Mountains. The series takes its name from Kuzitrin River, along whose lower course it is well exposed. Here the rocks in the fresh cuttings of the river channel show well-marked bedding planes. The series as mapped in this part of the area includes some calcareous schists which may possibly belong to the overlying Nome series.

From this description it will be seen that these rocks were not clearly differentiated from the Kigluaik group on the one hand or

[a] Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 28–29.

quartz-biotite schists and gneisses similar to those of the Kigluaik Range. Sills and dikes of coarse-grained granite or pegmatite are also present. White crystalline limestones containing scattered grains of graphite occur in beds 20 feet or more in thickness interbedded with the schists, along Parantulik River from a point near its head to the edge of the Fish River lowland. Mendenhall,[a] who examined a section across this range at the head of Fish River in 1900, described the geologic condition as follows:

> About the head of Fish River the mountains are chiefly granitic, but along their flanks and sometimes extending through them in belts of varying breadth, which mark the passes, are areas of schistose sediments.
>
> About 1 mile above the camp of July 20, along the creek bed, is an outcrop of rusty and very graphitic schist associated with more calcareous phases. Five miles farther along the right bank of this same branch of Fish River is an outcrop of buff slates with very little calcareous matter, while 2 miles farther northwest, in a gap between two branches of Fish River, the series is represented by a white, coarsely crystalline marble. This narrow belt of the crystalline series, between two great intrusive granitic masses, expands to the northwest and forms a series of hills somewhat lower than the more resistant masses on either side, separating the Fish River drainage basin from a low area to the north, which is probably a part of the Kuzitrin Valley. East and west from the camp of July 20 these sediments appear as remnants on the flanks of many of the spurs running from the high mountains out toward the Fish River basin. Whether or not these outcrops form a continuous belt westward from the camp of July 20 could not be determined during the hasty reconnaissance, but eastward they seem to extend uninterruptedly to the broad belt which runs northeastward toward the basin of Tubutulik River.

From this description it is inferred that the geologic conditions here are not different from those in other parts of the Bendeleben Range except that there are few, if any, intrusions of granite exposed in this valley.

Where this range has been crossed near its west end there are few good exposures of bed rock in place. The surface is covered with tundra vegetation and residuary soil through which some masses of coarse-grained granite or pegmatite crop out in the form of pinnacles. Fragments of biotite schist and gneiss are found in the surface débris and there are a few exposures of the rock in place, but not enough to determine the structure of the whole range.

There is no direct paleontologic evidence regarding the age of these rocks. The limestone and graphite beds mentioned, which are too highly metamorphosed to retain any recognizable fossils, are the only materials found in them of possibly organic origin. Their stratigraphic relation to the rocks of the Nome group, which, as will be shown, are in part Silurian, indicates that they are either lower in the Silurian or are pre-Silurian. The apparently great thick-

ness of schists which intervenes between the known Silurian beds and the rocks of this series seem to point to the latter conclusion.

KUZITRIN FORMATION.

Overlying the biotite schists and gneisses of the Kigluaik group in some localities is what seems to be a well-defined formation, whose type rocks are graphitic quartzites or quartz schists and which was described by Brooks in 1900 under the name "Kuzitrin series." These rocks have not been reexamined in their type locality since 1901 and the following description is quoted from the report of reconnaissances in 1900:[a]

> The type rock of this series is a well-jointed graphitic quartz schist, but there are many variations from this type. Intercalated strata of graphitic slates are not uncommon, and the schists are sometimes very calcareous, approaching an impure limestone in composition. The calcareous phases are more particularly characteristic of the top of the series. Locally the Kuzitrin rocks contain beds of mica and chloritic schist whose sedimentary origin it is not always possible to prove. In many localities amphibole schists and chloritic schists are abundant in the Kuzitrin series. These are usually intruded parallel to the bedding plane and are often difficult to differentiate from the sediment; they will be discussed below in more detail. On Kuzitrin River some pegmatite dikes were found cutting the graphitic schists.
>
> Though these rocks are usually well bedded, in some localities the bedding planes are nearly obliterated by a secondary development of schistosity and jointing. In attempting to obtain a measure of their thickness several difficulties were encountered. The intercalated beds of graphitic argillites are often intensely crumpled and folded, and the inclusion of such crumpled beds in a section must necessarily introduce a large element of error. In other localities, again, the large intrusion of greenstones gives rise to another source of error. Moreover, the base of this series is not well defined, as it was not found in contact with the underlying limestone except in the York region. In view of the above facts it is clear that an estimate of thickness can be regarded only as a very rough approximation. The several sections studied would go to show that the Kuzitrin beds are between 2,000 and 3,000 feet thick.
>
> The Kuzitrin series is typically exposed in the Kigluaik Mountains, near their northern limit, where it occurs in a belt which runs parallel to the axis of the range and is cut by the northerly tributaries of Kruzgamepa River. The rocks strike about east and west, and dip with great regularity to the south. These rocks are again found on the upper portion of Ophir Creek, where they strike a little north of east and dip to the south, and their topographic relation to the Bendeleben Mountains is similar to that which the western belt bears to the Kigluaik Mountains. The series takes its name from Kuzitrin River, along whose lower course it is well exposed. Here the rocks in the fresh cuttings of the river channel show well-marked bedding planes. The series as mapped in this part of the area includes some calcareous schists which may possibly belong to the overlying Nome series.

From this description it will be seen that these rocks were not clearly differentiated from the Kigluaik group on the one hand or

[a] Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 28–29.

from the Nome group on the other. In the type locality along Kuzitrin River the graphitic quartzites are in contact with the biotite schists and gneisses which they overlie. They form a belt here several miles wide in which the rocks seem to be distinct lithologically from those of the Nome group. South of the Kigluaik Mountains at their east end, also, there is a somewhat similar belt of graphitic quartzites overlying the Kigluaik schists, though here the boundary between them and the schists has never been clearly defined. The continuation of this belt west of Grand Central River has not yet been recognized, though it may exist there as an undifferentiated member of the Nome group, which seems to rest directly on the Kigluaik. Outside of these two localities this formation has not been positively identified, though it is possible that it occurs in the Nome group at a number of localities where it can not now be differentiated. In 1900 Brooks correlated the slates of the York region with this formation on lithologic grounds, and in 1901 the writer extended this correlation to include some dark siliceous slates or schists which lie northwest of the Kigluaik Mountains and some quartzites in the vicinity of Ear Mountain. There are also some dark siliceous schists near the head of Kougarok River which resemble these and may ultimately be correlated with them. In the present report the Kuzitrin will be regarded as a formation composed for the most part of graphitic quartzites and siliceous schists, which overlies the biotite schists and gneisses of the Kigluaik group and underlies the schists of the Nome group. It is not differentiated on the geologic map from the Nome group. The absence of this formation in the contact of the Kigluaik and Nome groups at some points is regarded as an indication of unconformity in the metamorphic series at the base of the Nome. The slates of the York region, which were formerly correlated with the Kuzitrin, will be described separately, as they comprise a formation which is well defined locally and of some economic importance, and whose correlation with the Kuzitrin can not be established beyond question.

There is no direct evidence regarding the age of the Kuzitrin formation. Like the Kigluaik group, it underlies a great thickness of schists which are in part Silurian. The formation may belong near the base of the Ordovician, though the probabilities would seem to place it either in the Cambrian or Algonkian.

NOME GROUP.

GENERAL DESCRIPTION.

Overlying the Kigluaik and Kuzitrin is a complex assemblage of altered sediments and intrusives, which was first described by

Brooks under the name "Nome series."[a] These are the most widely distributed metamorphic rocks in the peninsula and are also of the most economic importance, as they contain nearly all the veins from which placer gold has been derived. For this reason they have been examined more closely than the other formations; but owing to their complicated structure in many places and the inadequate field work on them they are still only imperfectly understood.

These rocks are here described as the Nome group. The group is not regarded as a stratigraphic unit, as the lithologic constitution of its beds is heterogeneous, and on the map some portions of overlying and underlying formations that are elsewhere differentiated may be and probably are included. The general conclusion from the observations made during the last several years is that this group of metamorphic rocks may be roughly divided into three parts. The lower portion, which is characteristically exposed near Nome and again in a wide belt south of the Kigluaik Mountains, consists of several thousand feet of schists of various types, including some limestones in beds less than 100 feet thick. These schists are overlain by massive limestones several thousand feet thick, which over a large area in the western part of the peninsula are comparatively unaltered and contain fossils of Silurian age. This formation has been called the Port Clarence limestone. The limestones are themselves overlain in the northeastern part of the peninsula by schists of somewhat different type from those forming the base of the group.

The prevailing rocks of the basal portion of this group are schists consisting essentially of quartz and chlorite, with albite, muscovite, and epidote in varying amounts. Locally the formation contains beds of graphitic mica schist, graphitic quartzite, limestone, and calcareous schist, as well as intrusive masses of greenstone that are also more or less schistose. Among the many thin sections examined, specimens of graphitic chlorite schist and feldspathic calcite schists are not uncommon. Magnetite, pyrite, ilmenite, leucoxene, and garnet occur in many of the specimens. The elements from which such metamorphic rocks are formed are afforded by sedimentary as well as igneous rocks, and probably the group includes rocks derived from both types.

In the section from Nome to the Kigluaik Mountains these schists, which here contain some massive limestone beds up to 100 feet or more in thickness, extend northward from the coast for 16 miles, to a point where they dip under massive limestones that are interbedded with thin beds of schist and lie in a synclinal trough extending east and west. These limestones are tentatively correlated with the Port

[a] Brooks, A. H., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 29–31.

Clarence. On the south side of Stewart River, 22 miles from the coast, the schists reappear and are continuously exposed to the base of the mountains. In the southern part of this section they are faulted at so many places that no estimate of their thickness is possible. North of Stewart River, however, the faults are not so numerous, and the prevailing dips seem to indicate a thickness of about 7,000 feet. Whether the beds in this area are repeated by close folding or by unobserved faults could not be determined in the rapid reconnaissance. A large allowance for any such folding or faulting would seem to indicate that the minimum thickness possible can scarcely be less than 2,500 feet; the probabilities are that the thickness is much greater.

In the region northwest of the Kigluaik Mountains these rocks are less altered than in the Nome region. They here contain many sills of greenstone, and some of the sedimentary beds are but little altered clay slates. They overlie the biotite schists of the Kigluaik group and appear to be themselves overlain by the Port Clarence limestone. In their comparatively unaltered condition they apparently represent a series of rocks such as would by a little greater metamorphism produce the schists of the Nome region.

North of the Kigluaik and Bendeleben mountains schists similar to those of the Nome region occur in the basins of American and Kougarok rivers, where they were mapped in 1901 by the writer, who, on the evidence of obscure fossils collected from associated limestones, regarded them as younger than the Port Clarence formation and applied the name "Kugruk group" to them.[a] The larger collections made in 1903, however, justify the correlation of these limestones with the Port Clarence and of the schists which underlie them with those of the Nome precinct.

The clay slates and phyllites of the York region apparently underlie the Port Clarence limestone and may represent a less-altered portion of the same body of sediments that produced the schists of the Nome group. The rocks were provisionally correlated with the Kuzitrin[b] in 1900 and 1901, but inasmuch as it is certainly true that they are lithologically distinct from any extensive mass of rocks represented elsewhere in this peninsula, they will be described separately (pp. 79–80). Although these phyllites underlie the Port Clarence limestone, the stratigraphic relation is not definitely known, as there is evidence of a thrust fault along the contact. This fault, which was not detected in 1901, led the writer to infer an unconformity between

[a] Collier, A. J., Reconnaissance of the northwestern portion of Seward Peninsula, Alaska: Prof. Paper U. S. Geol. Survey No. 2, 1902, pp. 21–24.

[b] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 28–29.

the two formations.[a] Two small areas of phyllites resembling these occur east of this contact; they are surrounded by Port Clarence limestone, which they seem to underlie conformably.

In the east end of the Nome precinct and in the Council precinct the schists resemble those of the Nome region in their degree of metamorphism. They are extensively developed and have been studied by the writer along Fox River and the eastern tributaries of Solomon River. A wide belt of such rocks, including the lower drainage of Eldorado and Bonanza rivers, extends northeastward across the headwaters of the Casadepaga. These rocks were examined near the coast by Richardson in 1900[b] and along the upper Casadepaga and Eldorado by the writer in 1903. Although they are apparently identical with the schist of the Nome region, they overlie the massive limestone correlated with the Port Clarence, near Solomon River, and may be in part equivalent to the schists which overlie the Port Clarence limestone in the northeastern portion of the peninsula, described on page 79. It seems more probable, however, that they are either overthrust on the Port Clarence limestone or that the correlation of the massive limestone with the Port Clarence is at fault.

The age of the schists at the base of the Nome group is probably Ordovician, though they may be in part older, for there is no direct paleontologic evidence regarding it. They underlie the Port Clarence limestone, which is known to be Silurian or Ordovician. No definite evidence of unconformity between the formations has been discovered and they are therefore provisionally regarded as conformable.

PORT CLARENCE LIMESTONE.

The massive limestone member of the Nome group is comparatively unaltered over a large area north of Port Clarence and was described and named the Port Clarence limestone by the writer after his visit to that region in 1901.[c] In some of the sections examined, unless there are faults which were not detected, a thickness of at least 5,000 feet is exposed. In this vicinity the unaltered limestones form a continuous outcrop over an area of 1,400 square miles. In the west end of this area they are cut by bosses of granite and dikes of rhyolite and other acidic rocks. The limestones surrounding these intrusions are locally marmorized and contain many contact minerals, among which are vesuvianite, wollastonite, garnet, and tourmaline. They also contain veins of cassiterite, zinnwaldite, fluorite, tourmaline,

[a] Collier, A. J., Prof. Paper U. S. Geol. Survey No. 2, 1902, p. 18.

[b] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 31.

[c] Collier, A. J., Prof. Paper U. S. Geol. Survey No. 2, 1902, pp. 18–19.

wolframite, and quartz. The limestones become progressively more metamorphosed and locally contain thin beds of graphitic and other schists toward the east. In the divide between American and Kougarok rivers and also east of the Kougarok they exist as massive crystalline marbles, but retain traces of fossils by which their correlation with the Port Clarence is rendered certain. In the southern part of the peninsula they form the large area of white marble hills at White Mountain, north of Golofnin Bay. Obscure fossils were collected here in 1900 which were regarded as of possible Mesozoic[a] age, but the larger collections made by Hess in 1903 permit their correlation with the Port Clarence limestone. No estimate of the thickness of the formation at White Mountain has been attempted, as its upper and lower limits could not be defined. It comprises a great thickness of crystalline limestones which contain some minor beds of calcareous schist and overlie schists similar to those of the Nome region.

West and north of White Mountain many extensive areas of massive crystalline limestone have been differentiated, as shown on the geologic map (Pl. X, in pocket). In general, these rocks are more highly altered than those already described, and are destitute of fossil evidence. They are correlated with the Port Clarence on the grounds of stratigraphic and lithologic similarity. Near Casadepaga River Richardson measured a thickness of 2,500 feet.[b] South of American Creek and west of the Kruzgamepa, near Iron Creek, the thickness is probably as great, though no section has been measured.

In this region the limestones contain numerous sills of basic igneous rock, some of which are so much altered that they can not be distinguished from the schists.

In the region between Nome and the Kigluaik Mountains the thickness probably does not exceed 2,000 feet, but the upper limit is not defined. The limestones contain many small beds of schist, also some definite sills and dikes of greenstone, and locally they are capped by schists which may also be altered greenstones.

Near Cape Woolley the limestone covers a large area which has not been examined in detail. The thickness, however, doubtless exceeds 2,000 feet. The rock is not so much metamorphosed as in the Nome region, though tremolite is locally developed, and it should yield fossil evidence if carefully searched.

The Port Clarence limestone has been determined from paleontologic evidence to be probably of Silurian age, though forms heretofore regarded as Ordovician are present in some of the collections.

[a] Mendenhall, W. C., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 203–204.

[b] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape

In 1901 the writer obtained small collections of fossils from many localities north of Port Clarence; on these Dr. Charles Schuchert, of the United States National Museum, reported as follows:[a]

Loc. 26. Two miles southwest of forks of the Don River. *Porambonites*, probably *P. intercedens* Pander; *Columnaria* with large corallites, and *Bythotrypa?* sp. undet.

Loc. 28. Mountain 4 miles north of Rapid [Lost] River. *Illænus* near *I. auricornis*, but much smaller; *Illænus* sp. undet.; and a lithistid sponge on the order of *Calathium*.

Loc. 45. Don River 4 miles north of Tozier Creek. *Maclurina*, probably *M. manitobensis* Whiteaves; *Columnaria* with small corallites; *Halysites catenularia* Linné; *Syringopora* sp. undet.; *Streptelasma?*; and an undetermined *Lophospira*.

Loc. 77. Bluff above Nuluk River, latitude 65° 41′, longitude 166° 20′. *Orthis*, probably *O. parva* of European Russia.

Loc. 78. Foot of talus slope, Nuluk River. A large section of an undetermined gasteropod.

Loc. 76. Bowlder from gravel of Nuluk River. Fragments of a large trilobite. Undeterminable.

Loc. 185. Pebble from sand spit 1 mile north from Teller. *Girvanella* and *Raphistoma?*.

The above localities represent the middle of the Lower Silurian system. This is the first proof of the occurrence of rocks of this age in Alaska. Localities 26, 28, and 77 are particularly interesting, as species found there were first described from European Russia about St. Petersburg. This fauna has not before been ascertained to occur in America, nor has *Porambonites* been noted in any American Arctic region.

Locality 45 is also very interesting and perplexing—perplexing in that the association of *Halysites* with *Syringopora* would under ordinary circumstances be accepted as proof for Upper Silurian age. However, since both are here associated with such unmistakable Lower Silurian forms as *Maclurina manitobensis* and *Columnaria*, the latter outweighs the evidence of the corals. On the other hand, *Halysites* is often found in the Lower Silurian and while I know of no *Syringopora* in this system, yet I learn from Mr. Ulrich that this genus has been noticed by him twice in association with Lower Silurian species.

* * * * * * *

Locality 163 [summit of Baldy Mountain] indicates a second formation younger than any of the above-described lots. The rock has undergone considerable alteration, so that the fossils are mostly undeterminable. However, the presence of a coral like *Cladopora* or *Striatopora* indicates either Upper Silurian or Devonian. No coral of this nature is known to me in the Lower Silurian.

In 1903 larger collections were made at a few localities, on which Doctor Schuchert reports as follows:

Loc. 3AC146 (near the forks of Rock Creek, a northern tributary of Agiapuk River) has—

Stromatopora sp.

Favosites favosus Goldfuss.

Favosites cfr. *niagarensis* Hall or *F. gothlandicus* Fought.

[a] Collier, A. J., Prof. Paper U. S. Geol. Survey No. 2, 1902, pp. 20-21, 22.

Columnaris? apparently closely related to *Favistella reticulata* Salter of the Arctic Silurian.

Halysites catenularia feildeni Etheridge.

Halysites catenularia harti Etheridge.

Diphyphyllum cfr. *multicaulis* (Hall).

Alveolites sp.

Gasteropods, one a *Lophospira*, another a *Hormotoma*.

Orthoceras sp. undeterminable.

Loc. 3AC170 (Harris Creek, about 3 miles north of Baldy Mountain, where No. 163 was collected in 1901). *Cladopora* sp., resembles *C. seriata* Hall of the New York Silurian; *Striatopora* sp.; *Alveolites* sp., a branching form.

The species of these two localities indicate clearly the age of the limestones to be Niagaran or the middle third of the Silurian. This same horizon with the same species is known to occur in the Arctic region at Dobbin Bay, Cape Hilgard, Cape Louis Napoleon, Offley Island, etc.

These two collections of Mr. Collier also shed light on his earlier collections numbered 1AC45 and 1AC26. The former has an assemblage of species suggesting both the Ordovician and Silurian formations, and a similar occurrence was noted by Etheridge[a] for the Arctic localities mentioned above. Either there are two dolomitic superposed horizons in the far north, one of Ordovician age the other of Silurian, causing the fossils of different ages to be mixed, or we have here indications that there was no break in the sedimentation between the Ordovician and Silurian permitting species usually accepted as restricted to the Ordovician to pass upward into the Silurian. Reference is here made to my former identification of *Maclurina manitobensis*. Etheridge also finds a similar shell which he labels *Maclurea magna* associated with Silurian fossils at Cape Hilgard and Cape Louis Napoleon. Further, Salter and Etheridge report *Favistella Columnaria* in the same association. This is a genus of corals elsewhere known only in the Ordovician. Collier also appears to have specimens of this genus from his loc. 3AC146 associated with unmistakable Silurian forms. My identifications of lot 1AC26 also should be changed to *Favosites* sp. undet., *Conchidium ? coppingeri* Etheridge?, and *Bythopora?*. Loc. 1AC77 is either Ordovician or Silurian.

There may be Ordovician strata on Seward Peninsula, as lot 1AC28 seems to have fragments of *Illaenus*. However, the material is so fragmentary that no positive identification can be made, and the age of the strata in question is either Ordovician or Silurian. Lot 3AH51 (South Fork of Budd Creek) has a *Syringopora* different from other Seward Peninsula species and yet it may be of Silurian age.

In 1900 some obscure fossils were collected by Mendenhall[b] from the limestones at White Mountain, about 10 miles north of Golofnin Sound, which, though they could not be identified by paleontologists, seemed to indicate either a Mesozoic or Tertiary age.

In 1903 Hess made a thorough search for fossils on several low, rounded limestone buttes which stand as islands in the Quaternary deposits of the Fish River delta near White Mountain. His search resulted not only in a collection of fossils from Mendenhall's original locality, but in additional collections from a hill called Black Moun-

[a] Quart. Jour. Geol. Soc. London, vol. 34, 1878.

[b] Mendenhall, W. C., Reconnaissances in the Cape Nome and Norton Bay regions,

tain, which lies several miles north of White Mountain. The collections were submitted to Doctor Schuchert, who reports on them as follows:

Lot 3AH103 (Black Mountain, near Fish River, 6 miles above White Mountain) has a *Diphyphyllum* quite unlike the other Seward Peninsula species. So far as the fossils go the horizon may be either Silurian or Devonian. However, I am told that the specimens from loc. 3AH102 (on the southeast slope of Black Mountain, which are undoubtedly Silurian) are from a horizon above 103, and as the species from the former seems to be the abundant *Cladopora* of loc. 3AC170 it follows that if no overturn of the beds occurs here loc. 103 also is Silurian.

Loc. 3AH106 (Mendenhall's original locality at White Mountain). The limestone of this locality is much metamorphosed, shattered, and squeezed, so that one hesitates to state what genus the white calcite sections in the rocks represent. However, they appear to be of a large bivalve, and as the strata not far away from this locality seems to be certainly of Silurian age the suggestion is arrived at that *Megalomus* may be represented. This suggestion would not have offered itself if we did not know of a similar occurrence on Drake Island, Glacier Bay, Alaska. At this locality the natural sections indicate that they belong to a thick-shelled bivalve like *Megalomus*, and as there are associated with them unmistakable Silurian fossils the fact is established that a horizon of about the age of the Silurian Guelph is present on Drake Island. For the present it may be best to accept the age of the rocks at loc. 3AH106 as Silurian. Accepting this as true, then 106 should hold a somewhat higher horizon in the section than AH102 and 103.

The above remarks lead to the conclusion that there may be Ordovician strata on Seward Peninsula and that there is there an extensive development of Silurian. The places where Silurian fossils occur are 1AC26 (2 miles southwest of the forks of Don River), 1AC45 (Don River, 4 miles above Tozier Creek), 3AC146 (Rock Creek, tributary of Aglapuk River), 3AC154 (forks of Budd Creek), 3AC170 (Harris Creek, 3 miles north of Baldy Mountain), 3AH52 (South Fork of Budd Creek, tributary of American River), and 3AH102 (southeast slope of Black Mountain, near Fish River, 15 miles above Golofnin Bay).

The following localities may also be Silurian, as they seem to have single species of apparently the same forms as occur at the localities just cited: 3AC156 (head of South Fork of Budd Creek, near Kougarok Mountain), 3AC155 (mountain south of forks of Budd Creek), 3AH104 (river face of Black Mountain, 6 to 8 miles above White Mountain).

The geologists of the Harriman expedition, who touched at a point not definitely located on the east shore of Port Clarence in 1899, describe the rocks here as slates intercalated with brown sandstones. The slates are described as "dark-gray fissile argillites, which are often fossiliferous and some of which are calcareous and run into thin beds of limestone."[a]

These rocks were correlated with the Jurassic-Triassic "Vancouver series." Although this coast has been traversed by geologists of the Geological Survey, no rocks were found which could be distinguished from the Port Clarence limestone and the undifferentiated schists of the Nome group. Moreover, some of the fossils collected by mem-

[a] Emerson, B. K., Harriman Alaska Expedition, vol. 4, 1904, pp. 44, 53–54.

bers of the Harriman expedition seem to have been mixed or mislabeled, so that no fossils which are known to have been collected at Port Clarence appear to have been brought back. Fucoid forms which may have been confused with some of the fossils collected in the Yakutat formation[a] are common in the less-metamorphosed earthy Port Clarence limestone, and a small collection of these was made in 1904 near Mount Merrill for comparison with the Yakutat fucoids. These were submitted to Mr. Ulrich, whose report is as follows:

The fossils collected by Mr. Washburne at Merrill Mountain, 3 miles north-northeast of the mouth of Lost River, Seward Peninsula, Alaska, comprise, all told, 17 specimens in an extremely unsatisfactory state of preservation. On consultation with Mr. Collier I learned that the main purpose of the collection was to determine whether any of the fucoid-like markings, which are said to be abundant in the Port Clarence limestone, are comparable to the Yakutat formation fucoids recently described by me. This probability may be set aside at once, since the "fucoids" of the two formations are in no wise similar. Indeed, the organic nature of the Port Clarence markings is doubtful, while I can entertain no such doubt concerning the Yakutat fucoids. Nine of the specimens from Merrill Mountain were collected on account of the markings in question.

Of the remaining eight specimens one is a light-colored banded magnesian limestone; the others are in a dark, compact limestone very different lithologically from the first. The banded or laminated specimen may not be organic, but it agrees in appearance and general structure very well with those doubtful fossils called Cryptozoan which are so widely distributed in the early Ordovician or Cambrian magnesian limestones in the United States. The fact that the Alaskan specimen is dolomitic is probably significant in this connection. However, if on investigation the bed from which this specimen is derived is not distinctly beneath the dark, purer limestones containing the other fossils, I would be inclined to compare it with the similarly laminated *Stromatocerium rugosum*, a fossil characterizing the Black River limestone of New York.

The fossils in the dark limestone are:

Sections of two specimens of an undetermined gasteropod having about the shape of *Hormotoma bellicincta*, only much smaller—one-half to three-fourths of an inch in length.

Two specimens of a low-spired, round-whorled gasteropod of uncertain affinities. *Trochonema* is suggested by the broad umbilicus and general form of the shell, but it is so imperfectly preserved that identification is impossible.

A cephalopod with a curved shell like these commonly referred to *Cyrtoceras*—perhaps a species of *Cyrtorizoceras* according to Hyatt's classification. However, the material is so poor that it is not safe to say more than that it represents a simple *Cyrtoceras*-like cephalopod with close septa and apparently a nearly smooth surface.

The other (3) specimens consist (1) of a part of a radiately marked impression, the relations of which are very uncertain, and (2) of fragments of a thick-walled hollow cylinder, possibly indicating siphuncles of some small *Endoceras*. They are about one-fourth inch in diameter.

Despite the imperfection of the material there is little doubt in my mind as to its Ordovician age. It must come from a lower horizon than that in the same vicinity from which the probably Silurian corals reported on by Mr. Charles Schuchert were found.

The collections regarded by Messrs. Schuchert and Ulrich as possibly Ordovician or "Lower Silurian" are 1AC28 (near mouth of Lost River) and 1AC77 (Nuluk River, latitude 65° 41′, longitude 166° 20′). From a review of the stratigraphic evidence the writer is of the opinion that these horizons are not lower than the other fossil-bearing horizons of the Port Clarence formation and that, therefore, they also are Ordovician or Silurian. Larger collections from these localities will, it is believed, verify this conclusion.[a]

UNDIFFERENTIATED SCHISTS OF FAIRHAVEN PRECINCT.

The schists which overlie the massive Port Clarence limestone find their greatest development in the northeastern part of the Peninsula. In this region Moffit found extensive areas of mica schists overlying the massive limestones believed to be Port Clarence. These rocks differ from the schists which underlie the Port Clarence limestone in the Nome region in that they are calcareous or siliceous and in many places graphitic mica schists, but are rarely feldspathic.[b] Their stratigraphic relation to the Port Clarence limestone places them either in the Silurian or higher. In lithologic character they are distinct from the slates in the York region, which will be next described and which are also regarded as of possible Devonian age.

SLATES IN THE YORK REGION.

Northwest of the York Mountains there is a large area of slates or phyllites which seem to be distinct in lithologic character from any of the other large rock masses in the peninsula, though rocks somewhat similar occur in the Nome group south of Grantley Harbor. These rocks have been differentiated on the geologic map (Pl. XI, in pocket). Similar slates which are provisionally correlated with them occur in two small isolated areas surrounded by Port

[a] In regard to fossil collections the writer begs leave to make the following suggestions to miners and prospectors in Alaska:

First. Fossils furnish the most definite evidence of the relative age of rock formations.

Second. Though the relative age of rock formations does not seem to have a direct economic bearing, as rocks of all ages carry gold, and, according to the old adage, "gold is where you find it," it is equally true that in many districts the gold-bearing rocks are confined to definite horizons, which are often indicated by the fossils contained in them or in contiguous rocks.

Third. The men engaged in United States Geological Survey work in Alaska invite the cooperation of miners and prospectors in collecting such evidence, either by furnishing information regarding fossil-bearing localities or by sending specimens. Such correspondence should be addressed to the Division of Alaskan Mineral Resources, U. S. Geological Survey, Washington, D. C.

[b] Moffit, F. H., The Fairhaven gold placers, Seward Peninsula, Alaska: Bull. U. S. Geol. Survey No. 247, 1905, pp. 20–24.

Clarence limestone north of Brooks Mountain and east of Don River, and in a large area at Ear Mountain.

The type rocks of the formation are fine-grained graphitic arenaceous slates which are in many places broken into rhomboidal blocks and pencil-shaped fragments, but there is considerable variation from this type. Some beds of coarse-grained dark sandstone have been observed and here and there calcareous phases are manifested in beds of impure flaggy limestone.

On the west these slates are in contact with some crystalline limestones and interbedded phyllites which are of Mississippian ("Lower Carboniferous") age. The relation of the slates to the limestones is difficult to determine, mainly on account of the obscure bedding of the slates and the few exposures within the limestone area near the contact. In 1900 Brooks was of the opinion that the limestone underlie the slates and are therefore the older.[a] Although the writer has twice crossed this contact since that time, he is unable to advance any positive evidence either confirmatory or otherwise of this opinion.

In regard to the stratigraphic position of these slates, either one of the three following hypotheses is possible in view of the facts obtained: (1) They may be of the same geologic series as the limestones exposed near Palazruk, as they are not perceptibly more altered. Moreover, fossils similar to those obtained from the limestone have been found in beach pebbles several miles east of the line of contact, and though these may have been transported by ice floes it is equally possible that they came from some minor bed of impure limestone included in the slate formation. (2) They may be older than the limestone and underlie it conformably. In a general way they resemble some highly jointed slates and sandstones which conformably underlie rocks of the Mississippian ("Lower Carboniferous") series in the Cape Lisburne region.[b] The close association of these slates with the Mississippian limestones therefore suggests their correlation with the supposed Devonian rocks of the Cape Lisburne region. (3) These slates may be equivalent to the lower undifferentiated schists of the Nome group. If this be true, there must be a fault of several thousand feet which has not yet been detected along their contact with the limestone exposed near Palazruk. The relation of the slates, and more especially of one of the smaller outlying masses correlated with them, to the Port Clarence limestone argues strongly for this hypothesis.

[a] Brooks, A. H., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 28.

[b] Collier, A. J., Geology and coal resources of the Cape Lisburne region, Alaska: Bull. U. S. Geol. Survey No. 278, 1906, pp. 17–18.

LIMESTONE NEAR PALAZRUK.

West of the area of the slates there is a belt of crystalline limestone and interbedded dark mica schists or phyllites. These rocks are exposed along the Bering Sea coast for about 5 miles, between the native village of Palazruk and the granite outcrop of Cape Mountain. Near Palazruk they are intensely crushed and probably faulted. These limestones were correlated in 1900 with the limestones of the Kigluaik group.[a] As has been noted, they lie immediately west of the typical area of the slates, their relation to which has not yet been clearly determined, though they form a distinct lithologic unit.

In 1903 a small collection of rather poorly preserved fossils was obtained by the writer along the beach between Palazruk and Cape Mountain. Similar fossils were found in 1904 in the limestones south of Lopp Lagoon and also in beach pebbles several miles east of Palazruk, but were lost in shipment. The collections made from beach pebbles in 1903 were referred to Dr. George H. Girty, who reported on them as follows:

> Only three species seem to be represented in the collection, and these belong to the corals, a group which serves ill as a means for correlation or for age determination. The material is also so metamorphosed that almost all structure has been effaced. There is a single small zaphrentoid coral whose generic position has not been determined. Several specimens of *Syringopora*, apparently all one species, have been identified by their characteristic appearance and mode of growth. All internal structure in these fossils has been obliterated. A third form, represented by several specimens, appears to be related to *Lithostrotion* or *Lonsdalea*. The corallites are moderately large and form bushy fasciculate colonies. Septa are present, and also a central axis is simple or compound. The presence of this form seems to make it necessary to refer this fauna to the Carboniferous, and it is more probably Lower than Upper Carboniferous. Were it not for the species last mentioned (*Lithostrotion?*) I would have regarded this as one of the Devonian coral faunas. Its age can hardly be older than Devonian.

In regard to the same collection, Doctor Schuchert, who also examined it, says:

> Regarding locality 3AC136, it is certain that these corals are wholly different from any others of Seward Peninsula and that they do not suggest any horizon below the Carboniferous. In other words, these corals are of Carboniferous age. A very similar coral, *Lithostrotion*, was collected by Schrader in 1901, on East Fork of John River, at a locality on Contact Creek.

A large collection of Mississippian fossils in a good state of preservation was obtained in 1904 at Cape Lisburne, which is about 200 miles northeast of Cape Prince of Wales. After these had been deter-

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 28. Collier, A. J., Reconnaissance of the northwestern portion of Seward Peninsula, Alaska: Prof. Paper U. S. Geol. Survey No. 2, 1902, p. 16.

mined the fragmentary fossils from the York region were compared with them by Doctor Girty, from whose report the following note is added to those already given:

> Another collection was that made by Mr. Collier in 1903 near Cape Mountain. These fossils have been so altered that absolute identification of the species is in most cases impossible, but I feel little doubt that the horizon will prove to be that of the Lisburne series.

From this evidence the correlation of the limestone exposed near Palazruk with the Mississippian limestone of Cape Lisburne seems well established. Fossils similar to those from the Cape Lisburne region were also found on St. Lawrence Island 160 miles southwest of Cape Prince of Wales, though their source in the bed rock has not been located. Mississippian rocks are extensively developed in a broad belt extending eastward from the Cape Lisburne region[a] across northern Alaska. The same horizon is also represented on Chichagof Island,[b] southeastern Alaska.

SUMMARY OF THE METAMORPHIC FORMATIONS.

The metamorphic rocks of Seward Peninsula consist of interbedded schists and limestones and are among the oldest known rocks in Alaska. In general the schists are of sedimentary origin, though they doubtless include many undifferentiated igneous masses. Lithologically they present a variety of types, the most common being quartz-biotite schists grading into gneisses; quartz-chlorite-muscovite schists, many of which contain secondary feldspar; graphite schists, hornblende schists, epidote schists, calcite schists, quartzites, and clay slates. The degree of metamorphism varies, but as a general rule is greater in the eastern than in the western part of the peninsula. In many places the schistosity appears to be parallel with the bedding, but locally there is evidence of close folding developed previous to the schistosity, and it is probable that this condition prevails in many of the more highly altered rock masses where it has not been detected in the reconnaissance examination. The most extensive limestone formation, which is called the Port Clarence limestone, is believed to belong to the Silurian, though several of the collections of fossils contain forms heretofore regarded as Ordovician associated with Silurian forms. Concerning the schists of the Nome group, which underlie the Port Clarence limestone, it can only be said that they and the Kuzitrin and Kigluaik are pre-Silurian. Some undifferentiated schists which overlie the Port Clarence limestone may be either Silurian or Devonian. So far as the evidence at hand shows, the

[a] Collier, A. J., Geology and coal resources of the Cape Lisburne region, Alaska:

slates in the York region may belong in either of the Paleozoic systems. The youngest rocks known in the metamorphic series are the limestones near Cape Mountain, which are of Mississippian age.

Briefly stated, the metamorphic rocks of Seward Peninsula include sediments which range in age from pre-Silurian to Carboniferous. The formations that have been differentiated are lithologic and probably also stratigraphic units, though as a general rule the stratigraphic features are obscured by metamorphic structures.

Where paleontologic evidence is wanting any correlations are apt to be at fault, as the undifferentiated schists, although mainly of pre-Port Clarence age, may include infolded masses of younger Paleozoic rocks, and some of the limestones which have been mapped as Port Clarence may belong to an undifferentiated horizon above or below the Port Clarence.

UNALTERED SEDIMENTARY ROCKS.

Unaltered sediments composed of conglomerates, sandstones, and shales, which are in places coal-bearing, overlie the metamorphic rocks unconformably in a few small areas, most of which are east of the region under discussion in this report. Several such areas are reported along Tubutulik and Koyuk rivers, in the Koyuk precinct,[a] and a similar area which has produced some coal occurs on Kiwalik River, in the Fairhaven precinct.[b]

In the Nome precinct a small area of unaltered sediments, including some coal beds, occurs on Coal Creek, a western tributary of the Sinuk, about 14 miles from the coast. The surface here is deeply covered with erratic bowlders, peat, and moss, and the bed rock, even in stream channels, is exposed in but few places, so that it was not possible to outline definitely the area occupied by this formation. From the meager exposures which occur, however, it seems probable that the greater part of the plateau surface in which Coal Creek is trenched is underlain by crystalline limestones and schists resembling those near Nome, and that the younger sediments do not extend for more than half a mile along the creek. The most prominent outcrops consist of a conglomerate containing pebbles of schist and vein quartz and some large, well-rounded bowlders of greenstone that has been slightly sheared. A diligent search of this conglomerate failed to reveal any pebbles of granite, although granite pebbles are common in the surficial deposit. In addition to the conglomerates, the coal-bearing formation contains finer sediments made up largely of

[a] Mendenhall, W. C., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 205–206.

[b] Moffit, F. H., The Fairhaven gold placers, Seward Peninsula, Alaska: Bull. U. S. Geol. Survey No. 247, p. 18.

schist pebbles that are very much decomposed. These beds have been slightly crushed and sheared subsequent to their deposition, making it difficult to distinguish the clastic material from the schists which are in place. The formation also contains a number of seams of finer material in the condition of fire clay. The beds strike nearly northwest and dip to the southwest at an angle of about 30°.

The attention of prospectors was first called to the coal deposit by Eskimos from the village at the mouth of Sinuk River, and systematic development was attempted in 1902. A tunnel driven into the west bank of Coal Creek across the strike of the coal-bearing strata exposes a number of thin seams of coal with beds of white fire clay between them. It is reported that while the tunnel was in construction seventeen stringers or thin seams of coal were exposed, the thickest of which measured about 16 inches, and the thinnest about 3 inches. Below the lowest bed the floor consists of white fire clay similar to that between the beds. No analysis has been made, but the appearance of the coal indicates that it is bituminous and of fair quality. A blacksmith at Nome reported that he found it very satisfactory for welding purposes, but it is evident that the deposit has little if any value on account of the small size of the beds.

Although it is not believed by the writer that the whole area of coal-bearing land is more than one-half of a square mile, it is possible that its extent is somewhat greater, for it is natural to suppose that the coal-bearing rocks, being softer than the schists and limestones, would be less likely to crop out through the surficial deposits and for this reason their presence would not be detected.

As was noted, the conglomerates of the coal measures contain a great many pebbles of a coarse-grained greenstone. Greenstones of this character occur about 10 miles to the northwest and there they make up a large part of the bed rock. It is entirely possible that they may also occur at many places nearer to the basin, as dikes of finer-grained greenstones are known in the vicinity. These sediments were probably deposited in a fresh-water basin that was of small extent. Subsequent to their deposition they have been folded with the older rocks and eroded to base levels with them, so that the original extent of the basin can not be determined. The character of the pebbles of this formation shows that it was deposited after the metamorphism of the Nome group and after the greenstone intrusions. The absence of granite pebbles suggests that the sediments may be older than the granite intrusions, though it may be due to lack of drainage from that direction.

No paleontologic or paleobotanic evidence regarding the age of any of the coal-bearing rocks of Seward Peninsula has been

obtained, but from their lithologic resemblance to other coal-bearing formations of Alaska a late Mesozoic or Tertiary age is inferred. The coal-bearing series of the lower Yukon, which includes both marine and fresh-water deposits, is mainly of Upper Cretaceous age, whereas the isolated coal basins of the upper Yukon, which these basins most resemble, are Eocene.[a]

Coal-bearing sediments of Eocene age also occur on St. Lawrence Island, about 160 miles southwest of Seward Peninsula.

UNCONSOLIDATED DEPOSITS.

INTRODUCTION.

An accumulation of detritus, composed of gravel, sand, silt, ground ice, and residuary clay, or glacial moraines and erratic bowlders overlain by peat and moss, forms a widely spread mantle of varying thickness that effectually conceals the bed rock over much of the surface. Except for their frozen condition these deposits are unconsolidated, and, though their deposition may have begun in the late Tertiary, they are, for the most part, of Quaternary age, including both Pleistocene and Recent. They are of the greatest economic importance, inasmuch as they probably everywhere contain traces of gold and no productive gold placers are found except in them. On the geologic map the Pleistocene and Recent sediments are not differentiated from each other, since most of the Recent deposits overlap and merge with the Pleistocene. The areas in which gold has actually been found, but not in commercial quantities, and the areas which have produced placer gold are differentiated from those in which the presence of gold has not yet been proved. Glacial deposits that are probably of Pleistocene age have not been differentiated from the sediments. They are not important economically, as no productive mines occur in them, though they are believed to contain some disseminated gold.

The Quaternary sediments are most conveniently classified according to their extent and topographic relations, as follows:

1. Gravel-plain deposits, consisting of gravels, sand, and silts, covering the coastal and inland-basin plains.

2. Alluvial deposits, found in stream beds, flood plains, and benches along river and creek valleys.

3. High-bench deposits of both fluvial and residuary character, occurring in small areas and at considerable elevation above the lowland plains and the existing valleys.

[a] Collier, A. J., Coal resources of the Yukon: Bull. U. S. Geol. Survey No. 218, 1903, p. 17.

GRAVEL-PLAIN DEPOSITS.

CHARACTER AND EXTENT.

The deposits of the first group are most extensive in area and also in depth. They form the surficial covering of all the coastal plains and inland basins that are such marked features of the topography. In general they are all of similar character, consisting of silts, sands, and gravels, which, as a rule, become coarser near the foothills. Although they include deposits of two types—namely, marine and lacustrine—they are probably nearly identical in the method of their deposition, as shown on pages 90–91. More than half of the deposits of this type are found on the extensive lowlands that fringe both the northern and southern coasts. The Arctic coastal plain, which extends from Cape Prince of Wales to Cape Espenberg, has an average width of about 15 miles and an approximate area of 2,500 square miles. Along its southern margin the gravels are from 100 to 200 feet above sea level and seem to lap over the surface of the York Plateau, which rises toward the south by a very gentle slope. Very little is known regarding the detail of this deposit. Near its southern edge it contains some beds of gravel derived from the schists and limestones of the immediate vicinity. Along the coast the material is finer and by the action of waves and wind it has been piled up in sand dunes. The streams flowing across the plain have trenched their beds, exposing numerous sections of the upper part of the deposit, in some of which a layer of black silt, several feet thick, overlies the gravels and sands. Remains of the mammoth and other extinct mammals have been seen in this layer, but no marine fossils are known to have been discovered.

The Bering Sea coastal plain extends with some interruptions from the north shore of Port Clarence to Golofnin Bay. In some places it has a width as great as 7 miles, though it is in general much narrower. It differs from the Arctic coastal plain in that the hills rise abruptly from its inland margin. North of Port Clarence the deposit consists mainly of gravel and has considerable thickness near the shore, but thins out perceptibly near the hills, where the harder rocks are locally exposed in stream beds. Some inequalities in the elevation along the coast are best explained as the result of unequal uplifting. Between Port Clarence and Sinuk River also the deposit is very thin in some places, as is shown by bed rock outcropping along the beach escarpment. Here, too, there is some evidence of deformation, for part of the surface is depressed below sea level north of Cape Woolley.

The gravel-plain deposits have been examined more thoroughly

Cripple River and Cape Nome.[a] This plain is roughly crescent shaped and has a maximum width of 5 miles. It is bounded on its seaward side by a low escarpment from 10 to 20 feet high, from which it rises to an elevation of about 100 feet at the foothills. The detailed topographic map[b] of this plain shows that there is considerable inequality in the surface levels, though without careful measurement this would scarcely be detected. About half a mile back of the present beach a well-defined escarpment that is evidently the inland margin of an older beach line can be recognized for about 10 miles. The western extension of the line of this escarpment falls along the seaward side of a depression, occupied for several miles by Snake River, which was probably a lagoon formed on a low portion of the plain surface and shut in by the same beach that lay along the base of the escarpment. The inequality of the surface levels may be due either to unequal deposition or to deformation. The deposit varies in thickness from 30 to more than 100 feet. It rests upon a somewhat uneven bed-rock surface that slopes gently from the foothills to the shore. Many excavations which have been made in this deposit show that it is composed mainly of stratified gravels, sands, and silts overlain by peat and moss. The stratification is more or less irregular, indicating varying water currents. The pebbles are for the most part derived from the rocks of the Nome group, though they include some granite bowlders and pebbles which could have come only from the Kigluaik region. Near the coast the pebbles are well rounded, but toward the foothills considerable semiangular material is found in places. On this account a possible glacial origin for part of the deposit has been suggested, though such material could doubtless have been contributed as talus by local slides from the higher ground north of the lowland, or could have been brought by floating ice.

No remains of mammoths or other extinct mammals have been found in this deposit, but marine fossils are common on the dumps of prospect holes within a mile of the beach. The species represented are identical with forms now living in Bering Sea. This portion of the coastal plain is described in considerable detail in connection with the economic geology (pp. 156–170), as it is known to contain gold values in many places, and the method of its exploitation is one of the difficult problems of placer mining.

Little is known to the writer of the portion of the coastal plain lying between Cape Nome and Topkok Head, though it is one of the largest areas on the south side of the peninsula. From the evidence of the topographic map it is inferred that it has been slightly

[a] See Brooks, A. H., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 81.

[b] Nome special map, U. S. Geol. Survey, 1906.

depressed in its western part, forming the inlet known as Port Safety. In parts at least the deposits are comparatively thin, so that some of the streams have cut through to bed rock.

Gravel and silt deposits resembling those of the coastal plains occur in a remarkable series of extensive valley lowland areas that characterize the topography of the interior. These deposits differ superficially from those of the coastal plains only in the fact that they are wholly surrounded by uplands. The areas are best designated by the names of the rivers which drain them or the lakes or bays which they surround, as the Imuruk, Agiapuk, Kuzitrin, Niukluk, Golofnin, and Fish River lowlands. Of these, the first three are all but connected with each other by continuous deposits, only short rock canyons cut in low plateau surfaces intervening along Agiapuk and Kuzitrin rivers. The Imuruk lowland deposit also extends without interruption up Kruzgamepa River and over a broad, flat divide to the upper waters of Niukluk River, but from that point the deposit is not continuous to the lowland basin on the lower Niukluk, as between the two the river flows for several miles through a rock-cut valley. The sediments of the lower Niukluk basin are continuous along Fish River with those which surround Golofnin Sound. The Fish River basin is more isolated than the others, and its deposits are not connected with any of them.

In some of these basins there is evidence that the vertical extent of the deposit has been much greater and that a considerable upper portion has been removed by erosion. Whether or not they have suffered deformation anywhere has not been positively proved, though the writer is of the opinion that they have been so affected and that certain mesa-like buttes and terraces described elsewhere are remnants of differentially uplifted portions.

The gravel plain of the Imuruk lowland surrounds a large body of brackish water called Imuruk Basin. This basin is connected with Bering Sea by a sinuous tidal channel called Tuksuk Channel, which lies in a precipitous canyon cut to a depth of 100 feet or more in what appears to be the elevated floor of a broader valley connecting the inland basin with the coast. The various rivers which discharge into Imuruk Basin are gradually extending their deltas, forming plains which can not superficially be distinguished from the older gravel-plain deposits. The materials deposited at the outer margins of these deltas consist of fine silt, with only here and there piles of coarse gravel floated down on cakes of ice, but near the heads of the deltas the river beds and banks are composed of gravel. The surface of the plain is dotted over with ponds, many of which are abandoned river

rests upon frozen silt. There is reason to believe that some at least of these bodies of ice are frozen ponds covered with moss. Near the northern margin of this lowland there are several mesa-like gravel buttes 20 feet or more high, remnants of a higher surface removed by erosion.

Along Kruzgamepa River the gravel plain stands at considerable elevation, and sections exposed along the river's trench show coarse gravel and bowlders overlain by finer gravels and silts. No data regarding the thickness of this deposit are available except around the margins, where in some places the streams have cut through to bed rock. No fossil remains have been reported, though marine shells are known to exist in the recent sediments of Imuruk Basin.

Little is known in detail regarding the deposit covering the Agiapuk lowland, though one prospect hole is said to have been sunk to a depth of 65 feet without reaching bed rock. The section disclosed in this hole consisted for the most part of blue clay with some vegetable fragments. At its west end this deposit overlaps a plateau that is correlated with the York Plateau, and here the upper part of the deposit consists of gravel with a thin covering of peat and moss. Fossil remains of the mammoth derived from these deposits have been found in some of the river gravels.

The Kuzitrin lowland deposit is the most extensive of the basin areas. The upper layers seem to be more gravelly than those of the Imuruk deposit. Around its western and northern borders there is a terrace from 50 to 100 feet above the general level, from which it is separated by a marked escarpment. There are also many isolated gravel buttes from 25 to 50 feet high scattered over the lower portion. These features are regarded as residual parts of an older surface left behind in the erosion that has reduced the surface to the present level. Remains of the mammoth, horse, and other mammals, together with some large logs and accumulations of vegetable material, have been found in these buttes and terraces. Near the east end of this basin the gravels are overlain by lavas that flowed from vents near the head of Kuzitrin River.

The deposits of the lower Niukluk are continuous with those which surround Golofnin Sound. Excavations which have been made near Council show several feet of sandy silt overlain by several feet of peat, but in general little is known of the composition or thickness of the deposit. Fragments of mammoth bones have been found at Council and White Mountain. At the head of Golofnin Sound the gravel plain merges with the growing delta of Fish River. A portion of the gravel plain between Golofnin Bay and Golofnin Sound has been elevated from 10 to 20 feet since it was deposited.

The deposits of the Fish River basin have been described by Mendenhall as follows:[a]

> Fish River basin above the gorge, already described among the topographic features as the gathering point for the upper tributaries of the river, is filled with similar deposits, coarse near the borders and finer near the center of the basin. The depth of this filling is purely conjectural, but presumably is not great. No islands of bed rock exist within it as far as known, but sand and gravel prominences, rising in some instances 30 or 40 feet above the general level, are abundant over it, and are interpreted as remnants of a slightly higher level generally destroyed by the meanderings of the stream.

At the west end Ophir Creek drains a part of this basin through a narrow canyon, cut in an ill-defined plateau which the gravel deposits seem to overlap. Mammoth remains have been found on the gravel bars of some of the streams.

ORIGIN OF THE GRAVEL PLAINS.

From the above descriptions it may be inferred that these deposits are probably all comparatively shallow and that they rest upon bedrock surfaces produced by erosion. The gravels, sands, and silts are for the most part ancient deposits laid down by water, and the upper layer of peat and moss is the product of vegetable growth and accumulation still in progress. In the Coastal Plains the erosion of the underlying bed rock may have been either subaerial or marine, though the minor inequalities noted in some places would seem to indicate stream rather than wave action. The sediments are littoral and lagoon deposits laid down during periods of subsidence, and were contributed for the most part by streams from the upland, though along the inland margins, especially where foothills rise abruptly, local slides probably contributed some talus. While these deposits were again being elevated the level sometimes remained constant long enough for beaches like the ancient one near Nome to form. In their elevation these plains have suffered slight deformation, some portions being brought above sea level and others being still submerged. Parts of the Arctic coastal-plain deposit appear to rest on and overlap a depressed portion of the York Plateau, whereas a portion at least of the Bering Sea coastal-plain floor is certainly of more recent erosion than that plateau. It may therefore be inferred that a part at least of the Bering Sea gravel plain is of more recent origin than that along the Arctic coast.

The interior-basin plains are in all probability mainly the products of subaerial erosion and deformation. In the course of these processes broad, flat river valleys were carved from the bed rock and partially covered with alluvium, after which deformations of the surface have occurred, depressing some of the valleys below sea level to

[a] Mendenhall, W. C., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 207.

form bays of the type of Grantley Harbor and Golofnin Sound, and impounding the water of others to form lakes. Imuruk Basin is probably an example of the latter type. By the deformation of an old river valley its waters were impounded, forming a lake or system of lakes coextensive in area with the Imuruk, Agiapuk, and Kuzitrin lowlands. These lakes remained in existence from the time of this deformation until Tuksuk River could cut its gorge to the lake-bed level through the barrier at the lower end of Imuruk Basin. A later depression has permitted the sea again to invade Imuruk Basin along Tuksuk Channel. It seems probable that the greater part of the silt, sand, and gravel covering of these lowland areas was laid down in the deltas of rivers discharging into these lakes in much the same manner as such deltas form at the present time. They are therefore for the most part lacustrine deposits. Since their deposition parts of the original surface have been eroded and reduced to a lower level. From the many evidences of recent warping afforded by some of the base-leveled plains, more especially along the coasts, it is inferred that these inland-basin plains have also suffered differential movements and that the eroded areas are in all probability only differentially uplifted parts. Erosion of elevated parts may have begun while deposition was still in progress over depressed portions. The lower Niukluk and Golofnin gravel plains were probably laid down mainly as delta deposits over the bed of a large bay or sound formed by the subsidence of a broad river valley.

The Fish River basin is more difficult to account for than the others, and at present our information regarding it is too meager to afford a satisfactory explanation of its origin. The depression is probably the result of the deformation of an old erosion surface, though the detail of its history has not yet been ascertained.

AGE OF THE GRAVEL PLAINS.

It has been shown that though deposits of this type are still forming as deltas in some of the bays, most of them were formed previous to the latest earth movement, by which the gravel plains were brought to their present level. The presence of mammoth and other mammalian remains indicates that the deposits containing them are of Pleistocene age and the apparent conformity of the beds throughout the sections exposed suggests continuous deposition from Pleistocene to recent time.

The remains of these extinct mammals and of large trees also indicate a climatic condition vastly different from the present one. A generally warmer and moister climate must have prevailed, and as a result rock decay, erosion, and consequent deposition must have been much more rapid than at present. That the precipitation of moisture and consequently the erosive and transporting power of the rivers

was greater during a previous period, presumably the Pleistocene, is also proved by the extinct glaciers of the mountain areas. The conclusion seems warranted, therefore, (1) that previous to and at the time of the deposition of most of the gravel plains rock decay was more rapid, and consequently the depth of the zone of weathering was greater; (2) that the streams and rivers were more active agents in removing, transporting, and redepositing residual materials than they are now. In brief, the sediments of the gravel plains were accumulated under conditions which were probably much more favorable to rapid deposition than those now existing.

ALLUVIAL DEPOSITS.

CHARACTER AND EXTENT.

The deposits included in the second group differ from those of the gravel plains in two particulars—namely, (1) the areas covered are of less extent and are generally confined to river and creek valleys, where they occur in the stream beds and flood plains and on terraces and benches, with local remnants of older drainage systems in the divides; (2) they are the product of ordinary stream action. In many places these deposits merge with those of the gravel plains around their margins, and in such places the differentiation of the two is necessarily arbitrary. They are confined to channels eroded in the bed rock by rivers and creeks and rest upon surfaces formed by such erosion. In general the gravels show less attrition than those of the gravel plains and become progressively coarser toward the heads of the streams. Although in an economic sense these deposits are of greater importance than any of the geologic formations yet described and are of general distribution, many of the areas covered by them are too small to appear if reduced to the scale of the geologic map. As many of them are auriferous they will be described in detail under the heading "Description of placers" (pp. 142 et seq.), but the following general statements regarding them may be appropriately inserted here:

The alluvial deposits consist for the most part of gravels, sands, and clays, and, like the plain gravels, are overlain by peat and moss except along creek and river beds. As a general rule the coarser and heavier sediments are near the bottom and the finer and lighter materials near the top. Although the gravel pebbles can usually be traced to bed-rock sources within the drainage basins, many of the pebbles and bowlders have been transported to their present positions by other agencies than the existing streams. Such transported material is as a rule confined to certain layers of the alluvium. The gold and other heavy minerals contained in the alluvium are generally found concentrated in a lower layer which rests upon bed rock and is called the pay streak, but in a few places the gravel resting directly upon

he bed rock is barren and is overlain by a bed of impervious clay alled a false bed rock, above which the gold and other heavy minerals re concentrated.

ORIGIN AND AGE OF THE ALLUVIUM.

The topography of Seward Peninsula is characterized by broad, lat, and comparatively straight trunk valleys in which the streams ppear to be disproportionately small. Into these valleys the waste from the uplands is carried by the many tributaries, which, while the snows are melting, are overloaded with sediments partly plucked from their beds and partly moved down their valley slopes by creeping slides. Such creeping movements are more pronounced on the north and east sides of the valleys, as on such slopes the sun's heat is more intense; consequently many of the streams have been crowded to the south and west sides of their valleys and the alluvium along the north and east sides may be covered with talus or slide deposits. Wherever in mining operations abandoned channels have been found they generally lie on the north and east sides of the valleys and their gravels are overlain by slide deposits.

It has been shown that these deposits are still accumulating and also that in some places they merge with the gravel-plain deposits, whose age has been determined to be for the most part Pleistocene. Moreover, from the fact that in a few places mammoth remains have been obtained from the alluvial gravels, it may be inferred that their deposition was in process during the Pleistocene and has continued to the present time. It has been shown that during that epoch erosion was much more active than at present; the streams were larger and presumably, although heavily burdened, they were not overloaded with detritus. Such conditions would be more favorable for the concentration of heavy minerals than those at present prevailing, on account of the great activity of the streams and the more rapid disintegration of the bed rock.

HIGH-BENCH DEPOSITS.

CHARACTER AND EXTENT.

The group of high-bench deposits includes many accumulations of small extent and heterogeneous character which resemble each other mainly in their topographic location and elevation. They occur on benches, terraces, flat divides, and plateaus high above the level of the gravel plains and disconnected with the valleys of existing streams. The materials contained vary from distinctly rounded, water-laid gravels to angular, residual gravels formed in place, and between these extremes they vary in the proportion of residual and waterworn materials contained. Several of the high benches

near Nome are known to be auriferous and are described in detail on pages 198–209, but of most of such deposits in other localities little is known, as they are in general mantled with moss, peat, and earth, and no natural sections are exposed. Many extensive plateau surfaces are covered with residual clay mixed with angular bowlders and pebbles, among which some rounded pebbles can occasionally be found. These deposits are probably not very thick and through them the bed rock outcrops in many places. Generally they are not shown on the geologic map. The distinctly water-laid materials are commonly of great thickness, but they are confined to small areas, many of which are defined by channel walls and can not be shown on the scale of the geologic map.

ORIGIN AND AGE OF THE HIGH BENCHES.

The waterworn gravels are in general confined to more or less definite channels and can best be accounted for as the deposits formed by the streams of older drainage systems. In many places they are overlain by angular and other residual materials, having probably been covered by creeping slides from higher hills. The broad plateau surfaces are topographic features due to erosion when the land stood at lower elevations. On such surfaces deposits of washed gravel are to be expected in old flood plains and stream channels, but since their elevation much of the gravel has either been washed away or disintegrated, leaving the remnants of the old gravels mixed with the products of bed-rock weathering.

No fossil remains that would give a clue to the age of these deposits have been found. They are certainly older than the alluvium of the existing streams, and since much of the detritus from the high interstream areas must have washed down to form the gravel plains, it is probably safe to assume that the high-bench gravels are also older than the greater part of the gravel-plain deposits; in brief, they are Pleistocene or older. It has been shown that during the Pleistocene the conditions were more favorable to rock decay than at present. It is therefore probable that most of these high-bench deposits, including both the water-laid and the residual portions, were formed before the end of the Pleistocene.

GLACIATION AND GLACIAL DEPOSITS.

Very little has been added during the last three years to the general information on glaciation and glacial deposits published in the report of 1900,[a] which may be briefly summarized as follows: (1) Seward Peninsula has suffered no general glaciation at any recent time and none of the unconsolidated deposits thus far described can

be accounted for in this way. This is proved by the mantle of residuary waste resting undisturbed upon the rock from which it was derived and by needles and crags of bed rock projecting through the residuary soil. (2) In its nonglaciated character this region does not differ from other parts of northwestern Alaska surrounding Bering Sea which have been visited and described by geologists.[a] (3) Although there has been no regional glaciation, the valleys of the higher mountain areas have been occupied by local glaciers, some of which were rather extensive. The Kigluaik and Bendeleben mountains were the two main centers of such glaciation, but there were probably also smaller glaciers which did not extend beyond the mountain gorges in several of the lower mountain areas. (4) In the glaciated region the valleys have typical U-shaped cross sections, and head in glacial cirques, and some of the higher valleys still contain remnants of these former glaciers. Around the flanks of the mountains where the valleys debouch on the lowlands, moraines and morainal lakes are common features. (5) Beyond the limits of the definite morainal deposits erratic bowlders are strewn over the surface up to elevations of 1,000 feet. These bowlders are provisionally attributed to the action of floating ice.

The explorations since 1900 have added only cumulative evidence as to the truth of the above statements, but much detailed information regarding the extent and character of the glacial phenomena has been obtained. The glaciers of the Kigluaik Mountain area were the most active and extensive. Practically every valley is glaciated and has the characteristic U shape, though in the floors of some of them V-shaped canyons have been cut by streams since the glaciers disappeared. Glacial moraines extend to the surrounding lowlands on all sides of this mountain mass, but are most extensive on the south side, where there were at least two great piedmont glaciers. During the time of greatest glaciation the ice from many mountain gorges discharged into the upper Sinuk Valley, forming here an immense glacier of the piedmont type. Apparently this valley was filled to overflowing and tongues of ice were forced through two low passes into Stewart Valley, which was also filled to a depth of several hundred feet. The southern limit of the definitely morainic deposits of this glacier is in Sinuk Valley, a short distance below the mouth of Stewart River and about 4½ miles from the base of the mountains.

[a] Dall, W. H., Alaska and its resources, 1870, p. 462. Muir, John, Report of the cruise of the U. S. revenue steamer *Corwin* in the Arctic, 1881, pp. 133–145. Dawson, G. M., Geological notes on some of the coasts and islands of Bering Sea and vicinity: Bull. Geol. Soc. America, vol. 5, 1894, pp. 117–146. Stanley-Brown, J., Geology of the Pribilof Islands: Bull. Geol. Soc. America, vol. 3, 1892, pp. 496–500. Nordenskiold, A. E., The voyage of the *Vega*, New York ed., 1882, pp. 569, 583–585. Gilbert, G. K., Glaciers and glaciation: Harriman Alaska Expedition, vol. 3, 1904, pp. 186–194.

Definite moraines have not been recognized as such in Nome Valley, which heads in the Kigluaik Mountains and leads directly southward, but the valley of Salmon Lake is known to have been occupied by a great ice mass, from which a glacial tongue extended southward across the divide into Eldorado Valley, the extreme moraine being about 5 miles south of the base of the mountains.

In the Bendeleben Mountains glaciation was not nearly so active as in the Kigluaik Range. Though practically all the valleys are glaciated and many cirques and U-shaped gorges are to be seen, the fringe of moraines, which is so pronounced around the Kigluaik Mountains, seems to be wanting in this range.

In the lower mountain areas the evidences of glaciation consist only of U-shaped valleys, some of which contain small moraines. Only very local and small glaciers are indicated. In many places the snow which accumulates to great depths in gulches on hillsides, even at comparatively low elevations, remains until late in the summer. While melting these snowdrifts often move after the manner of real glaciers, and when they have disappeared disclose paved beds which resemble small glacial cirques. In the absence of morainic deposits, therefore, it is difficult to distinguish small glacial valleys formed by perennial glaciers now extinct from those which may be due to local annual glaciers still in operation. It is evident that a climatic change producing a slight increase in the precipitation of snow might be sufficient to convert these annual glaciers into perennial ones and to restore to life the glaciers of the Kigluaik and Bendeleben mountains.

Since 1903 accurate topographic maps, on a large scale, covering a considerable area north of Nome, have been prepared.[a] This area includes several of the typical valleys, both in glaciated and nonglaciated regions, and affords a basis for their comparison. From these maps it will be seen that, except in their greater depth, the cross sections of the glaciated valleys do not differ materially in character from those of some that are nonglaciated. In the writer's opinion processes of erosion now operating in Alaska are competent to produce valleys of this type. Moreover, beyond the limits of the glacial moraines shown on the geologic map the valley floors are covered with alluvium and the slopes with residual detritus through which pinnacles of bed rock outcrop here and there. If these valleys ever contained glaciers, it was at such a remote period that all definite surficial evidences have been destroyed by subsequent erosion.

The deposits of glacial origin which are of sufficient extent to be noted on the geologic map are of two distinct types—the moraines and the extramorainic bowlder beds. They are all confined to the comparatively low areas fringing the Kigluaik Mountains. Although

on the geologic map they are not differentiated from other Quaternary deposits, their extreme limits are shown approximately by broken lines. The limits of the moraine north of these mountains have not been determined, though such deposits are known to extend out for some distance on the Imuruk lowland and to lie little, if any, above sea level. On the southeast, south, and west sides of the Kigluaik Mountains the limits of the moraine have been fairly well determined. East of the range the moraines from Big and Crater creeks reach the left bank of Kruzgamepa River. The moraine from Grand Central River and Fox Creek fills the whole upper valley of the Kruzgamepa and extends southward to the head of Eldorado River. The glaciers from the gorges north of the Sinuk Valley filled the Sinuk and Stewart valleys as far down as the mouth of Stewart River. A phase of this invasion was the blocking of Sinuk River below Windy Creek, forming a lake in the Sinuk Valley that persisted long enough to permit the cutting of beach terraces. The glaciers west of Glacial Lake have left little evidence of their existence in the form of moraines, though some of them must have extended a considerable distance from the mountains.

The extramorainic bowlders and bowlder beds, so far as known, are confined to the region south of the Kigluaik Mountains. They consist of more or less angular bowlders of granite, gneiss, and biotite schist derived from the Kigluaik group and are scattered over the surface on hillsides and plateaus up to an elevation of 1,000 feet. The heaviest deposits of such material occur on the plateau between Sinuk and Feather rivers, where they extend to the headwaters of Fairview and Independence creeks, both of which streams are filled with pebbles derived from them. Similar deposits occur to an elevation of 800 feet along Cripple River, where, though they form some definite bowlder beds, they are represented mainly by scattered erratics lying on the surface. East of Cripple River no extensive bowlder beds of this kind have been noted, though erratic bowlders strewn here and there over the surface up to an elevation of 800 feet occur as far east as Osborne Creek. One bowlder of this kind was found lying in a limestone outcrop in the divide between Kruzgamepa River and Iron Creek at an elevation of 800 feet. West of the Kigluaik Mountains the extramorainic drift extends to the basin of Gold Run, but no bowlders or pebbles of this kind occur in Bluestone River above the forks.

The following hypotheses regarding the transportation and distribution of these bowlders suggest themselves: (1) They may have been washed down from the mountains by the rivers and streams of an older drainage system belonging to an earlier physiographic cycle. (2) They may represent an earlier stage of the Kigluaik glaciers

than that shown by the moraines, in which they extended from the mountains to the shores of Bering Sea. (3) They may have been transported from the mountain front by ice floes or bergs in estuaries, produced by the subsidence of the land surface.

That bowlders may be carried for long distances by rivers and streams is evident. This is especially true in a region like Alaska, where at the breaking of spring the streams are filled with floating ice. A good example of granite bowlders transported in this way may be seen in Ophir Creek, which is not glaciated, but contains granite pebbles and bowlders, from outcrops near its source, distributed through its whole length. All the streams of the Nome region that head in the glaciated area contain granite pebbles that have been washed down in this way. Although it is possible, therefore, that some of the extramorainic bowlders reached their present position by river and stream action, their distribution as bowlder beds over flat hilltops and the occurrence of scattered erratics render this hypothesis in the main untenable.

In regard to the second hypothesis, it may be said that although some of the bowlder beds near Sinuk and Cripple rivers resemble glacial moraines, the region between them and the glacial center is apparently unglaciated. Some angular crags remain which could not have withstood an advancing ice sheet. Many of the bowlders also occur as solitary erratics overlying residuary soil.

The occurrence and distribution of these bowlders is best accounted for by the third hypothesis, which is that during a part of the glacial period, and presumably an early part, a subsidence of the region south of the mountains occurred and estuaries from the sea extended inland to the ice front. Over these waters the bowlders were floated by icebergs and floes. The maximum amount of subsidence required to produce this effect would be 1,100 feet in the Sinuk Valley. This hypothesis requires that the area of maximum subsidence must have been local and coextensive with the distribution of erratic bowlders. It will be seen from the topographic map (Pl. VIII, in pocket), however, that the average upland levels of the bowlder-strewn area are considerably lower than those of the remainder of the southern half of the peninsula, and hence a general subsidence of the southern part of the peninsula might be competent to account for this distribution. No elevated beach lines or other indications of such a system of estuaries, except the erratic bowlders, have been recognized. Since many of these erratics lie upon or near the surface of the mantle of residuary and waterworn waste on the uplands and near the surface of the coastal-plain gravels, it seems probable that they were carried to their present resting places after most of these deposits were

affect materially the distribution of ocean currents, it would doubtless also have produced climatic changes of great importance, and the inauguration of the glacial epoch just described is tentatively assigned to this cause.

IGNEOUS ROCKS.

INTRODUCTION.

Igneous rocks are widely distributed in the peninsula. Though they present considerable variety both in composition and in the degree of metamorphism which they have suffered, they fall readily into three groups, two of which, the greenstones and basalts, are basic, the third being acidic. The type rocks of each group are distinct and can be readily recognized, but in some localities intermediate phases occur whose relations can be determined only by more refined petrographic and stratigraphic investigation than has yet been undertaken.

GREENSTONES.

The most widely distributed igneous rocks of the region are some granular intrusives which are characterized by a dark-green color, and which, though they exhibit many varying phases, are most conveniently grouped under the field name greenstones. Without exception these rocks are more or less altered and are composed of secondary minerals, many of which are due to dynamic as well as to metasomatic influences. Though usually massive, in many localities they present schistose phases, so that in extreme cases it is impossible to distinguish them from schists of sedimentary origin. The investigations that have been made show that the rocks from which the greenstones were derived, although generally of a basic character, were of considerable variety. It has not yet seemed feasible to attempt to subdivide the group, but the following notes regarding some of the more definite types in the various regions will give an idea as to what it includes.

A dike of greenstone in a dynamically almost unaltered condition occurs at Cape Douglas. Under the microscope the rock appears to be composed mainly of pale amber augite and feldspar, a part of which is included in the augite. The augite is changed to light-colored hornblende only around the margins, but the feldspar is too much decomposed to determine its character. There are also large grains of ilmenite bordered by leucoxene and some patches of isotropic serpentinous matter. In the region northeast of Cape Douglas there are many bodies of greenstone that show a somewhat similar general texture, but present various degrees of alteration from the original type. The pyroxene is usually changed to hornblende and chlorite, and garnet, epidote, zoisite, calcite, and quartz are common constitu-

ents. B. K. Emerson, who with the Harriman expedition touched on the east shore of Port Clarence, has described the igneous rocks found in this region as amphibolites derived from eruptive pyroxenites.[a]

West of the York Mountains there are some coarsely granular greenstones which are only slightly more altered than that from Cape Douglas, which they resemble, but in these rocks the feldspar is somewhat in excess of the pyroxene, and the rocks were probably gabbros.

Along Fox River, about 10 miles south of Council, there are several dikes of greenstone that under the microscope are found to be slightly altered diabase. They consist of labradorite and olivine phenocrysts in a groundmass of plagioclase, augite, and biotite.

Some greenstone masses which appeared to be slightly altered tuffs were found in the divide between Fox and Solomon rivers.

In nearly all places where the greenstone exists in comparatively unaltered condition, transitional phases to the more typical greenstone composed wholly of secondary minerals were found. The greenstone masses occur most commonly in the form of sills and dikes, though a few of them appear to be necks or stocks, and it is probable that some surface flows may be included among the more altered portions.

In a few places contact-metamorphic minerals have been developed around the margins of the intrusive bodies. On Newton Peak a veinlike deposit of chlorite and albite was observed in the contact of a greenstone mass with the schist. On the upper Casadepaga the limestone surrounding a greenstone mass is marmorized and contains brown hornblende phenocrysts. At the contact of a greenstone sill with the limestone on Tisuk Creek albite occurs in the limestone and tourmaline needles in the greenstone. The contact of a greenstone dike with schist on the upper Kougarok contains tourmaline in radiating groups of crystals and a pale-blue hornblende which has not been determined. The deep-blue hornblende glaucophane has been found in many of the greenstone masses.

In its schistose phases the greenstone seems to be composed entirely of secondary minerals, the most common being hornblende, chlorite, epidote, zoisite, garnet, secondary feldspar, sericite, quartz, and calcite. Some chlorite-epidote schists that are widely distributed in small masses seem to represent extreme metamorphism of the greenstones and it is probable that many of the green schists made up of quartz and chlorite that have not been differentiated from the metamorphosed sediments may also be altered greenstones.

It will be seen from the geologic map that the greenstone intrusions occur in the undifferentiated schists of the Nome group, in the

which are believed to be of pre-Carboniferous age. They have not been recognized in the Kigluaik group nor in the limestones exposed near Palazruk.

As many of the greenstone masses present schistose phases, it is evident that some and possibly the greater part of them were intruded before metamorphism of the Nome group. In some respects these greenstones resemble the extensive greenstone masses of the Devonian Rampart formation of the Yukon basin. The Rampart greenstones, however, are mainly surface flows and are interbedded with tuffs, limestones, and various other sediments.[a] They indicate that in parts of Alaska during Devonian time there was an enormous amount of volcanic activity, which probably continued into the early Carboniferous. If this volcanic disturbance extended northwestward as far as Seward Peninsula it was probably sufficient to account for the greenstone intrusives in the metamorphic series there. These intrusions evidently must have occurred after the close of the Silurian and most of them while the Silurian rocks were deeply buried.

BASALTS.

A second group of basic rocks is composed of unaltered basalts, which occur at many places in the northern and eastern parts of the peninsula. Typically they are dark-gray or nearly black lavas, usually very cellular or even spongy in appearance, but in some places compact and without amygdaloidal cavities. They are diabases and basalts, both rich in olivine. In the basalts especially olivine phenocrysts are abundant and are noticeable even in the hand specimen. Rocks of this type find their greatest development in the Fairhaven precinct, where Moffit[b] reports that there has been a succession of outbreaks of lava occurring through a considerable period of time. In the region about the head of Kuzitrin River the most recent outpouring of liquid rock occurred at no very distant date, for the ropy surface and irregular margin are still preserved. Caverns or tunnels produced by the cooling of the surface and the continued flow of the still liquid rock beneath are numerous. Flattened lenticular steam cavities 2 or 3 feet in diameter are exposed in some places and the upper surface of the sheet is marked here and there by smooth irregular elevations produced by the escape of steam and the welling up of the lava from below.

On Noxapaga River the writer found these later lavas overlying Pleistocene or late Pliocene gravels that were indurated near the

[a] Spurr, J. E., Geology of the Yukon gold district: Eighteenth Ann. Rept. U. S. Geol. Survey, pt. 3, 1898, p. 161. Collier, A. J., Coal resources of the Yukon: Bull. U. S. Geol. Survey No. 218, 1903, p. 15.

[b] Moffit, F. H., The Fairhaven gold placers, Seward Peninsula, Alaska: Bull. U. S. Geol. Survey No. 247, 1905, pp. 31–35.

contact and contain rounded pebbles of basalt derived from an older flow.[a] Along Koyuk and Tubutulik rivers Mendenhall[b] reports the occurrence of several masses of basalt of similar character. On the upper Koyuk the lava has a relation to the unconsolidated gravels similar to that seen by the writer on the Noxapaga. This is probably an outlying portion of the large lava field mapped by Moffit.

Basalts occur in small flows and volcanic necks at a number of localities north of Port Clarence and Grantley Habor. Mukacharni Mountain, the two small buttes to the east of this mountain, a small area on the east side of California River, and a small hill about 2 miles east of the forks of Don River are composed of unaltered basalts that exhibit both compact and vesicular phases and vary in color from gray to black. The vesicles are unfilled and are often confused in weathered specimens with the cavities left by olivine phenocrysts.

Mukacharni Mountain, the two buttes to the east of it, and the small hill to the east of Tozier Creek are volcanic necks cutting the schists and slates. The basalt areas west of Mukacharni Mountain and east of California River are remnants of surface flows or possibly sills which were erupted at the same time as the necks. The amount of erosion since these eruptions indicates that most of them are pre-Pleistocene in age, only the more recent occurring during the Pleistocene. The age of the older flows of the Fairhaven country and of the necks and flows north of Grantley Harbor, however, has not been satisfactorily determined. Moffit[c] states that the lowest possible age limit for the earlier lavas of the Fairhaven district is fixed by the coal-bearing formation of that district, which may be either Tertiary or Upper Cretaceous.

There are no criteria for age determination of the basalts north of Grantley Harbor except the amount of erosion which they have suffered. They antedate the formation of the Kougarok plateau, which is certainly older than most of the Pleistocene sediments. The lava flows of the lower Yukon and St. Michael Island, a region which lies about 100 miles southeast of Seward Peninsula, began, according to Spurr,[d] in the late Miocene and continued until the early Pleistocene. They are represented in part by dikes which cut Upper Cretaceous rocks, and as some of the eruptive masses were reduced to the base level of the Yukon plateau it is evident that the eruptions may have begun before the end of the Cretaceous.

[a] Reconnaissances in the northwestern portion of Seward Peninsula, Alaska, in 1900: Prof. Paper U. S. Geol. Survey No. 2, 1902, p. 31.

[b] Mendenhall, W. C., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 206.

[c] Moffit, F. H., The Fairhaven gold placers, Seward Peninsula, Alaska: Bull. U. S. Geol. Survey No. 247, 1905, p. 34.

St. Lawrence Island, which lies about 100 miles southwest of Seward Peninsula, is in part made up of tuffs and lavas that do not seem to be older than Pleistocene. In the central part of the island there are numerous volcanic cones that have suffered little erosion. On an extensive lava bed examined by the writer the original surface of the flow is still preserved in many places, presenting features similar to those of the most recent flow in the Kuzitrin basin. That volcanic activity began here prior to the Kenai (Eocene ?), however, is indicated by pebbles of lava contained in a conglomerate of that formation. If we assume that the lavas of St. Lawrence Island, Seward Peninsula, and the lower Yukon belong to the same period of eruption, the inference may be justified that the lavas and basalts of Seward Peninsula represent a series of eruptions which commenced in the early Eocene and continued into the Pleistocene.

None of the basalts or diabases included in this group have been affected by dynamic metamorphism and although in a few places they occur in the neigborhood of greenstone masses they are readily distinguished from the greenstones without the aid of the microscope. In the southern part of the peninsula, however, some small dikes of igneous rock have been found that greatly resemble the basalts but seem to present transitional phases to the typical greenstone. The diabase dikes of Fox River described on page 237 are of this character. Some basaltic bowlders which may belong either to the basalt or the greenstone group were found on Independence Creek, a tributary of Sinuk River, but they were not traced to their source in the bed rock.

GRANITIC ROCKS.

The siliceous igneous rocks of the peninsula are grouped together under "Granitic rocks," though many of them vary from typical granite both in texture and composition. The larger masses in the region examined by the writer are generally normal granites, but the smaller masses, some of which may be apophyses from the larger ones, present various pegmatitic and rhyolitic phases. The granites of the Kigluaik and Bendeleben mountains form a network of intricate intrusions in the rocks of the Kigluaik group and were probably intruded at intervals during a rather extended period. Some of these intrusions that were probably the earlier ones are gneissoid and cannot in all cases be distinguished from gneisses and biotite schists that are almost certainly altered sediments. Generally the gneisses occur as sills interbedded with the schists and limestones. The larger granite bodies, which occur in the heart of the range, are generally massive, but many of them are slightly gneissoid and cut by later intrusions that are massive. In the flanks of the ranges there are numerous sills and dikes of coarse-grained pegmatite. Several peg-

matite sills of this character along Kuzitrin River were staked as quartz veins by the prospectors who went with the first rush to the Kougarok.

The granite in its massive phase is coarsely crystalline and consists essentially of quartz, orthoclase, and biotite, with plagioclase as an important accessory mineral. The gneissoid granites are similar in composition except that they contain a somewhat larger percentage of plagioclase. Their gneissoid structure is either original or due to entire recrystallization of the minerals, as the microscopic examinations afford little if any evidence of distortion or dynamic movement. The quartz and feldspar individuals are elongated without being crushed and the biotite plates are not deformed. The pegmatite phases, which seem to occur more commonly around the margins of the mountain areas, consist of quartz, orthoclase in large crystals reaching several inches in diameter, and muscovite, with biotite in smaller amounts if present. Tourmaline was observed as an important accessory mineral in one of the pegmatite sills near Kuzitrin River.

Batholiths of the character indicated by these observations regarding the granites of the Kigluaik and Bendeleben mountains would doubtless be competent to produce schists of the Kigluaik type from rocks that in neighboring localities might resemble the schists of the Nome group.[a] For this reason the detailed geologic survey of a portion of the Nome district that was commenced during the summer of 1905 may be expected to yield some important scientific results.

The granite masses that occur in the region north of the Kigluaik Mountains differ considerably in type from those just described. In general they are intruded bosses, few of which present gneissoid phases, but many of them are surrounded by a fringe of apophyses that differ from the central mass mainly in texture. Most commonly these offshoots are porphyritic dikes. The distribution of the granite masses of this type is of economic importance, as tin-bearing lodes occur rather commonly near their contact with the surrounding rocks. A typical granitic intrusion of this sort is found at Cape Mountain.[b] The large granite mass which composes this mountain is intruded through the Carboniferous limestone exposed near Palazruk. Around the margins some large masses of limestone are included in the granite, and many offshoots or apophyses from the main mass extend into the limestone. The largest of these differ only slightly from the granite of the main mass, while the smallest are apt to be aplitic. In the main granite mass there are some ill-defined veins of aplite (a granite rock containing none of the darker minerals) which have not

yet been studied in detail. No gneissoid phases are exhibited, but a platy or sheet structure appears in many weathered outcrops. The granite of Cape Mountain is coarsely crystalline and somewhat porphyritic. It consists essentially of quartz, microcline, and biotite, but locally contains as accessory minerals albite, muscovite, apatite, tourmaline, pyrite, fluorite, and cassiterite. Lodes containing cassiterite in appreciable quantities occur on the mountain.

A smaller granite mass which is lithologically similar to that at Cape Mountain occurs in the Port Clarence limestone on Tin Creek, a tributary of Lost River. In this vicinity the limestone is cut by a number of porphyritic dikes that are probably connected with this or similar masses that are deeply buried beneath the limestone. One of these dikes has been studied in some detail, as it is intimately associated with a tin lode of economic value. Microscopic examination shows that the rock was originally a rhyolite or quartz porphyry containing quartz and feldspar phenocrysts in a finely crystalline groundmass. In its present condition, however, the phenocrysts and much of the groundmass are replaced by fluorite. Southwest of this locality there are several somewhat basic dikes that have been placed in the granitic group for the reason that what seem to be transitional phases between them and the typical granite porphyries have been found.

At Brooks Mountain, near the head of Lost River, occur granite masses and dikes, but their field relations have not been determined. The same is true of a mountain east of the forks of Don River, where granite porphyry dikes cut the slates on the periphery, and massive granite bowlders occur on the mountain slopes, but have not been traced to their source in the bed rock.

Ear Mountain is a granite boss of a type similar to Cape Mountain. The massive granite shows the same platy structure in weathered outcrops and the main body of granite is surrounded by a fringe of porphyritic dikes. The granites of Ear Mountain consist essentially of quartz, orthoclase, and biotite. A smaller body of pegmatite-granite is made up of quartz, orthoclase, and plagioclase, and a small dike in the same region consists essentially of quartz and orthoclase phenocrysts in a groundmass of quartz and feldspar, with muscovite, largely secondary, and a secondary growth of feldspar surrounding the larger orthoclase phenocrysts.

On the north side of the mountain several dikes have been extensively staked as tin veins. Apparently these rocks were originally rhyolite or quartz porphyry, but in thin sections they show considerable alteration. In one specimen the porphyritic texture of the rhyolite remains, but the minerals, especially the feldspar phenocrysts, are partly replaced by tourmaline and pyrrhotite, or magnetic pyrites. In another section the original texture is completely obliterated and

the rock consists essentially of tourmaline in radiating groups of crystals surrounded by a groundmass made up principally of calcite with some quartz. These rocks, when carefully analyzed, were found to contain traces of tin, but no cassiterite was recognized in the thin sections. Specimens of tin ore that have been obtained at Ear Mountain indicate that, as at Cape Mountain, tin-bearing lodes are associated with the granite intrusives. Some rhyolite dikes that occur at several localities remote from any large granite mass, and some cassiterite veins in the slates of the York region probably indicate the presence of deep-seated granite magmas that have not yet been uncovered by erosion.

The granite from the large area near Midnight Mountain has not been examined microscopically, but seems to be of the same general type as that at Ear Mountain. The outcrops as a rule exhibit the platy structure noted in those localities. No fringing porphyritic dikes or contact minerals have been observed.

The granite masses in the eastern part of the peninsula, most of which lie outside the special area covered in this report, have been described by Mendenhall[a] and Moffit,[b] who investigated the geology of the Norton Bay region and of the Fairhaven district, respectively. These granites, which are confined to a belt extending northward from Norton Bay to Kotzebue Sound, seem to be of a distinct lithologic type from those described by the writer. Though in general appearance they resemble normal granites, they exhibit as a rule a dioritic phase that distinguishes them from the granites of the western part of the peninsula. According to Mendenhall, a broad belt of country, with a maximum width of about 12 miles, extending 55 miles northward from Cape Darby, in the Norton Bay region, is occupied by a great intrusive body of granite and granitoid rock that exhibits considerable variation in texture and mineralogical composition, but is regarded as belonging to one geologic body. At the south end of this belt the type rock is a diorite porphyry with large tabular phenocrysts of andesine or andesine-oligoclase, some colorless pyroxene, and abundant hornblende, in part, at least, secondary. Quartz is present but locally in very inconsiderable amounts, and titanite is a conspicuous accessory. Near the east edge of the northern part of the area the rock appears as a coarsely crystalline aggregate of pale-brownish orthoclase and smoky quartz, with a little biotite. A gneissoid phase of the same rock appears along the west side of its northern border.

A broad belt of schistose rocks and alluvium separates the granite mass of Cape Darby from the biotite-granite mass of the Bendeleben

Mountains, which lies to the northwest. The intrusive nature of the granite of Cape Darby is indicated by masses of schist and limestone caught up in the intruding magma and by dikes from the granitic mass cutting the surrounding schists.

Moffit[a] reports that in the eastern part of the Fairhaven district the siliceous igneous rocks form a group comprising granites, quartz diorites, and intermediate forms that may be properly classed with the monzonites. These rocks find their greatest development in a high ridge that lies between Buckland and Kiwalik rivers and extends from Eschscholtz Bay southward to Koyuk River, forming the boundary between Seward Peninsula and the mainland. The granites form the core of this ridge and outcrop in a series of disconnected areas surrounded by andesites of later age. Hornblende is the prevailing dark mineral of the granites, but here and there biotite takes its place. By a decrease in the amount of quartz the granites approach syenites in composition, such phases being characterized by the abundance and large size of orthoclase crystals.

From a consideration of the above-stated facts it will be seen that the larger granite masses of Seward Peninsula fall into three groups according to the nature of their occurrence, their effects on the intruded rocks, and their lithology. They are all of intrusive origin, but the masses of the Kigluaik and Bendeleben mountains are batholiths formed at great depth in the earth's crust within the zone of flowage. The masses north of the Kigluaik uplift represent intrusions in a zone nearer the surface which has been called the zone of fracture, and the dioritic masses in the eastern part of the peninsula seem to be of intermediate character. In their lithology the rocks of the Kigluaik uplift resemble those of the northern part of the peninsula, the distinguishing features being abundant gneissoid phases in the former and porphyritic phases and surrounding dikes of rhyolite in the latter. The northern granite masses are further characterized by such accessory minerals as fluorite, cassiterite, and tourmaline in their peripheral portions.

There is no direct evidence in regard to the relative ages of these intrusions. Those of the Kigluaik region may have been and probably were intruded at intervals through a long period of time, as granites of several ages can be recognized. The same thing may be true of the other granite masses, though the evidence for it does not seem to be so clear. The granite mass of Cape Mountain, which is regarded as typical of the granites north of the Kigluaik Range, is intruded in Mississippian rocks and is therefore certainly younger than that horizon. Moffit[b] reports that the granites of the Fair-

[a] Moffit, F. H., The Fairhaven gold placers, Seward Peninsula, Alaska: Bull. U. S. Geol. Survey No. 247, 1905, pp. 27–30.

[b] Op. cit., p. 30.

haven district are evidently older than the coal-bearing beds overlying the schists, which, as has been shown, may be of late Mesozoic age. Mendenhall[a] also states that the period of intrusion seems older than that of the coal-bearing sediments. Neither of these writers has presented more definite evidence for this conclusion than the fact that the granites present gneissoid phases whereas the sediments are unaltered. The rocks have not been found in contact, nor have granite pebbles been found in the sediments.

The coal-bearing sediments examined by the writer in the Sinuk basin have been sheared and folded with the surrounding schists, but contain no pebbles of granite, though such pebbles are the main constituents of the Pleistocene deposits that overlie them.

The unaltered sediments of the Fairhaven district have the same north-south strike and high dips that are common in the highly metamorphic rocks, and those of the Norton Bay region are also highly folded, with approximately north-south strikes. If, as Moffit suggests, this structure was produced at the time of the granite intrusions, the sediments would seem to be older than the granite. A similar inference may be drawn from the unaltered sediments of the Sinuk basin, which are highly folded and strike parallel with the beds in the front of the Kigluaik Range.

In view of these facts any conclusion regarding the relative ages of the granites and the unaltered sediments seems hazardous. The granitic intrusions may have continued into the Tertiary, though they are certainly older than Pleistocene. If we assume that all the granitic rocks of the peninsula belong approximately to the same period of intrusion, which seems reasonable, then it may be stated that these intrusions occurred between the early Carboniferous and the end of the Tertiary. The larger granitic masses of the Alaska Range and the Pacific seaboard, whose age has been determined, were intruded during the latter part of Mesozoic time, and some of the intrusive granitic masses of the Kuskokwim Valley have been assigned to the early Tertiary.[b] On the assumption that the disturbance attendant on the intrusion of the granite masses of southern Alaska extended to Seward Peninsula also, the conclusion is reached that these masses were most probably intruded in late Mesozoic or early Tertiary time.

QUARTZ VEINS.

Veins of quartz and calcite occur in the metamorphic rocks of nearly all parts of the peninsula, but most abundantly in the schists of the Nome group near the localities rich in placer gold. Most of

these veins are small lenticular masses whose longer axes are parallel with the foliation. Here and there occur larger masses of the same type, which may be called "blanket veins." A few of these lenses and blanket veins are known to be connected with approximately vertical fissures and zones of fracture, from which they seem to be offshoots.

Larger veins filling fissures that cut across the foliation and bedding have been found in a number of localities, and some of these are of economic value. (See pp. 228–232.) So far as observed, however, all the veins in the vicinity of the gold placers are irregular, and even those of considerable size are apt within a short distance to divide up into many veinlets and stringers which can not be mined profitably. As a rule these veins do not follow any discoverable system. They are disseminated in an intricate network through the metamorphic rocks and are very abundant in certain areas that may be best described as zones or belts of mineralization. Some of these veins were formed previous to the development of the schistosity and are sheared with the inclosing rock. A few of them can be shown to belong to different periods of intrusion, as veins of quartz cutting veins of calcite, or vice versa, have been observed.

In the rich placer regions nearly all the veins have been found to carry traces of gold, and some of them contain rich ore. In places the gold is free, though it is more commonly associated with sulphide minerals. Occasionally veins of white quartz have been discovered in which a little free gold may be seen near one of the walls, though the mass of the rock contains no trace of any.

Quartz veins containing cassiterite as well as traces of gold occur in the western extremity of the peninsula,[a] and silver-lead deposits have also been discovered in several localities, the best known being at the Omalik mine, on the upper Fish River.[b]

As a general rule no causal connection between the quartz veins and the greenstone intrusives that are so common in the rocks of the Nome group can be demonstrated, and though greenstones are nearly everywhere present in the bed rock where there is placer gold and are in many places cut by quartz veins, they can not be regarded as indications of the presence of gold. The cassiterite-bearing veins of the western part of the peninsula, however, have been shown with a reasonable degree of certainty to be due to emanations from intrusive masses of granite and kindred rocks of an acidic nature. In the same region some lead-silver deposits have been found intimately associated with acidic dikes. Gold in small quantities is known to be associated

[a] Collier, A. J., Tin deposits of the York region, Alaska: Bull. U. S. Geol. Survey No. 225, 1904, pp. 154–167.

[b] Mendenhall, W. C., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 213–214.

with the cassiterite and to occur in the same veins, and as cassiterite in small amounts has been found associated with the placer gold at many widely scattered localities it is not unreasonable to expect that the influences producing the cassiterite veins have extended over a considerable part of the peninsula. Although, as stated above, some of these veins were probably formed before the metamorphism of the Nome group occurred, the majority of them were intruded at some later period. There is reason to believe that the tin-bearing veins were deposited during the period of granite intrusion. The rocks of the whole peninsula were greatly disturbed at that time and the more deeply seated ones were intensely altered. It is therefore the writer's belief that most of the unsheared quartz veins were formed during the intrusion of the granites and are traceable either directly or indirectly to the same influence.

OUTLINE OF ECONOMIC GEOLOGY.

By Alfred H. Brooks.

GENERAL STATEMENT.

Though the general features of gold placers are so simple as to require no searching analysis, yet but few studies of even the more prominent characteristics have been made and there are many obscurities in regard to the occurrence, origin, and distribution of alluvial gold. This field of applied geology has been somewhat neglected, probably in the main because the data needed for the investigations must be gleaned during the mining operations or they are lost forever. It is therefore only in exceptional cases that the facts bearing on the occurrence of alluvial gold have been available to the geologist.

It is proposed here to discuss the gold placers of Seward Peninsula in their larger relations, and thus to present an introduction to the detailed descriptions by Mr. Collier and Mr. Hess which follow. Attempt will be made to formulate the laws governing the occurrence and origin of the alluvial gold, so far as the data at hand will permit. In the preceding pages Mr. Collier has presented in some detail the geography and geology of the peninsula, but brief comments will be made on those features that bear directly on the geology of placers.

A study of the maps (Pls. VIII and IX, in pocket) shows that this is essentially a region of mature topography, for with the exception of a few rugged mountain masses, the region is characterized by broad valleys and flat-topped interstream areas. As a rule the valleys have broad floors with gently sloping walls, but there are a few sharply incised canyons. The rock valley floors are usually gravel covered, and bed rock is exposed only in the smaller gulches. In most places the seaward bases of the uplands are buried in extensive gravel sheets that form coastal plains and are made up of elevated fluvial deposits. Near the sea many of these deposits break off in escarpments. The gravel plains mark former epochs of

deposition, and evidences of periods of erosion and sedimentation are to be found in the many well-marked terraces which occur up to altitudes of 600 feet. Less well preserved benches occur here and there at still higher altitudes,[a] but most of the topographic evidence of such older epochs of erosion has been effaced. An exception must be made, however, of the erosion that produced the highest surface. This appears to have beveled the rocks of much the larger part of the peninsula, and evidence of the base-level thus formed is still preserved in a general accordance of summit levels of the interstream areas, a very noticeable topographic feature throughout the province.

All through the peninsula there is evidence of deep rock decay, for nearly everywhere, except in the higher mountain masses where there has been some recent glaciation, a heavy residual soil mantles the hills. The valley slopes are in general deeply buried in talus, and outcrops are abundant only along the crest lines of the ridges. This residual mantle is due to (1) absence of glaciation, (2) long stability of the land relative to sea level, and (3) slowness of erosion because of the thick mat of vegetation that covers the surface.

The data now at hand point to the following succession of events in post-Eocene time. (1) A long period of erosion which reduced much of the peninsula to a peneplain.[b] During this base-leveling, or subsequently, the rock surface became deeply weathered. (2) Uplift succeeded base-leveling and was probably of an intermittent character. With elevation erosion was revived. The sum of movement was upward, yet the elevations appear to have been interrupted by periods of depression. The succession of uplifts is recorded in the benches now found at various altitudes. When the high terraces near Nome were formed, the land mass must have remained stable sufficiently long to permit an extensive drainage system to be developed. Collier[c] has pointed out that at some later stages local base-levels were developed, but these do not appear to be recorded throughout the peninsula. The last extensive period of erosion is represented by the extensive gravel deposits found in the coastal plains and the interior basins. Later these gravels were elevated and dissected, and then the present creek deposits were laid down.

The physiographic conditions above outlined were favorable to the formation of placers, for the deep rock decay set free the gold in the bed rock and the various epochs of erosion and deposition brought about a concentration of the heavier materials in the gravels.

[a] These features have been fully discussed in Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 48–64.

[b] The age of this peneplain has not been determined, but it is probably the same

Furthermore, dissection of the older alluvial deposits, brought about by uplifts, resulted in a reconcentration of the gold, and thus some of the richest placers were formed.

Mr. Collier (pp. 65–83) has shown that the bed rock is chiefly metamorphic, and that it has been subjected to stresses producing folding, faulting, and jointing. He also notes that intrusives are plentiful and that stringers and veins of quartz, locally metalliferous, are not uncommon.

Though a number of stratigraphic units are recognized on the map, only the two oldest, the Kigluaik group and the Nome group, need here be considered, for they form the country rock practically throughout the placer districts. The Kigluaik falls into three subdivisions—a basal biotite gneiss, a middle member of heavily bedded limestone, and a younger member made up chiefly of biotite schists and thin limestones. The rocks are folded and faulted and carry some quartz veins, but these have not so far been found to be much mineralized. The Nome group includes a great thickness of quartz and calcite schists, greenstones, and greenstone schists, together with a massive limestone member which has been called the Port Clarence and which carries Silurian fossils. Schists occur both above and below the limestone. The placer gold thus far found has been chiefly associated with rocks belonging to the Nome group, which have a wide distribution throughout the peninsula. The schists of this terrane are locally much fractured and seamed with quartz and calcite stringers, and some of them carry larger veins in which metallic minerals are not uncommon. Igneous rocks have a wide distribution in the peninsula, the dominant types being granites, in the form of dikes, sills and stocks, and greenstones, occurring as sills and dikes. Some of the acidic intrusives have been found to be mineralized. (See p. 120.)

Mr. Collier has discussed the structure (pp. 60–63), and it will be necessary here only to draw attention to certain larger features. Though in detail the structure is probably exceedingly complex, the geologic maps indicate that there are certain areas of uplift which are marked by the distribution of the limestone. (See Pls. X and XI, in pocket.) These suggest structural domes of great irregularity, probably modified by folding and faulting.[a] As shown on page 122, these uplifts may have causal connection with the distribution of the gold, for it appears that the rocks have been most intensely deformed

[a] This type of structure was discussed by the writer in the previous report (Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 36–37) and, though by no means proved by the later work, yet appears to find some support. Furthermore, indications of a similar type of structure were found by Moffit in the Fairhaven district. (See Bull. U. S. Geol. Survey No. 247, 1905.)

along the margins of these uplifts and that in such zones of movement the most extensive veining occurs.

GENESIS AND CLASSIFICATION OF PLACERS.

Three conditions are usually operative in the formation of placers (1) the occurrence of gold in bed rock to which erosion has access; (2) the separation of gold from bed rock by weathering or abrasion; (3) the transportation, sorting, and deposition of the auriferous material derived by erosion. It is self-evident that unless gold occurs in bed rock and then is separated from it no placers can be formed. The third agency, namely, transportation, sorting, and deposition, though it has been operative in most regions of extensive auriferous alluvium, is, nevertheless, not absolutely essential to the formation of placers. In many parts of Europe, in the southern Appalachians, and in the Tropics workable placers have been found which were formed solely by the weathering in place of the auriferous bed rock. Rickard[a] has described residual deposits of this kind in Australia, where a surface concentration of gold has been brought about through the agency of wind, the lighter material having been removed.

The distribution and origin of the gold in bed rock, involving as it does the study of ore deposits, though of first importance to the study of placers, can here be only briefly discussed. Of equal importance and more closely related to the genesis of placers is the consideration of the agencies leading to the separation of gold from the bed rock and its subsequent transportation, sorting, and deposition.

That the changes brought about by secular decay of bed rock play an important part in the genesis of placers is a fact that has hardly been fully enough recognized.[b] In the text-books emphasis has usually been laid on the two types, the residual placer and the transported or true placers, without full recognition of the fact that the former often represents an intermediate stage between the bed-rock source of the gold and the true placer. It appears to the writer that, as a rule, the primary concentration of the auriferous detritus brought about by rock weathering is a necessary stage in the formation of rich placers.[c] As shown on page 112 this really amounts to a recognition of the geographic cycle as an important factor in the genesis of placers.

[a] Rickard, T. A., The alluvial deposits of western Australia: Trans. Am. Inst. Min. Eng., vol. 27, 1898, pp. 490–537.

[b] H. L. Smyth has drawn attention to this feature of the formation of placers. See The origin and classification of placers: Eng. and Min. Jour., vol. 79, 1905, pp. 1045–1046, 1179–1180, 1228–1230.

[c] J. S. Diller has made a similar suggestion for the California placers. See Revolution in the topography of the Pacific coast since the auriferous gravels period: Jour.

The transportation, sorting, and deposition of material furnished by the weathering of rocks, the most easily understood of geologic phenomena, are all important agencies in placer formation. Uplift may revive the forces of erosion, and in this way these agencies may be repeatedly effective, resulting in reconcentration of the alluvial gold.

A logical classification of the placers should be based, first, on genesis; second, on form.[a] The primary grouping, according to origin, would be "residual placers," "sorted placers," and "re-sorted placers." The residual placers are those in which there has been no water transportation, the concentration of the gold being due solely to rock weathering. The gold of the sorted placers is the result of transportation, sorting, and deposition by water. Placers of the third group are those in which the gold has passed through two or more cycles of erosion before its final deposition. Those of the first class are practically all of one type. The sorted and re-sorted placers embrace many subordinate types, named according to the form of the occurrence. The following list presents the larger groups and the more important of the subordinate types:

1. Residual placers.
2. Sorted placers.
   - Hillside.
   - Creek and gulch.
   - River bar.
   - Gravel plain.
   - Bench.
   - High bench.
3. Re-sorted placers.
   - Creek and gulch.
   - Beach.
   - Elevated beach.

It is evident that in this, as in most other classifications, intermediate types are found which may belong to either one of two groups. Hillside placers, for example, are those that occur on hill slopes and do not occupy any well-defined channels. These, though usually water sorted to a certain extent, grade directly into deposits of a purely residual origin on the one hand and into stream or gulch deposits on the other. Again, creek and gulch placers occur both in material which has been sorted only once and in that which has passed through several cycles of erosion.

In the following pages an attempt will be made to trace the placer gold through the various stages, from its occurrence in the bed rock to its deposition in the reconcentrated placers.

[a] The subject of the classification of placers has been discussed in Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 144–150, where the same classification was suggested, though different names were applied.

GOLD IN BED ROCK.

INTRODUCTION.

The distribution of gold in the parent rock is of first importance to the mining industry; for it determines not only the occurrence of auriferous gravels, but also the possibility of lode mining. Unfortunately, the data at hand are entirely inadequate for a proper discussion of this important subject. Geologic research in Seward Peninsula has been of a reconnaissance character and only the larger features, with few details of the bed-rock structure and veining, have been determined. Detailed surveys of the Nome region proper have been begun by F. H. Moffit and F. L. Hess, but the results have not yet been worked up. The prospector, who might furnish additional facts, has assiduously devoted himself to the placers, which give promise of more immediate returns than the lodes.

Veins and impregnated zones are not uncommon in the placer districts; and though prospectors have not been backward in filing location notices, few excavations have been made and much of the search for auriferous quartz has been made by men either without experience or without capital. The Big Hurrah quartz mine (described by Mr. Collier on p. 228), one of the few examples of intelligently directed lode development, has attained a depth of 130 feet (1904). Elsewhere in the peninsula but few prospect shafts and tunnels have reached a depth of 20 feet (1904).

The search for lodes and the study of the bed-rock source of the gold are rendered difficult by the thick mat of vegetation which mantles much of the surface. A heavy talus covers the hill slopes, and the rock floors of the valleys are usually deeply buried in gravels. There is, therefore, relatively little opportunity to study the bed rock.

GROUPING OF DEPOSITS.

For this discussion a somewhat arbitrary subdivision of the ore bodies has been adopted, namely, (1) disseminated deposits and (2) concentrated deposits. In the first group falls all of the auriferous bed rock in which the gold does not occur along any well-marked individual fracture or zone of fracture, but is disseminated in larger rock masses. The second group embraces all the auriferous deposits which have been laid down along well-defined fractures or zones of fracture. All ore bodies having any prospective commercial value fall into the group of concentrated deposits, but it also embraces many in which the values are too low or too widely distributed to have any prospective value. It is evident that, as there is a gradation between

lodes of the York region and the galena deposits of the Fish River basin.

DISSEMINATED DEPOSITS.

In previous reports treating of the mineral resources of Seward Peninsula, emphasis has been laid on the fact that the gold was derived chiefly from disseminated deposits. The richness of the placers has been attributed rather to the erosion of extensive rock masses and subsequent concentration by repeated sorting than to the richness of the bed-rock deposits. Though this no doubt holds true for many deposits, yet the accumulation of more evidence both from placer-mining operations and from closer studies of the bed rock suggests a far greater concentration of gold in the bed rock than was at first supposed. However this may be, the wide distribution of gold in the metamorphic terranes is attested by the occurrence of colors in the gravels of almost every creek whose gravels have been derived from metamorphic rocks.

The disseminated deposits appear to occur only in rocks having a secondary structure that is sufficiently well developed to permit the circulation of the mineral-bearing solutions. In general, however, they can be defined as deposits formed by mineral solutions that followed zones of fracturing not sufficiently intensified or localized to afford well-defined channels of circulation. These belts of mineralization, for such they are, probably have more or less zonal arrangement, as is indicated by the distribution of the placers, and appear to follow the major structural features. Some of the deposits carry little or no gangue, the evidence of mineralization being limited to the presence of pyrites or their oxidation products, together with some gold. In others lenticular masses of quartz and, less commonly, calcite, following the planes of foliation and carrying metalliferous minerals, are found. These lenses are discontinuous aggregates of gangue minerals, and are usually less than an inch in width. Locally the quartz and calcite occur merely as blebs a few inches in diameter, with no apparent connection.

The York region appears to offer an example of the dissemination of gold in the bed rock and consequent absence of rich placers, in spite of the extensive erosion that has taken place. In the metamorphic slates of that region (see p. 79) blebs and stringer veins of auriferous quartz are not uncommon in the bed rock. From a scientific standpoint, considerable areas of bed rock can be said to be mineralized, but these are disseminated through large masses, and up to the present time no well-defined impregnated zone has been recognized. This appears in a large measure to account for the absence of any considerable amount of alluvial gold, though certain conditions

of erosion,[a] discussed elsewhere, also have been adverse to the formation of placers.

CONCENTRATED DEPOSITS.

The concentrated ore bodies are of two general types—(1) impregnated zones of fracture and (2) fissure veins. The first are probably the most abundant, but in many places the two grade into each other.

The impregnated zones of fracture appear to have been formed by the shearing of rock masses along more or less well-defined zones and the intrusion of the shattered rock masses by mineral-bearing solutions. The presence of included fragments of foliated rocks in the shear zone indicates that the stresses that developed the secondary structure antedated the shearing, which was accompanied by impregnations.

Within the mineralized zone there is usually a system of intersecting fractures that are followed by quartz or calcite veins and stringers, the whole forming what Becker has termed a stringer lead. As a rule, the entire zone strikes parallel to the dominant structures of the country rock, but many of the fractures are discordant to the walls of the deposit. The dips of the ore bodies vary greatly, but most commonly are nearly vertical. In most of the deposits which have come to the notice of the writer the zone of mineralization is bounded by slickensided walls. Here and there, however, the ore body merges gradually into the wall rock. In some deposits gash veins penetrate both walls.

At some localities two systems of veining were observed, one of which, following the foliation, has been more or less deformed. The second system is an infiltration along joints that intersect the lines of foliation. Though both systems were found to carry sulphides, the younger one appeared to be most heavily mineralized.

The dominant mineral in the vein filling is usually quartz, but in some veins calcite is more abundant than the quartz, and they very commonly occur together. Little attention has been given to the ores themselves. Those that have come to the writer's attention are chiefly pyrites, and among these, iron, arsenical, and antimonial pyrite appear to dominate, but chalcopyrite has also been found. Other metallic minerals that have been recognized are free gold, galena, and stibnite. Scheelite is often found with the placer gold, but has not been observed in place. Cinnabar occurs in abundance in the gravels of Daniels Creek, and cassiterite associated with alluvial gold has been found in some localities.

These deposits appear to be somewhat irregular, but no systematic

from less than a foot to possibly 50 feet or more, but there are still wider ones which probably belong to the disseminated deposits. Most of them have not been traced farther than a few hundred feet, but in one case at least a zone of impregnation has been followed a mile or more along the strike.

Few of these ore bodies have been sampled and there is little information regarding values. As high as $3 to $10 a ton in gold has been reported to the writer as the result of careful sampling. Inexperienced men are often misled by the high values obtained from the assay of picked specimens. It appears that wherever gold is found some silver is present. It should be noted that many of these mineralized zones in which pyrite is present carry little or no free gold. Though some free gold has been found, it appears that most deposits of this type carry base ores.

The fissure veins, the second type of concentrated deposits, are relatively rare compared to the impregnated zones. This is at least true of those which are ore bearing, but large barren quartz veins are not uncommon in the metamorphic rocks of the peninsula.

The fissure veins are well defined and usually cut the foliation of the country rock. Like the impregnated zones, many of them are sharply differentiated from the wall rocks by slickensides. Some of them, however, send off gash veins into the country rock which follow the foliation. Quartz veins 2 to 15 feet wide have been found, but these appear to be barren and have been traced no great distance. The ore-bearing veins probably range from less than a foot to 8 feet in width. In the Solomon River Valley veins have been traced by surface croppings for a distance of more than half a mile. From the evidence in hand it would appear that the fissure veins were more persistent than the impregnated zones.

The vein filling is chiefly quartz, but in some veins calcite is practically the only gangue mineral. Gold, where present, is usually free. Iron pyrite is almost invariably present, and some galena and chalcopyrite has been found. It is reported that one chalcopyrite-bearing lode has been found near the head of Nome River and another (see p. 298) in the Kougarok region. Two types of vein filling have been recognized. In one the quartz is ribboned and little calcite is present. This is the characteristic deposit of the Big Hurrah Creek region, described by Mr. Collier (p. 228). In the other type the gangue is nearly all calcite, through which the gold occurs in a free state, together with some iron pyrite. No workable deposits of this type have been discovered, though many of the calcite veins yield high assay values. In general it may be said that the fissure veins thus far prospected, except those in the Solomon River region, have not been proved to be workable ore bodies.

Though the fissure veins and impregnated zones have been de
as different types of deposits, yet it is not intended to imply th
represent distinct epochs of mineralization, for they may, in
least, belong to the same period of intrusion. In many ca
formation of the impregnated zones appears to have been an id
process with that of the veins, except that in the fissure the
appear to have been crushed without any notable open spacing

CASSITERITE- AND GALENA-BEARING LODES.

Besides the auriferous deposits above described, two other
of ore bodies have been found on the peninsula, namely, t
siterite-bearing dikes of the York region and the galena-b
lodes of the Fish River region.

The tin-bearing lodes have been described by Collier[a] as m
ized granite dikes which appear to be apophyses from larger
masses. Besides these, Hess[b] has described tin-bearing impreg
veins in the granite area at Cape Mountain. In some plac
mineralization appears to have occurred along the peripheries
granite stocks. A lode on Cassiterite Creek is described by
and Hess as essentially a mineralized porphyry dike, more
altered, through which crystals of cassiterite are scattered. I
the cassiterite the ore carries galena and some gold and a
variety of secondary minerals. Hess has also described a gol
ing aplite dike which occurs on Cape Mountain.

Mendenhall[c] has described the Omalik silver deposit as a
bearing lode, occurring at the contact of a schistose intrusive
white crystalline limestone. He notes the presence of pyri
stibnite. His examination was confined to the outcrop, for
time of his visit the mine workings had caved in. Analysis s
the presence of gold. It appears that this deposit is unlike
described from which the alluvial gold has been derived. S
ore bodies have been reported by prospectors from other p
the peninsula, but have not been examined by geologists.

These two types of ore bodies, occurring near the easter
western extremities of the peninsula, indicate a wide distribu
the mineralization. They are also of interest to the miner, b
they appear to be examples of types of deposits different fron
which furnished the placer gold.

---

[a] Collier, A. J., The tin deposits of the York region, Alaska: Bull. U. S. Geol.
No. 229, 1904, pp. 16–29.

[b] Hess, F. L., The York tin region: Bull. U. S. Geol. Survey No. 284, 1906, pp. 1

[c] Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a
publication of the U. S. Geol. Survey, 1901, pp. 213–214.

DISTRIBUTION OF MINERALIZATION.

An adequate discussion of the distribution of the ore deposits must await a more complete knowledge of the geology. Some facts have, however, developed in course of the investigation that appear to give support to certain conclusions. These theories, being still largely hypothetical, are here presented with some hesitancy, because the determination of the loci of gold in bed rock is of such obvious importance to the mining industry. False deductions, if accepted by the miner, may lead to misdirected efforts in the search for auriferous placers and lodes.

As yet almost the only criterion of the occurrence of gold in bed rock is the distribution of the placers. This evidence must be used with caution, because (1) placers may be found a long distance from the bed-rock source of the gold, as in the Nome beach deposits, and (2) gold may occur in bed rock where the conditions are unfavorable to the formation of placers. It is a well-established fact,[a] however, that the gold of the gulch and creek placers is for the most part derived from bed rock of the immediate vicinity, and this fact makes it certain that the areal distribution of this type of placers is probably almost identical with the areal distribution of gold in bed rock.

The gold placers of Seward Peninsula fall into two broad belts, separated by the Kigluaik and Bendeleben mountains. (See Pls. X and XI, in pocket.) In the southern belt, at present the largest producer of gold, are included the Nome, Solomon, and Ophir regions and some smaller mining districts. The Bluestone, Kougarok, and Fairhaven placers lie in the northern zone. The absence of placer gold in intervening regions suggests the absence of gold from the bed rock, but may also be explained by the fact that glaciation and other conditions have not been favorable to the accumulation of auriferous gravels.

Within the two belts the placers are so irregularly distributed as to make it certain that some other cause must have operated in determining their occurrence than the accidents of erosion and deposition. On some creeks there are rich placers, while at near-by localities, where the character of the alluvial deposits is identical, gold may be almost entirely absent. (See maps, Pls. X and XI.) A natural inference is that this irregularity is due to the irregularity of the distribution of the gold in bed rock.

It has already been pointed out[b] that there appears to be a connection between structure and the distribution of the auriferous gravel. This view is borne out by the evidence of the geologic maps, which indi-

[a] Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 141.

[b] Op. cit., p. 144.

cate that most of the workable placers occur along or close to the contacts of limestones and schists. These contacts have in many places been exposed to erosion as a result of the domal uplifts already mentioned. This, however, is not everywhere the case, for some of the limestone-schist contacts are simply the margins of lenses of limestone included in the schist. Be the relation of the limestone to the schist what it may, it appears to be established that the bed-rock source of the gold in most deposits is traceable to a limestone-schist contact. Furthermore, these contacts appear to have been loci of the greatest mineralization, either as impregnated zones or as fissure veins. These contacts have only in part been studied and mapped, and if the distribution of all the placers (Pls. X and XI, in pocket) does not follow this law, this may only appear so because of the lack of complete data on the bed-rock geology.

The close association of the placers with the contacts between limestone and schist is well illustrated by the Ophir Creek region, the geology of which is indicated on the accompanying sketch (fig. 6) in greater detail than on the general map (Pl. X). Several limestone areas are mapped which may belong to an older formation or may be lenses in the schists which surround them. The contacts between the two types of rocks where examined give evidence of intense deformation, resulting in shattering and shearing. It is in these zones of disturbance that the presence of quartz veins, many of them ore bearing, is most noticeable. In the diagrammatic section (fig. 6) the relation of the mineralized zones both to the limestones and schists and to the placers is brought out. For the purpose of this discussion it is immaterial whether the limestone is a distinct lower member of the succession that has been infolded or whether it is a series of lenses in the schist.[a] The point is that along the contact of the limestone and the schist shearing has taken place, and also intrusion of mineral-bearing solutions. This may be due solely to the mechanical influence of a massive bed in its contact with a schist during the deformation, or also to the chemical composition of the limestone, which may have had some influence on the deposition of mineral veins.

Though the evidence of the placers makes it appear that the loci of mineralization are usually confined to the contacts of the limestones and schists, yet there are known to be ore bodies which occur in other associations. Mention has been made of the cassiterite-bearing dikes and the galena lodes occurring in crystalline limestone. It is also probable that much of the placer gold may have been derived from other than limestone and schist contact deposits. Detailed

special map, though not completed, appear to indicate that the placer gold finds its source in a zone of intricately folded and faulted rocks, and not necessarily along limestone-schist contacts.

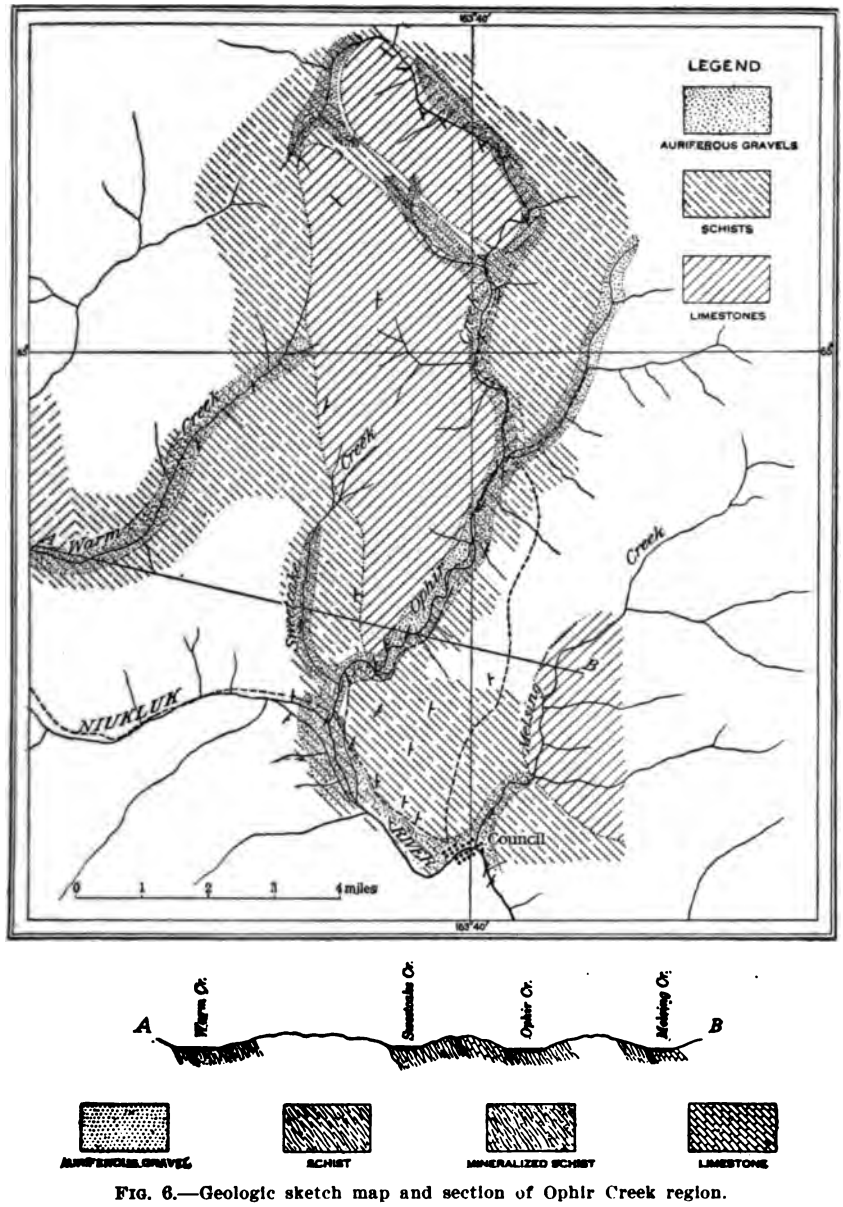

FIG. 6.—Geologic sketch map and section of Ophir Creek region.

All the deposits referred to in the foregoing discussion occur in the Nome group, a rather heterogeneous succession of limestones and calcareous, graphitic, and quartz schists, together with many

greenstones. Most of the placer deposits occur in the rocks of this group and hence it would appear to afford the most likely field for ore bodies. It must be remembered, however, that the areas in which the Kigluaik group is the country rock had a physiographic history unfavorable to the formation of placers. The absence of placers, therefore, may not be taken as definite proof of the absence of lodes. As a matter of fact, large quartz veins are not uncommon in the upper formation of the Kigluaik group, but most of these have been found to be only slightly mineralized. A little gold is, however, present in some of these veins and they deserve examination.

AGE OF MINERALIZATION.

The last epoch of extensive intrusion appears to be that represented by the massive granites occurring as stocks or dikes throughout the peninsula. There is apparently some evidence that the last intrusion of the quartz veins was coincident with the granite injection. Collier and Hess have shown this to be the case with some of the cassiterite-bearing veins so closely associated with granitic intrusives. In any event it is certain that both the granite and the quartz veins have been injected since the last extensive epoch of deformation. The fact that there are deformed quartz veins and granites does not militate against this conclusion, for it appears that these belong to an older intrusive epoch. In a former report the writer has suggested that the dome structure may have been brought about by greenstone intrusions, but this does not appear to be borne out by the later investigations. In the northeastern part of the peninsula Moffit[a] found that many of the domes had a granitic core, and he suggested that the dome structure may have been caused by granite intrusions. If this is the case and the margins of the domes prove to be the loci of ore deposits, there is probably a genetic relation between the granite and the quartz veins.

There is little direct evidence of the age of the granite intrusion, but it appears to have antedated the deposition of the lignite-bearing beds found in various parts of the peninsula, probably of Eocene,[b] but possibly of Upper Cretaceous age. Spurr[c] found granitic rocks cutting beds of Lower Cretaceous age in the lower Kuskokwim basin. These are the nearest granites to Seward Peninsula of whose age anything is known. As no granitic intru-

[a] Moffit, F. H., The Fairhaven gold placers, Seward Peninsula, Alaska: Bull. U. S. Geol. Survey No. 247, 1905, p. 23.

[b] Brooks, A. H., Geography and geology of Alaska: Prof. Paper U. S. Geol. Survey No.

sives have been found in any of the younger terranes of Alaska it seems probable that those of the peninsula were intruded in early Cretaceous time.[a]

SEPARATION OF GOLD FROM BED ROCK.

The separation of gold from bed rock is brought about by processes of erosion, of which secular decay is the most effective, but corrasion also plays a part. Though the long accumulation of weathered bed rock in place is the most favorable condition for the formation of placers, yet it does not follow that rich alluvial deposits may not be formed by rapid erosion of bed rock when the detritus is removed as fast as it accumulates. The ordinary processes of erosion, by which through the action of rain, frost, ice, vegetable life, and other agencies, hard rocks are converted into loose material, are too well known to require description. Of greater importance to this discussion is the rock decay that is not accompanied by any considerable mechanical removal of material.

Hard rocks by disintegration and decay are transformed into loose material. During these processes the soluble rock constituents are removed through the agency of water, and there remains a residual mass made up of relatively insoluble matter. The breaking down of the rock and the accompanying chemical changes of the constituent materials set free the gold, one of the relatively indestructible minerals, and this becomes intermingled with the other insoluble material. Clay dominates in the residual mass, but if the parent rock contained quartz, this, too, usually remains, being probably the most refractory of all the common minerals toward purely chemical agencies. Mineralized vein quartz very commonly carries easily decomposed minerals, such as pyrites, and is therefore readily broken up, allowing the insoluble ingredients of the ore body, such as gold, to be set free. This process is hastened by purely physical agencies, such as frost and changes of temperature, which break up the insoluble rock constituents.

Russell,[b] in describing residual rocks of the southern Appalachian region, says:

> The quartz veins so common throughout the crystalline areas of Virginia, the Carolinas, etc., are more durable than the rocks inclosing them, and retain their integrity long after the associated schists have changed to plastic clays. Bowlders and pebbles derived from the breaking up of quartz veins cover the surface with a continuous sheet of débris over large areas, forming a residual deposit,

[a] The age of the mineralization in southeastern Alaska and the Yukon basin has been briefly discussed by the writer in Some recent publications on Alaska and adjacent regions: Economic Geology, vol. 1, 1906, pp. 342–355.

[b] Russell, I. C., Subaerial decay of rocks and origin of the red color of certain formations: Bull. U. S. Geol. Survey No. 52, 1889, p. 14.

the origin of which is revealed at a glance. The quartz itself, although opposing great resistance to disintegration, is not indestructible, as is shown by the brown, iron-stained lines that traverse it in every direction, marking the course of incipient fractures. The continual breaking of the quartz into smaller and smaller fragments produces an angular sand which everywhere forms an ingredient of the red-clay soil.

Hayes[a] has shown that under certain conditions even quartz is readily soluble by surface waters. It is evident, therefore, that the gold included in quartz veins, will, in course of the process of weathering, eventually be set free.

As a rule, the changes in a rock mass brought about by weathering result in a very material reduction in its bulk.[b] The loss of material by weathering among siliceous crystalline rocks, according to Merrill,[c] amounts to more than 50 per cent, and in the purer forms of limestone it may reach as high as 99 per cent. Pumpelly[d] has estimated that in the limestone areas of the Ozark Mountains the residual material represents only from 2 to 9 per cent of the original rock mass. Such reductions in volume necessarily result in more or less concentration of any insoluble material that may have been disseminated in the parent rock. This concentration will be materially greater in the case of substances of high specific gravity, such as gold, than in that of the lighter minerals, for the former will have a constant tendency to settle to the bottom of the loose material. On declivities gravity will accelerate the process and help to sort the material, producing in some places a rough stratification.[e] This is a secular process and will proceed as long as the rocks continue to disintegrate. Placers may be formed in this manner without mechanical transportation. Becker[f] has described such types of placers in the southern Appalachian region, where they at one time formed an important source of gold. To the same class probably belongs also the extraordinarily rich placer known as the Caribou Bill claim near the divide between Anvil and Dexter creeks on Seward Peninsula. (See p. 200.)

This process is here set forth in some detail because it is believed that the first concentration of gold after being set free from bed rock, by the contraction of the residual mass due to disintegration

[a] Hayes, C. W., Solution of silica under atmospheric conditions: Bull. Geol. Soc. America, vol. 8, 1897, pp. 213–220.

[b] Merrill has shown that in certain changes by hydration there is an increase in bulk. He estimated that in the conversion of granite into soil (District of Columbia) there had been an increase in volume amounting to 88 per cent. Compare Merrill, G. P., Principles of rock weathering: Jour. Geol., vol. 4, 1896, p. 718.

[c] Merrill, G. P., Rocks, rock weathering, and soils, New York, 1897, p. 234.

[d] Pumpelly, Raphael, The relation of secular rock disintegration to loess, glacial drift, and rock basins: Am. Jour. Sci., 3d ser., vol. 17, 1879, p. 136.

[e] Kerr, W. C., The gold gravels of North Carolina, their structure and origin: Trans.

and decay, has been an important factor in the formation of rich placers. It is not intended to imply that these residual placers are themselves of great value, except in certain places, but rather that they represent an intermediate stage between the gold in bed rock and the sorted placers.

If it is granted that the deep decay of bed rock is a favorable preliminary stage to the formation of placers, it is pertinent to consider the conditions under which such decay takes place. The agencies that bring about weathering are primarily solution, changes of temperature, beating of rains, gravity, and vegetation. All these agencies have played their part in the reduction of the rocks of Seward Peninsula. Though it is probably true that rock weathering is more rapid in warm than in cold countries, yet the sweeping assertions that have been made in regard to the absence of residual material in high latitudes have not been borne out by the writer's observations. Many of the placer-mining operations in this region have disclosed a considerable thickness of residual material, but the data are as yet too incomplete for a detailed discussion. The great irregularity in the distribution of the permanent ground frost—in some places reaching to depths of 100 feet or more, in others entirely lacking—would appear to favor the breaking down of the hard rocks. Throughout Seward Peninsula, except in the Kigluaik Mountains, which have been glaciated, the lower hill slopes are buried in a thick mantle of talus and residual material, and bed rock is usually exposed only at the crest lines. In the gulches and stream valleys residual clays 8 to 15 feet thick are not uncommon. All of this goes to prove that decay is not confined to the region of warmer climate and excessive rainfall.

It is evident that the effectiveness of all these agencies is proportional to the length of time in which they are operative. A land mass must remain stable, relative to sea level, for a long period of time to permit the accumulation of any considerable amount of residual material. Uplifts bring about renewed activities of the watercourses, and the residual mantle is quickly removed by erosion. It is evident that the conditions that are most favorable to the accumulation of residual material are those in which the land mass is at or near base-level, when erosion is reduced to a minimum.

Attention has been called to the topographic evidence of a long epoch of erosion, which planated much of the peninsula. If the facts are interpreted correctly, a peneplain was formed over nearly the entire peninsula since Eocene time. This indicates a long period of time during which the conditions would be favorable for disintegration and decay. The thesis that the writer would advance, then, is that the peneplanation of Seward Peninsula, previous to the present geographic cycle, has been an important factor in the concentration of the placer gold.

TRANSPORTATION AND DEPOSITION OF PLACER GOLD.

The third important agency in the formation of placers is transportation, sorting, and deposition by water. Material set free from the bed rock has a constant tendency to move toward base-level. This movement is brought about by gravity aided by the transporting power of water. The transporting power of a stream is dependent on its velocity, which is a variant determined by the gradient, volume, and load. When a stream is overloaded with sediment, the excess is dropped. When it is underloaded, it erodes. When equilibrium has been established, neither erosion nor deposition takes place. Gradient, volume, and load usually vary in the same stream, so that deposition may be going on in one part of its valley and erosion in another. When a stream is eroding, the material within reach of its activity is constantly moved in a downstream direction. All movements of this kind are accompanied by more or less sorting and make for the concentration of the heavier particles.

Deposition takes place in a stream when the velocity is decreased, either by the periodic changes in volume or by a change of gradient. Where there is a change of grade, resulting in diminished velocity, the gold is laid down with the other sediments. It must be remembered, however, that placer gold may find lodgment in inequalities of the bed-rock surface where no considerable deposition of detrital matter has taken place, though extensive placers are, as a rule, not formed because of irregularities in the bed-rock surface alone. The concentration of gold in river bars in analogous to its deposition in stream beds, for it is dropped where the velocity of the current is checked by the formation of eddies, due to the inequalities of the river floor.

CONCENTRATION OF GOLD ON BED ROCK.

The occurrence of the richest placers on or near bed rock is a normal condition wherever auriferous alluvium has been mined. Various theories have been advanced for this concentration on bed rock, but they appear to be inadequate to explain many occurrences. It is self-evident that a placer with an overburden not exceeding the depth to which alluvium is disturbed and sorted during one period of deposition would have its heavy ingredients concentrated at the bottom merely by the action of gravity. Gravity alone would appear insufficient to account for the concentration of gold in gravels having a depth of 20 to 200 feet, for such gravels were evidently not laid down at one time. The highest strata must have been deposited without disturbing the lower strata. If the gold were deposited at the bottom solely by the action of gravity during the process of depo-

Posepney [a] has argued that the particles of gold were concentrated on bed rock by working their way down through the unconsolidated material below solely through the action of gravity and after the gravels had been deposited. Smyth [b] has, however, shown that such action would be inversely proportional to the size of the particles, and hence the finest gold should be at the bottom of the deposits. As a matter of fact the contrary is true. Moreover, many of the Alaskan placers are frozen and have probably been so for the most part since their original deposition.

Spencer [c] has described the placers on Gold Creek, near Juneau, showing that here deposition began on bed rock where there was a change in the gradient of the stream and that this action continued progressively toward the headwaters, and this appears to be a general law. In such a manner a series of placers would be formed, lying on or close to bed rock. It would seem, however, that this can not be advanced as a general law governing the formation of placers, unless the supply of gold furnished by erosion ceased when all the bed rock had been covered. If the gold from the parent rock had been concentrated by secular decay, leaving it intermingled with clay and other light substances, not only would the conditions then be favorable to the formation of placers, but such placers would carry more gold than later ones unless a period of quiescence with accompanying decay intervened.

The gold set free by secular decay is intermingled chiefly with clay, and this would be quickly removed by erosion if uplift renewed the cutting power of the stream. By this means gold already concentrated by weathering would be deposited as the bottom layer of the sediments laid down during the new geographic cycle. The erosion of bed rock after the mantle of weathered material had been removed might continue to supply gold, yet this could be concentrated only by the ordinary processes of sorting and would be more or less disseminated in the overburden covering the first placers formed. It seems probable, too, that more rapid erosion and the abrasion accompanying the destruction of the hard rock during the new geographic cycle may account for the absence of any large percentage of coarse gold in the later alluvial deposits.

In the southern Appalachians there appears to be a field where the first condition for the formation of placers has been met. During

[a] Posepney, F., Zur Genesis der Metallseifen: Oesterreichische Zeitschr. f. Berg- und Hüttenwesen, vol. 35, 1887, p. 327.

[b] Smyth, H. L., The origin and classification of placers: Eng. and Min. Jour., vol. 79, 1906, p. 1228.

[c] Spencer, A. C., The Juneau gold belt: Bull. U. S. Geol. Survey No. 287, 1907, pp. 77–85.

two cycles of planation[a] deep rock decay has taken place, and hence residual placers have been formed. The absence of any considerable uplift, however, has prevented the dissection of these residual deposits, and as a result there has been no sorting. The gold, therefore, is found on bed rock only where gravity has aided the concentration, namely, on hill slopes.[b]

Deep secular decay, a concomitant of base-level conditions, has, in the opinion of the writer, in most of the important placer fields of the world, preceded the period of rapid deposition to which the formation of placers is usually assigned.

The general cycle of events favorable to the formation is, then, base-leveling, followed by rapid uplift. The simple conditions above set forth are probably rarely fulfilled. In Seward Peninsula a general base-leveling antedated the formation of the placers, yet since that planation there have been many uplifts and depressions, probably separated by intervals of stability long enough to permit considerable secular decay.

RECONCENTRATION OF PLACER GOLD.

In the foregoing pages the succession of events in the formation of placers has been traced from the time when the gold is set free from bed rock until it finds a resting place in the auriferous alluvium. What has been described is the history of events that take place during an uninterrupted geographic cycle. If, however, after the placer has been formed, an uplift which renews the erosive power of the streams occurs, a re-sorting of the auriferous material may be effected and new placers formed that may be much richer than the primary deposits. Such a secondary concentration has been very marked in some of the Seward Peninsula placers. The processes of erosion and deposition are those already described and need not be considered again.

Among the important re-sorted types are the beach placers, formed by the action of the surf on the uplifted stream gravels of the coastal plain. This process of wave concentration has yielded some extraordinarily rich deposits. (See description of Nome beach placers, p. 151, and of Topkok beach placers, p. 289.) A less evident but probably equally important type of reconcentrated placers comprises those enriched by the dissection of the high gravels in the Anvil Creek region (p. 186). Reconcentrated placers are also found in the beds of the streams which traverse the costal plain near Nome.

[a] Hayes, C. W., and Campbell, M. R., Geomorphology of the southern Appalachians:

In some places the placer gold has probably existed as such through several geographic cycles and has been re-sorted a number of times since it was freed from bed rock. The processes of reconcentration and the various types of placers thus formed have been considered at some length by the writer[a] and need not here be further discussed.

HINTS TO PROSPECTORS.

INTRODUCTION.

The foregoing pages are intended to lead to a better understanding of the detailed descriptions that follow and also to elucidate some of the general laws that control the occurrence of gold in this province. An attempt will here be made to present briefly the application of these theories to the placer-mining industry. Had the investigation gone far enough to formulate definite laws on the source and distribution of the alluvial gold, it would, no doubt, have great practical value, but even the incomplete data and more or less theoretical conclusions will, it is hoped, be useful to the prospector. Prospectors and miners are sometimes prone to regard the results of the geologist's study as of purely scientific interest, but as the application of geology to mining becomes better known this fallacy is gradually being dispelled. It is hoped that the matter here presented, though intended primarily for the inexperienced prospector, may be not without interest to those who are unfamiliar with the conditions prevailing in Seward Peninsula.

A placer is an unconsolidated deposit accumulated by mechanical processes, carrying one or more minerals in commercial quantities. All placers are secondary deposits—that is, the material of which they are composed was originally derived by erosion of bed rock. Although it is undoubtedly true that under certain conditions nuggets of placer gold have been enlarged through chemical precipitation, yet this action is a negligible quantity in placers.[b] Placers may be derived solely by rock weathering without water sorting, but more commonly are the result of water transportation, sorting, and deposition. Some of the richest placers are those formed by the erosion of older placers and the reconcentration of their gold.

A theory not uncommon among miners that the placer gold reached its present position by glacial action is not sustained by any facts known to the writer. The forces of erosion now in operation are ample to bring about the formation of placers, and it is not neces-

[a] Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 144–151.

[b] A. Liversidge (On the crystalline structure of gold and platinum nuggets and gold ingots: Jour. Roy. Soc. New South Wales, 1897, pp. 70–79) has shown that gold nuggets studied by him have no internal structure indicating chemical growth.

sary to have recourse to the various theories of glacialism, volcanism, etc., current among prospectors. It should be noted, however, that erosion may have been accelerated or retarded in the past by the uplift or depression of the land. Evidences of uplift are common in Seward Peninsula, the most striking being the elevated beach placers near Nome and the high-bench gravels near the head of Anvil Creek. Elevation may bring about the destruction of former placers and the concentration of their gold in new placers.

GOLD IN BED ROCK.

As has been stated, the placer gold has its source in the bed rock and in this field none except some of the finest has been transported far from its source. The facts previously presented indicate that the lines of contact of the limestones and schists are most favorable for the occurrence of gold in bed rock. This is especially true if the contact gives evidence of having been a line of movement. An exceedingly broken up and schistose condition of the rock is an indication of such movements, which are often accompanied by the development of micaceous minerals, giving the rock the appearance of talc or soapstone. If such contacts are found they should be carefully examined for evidence of mineralization, which may result in the formation of well-defined quartz or calcite veins, or may be simply an impregnation of the bed rock by mineral-bearing solutions. If mineralization occurs it is usually accompanied by the deposition of some of the pyrite minerals and then decomposition gives a characteristic iron or copper stain.

The character of the ores has been described, but it should here be noted that the gold of many of the mineralized zones appears to be included in arsenical and iron pyrite. In this type of deposit free-milling ores would be limited to a shallow surface zone. In another type, to which the Big Hurrah quartz mine belongs, the gold occurs free in a quartz or calcite gangue.

The more detailed knowledge gained since the former report was prepared makes it probable that the gold was not so widely disseminated in the bed rock as was at first supposed. On the whole, therefore, the cumulative evidence rather favors the discovery of lode deposits. It is with some hesitancy that the writer makes this statement, for it may be interpreted as an unqualified indorsement of the lode-mining industry of the peninsula, which is far from being his purpose. The sole object of this statement is to draw attention to this region as a possible field for quartz mining.

It can not be too strongly urged that every quartz claim be thoroughly prospected before any elaborate equipment is purchased

mining schemes that have been foisted on the public. Nonresidents should be particularly careful in investing in mining enterprises concerning the management of which they have no personal knowledge. As a general rule, it is safe to presume that a man who has to find his capital by alluring advertisements in communities where he is personally unknown has something to dispose of that is unmarketable among those who are most familiar with it.

Though the question of costs in lode mining has not yet been carefully studied in Seward Peninsula, they are higher than in many more accessible regions. It is perhaps safe to say that under the present conditions (1905) no lode deposit not yielding at least $10 to the ton by carefully taken commercial samples is worthy of further investigation. The cost of mining is, however, being gradually reduced. When the placers are worked out the water ditches can be turned into power for lode mining, and by that time, too, there will be ample transportation facilities.

GOLD IN PLACERS.

The search for alluvial gold should be guided by the fact that it is usually deposited where the current of a stream has been checked. For example, a broad basin above a steep-walled canyon is more likely to carry gold than the valley below the canyon, provided the bedrock source of the gold is above the basin. Moreover, coarse gold is more likely to be found at the head of a filled basin than near its outlet. The same holds true of a stream that debouches on a coastal plain, which will deposit the coarse gold it may carry near the head of its delta. Some special conditions of deposition are described by Mr. Collier and Mr. Hess (p. 198) in the high-bench gravels between Anvil and Dexter creeks. Here the gold deposited by a former drainage system has been apparently laid down in steep-walled valleys and stream deposition has alternated with the accumulation of talus material (slide rock). This broken rock, making its way down the valley slope in huge slabs, has settled together, presenting the semblance of bed rock and furnishing a floor upon which the gold has been deposited. The piercing of these old buried talus slopes and the finding of gravels underneath has led some to believe that gravels occur under solid bed rock. A consideration of the origin of these deposits shows the utter fallacy of this conclusion.

High-bench gravels have been found in many parts of the peninsula, but only near Nome have they become important gold producers. The high gravels of Anvil and Dexter creeks are of such an extent and thickness as to indicate that there was a well-developed drainage system, which, having been disturbed by uplift, has lost a part of its accumulated deposits by erosion. There is good reason to believe that these ancient gravels may be gold bearing in other placer-bearing parts of the peninsula, and they are worthy of careful prospecting.

In seeking high-bench deposits the prospector should be guided by the topographic evidence, but should remember that every flat-topped shoulder of a mountain is not necessarily underlain by gravels. The best evidence is the presence of well-rounded material. Distinction should be made between placers occurring on hill slopes, the accumulation of minor streams belonging to the present drainage system, and those belonging to an old drainage system. Though the first type may be very rich it is less likely to include extensive deposits than the second.

Mr. Collier describes elsewhere (p. 189) the influence of talus slopes in crowding streams to one side of their valleys, and thus influencing the position of the placers. This has been a very important factor in the formation of the placers on Anvil and Ophir creeks (pp. 189–242).

The reconcentration of gold by stream and wave action is considered at length elsewhere (p. 130). It is shown that the dissection of placers and the re-sorting of the gold have led to the formation of many of the richest diggings. These theories can be made of direct commercial value by seeking the localities where such concentration has taken place. These localities may be old or present beach lines, or streams that traverse the coastal plain or that have dissected high-bench gravels. It is important that the prospector bear in mind the facts in regard to reconcentration or he may be misled in regard to values. Thus the gold in the stream traversing the tundra back of Nome has been concentrated from the gravels underlying the tundra and is not necessarily a measure of the gold tenor of the parent placer.

GEOLOGIC MAPS.

All the known facts regarding the geology of Seward Peninsula have been brought together in graphic form on the geologic maps (Pls. X and XI, in pocket). The prospector will naturally turn first with interest to the areas marked as carrying placer gold. These areas are outlined from the best information available, but final determination of the distribution of gold must await more detailed surveys and the accumulation of more data by mining operators. The facts here presented may, however, serve as a general guide. Those using the maps should bear in mind, first, that not all these auriferous areas carry commercial placers and, second, that placers may be found in areas not indicated as being auriferous.

The bed-rock geology indicated on the map has the same value, and the prospector in course of his detailed examination will no doubt find that some of the boundaries between the formations are

of aid in locating mineralized zones. The distribution of the granite masses is of practical importance, as it is along their contacts that lode tin has been found.

THE FUTURE OF THE MINING INDUSTRY.

Those who are devoting their labor or capital to the development of Seward Peninsula have a right to expect in this report some statement of the probable life of the placer-mining industry. Were the entire gold-producing area surveyed and studied in detail it would be difficult enough to form an estimate of the gold contents of the gravels; but with only the present general knowledge of the factors necessary to such an estimate the task may seem well-nigh hopeless. For this reason undue weight should not be given to the figures here presented, and the reader should carefully consider the character of the evidence and make his own deductions as to the reliability of the conclusions. No doubt any presentation of the facts or theories bearing on this subject will be distorted and misquoted by promoters of worthless mining enterprises for their own use, but this can not be prevented, however guarded a geologist may be in presenting his conclusions.

It is self-evident that if the areal distribution of the placer gold indicated on the map were correct and the approximate thickness of the alluvium were known, it would be a mere matter of multiplication to determine the cubical contents of the auriferous gravels. Unfortunately, however, these factors of the equation can be only approximated. The average gold content of the gravels, forming the third element of the problem, is also an unknown quantity. The following estimates are based on certain assumptions and on the best information available, but are not now susceptible of proof. Mr. Moffit has carefully measured the areas marked on the maps (Pls. X and XI; also Bull. U. S. Geol. Survey No. 247, 1905, Pl. III) as underlain by gold-bearing gravels. Allowing for the exaggeration of the areas because of the small scale of the maps, he finds the total area of auriferous alluvium to be about 210 square miles, or 650,496,000 square yards. The pay streak is assumed to average 3 feet in depth, which is believed to be a conservative estimate. By this calculation Seward Peninsula is estimated to carry a total of 650,496,000 cubic yards of gold-bearing gravels.

Although it is true that the pay streaks thus far mined have a very high gold content, it is equally certain that this gold tenor is not maintained throughout the auriferous areas, for the gravels mapped as auriferous include considerable alluvium that probably carries little more than colors of gold. A valuation of 50 cents to the cubic yard is therefore probably not too conservative. If these assumptions are correct the gold contents of the auriferous gravels of the penin-

sula can be valued at $325,248,000. It should be borne in mind that it does not follow that these values, if present, will necessarily be recovered, for they may be in part so disseminated or so difficult of access as not to permit profitable exploitation.

Another estimate by Mr. Moffit is based in part on the number of linear miles of gold-bearing streams. The total as measured on the maps is 750 miles. If the average width of pay streak is assumed to be 15 yards and the depth 3 feet, the total bulk of the creek gravels would be about 20,000,000 cubic yards, of which probably 600,000 cubic yards have been worked out. This leaves a total for unworked creek gravels of 19,400,000 cubic yards. This computation takes into account the well-defined pay streak and not the areas of auriferous gravels, and hence the gold tenor will be much higher than that used in the previous estimate. Mr. Moffit found the average gold contents of the gravels of seventeen streams, on data given in this report by Mr. Collier and Mr. Hess and based on statements by owners and operators, to be $5.93 per cubic yard. He obtained a gold content of $5.98 per yard by dividing the total gold production from the creeks by the number of cubic yards of pay streak estimated to have been mined. The practical identity of gold tenor of pay streaks in these two calculations is suggestive, though it may be purely fortuitous. In view of the fact that some of the richest creek gravels have been mined out, it is not safe to accept the above gold tenor as representative of all the creeks of the district. It is probable, however, that a 3-foot pay streak may average $2.50 a cubic yard along the watercourses. With this assumption the gold contents of the creek gravels would in round numbers amount to $50,000,000.

In addition to the stream placers above considered, there are also the auriferous deposits in the gravel plains, of which that of the Nome tundra is the most extensive, and in the high-bench deposits. The gravel plain stretching inland from the coast at Nome, usually called the tundra, is the richest of this class of deposits thus far prospected, but similar deposits, some of which are known to be auriferous, occur in other parts of the peninsula. It will remain for the future to determine what percentage of this type of placers can be profitably exploited, but in the opinion of the writer it constitutes the largest gold reserve of the peninsula. In estimating the gold contents of the gravel-plain placers values of 25 to 50 cents per cubic yard of pay streak have been adopted as being conservative. As in previous calculations the pay streak has been assumed to be 3 feet thick. The pay streaks of the coastal-plain gravels, known to contain considerable gold, have been assumed to carry 50 cents and the others 25 cents to the cubic yard. Many persons will doubtless take exception to these

valuations per yard, because they are familiar with some of the extraordinarily rich deposits which have been mined. These higher values are compensated for by the fact that much gravel is probably included in the above measurements of the gold-bearing areas whose tenor is far below 50 cents. The placers of the high-bench gravels, so far found only near Anvil Creek, are almost an unknown quantity and their gold contents have been put in as a lump sum in the following estimate. By these estimates the total values of the gravel-plain (tundra) and of the high-bench placers are found to be $215,000,000. This sum added to the value of creek placers gives a total reserve of $265,000,000, as compared with $325,000,000 in the previous calculation. The difference lies in the fact that in the second calculation the stream gravels lying outside of the 15-yard pay streak are not considered as gold-bearing.

Of the 750 linear miles of gold-bearing creeks, only 172 miles represent creeks which have produced gold in commercial quantities, but it must be remembered that many have not been carefully prospected and that there are probably other creeks not so marked on the accompanying map which will be found to carry gold. Mr. Moffit's computations indicate that those parts of the creeks which have been worked out carried values averaging probably $500,000 to the mile. Some of the richest creeks have yielded more than double this amount, but the yield of others is very much below it. These values are low compared with those in the Klondike, where, according to an estimate by McConnell,[a] 50 miles of paying portions of creek carry gold aggregating $95,000,000, or $1,900,000 to the mile. According to Hammond,[b] some of the ancient river channels of California have yielded $2,000,000 to $3,000,000 per mile. The deep leads in Victoria, Australia, have yielded nearly $2,000,000 worth of gold to the mile.[c]

Optimistic mine operators will undoubtedly regard the totals here presented as entirely too low, whereas those who have lost money in ill-advised mining ventures in Seward Peninsula must naturally evince skepticism toward the estimate of so large a gold reserve. On the one hand it is evident that it would not take many creeks as rich as Anvil, Dexter, and Ophir, to change this estimate entirely, but on the other hand the estimate is based on the assumption that gravels of much lower grade will be mined in the future than at present. The total is small compared with the output of the Cali-

[a] McConnell, R. G., Preliminary report on the Klondike gold fields: Geol. Survey of Canada, Ottawa, 1900, p. 18.

[b] Hammond, J. H., The auriferous gravels of California; geology of their occurrence and methods of their exploitation: Ninth Ann. Rept. California State Mineralogist, year ending December, 1889, 1890, p. 114.

[c] Lindgren, Waldemar, The deep leads of Victoria: Eng. and Min. Jour., vol. 79, 1905, p. 315.

fornia placers since 1849, which amounts to about $1,142,000,000,[a] and much larger than the estimated original total gold content of the Klondike district, placed by McConnell[b] at $200,000,000. In the Klondike district the number of miles of creeks bearing placer gold is estimated to be but 50, whereas there are 750 on Seward Peninsula. Moreover, all parts of the Klondike are much more accessible than much of Seward Peninsula, and consequently have been more thoroughly prospected. For this reason it is not to be anticipated that many important discoveries will be made in future in the Klondike, but the results of each year's prospecting in Seward Peninsula prove that the limit of new fields there has not been reached. The cost of mining in Seward Peninsula is as a rule less than in the Klondike, making it possible to exploit gravels carrying lower values.

All the above facts being taken into consideration, it is believed that an estimate of $250,000,000 to $325,000,000 for the placer-gold reserves of Seward Peninsula is conservative. Although these speculations may be of interest in showing the possibilities and probable direction of future growth, the actual estimate of the gold reserve must be regarded as little more than a bold guess.

The future of lode mining is impossible to predict. Some facts have been presented indicating the favorable conditions for the occurrence of ore bodies, but until more of these bodies have actually been discovered and found to carry commercial values no definite statements should be made.

The data bearing on the placer-gold reserves having been discussed, it becomes pertinent to inquire at what annual rate these reserves may be mined out. Here again the dearth of exact information makes it impossible to arrive at definite conclusions, but those here presented may be at least suggestive. Even were the amount of water available for placer mining known, there would still remain a large indeterminable factor, for the mechanical methods of mining are relatively little developed in this district and admit of much expansion. Moreover, with the gradual decrease in cost of transportation and the concomitant reduction in cost of fuel, machinery driven by petroleum or coal-consuming engines will undoubtedly be more commonly introduced to exploit gravels that lie inconveniently for economic handling by the use of water under head. The dredges now extensively used in the Solomon River region (Pl. IV, p. 232) are examples of the development of this method of mining.

[a] Based on figures furnished by Waldemar Lindgren. Compare also Lindgren, Waldemar, Geological features of the gold production of North America: Trans. Am. Inst. Min. Eng., vol. 33, 1903, pp. 816–818.

[b] McConnell, R. G., Report on the Klondike gold fields: Ann. Rept. Geol. Survey of Canada, 1897, pt. B, p. 61B.

It is probable that not more than 60,000 or 80,000 miner's inches of water may eventually be made available for hydraulic mining in Seward Peninsula, but this estimate is again little more than a guess. Purington[a] has shown that because of the low stream gradients and for other reasons the duty of an inch is very low in Seward Peninsula. The average of his table is 2.76 cubic yards per twenty-four hours, equal to about 300 for a season. According to these figures, 16,000,000 to 20,000,000 cubic yards of material could be moved in a season, but certainly not more than 5,000,000 to 8,000,000 cubic yards would be pay streak. If double this amount of gravel were excavated by mechanical means, the total maximum volume of pay streak which could be exploited in a single season would be 15,000,000 to 24,000,000 cubic yards. If there are 650,000,000 cubic yards of gold-bearing gravels in the peninsula they could not be mined at this rate in less than twenty-five to forty years. As a matter of fact, however, this maximum volume could be reached only after years of preparation and may never be attained. This is emphasized by the fact that during the last six years the average amount of pay gravels handled has probably been less than 1,000,000 cubic yards annually.

These speculations as to the life of the placers of Seward Peninsula are too indefinite to have much value, but they suggest, at least, that the gold production will probably increase rather slowly and that the outlook is favorable for a long period of rather uniform output.

[a] Purington, C. W., Methods and costs of placer mining in Alaska: Bull. U. S. Geol. Survey No. 263, 1905, pp. 138–141.

DESCRIPTION OF PLACERS.

By ARTHUR J. COLLIER and FRANK L. HESS.

INTRODUCTION.

It has been shown that the value of the annual gold production of Seward Peninsula is now (1906) about $7,500,000 and that the total, including 1906, is nearly $40,000,000. This has practically all been derived from the placers, though a small amount has been obtained from auriferous quartz veins. All of the placer gold carries some silver, the present annual production of which is valued at about $25,000. Of other mineral wealth tin is the only metal of immediate interest. Some placer tin has been exported, and the development of both lode and placer deposits is being actively pushed, but up to the present the tin deposits can not be said to have reached a productive stage. There are a few small areas[a] of coal-bearing rocks on the peninsula, but in only one of these has a workable seam been found, and this appears to be of value only for the very local demand.[b] Besides the above minerals, graphite and bismuth deserve mention, though their commercial value in this field remains to be proved.

A general account of the placers will next be presented, followed by a detailed description of the gold deposits of the Nome, Solomon, Council, Port Clarence, and Goodhope districts. In later sections of the report an account of the Bluff and Kougarok regions will be presented by Mr. Brooks, and of Iron Creek by Mr. Smith.

DISTRIBUTION OF GOLD.

On the geologic maps (Pls. X and XI, in pocket) is indicated the distribution of the unconsolidated silts, sands, and gravels, under the general group name Quaternary. These deposits have already been discussed at some length in the section devoted to the geology of the peninsula (pp. 83–99). As these Quaternary beds carry the

[a] See pp. 83–85 of this report; also Mendenhall, W. C., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 214.

lluvial gold their distribution is of first importance. It would equire far more detailed mapping than has yet been done to deter- ıine, with any exactness, the distribution of the auriferous gravels.)n the map these facts are indicated so far as the data at hand will llow. The auriferous alluvium is divided into two classes—first, hat from which gold has been recovered in commercial quantities, nd, second, that which is known to be auriferous, but in which t has not been proved that workable placers exist.

It is evident that this division is arbitrary. From a scientific tandpoint all the alluvium of the peninsula is probably auriferous. f the tests were made with sufficient minuteness, traces of gold ould probably be found in practically all the unconsolidated depos- ts. If this were a province of cheap mining, like California, the ıuriferous gravels of commercial importance would cover much arger areas than those indicated on the maps. Moreover, gravel vith a low gold tenor, which may be absolutely worthless under the)resent costs of extraction, may in the future prove of value.

These facts are well illustrated by the reductions in mining costs hat have taken place during the last six years. In the first years of nining in the peninsula but few pay streaks exceeding 5 feet in lepth could be profitably exploited, whereas profitable mining has ıow been carried to depths exceeding 200 feet. It is probable that ıt that time gravels whose tenor was less than $10 to the cubic yard ould not be worked at a profit, but at present, under certain favor- ıble conditions, the cost of mining has been reduced to less than 50 ents a cubic yard. The boundaries of the gold-bearing areas, there- fore, are not only more or less arbitrary, but also only in part deter- nined. Yet it seems justifiable to indicate on the map the areas that ive most promise of yielding returns to the placer miner. There ıre no doubt placers in some of the Quaternary deposits that have ıot yet been tested, and it is equally true that the areas indicated as gold bearing do not by any means everywhere carry workable placers. It is believed that if these facts are borne in mind the maps may serve as useful guides in directing intelligent prospecting. It is unfortunately true that they will probably also be used by unscru- pulous promoters for foisting on the public worthless mining stocks, but this can not be avoided.

It has already been pointed out that the gold is derived from quartz veins and impregnated zones in the metamorphic rocks, which have been grouped together under the name Nome group. The distribu- tion of loci of mineralization has been considered by Mr. Brooks in the preceding pages and need not here be dwelt on. Many facts bear- ing on the source of the gold are presented in the detailed accounts of the different districts.

CLASSIFICATION OF THE PLACERS.

INTRODUCTION.

All the productive gold placers here to be considered occur in the gravels of alluvial origin and are deposits concentrated from the bed rock by stream or wave action. Elsewhere in this report is given a discussion of the underlying principles which govern the occurrence of the alluvial gold, and with it is discussed a scheme of classification based on genesis. For the purposes of the present description the writers will hold to a topographic grouping of the various types, which is almost identical with the classification of placers recently published by Purington.[a] This group is as follows:

Classification of placers in Seward Peninsula.

Creek placers: Gravel deposits in the beds and intermediate flood plains of small streams.

Bench placers: Gravel deposits in ancient stream channels and flood plains which stand from 50 to several hundred feet above the present streams.

Hillside placers: A group of gravel deposits intermediate between the creek and bench placers. Their bed rock is slightly above the creek bed and the surface topography shows no indication of benching.

River-bar placers: Placers on gravel flats in or adjacent to the beds of large streams.

Gravel-plain placers: Placers found in the gravels of the coastal or other lowland plains.

Sea-beach placers: Placers reconcentrated from the coastal-plain gravels by the waves along the seashore.

Ancient beach placers: Deposits found on the coastal plain along a line of elevated beaches.

These types of placers in occurrence and origin have close affinities with the present topographic forms with which they are associated. Genetically they fall into five groups. One embraces those which are found in the present stream channels, such as the creek, river-bar, and in part the hillside placers. In a second group fall the gravel-plain placers, also of fluvial origin, but laid down by streams that have since shifted their channels. The bench placers form a third group, which includes most of the hillside placers as well, and these were for the most part stream deposits that have been elevated and dissected. The present sea-beach placers constitute the fourth subdivision, and the elevated sea beaches the fifth.

All these land forms are the result of extensive periods of denudation through which the peninsula has passed. This region has probably been exposed to subaerial erosion since late Tertiary time, and in this long interval there have been many upward and downward movements of the land masses relative to sea level. These movements have been irregular and broken by long intervals of stability during

been equally subjected to these influences, for the movements have been differential, so that while one part was elevated above sea level other parts were flooded. In other areas the land surface has been warped.[a] This irregularity of uplift may make a coastal plain in one part of the region of identical age with a high bench in another part. The possible economic importance of this fact will be readily recognized.

A logical discussion of the various types of placers demands that the oldest be taken up first, and this class comprises the high-bench deposits which formed before the development of the present topography. Next in order of genesis are the benches on the slopes of the present valleys; then the gravel-plain placers, together with the elevated beaches, and finally the placers in the beds of the existing watercourses as well as those of the present shore line.

BENCH PLACERS.

Bench placers may be classified as low gravel terraces, spur benches, pocket benches, and high benches, according to their topographic relations to the existing streams. The gravel terraces are wide, flat gravel benches whose surface is considerably above the high-water level of the stream but whose bed-rock floor is only slightly, if at all, higher, than the stream bed. Spur benches differ from the terraces in that the stream bed is intrenched in the bed rock below the gravel deposit; and where, as is usually the case, the stream meandered over the valley floor at the old level these meanders have been cut down into the bed rock, leaving the spaces between meanders projecting from the valley walls as flat-topped spurs. The pocket benches are mere remnants of old channels which usually hang high on the valley walls. They can not as a rule be traced in any definite system, for on many streams only one or two small deposits of this kind are discovered. The high-bench placers belong to stream channels of older drainage systems, since the development of which elevation has taken place. The deposits of these ancient watercourses are, as a rule, only in part preserved, having been for the most part removed by erosion. Rich placers of this type have thus far been discovered in only a few localities, but it is to be expected that others will be found.

HILLSIDE PLACERS.

The hillside placers constitute rather an indefinite subdivision of the bench type. They are in general not indicated by the surface

[a] The physiographic history of the peninsula has been only in part deciphered. Some account of it will be found in Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 48–64; Reconnaissance of the northwestern portion of Seward Peninsula, Alaska: Prof. Paper U. S. Geol. Survey No. 2, 1902, pp. 34–43; and The Fairhaven gold placers, Seward Peninsula, Alaska: Bull. U. S. Geol. Survey No. 247, 1905, pp. 42–47.

topography, nor do they rest upon definitely flattened surfaces of bed rock. Many of them may be accounted for by creeping movements of the soil and decomposed bed rock, which have destroyed higher benches and distributed their auriferous gravels over the hillside below, or by the gradual sidewise shifting and coincident downward cutting of the stream, leaving its gold-bearing gravels behind as it moved. Hillside placers, therefore, are likely to occur on the slopes of any valley which has benches on its walls.

GRAVEL-PLAIN PLACERS.

Most of the gravel-plain placers that have been worked in Seward Peninsula lie in the coastal plain that intervenes between Nome and the foothills, and they are usually referred to as the "tundra placers" or "tundra mines." Similar deposits have been discovered in the gravels of the Kougarok basin. As has been noted, the gravels of the coastal plain were deposited during a period of submergence after the bed-rock floor had been formed and were contributed mainly as deltas by the rivers and streams from the highland portions of the peninsula. As the gravels, except those close to the hills, were laid down mainly by the larger streams, their placers may be expected to be of the nature of river-bar deposits. The gold as a rule is finer than that of the creek and bench placers, and where concentrated it is in irregular pay streaks, due to variations in river and stream currents. The bed-rock floor upon which these gravels rest was probably produced by subaerial erosion, or, in other words, by streams which had their sources in the upland. It is quite possible, therefore, that there may be old stream channels, as rich in coarse gold as the stream and bench placers, beneath the deep covering of gravel and silt. Most of the gold that has been won from the so-called "tundra" has been obtained from the beds of streams which flow across it, but some has come from concentration on layers of clay. The placers of these intrenched streams differ from ordinary creek placers in the fact that their gold has been reconcentrated from the coastal-plain gravels.

CREEK PLACERS.

The creek placers, from which, up to the present time, most of the gold has been taken, constitute the best-known type of deposits. Brooks[a] has described this form of placer as follows:

> The pay streak in these deposits is usually on bed rock, though it sometimes is found on a clay which overlies the bed rock. Where no clay is present the gold is found not only on the bed rock, but also where the rock is broken the gold has worked its way down into the joints and crevices. Streams are often

found to have a layer of clay on bed rock, which gradually thins out upstream and finally disappears entirely. The presence of the clay on bed rock usually indicates that no gold will be found in the weathered rock below, as the impervious layers prevent the gold from working its way down. On most of the creeks the gravel overlying the pay streak is shallow, and the creek placers usually afford what are known as "open" or "summer" diggings. Very little stripping is necessary, as a rule, after a foot or two of moss and muck have been removed. It is common to find the gravel containing sufficient gold from the surface down to warrant sluicing it all. The horizontal extension of the pay streak differs very much, and no general law in reference to it can be formulated. Sometimes it forms a narrow but uninterrupted layer, running parallel to the side of the valley, but more often the pay streaks are not continuous and are of irregular outline. They very frequently suggest the windings of old stream channels. The coarsest gold of the region is found in the creek and gulch placers, it being there nearest to its source in the parent rock.

RIVER-BAR PLACERS.

The river-bar placers are similar in general origin to the creek placers, the main points of difference being that the former are deposited by larger streams, and that the gold contained in them consists mainly of fine flake or flour gold, which can be transported by running water. The gold of these placers is usually distributed through the gravel, though it may be richer next to the bed rock. River-bar placers occur on many of the larger streams of the peninsula, but they are of low grade as compared with creek and bench deposits, and have not yet been notably productive.

BEACH PLACERS.

The beach placers are confined to the narrow strip of ground along the coast which is affected by the sea waves. As has been noted, the coastal plain is for the most part bounded on its seaward side by an escarpment from 10 to 20 feet high, which marks the inland edge of the beach. The waves are continually encroaching on the coastal plain, cutting back this escarpment and concentrating the gold from its face in the beach sands. Every year the streams probably bring down a small amount of fine gold, which is also caught up by the waves and added to the beach placer. This action has been continuous for the long period of time that has elapsed since any movement of land has taken place relative to the sea. The amount of gravel, therefore, thus affected must have been very great, but as the concentration occurs only in the strip subjected to wave action the resulting placer is confined within the same limits. Some fine gold is also found in the gently sloping floor of the sea, but since this is probably derived from the beach, it is more disseminated and finer than beach gold, and can not at present be regarded as forming a workable placer.

NOME PRECINCT.

INTRODUCTION.

An area of about 2,000 square miles, embracing the extreme southwestern part of Seward Peninsula, forms a recording district under the name "Nome precinct." (See fig. 2, p. 42.) Its northern boundary is a sinuous line stretching eastward from Capt Douglas and following the watershed between Port Clarence on the north and Bering Sea on the south. This boundary maintains a generally easterly direction as far as the highlands east of Bluff, throwing all the southward-flowing streams of this part of the peninsula into the Nome precinct. Up to the present time this has been the most productive mining district of the peninsula, and to it must be credited at least four-fifths of the gold production. Its accessibility, lying as it does close to tide water, has led to the more rapid development of its placers than has occurred in the more isolated camps.

Three topographic provinces (Pl. VIII, in pocket) may be recognized in this region—the mountains, the upland, and the coastal plain. The first embraces the Kigluaik Mountains, which stretch as a rugged mass along the northern boundary of the precinct, forming a part of the range which begins near Cape Woolley on the west and ends at Cape Darby on the southeast. These mountains are pinnacled and are broken by steep-walled gorges which head in amphitheaters. On the south the mountains fall off abruptly to an upland 2,500 feet in height, which stretches toward the coast with constantly decreasing altitude, its summits near the sea being less than a thousand feet high. At three points along the coast the base of the upland is washed by tide water, namely, east of Sinuk River, at Cape Nome, and at Topkok Head, but in the main broad coastal plains of crescentic outline intervene between Bering Sea and the highlands. These plains are in places gently rolling, are broken by numerous benches, and form the typical tundras of the North. One plain stretches southeastward from the northern boundary of the precinct and includes the delta of the Sinuk. Another extends along the coast from Cripple River to Cape Nome, and a third from Cape Nome to Topkok Head. These coastal plains, as has been shown, are built up of gravels, sands, and silts, some of which are auriferous and near Nome, at least, form important placers.

The inland margin of the lowlands rises in many places by a series of benches to the uplands, on whose seaward flanks washed gravels have been found up to altitudes of 500 feet. These high gravel deposits, which are found filling flat divides, obviously mark former stages of erosion. Less evident is the interpretation of the

epoch of former base-leveling, or partial base-leveling, can not be doubted, but the detailed physiographic history of this region has not yet been worked out.

Most of the streams take a southerly course to the sea. Their valleys are broad and gravel floored, and have gentle slopes up to an altitude of 600 feet, above which steeper grades carry them to the upland level. The smaller tributaries are of the same general topographic type, though the grades are usually steeper.

GEOLOGY.

The bed rocks of this region fall into two classes—the Kigluaik group and the undifferentiated schists and Port Clarence limestone of the Nome group. The closely folded gneisses, schists, and limestone of the Kigluaik group form a broad east-west belt whose geographic distribution is coincident with the outline of the mountains from which it takes its name. (See geologic map, Pl. X, in pocket.) This series of rocks is broken by many intrusions of granite. No placer gold has been found in the area of Kigluaik rocks, and they need not here be further considered.

Of greater interest is the second group of rocks, which embraces the schists, limestones, and greenstones here called the Nome group. These rocks occur in a broad belt forming the uplands south of the mountains. They are highly schistose and much jointed and faulted, with very complex structures. Greenstones are everywhere associated with the schists of this series, and occur in both schistose and massive forms.

Quartz veins and stringers are very common in the Nome group, and many of them are sulphide bearing and not a few auriferous. Most of these veins thus far discovered are mere stringers and without commercial importance except as indicating the source of the gold. A few veins that carry commercial values have been found, and one has been opened up and worked. In some places the placer-mining operations have uncovered zones of mineralization, in which a series of stringer leads has impregnated a rock mass of considerable width with ore-bearing solutions. No such zones have been found which when fairly sampled would yield workable values, though some of the included individual veins carry a high gold content.

The Port Clarence limestone is a heavily bedded rock of Silurian age which forms a member of the Nome group. Its general unaltered character and its distribution relative to the placers indicate that it is not gold bearing. It is not uncommon, however, to find the margins of these limestone masses the loci of intense deformation accompanied by injection of quartz veins. The distribution of the limestone is thus not without economic significance.

A small area of coal-bearing rocks in the Sinuk River basin, probably of Tertiary age, deserves mention. The coal is, however, without value.

The unconsolidated deposits of this area can be grouped under three general heads—coastal-plain deposits, stream and bench gravels, and glacial deposits. All but the last carry placer gold. The coastal-plain deposits are the most extensive and in some places aggregate more than 100 feet in thickness. They are the elevated stream and delta deposits that were modified more or less by wave action. The stream gravels hardly need special description. The bench gravels include not only those of the present drainage system, but also some high terraces, which were laid down in drainage channels quite different from those now existing. Evidence of this older drainage system is found widely distributed, but detailed study of its deposits has been limited to those near Dexter Creek, which are known to be auriferous.

DISCOVERY AND DEVELOPMENT.

Nome, the recording office of the district and the supply point for the whole peninsula, lies at the mouth of Snake River, on the edge of the tundra which skirts Bering Sea. A railroad leads from the beach across the coastal plain to the mines about Anvil Creek, and has recently been extended up Nome River, across the divide and down the Kruzgamepa to Lanes Landing. Other important settlements in the district are Dickson and Solomon, which lie 30 miles east of Nome and from which a railroad has been built up the Solomon Valley and across the divide into the Casadepaga basin; and Bluff, about 50 miles east of Nome.

The first find of gold in the precinct was made on Anvil Creek in July, 1898,[a] since which time developments have been rapid. The greater part of the gold production was taken from deposits within 15 miles of Nome, but there are many other mining centers in the precinct that have produced smaller amounts. In addition to the region contiguous to Nome the precinct includes the Topkok, Solomon River, Eldorado River, Cripple River, and Sinuk River regions, all of which have produced more or less placer gold. The present beach and some of the creek-bed deposits have been exhausted, but new discoveries in the elevated beaches and the gravel-plain, stream, and bench placers are continually being made and the construction of ditches tapping the water reservoirs of the high mountain valleys to the north, together with improvements in transportation facilities and in mining methods, is constantly extending the field of operations.

Placer-mining operations in the Nome precinct include summer work in open cuts, where many kinds of mechanical devices are used, and winter work by shaft and drifting methods. Up to 1903 most of the operated placers were best adapted to summer work, and the gold obtained from winter dumps was only a small part of the output. Since that time the winter production has increased enormously, so that it now (1906) amounts to about 50 per cent of the total.

In the following account the region immediately adjacent to Nome will be described first, both because of its great importance and also because there has been more mining done here, which enables the geologist to gather more facts regarding the mode of occurrence of the gold than in the less well-developed regions.

NOME REGION.

GENERAL OUTLINE.

In the immediate vicinity of Nome there is a region containing many rich placer deposits of great variety, including the present and ancient beaches, gravel plains, and creek and bench placers of various kinds. (See fig. 7.) In places these forms merge with one another and the deposits extend across the divides, making a complete subdivision of the field by drainage basins impossible. For this reason it seems desirable in the following descriptions to disregard drainage lines and to arrange the subject-matter according to the kinds of placers. The Nome region, as here defined, is a triangular area, with its base extending about 15 miles east and west along the shore of Bering Sea and its apex 25 miles inland near the head of Nome River. The richest placers are within a radius of 10 miles from Nome, which lies near the center of the base of the triangle. The coastal plain here is from 4 to 7 miles wide; back of it the upland is drained by Snake and Nome rivers.

The bed rock of the coastal plain is deeply covered with Quaternary gravels and sands. Back of the coastal plain the bed rock is made up of the schists and limestones of the Nome group, described on pages 70–82. The structure of the bed rock seems simple at first sight, but the developments made in the last few years show that the rocks are faulted in many places, and as they are generally covered deeply with surficial deposits, it has not yet been possible to work out the stratigraphic relations in detail. Mineralized quartz and calcite veins have been found in many places where the bed rock has been exposed by placer-mining operations. They occur both as fissure veins following fault planes and zones of fracture and as stringers spreading out between the structural planes from the fissures. In some places the bed rock contains a network of small veins, and it is possible that some masses of bed rock mineralized in this

way may be rich enough in gold to work as quartz mines. Of the many samples taken by Government geologists from small veins and stringers near Nome for assay, a few showed no trace of gold, but

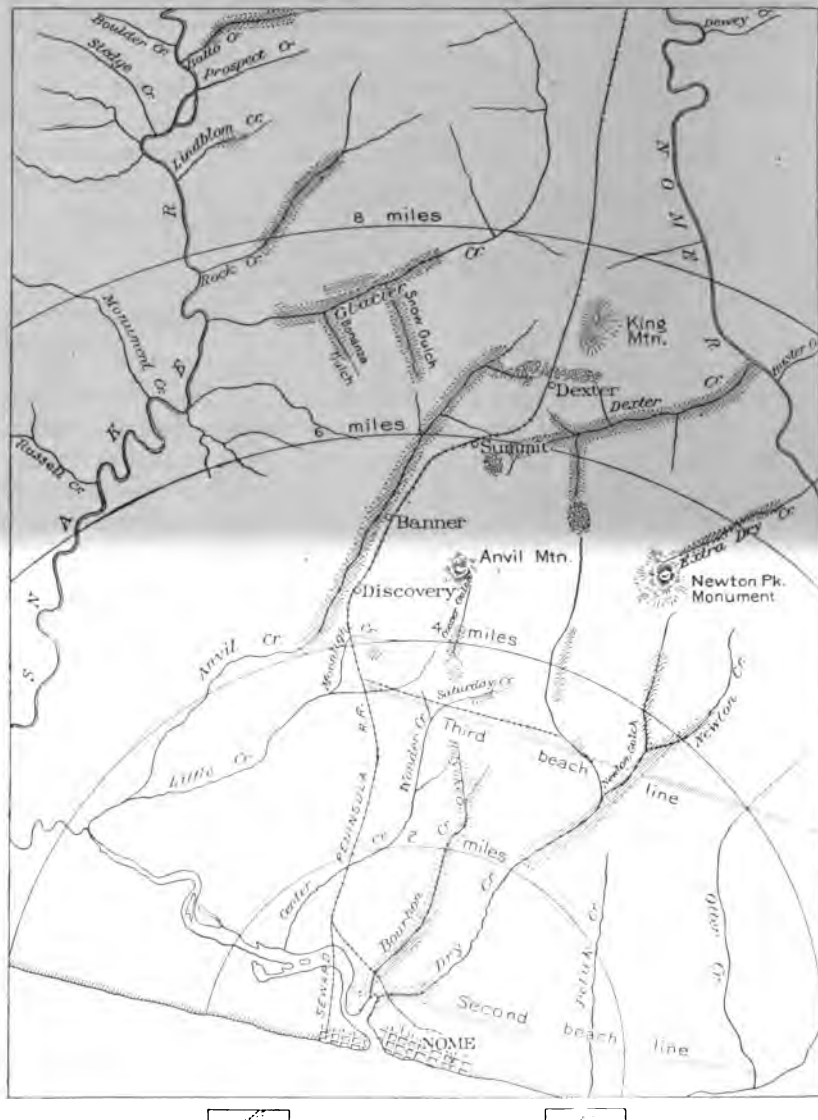

Stream bench and beach placer deposits

High bench placer deposits

of the Nome region was undoubtedly derived from these quartz veins. Great masses of bed rock thus mineralized have been eroded away, leaving their gold content concentrated in the gravels. In newly cut valleys this concentration has been direct from the bed rock, but in the older, broader valleys and the coastal plains and sea beaches these gravels have themselves been eroded and again and again reconcentrated.

BEACH PLACERS.

The beach placers of the Nome region extended along the shore of Bering Sea for about 30 miles, practically from Cape Nome to Cape Rodney. They have been worked continuously every season since 1899, and though the greater part of their gold content was doubtless extracted before the end of the season of 1900 they are still producing small amounts of gold and will continue to do so for some years to come. The methods of mining do not differ materially from those used in 1900, though at the present time the placers are of little economic importance.

The total output of the Nome beach placers has probably been $2,000,000. Of this about half was taken out in 1899 and about $350,000 in 1900, since which time the production has been less each year. There are still a few people working with rockers, and in 1904 several sluicing and dredging plants were in operation.

The following account of the beach placers is quoted from Brooks,[a] who had exceptional opportunities to study these deposits when he visited Nome during the height of the excitement in 1899 and again in 1900:

> It has been shown that the lowest bench of the coastal plain ends in an escarpment, 10 to 20 feet high on the seaward side. From the base of this escarpment the beach slopes to the sea at an angle of 4° to 5°, having a width of about 50 to 75 yards. Ordinarily the wave action is confined to the lower third, but during severe storms the surf sometimes rolls up the full width of the beach.
>
> The surface material of the beach is usually sand with occasional shingle and gravel. The pebbles, which have the characteristic oblate spheroidal form of beach shingle, are composed largely of quartz, but also of the various types of country rock of the adjacent region. Pebbles of more than an inch or two in diameter are relatively rare, but occasionally small bowlders are found, which probably owe their position to the drifting of shore ice.
>
> The beach sand consists largely of quartz, usually stained with iron, and mica and chlorite schist fragments. Reddish garnets form an important constituent, sometimes predominating over all the other minerals, and then constituting the "ruby sands" of the miners. Magnetite is always present, but usually forms less than 1 per cent by weight, though in the concentrated form

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 85–91.

found in the pay streaks it may run as high as 10 per cent. Such percentage, where the material is fine, gives the sand a dark color, and it is then termed "iron sand" or "black sand" by the miners. Mr. Collier made a separation, by sifting, of a typical beach sand taken from a prospect hole near Nome, with the view of determining approximately the relative proportion of the different-sized particles by weight. A sample of sand was put through sieves of different meshes, with the following results:

38 per cent coarser than 20-mesh sieve.
42 per cent coarser than 40-mesh sieve.
16 per cent coarser than 60-mesh sieve.
3 per cent coarser than 80-mesh sieve.
1 per cent finer than 80-mesh sieve.

The coarse material was chiefly quartz and schistose rock fragments. The garnet percentage was about 4 or 5 by weight and the magnetite less than 1. Mica is plentiful, but forms a relatively low percentage by weight.

An average cross section of the beach sands, as determined by an examination of the pits made during the mining operations, was as follows: Near the edge of the tundra a blue-clay bed is found close to the surface and seems to slope seaward. Halfway down the beach toward the water this clay bed can usually be recognized at a depth of 5 to 7 feet. These statements in regard to the clay bed have a general application, but the writer does not wish to imply that this one bed can be traced the entire length of the beach. In some cases several seams can be recognized and in others the clay seems to be entirely lacking. It is true, however, that in most of the workings a clay bed has been found a few feet below the surface which slopes toward the sea. The thickness of this clay stratum has not been determined, but it must aggregate several feet. Immediately above the clay are usually fine sands, though sometimes coarse gravels. This layer of sand, which includes the gold of the beach placers, contains as a rule a larger percentage of the heavier minerals than the beds above. The higher beds include coarser and finer material, such as sands and gravels, with occasional thin seams of clay. Sometimes fragments of wood and other vegetable matter are found in the beach sands, but these are relatively rare. When traced horizontally the various layers which make up the beach sands above the clay bed are found to be thin lenses, which rapidly thin out and seldom can be traced a hundred feet. The coarse gravels are usually found in pockets, often but a few feet in lateral extent.

The beach sand, from Cape Nome to Rodney Creek, a distance of about 30 miles, nearly everywhere carries colors of gold. Broadly speaking, the richest diggings have been confined to about 20 miles of the shore in the central part of this stretch. In this belt colors are obtainable nearly everywhere at the surface, but the beach proper, as a rule, carries values only some feet below and on clay beds. The pay streak measures from 6 inches to 3 feet, and rests on a clay bed at nearly every locality that was examined. The thickness of the productive sand layer at any one locality is a variant, depending on the refinement of methods used in mining and extracting. Where the ordinary cradle is used, from 6 inches to 2 feet of sand are washed. With the employment of more elaborate methods, where larger amounts of material are handled, all of the sand and gravel from the surface down to the clay bed is often sluiced. Sometimes two pay streaks are found, one on the clay and one a foot or two above, separated by intervening layers of nearly barren sand. The gold-bearing sand slopes with the clay bed from the coastal-plain escarpment toward

clay bed. The accompanying photograph,[a] taken by Mr. Schrader, and reproduced from the report already cited, gives a typical section of the beach sand near Nome. The lowest pay streak seen in the picture, which is said to run $1 to the pan, is among the richest that have been found in the beach. The richest part of the pay streak in its horizontal extension, similar to the layers of sand and gravel, is found to be of lenticular form, thinning out toward the margins. The sand of the pay streak differs in no way from that of the beach, except that it is usually finer and carries a larger percentage of the heavy minerals. There is often a progressive increase of the heavier minerals toward the pay streak. While in the surface sands the percentage by weight of the magnetite is often less than 1, near the clay bed rock it may run up to 8 or 10 per cent. In any given section the amount of garnet also increases toward the bottom of the sand layers.

A sample of gold-bearing "ruby" sand from a locality east of Nome River, 5 feet below the surface, was sifted by Mr. Collier, and the following percentages by weight were obtained:

3 per cent larger than 20-mesh sieve.
29 per cent larger than 40-mesh sieve.
53 per cent larger than 60-mesh sieve.
11 per cent larger than 80-mesh sieve.
3 per cent larger than 100-mesh sieve.
1 per cent smaller than 100-mesh sieve.

A rough mineralogical separation of the same sample resulted as follows:

38 per cent quartz stained with iron, with some fragments of schistose rock.
61 per cent garnet.
1 per cent magnetite.

Another sample of auriferous sand gave the following results:

65 per cent chiefly quartz and mica, with some fragments of schistose rock.
34 per cent garnet.
1 per cent magnetite.

A third sample from Nome beach, 7 feet below the surface, was constituted as follows:

96 per cent quartz and schist fragments, mica, etc.
3½ per cent garnet, magnetite, etc.

The above separations show that the minerals of beach sand can not be regarded as having anything like a fixed ratio.

Time has been lacking to make a complete mineralogical examination of the auriferous sands. The following minerals, however, have been noted in abundance: Quartz, muscovite, chlorite, and garnet; and as accessories magnetite, ilmenite, and pyrite.

Large flakes of gold are occasionally found, but these are relatively rare. Some small nuggets have been reported, running up to the value of $1, but are very exceptional. In purity it is about 0.890, has a bright-yellow color, and amalgamates readily.

The gold is flaky, and the average grains as saved by panning will run from 70 to 80 to the cent, valuing the gold at $14 an ounce. A comparison of it with beach gold from other localities shows it to be rather coarser. The beach gold from Randolph, Oreg., averages about 110 colors to 1 cent. That from the Sixes mine near Denmark, Oreg., averaged about 600 colors to the cent. The river-bar gold from the Snake River, Idaho, which is mined at a profit, runs from

[a] Not reproduced in this volume.

about 900 to 1,000 colors to the cent.[a] In making these comparisons it should be remembered that much of the fine gold of the Nome deposit is lost during the process of separation, and that this will increase the average size of the colors that are saved.

The source of this beach gold has been the subject of much discussion among the miners and prospectors of Nome. Theories as to its glacial origin are common, and hypotheses which assign its source to volcanic or meteoric agencies are not without supporters. The more careful students of the question, be they prospectors who have gained their knowledge by practical experience or mining engineers who have had theoretical as well as practical training, are generally agreed that the beach gold has the same source as the creek gold, and are at variance only on the question of its mode of distribution.

There can be no doubt that the beach gold found its source in the bed rock of the adjacent region and that it was transported to its present position by water. A theory which is often advocated assigns its distribution to the action of shore currents—that is, that the gold was brought down by the rivers and distributed along the shore by currents. In support of this theory attention is drawn to the fact that the richest deposits occur near the mouths of rivers which have their source in the gold-bearing area. The objections to this mode of distribution are: First, we have no evidence that such currents exist along the coast, and to suppose that the beach gold was distributed by currents at Nome we must believe that the currents run in both directions from the mouths of the rivers. For instance, beach gold is found along the shore in both directions from Snake River. If this river contributed the gold, it is difficult to understand why it should be found in both directions from the mouth. Second, objection is made that the river bars do not contain as much gold as we should expect if they had been the immediate source of the beach gold. Third, the gold is too coarse to be carried by ocean currents. Fourth, its distribution in the beach sands shows that it must have been concentrated by wave action. If we are to suppose that the gold was brought alongshore by ocean currents, the waves must have washed it up on the shore, and subsequently given it its peculiar form of concentration. If the gold was borne by ocean currents, we should expect to find it in the present ocean bottom of the same degree of coarseness as it is found on the beach. As a matter of fact, the little gold that has been obtained off the coast of Nome has been much finer than the beach gold. These objections to the theory of current distribution seem to be insuperable.

Attention has already been directed to the fact that the sand and gravels of the coastal plain are auriferous. Evidence has been given that points toward the conclusion that these deposits were laid down at the mouths of streams when the land stood at a lower elevation relatively to the sea than it does now. The streams and rivers gradually encroached on the sea floor by the building out of their deltas. In these delta deposits gold was laid down with the other material, and was more or less disseminated.

In the "Preliminary report" Mr. Schrader and the writer advanced the theory that the gold was concentrated from the coastal-plain gravels by the wave action which cut the seaward escarpment of the plain. The diagrammatic sketch [fig. 8] which was published to illustrate this point is here reproduced. In this sketch the edge of the coastal-plain escarpment is marked and the position of the beach placers in reference to it is shown. During high storms the waves even now reach the margin of the escarpment and cut away the base of

this wave action and the heavier particles, such as the gold, sink into the sand. It is a well-known fact that this fine gold will make its way through sand for some distance, provided its passage is not interrupted by any impervious layer. This downward movement is brought about near the surface of the beach by the constant motion which is given the sand by the waves. The percolating waters will also help to carry the grains of gold downward. It should be noted here that the beach sand, being well drained, is not frozen in summer. In the course of its downward passage the gold finally reaches a clay layer, and here becomes concentrated as it is found. There is another factor which may have accelerated the downward movements of the heavier particles. In the spring months southerly storms frequently pile up the ice on the Nome beach to a great height. When large floes are driven ashore on the shelving beach they must cause considerable movement in the underlying sands, and this motion is probably transmitted to a depth of several feet and causes a disturbance among the grains of sand. A sort of sifting process would take place by which the heavier particles would always descend and eventually be concentrated beyond the line of movement or on impervious layers which they could not penetrate.

The explanation by wave sorting may perhaps account for other beach placers. Mr. J. S. Diller informed the writer that the richest beach diggings on the Oregon coast are at points where waves have access to high bluffs. In fact, the Oregon and California beach placers have many things in common with those of Nome,

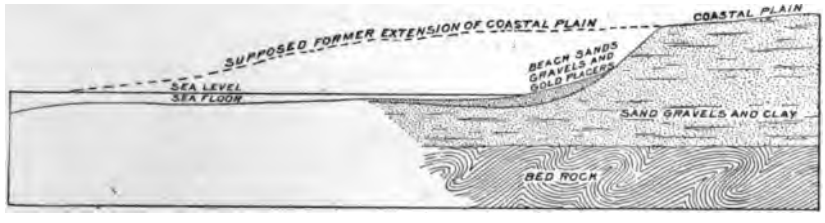

FIG. 8.—Diagrammatic section of beach placers.

but their gold seems to be much finer. In the early developments, however, of these southern beach deposits some diggings were mined which were more comparable to those of the Nome region in their richness and the coarseness of their gold; but these were long ago exhausted, and the operations are now confined to localities where careful and economic mining and separating methods enable the operators to work deposits which are of comparatively low grade.

A question of interest is whether there may not be old beach placers in this region similar to those that are found in Oregon. It has been assumed that this part of Seward Peninsula has in comparatively recent times been elevated to a height varying from 600 to 1,400 feet. Attention has been drawn to benches which are believed to represent former shore lines. It is a logical conclusion that during this period of uplift similar beach placers have been formed in the region, and a search for them should be a fruitful field of investigation. It has been suggested elsewhere that some of the escarpments in the coastal plain may mark former shore lines.

Mining operations on the Nome beach have all been carried on in a very haphazard way. During the first year the methods used were those of the hand rocker, and it was everybody's object to secure a rich patch of ground which would pay for the mining by this crude method. There was then ample room for the men who took part in the beach diggings. No claims were staked and no serious quarrels arose because of trespass. In the second year of the opera-

tions a vast deal of mining machinery was imported and many attempts were made to handle the beach sands at small cost. These enterprises were, on the whole, not paying ventures. The high freight rates in the Nome region and the great cost of fuel, as well as high wages, made the expense of running these plants very great. It was impossible for the operators to obtain exclusive right to any part of the beach, and the enterprises were constantly interfering with one another. Moreover, during the previous year the richest part of the beach diggings had been gutted, and, as the evidence of the working had been entirely destroyed by the ice of the winter, it was impossible to pick out fresh portions of the beach for mining operations. The choice of location had to be made at haphazard. The large number of men who were engaged in beach mining made intelligent prospecting previous to location entirely impossible. In August, moreover, a heavy storm destroyed a large part of the machinery along the Nome beach and put an effectual stop to many of the enterprises. In view of these facts it is not surprising that there were more beach-mining companies that lost money than there were that made money. A large amount was nevertheless taken out of the beach, which Doctor Whitehead estimates at $350,000.

As to possibilities of future mining developments, it can be prophesied that no large enterprises can be successfully carried out unless in some way a title for a given stretch of the beach can be obtained. A large percentage of the beach sand is probably far richer than that which is mined on the Oregon and California coast at a profit. Indeed, the fine gold, such as that found in the Oregon beaches, is not saved at all at the Nome beach.

PLACERS OF THE COASTAL PLAIN.

INTRODUCTION.

The auriferous gravels of the coastal plain, or tundra, as it is usually called, have not yet been very large producers. Many of the rich spots have been worked, especially near the base of the hills, but no means have yet been devised for handling the lower-grade auriferous gravels, which form very extensive deposits. Plans have been formulated for handling some of this material with steam shovels, and it has also been proposed to use hydraulic means, although this would necessitate some provision for the removal of the tailings, as much of the bed-rock surface underneath the alluvium is probably close to sea level, if not below it. The Brooks party studied this district in considerable detail in 1900, and not much can be added to the general description then published, though many additional detailed observations have since been made. Brooks's general account of these deposits is here quoted in full:[a]

The crescent-shaped coastal plain which intervenes between the highlands and the sea in the vicinity of Nome has already been described. The sandy beach slopes up from the ocean at an angle of about 5° to an escarpment 10 to 20 feet high. This same slope is carried seaward at a lower angle and gives the shallow bottom which extends out about a half mile from shore. From this

escarpment the plain extends inland to another escarpment, which marks the seaward limit of a second bench which is about 50 feet high. In some places this second bench lies within a quarter of a mile of the shore, while elsewhere it has receded much farther inland. A third bench, 100 feet or more in height, lies still farther from the coast, and from this the coastal belt merges with the upland in a succession of smaller and less-marked benches.

It has already been shown that the region has been gradually elevated during recent geological time. The coastal-plain terraces, like the high benches already described, are made up of material that was deposited along the margin of the shore while the land stood at lower elevation relative to the sea than it does now. The successive benches mark a series of interruptions in the uplift, when the land stood at a constant elevation long enough to permit the accumulation of the material of which the terraces are formed.

The sediments of the coastal plain are predominatingly of fine material, usually sand and sandy clay, with some coarser gravel layers and frequent beds of clay. Broadly speaking, these sediments increase in coarseness in an inland direction. They were contributed by the streams and rivers, which gradually built out their deltas. These coastal-plain deposits were laid down on a rock surface which had been more or less channeled by streams and which must have been very uneven, and the consequence is that there is probably great variation in their thickness. Near the town of Nome bed rock reaches close to the surface, and in close proximity pits 30 feet deep have failed to reach bed rock. Locally the thickness may be 100 feet or more. Therefore mining enterprises which depend on reaching bed rock must in every instance make a preliminary determination of thickness by boring or by sinking test pits, as generalizations regarding thickness are liable to be entirely in error.

The gravels and other sediments of the coastal plain have the same origin as those of the creeks and gulches which have already been described, and hence we should expect them to be auriferous, and such is the case. The gold of the coastal plain, having been carried farther from the parent rock than the creek and gulch gold, is much finer. In character it is more closely allied to the gold of the river bars.

The gold deposits of the coastal plain may be grouped under two headings. The first are the gravel-plain placers, in which the gold first accumulated. The gold is more or less disseminated through the gravels, sometimes concentrated on a clay bed, but characteristically in an unconcentrated form. The placers of this description have received but little attention. Where they are unconcentrated they can be worked only on a large scale, with improved machinery. The success of such mining would be dependent on handling a large quantity of material and on saving all the gold by refined methods rather than on the finding of the rich pay streaks.

As these coastal-plain deposits were laid down at the margin of the ocean, we should expect old sea beaches to be found in these gravels. If such beaches are found, they are likely to prove as rich as the present beach at Nome. It would therefore be well for the prospectors to examine carefully the seaward side of the different escarpments which mark the limits of the terraces. These bluffs are quite likely to mark an old sea beach. In such types of deposits we should expect their extension to be more or less parallel to the present coast line.

The second form of deposits is composed of the gulch and creek placers of the coastal plain. This class of deposit includes the placers of the smaller streams whose sources lie within the coastal plain. As these streams do not reach bed rock, their placers must have derived their gold from the gravels in which they flow. These placers are in fact reconcentrations of the auriferous gravels of

the coastal plain. They form natural sluices in which the disseminated gold of the gravel-plain placers has been collected. This concentration has usually taken place on a stratum of clay, or "false bed rock," as the miners term it. As these layers of clay are liable to be encountered at different horizons in the gravels, there may be a number of pay streaks, one above the other, separated by sands and clays.

Most of the development that has been made so far is in that part of the coastal plain which lies between Nome and Snake rivers. The probabilities are that this area includes the richer portion of the coastal-plain deposits. This corresponds in a general way with the distribution of the richer placers of the Nome beach, which, as will be shown, derived their gold from the coastal-plain deposits. In the detailed descriptions which follow, the heterogeneity of the coastal-plain deposits is well illustrated. Test pits but a few yards apart show very different sections. In the coarser gravels cross-bedding such as would be expected in deltas is not uncommon. The surface layers in all the sections consist of a foot or two of moss, other vegetable growth, and muck. Below this mantle the ground is usually found to be frozen, in summer as well as in winter. The few sections that were obtained, as will be seen, show a pay streak consisting of rather coarse gravel, 1 to 3 feet in thickness, and always overlying a clay bed. The pay streaks which have thus far been mined were found from 1 to 10 feet below the surface. The sands and gravels are usually found to carry gold from the surface down, but are never concentrated except on a bed of clay. The creek and gulch placers of the coastal plain at Nome are estimated to have produced about $150,000 during last season.

Since the above was written these auriferous deposits have received a constantly increasing amount of attention, and during the season of 1903 large areas were systematically prospected. Along the terrace east of Nome, already described, an old beach containing fine gold in large amounts has been uncovered in shallow prospect holes, verifying a prediction made in the previous report. Fossil mollusks and Bryozoa identified as Recent by William H. Dall have been found in the old beach sands uncovered by the mining operations.

OLD BEACH LINES.

One of the most definite placer deposits of the coastal plain lies about half a mile back of the present beach and is traceable for 9 miles from Hastings Creek to Dry Creek, being marked by the escarpment rising from 10 to 40 feet above the tundra already referred to. That this is a beach deposit is evident not only from the presence of the escarpment but also from the nature of the materials, which consist of characteristic well-rounded pebbles and white quartz sands containing rounded fragments of sea shells. The same beach line is probably continued westward, but is not marked by an escarpment, as it here formed a barrier between a lagoon and Bering Sea. It seems likely that the lower Snake River, whose course for 5 or 6 miles is parallel to the beach, follows the shore of the old lagoon. (See topographic map, Pl. VIII, in pocket.) The evidence for this supposi-

of this part of the Snake River trench, parallel with the present beach. Ancient beach deposits may be recognized by the character of the material, even where no scarp or lagoon is preserved. Perfectly rounded pebbles and shingle with white sands, composed mainly of quartz grains but containing rounded fragments of sea shells, are infallible indications of beach material. The peculiar bedding of the beach sands can usually also be recognized. By these criteria ancient beaches now deeply buried below the tundra have been identified and reported by prospectors at a greater distance from the coast.

The east end of the ancient beach above described is being mined about one-fourth mile from the present shore near Hastings Creek, which enters Bering Sea 10 miles east of Nome. Hastings Creek is about 6 miles long, and its basin is entirely within the coastal plain. It has a low gradient, but carries sufficient water for sluicing. About 2 miles from the coast a prospect hole reached bed rock at 32 feet.

Gold was discovered near the mouth of the creek in 1901, and since that time more than $6,000 has been produced. The section exposed by the mining is as follows:

Section near mouth of Hastings Creek.

	Feet.
Moss and muck	2
Beach sand	10
Coarse gravel and clay.	

The gold occurs in three or four thin layers of "ruby" sand near the bottom of the beach-sand stratum and is of the same character as beach gold. This pay streak has been traced about 400 yards to the west, and also occurs on the east bank of the creek, where a few hundred dollars have been produced. When Mr. Hess visited the locality in June, 1903, a dump of about 1,000 cubic yards had been mined out and a gasoline pump was being installed on the creek to provide water for sluicing. A ditch to bring water from Flambeau River for hydraulicking has been surveyed.

There appears to be an extension of this deposit about half a mile east of Hastings Creek, where there is a well-marked bench about 40 feet above the sea. At this place several pits have been dug, and it is said that several thousand dollars in gold has been taken out. The excavations show sands and gravels with some seams of clay. Gold has been found in a layer of "ruby" and black sand about 8 feet below the surface, where the placers are said to have yielded 10 cents to the pan.

The same beach deposit is found again east of Nome River, where it has been traced to Peluk Creek. This elevated beach has been prospected for about 1½ miles, and one claim is reported to have produced $20,000 during the winter of 1902–3.

Similar deposits have been mined to a limited extent about half a mile east of Nome near Dry Creek, and also at the mouth of Bourbon Creek. Here the gold-bearing stratum lies near the surface of the tundra, about 20 feet above the bed of the stream. The excavations show a few inches of moss and muck overlying beach sands that contain well-rounded fragments of sea shells. The fine gold is mostly concentrated in thin layers of "ruby" sand interbedded with white sand. From some of the layers of this "ruby" or garnet sand Collier obtained 15 to 20 fine colors of gold in a shovelful of the material. In one place the deposit was sluiced early in the season with water collected by a dam on the tundra. In another place horses were used and the pay dirt was scraped down the hill to sluice boxes near the creek bed. Dredges have also been used to handle this material.

The latest authentic information on the elevated beaches is contained in a report by Moffit, which includes an account of the so-called third-beach line discovered in the fall of 1904. The following is quoted from this report:[a]

Our knowledge of the tundra has been greatly increased during the last two years by developments on the buried beaches. Two well-defined ancient gravel deposits of this sort have now been explored through a part of their length. [See fig. 9.] One of these, near Nome, lies about three-fourths of a mile north of the present coast line and extends eastward to a point within a short distance of Cape Nome. At Hastings Creek it is about a fourth of a mile distant from tide water, but east of that locality its position is not known, and it appears to have been removed through erosion. To the west it is probably represented by the beach deposits of Jess Creek. Its elevation above sea level is 37 feet and its location is in most places indicated by a steep, moss-covered gravel bank, at whose foot it lies. The other beach line is definitely located from the place where it is crossed by the railroad tracks at Little Creek to McDonald Creek, a distance slightly more than 5 miles. Its elevation above sea level, according to reliable information obtained at Nome, is 79 feet. It extends in a nearly straight or slightly curved line between the points mentioned, yet shows slight undulations and is interrupted by the valleys of Nome River, Anvil Creek, and Snake River, these streams lying below its level. These two ancient coast lines are generally known as the second and third beaches, the present one being regarded as the first. Mention of others lying between is frequently heard, but although this is not only possible but even probable, no other continuous beach has yet been traced.

A generalized section of the deposits exposed along the third beach would show gravel or sandy gravel, with coarse bowlders resting either on schist bed rock in which are a few limestone beds or, as is the case at the east end of the beach, on fine sands which in turn rest on schist bed rock. Above this is a considerable body of gravel overlain by "muck" and the surface vegetable matter. This general section is, however, subject to wide variations. The thickness of the muck varies from 1 to 2 feet to 20 feet or more. Underlying the muck in several shafts a blue clay was found. In places a heavy wash

[a] Moffit, F. H., The Nome region, Alaska: Bull. U. S. Geol. Survey No. 314, 1907, pp. 134–144.

occurs near the surface. Here and there the gravels are slightly cemented by the deposition of lime or iron oxide. Marine gravels are interbedded with creek wash. The character of the material varies both in composition and in coarseness—in fact, the deposits where first exposed on Little Creek were so varied in appearance and manner of deposition as to cause doubt whether any of them were of marine origin.

The gold-bearing gravels or pay streaks vary in width from 25 to perhaps 100 feet and have a fairly constant southerly slope of about 1 foot in 10. They rest in some places on bed rock, in some places on other gravel, and toward the east, as has been stated, on fine sand.

Only a part of the shafts on the second beach have been sunk to bed rock, as the pay streak usually lies on a false bed rock of clay or sandy clay and

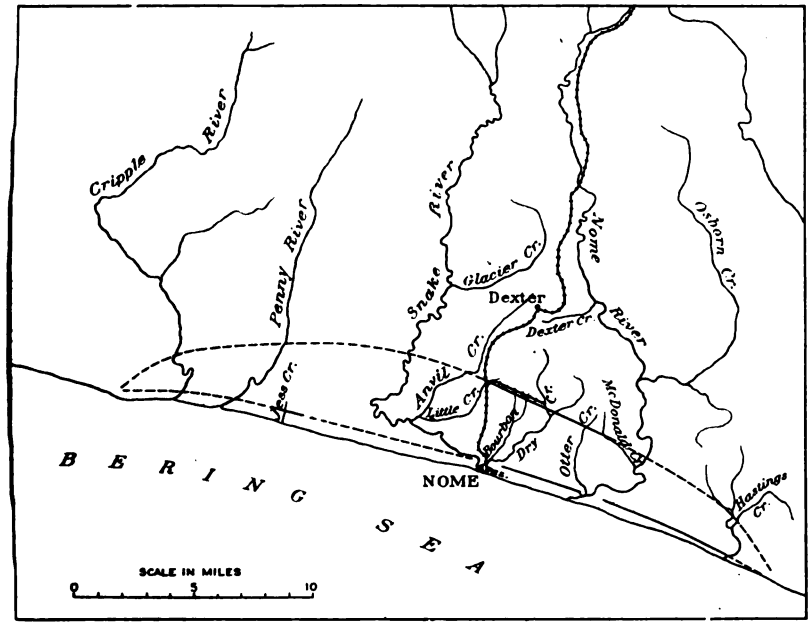

FIG. 9.—Sketch map showing the known parts of the second and third beaches (full lines) at Nome and their hypothetical continuations (dashed lines). The upper line also shows approximately the area of the Nome tundra.

gravel. There are few data, then, on which a complete generalized section could be based, but it appears that, though coarse, angular material is by no means lacking, it is not as abundant as on the third-beach line. Furthermore, the quantity of garnet, or "ruby sand," is far greater on the second beach, and the proportion of other sand and fine gravel is also greater. This is probably accounted for by the fact that much of the material of the third beach has traveled a shorter distance from its source and has been less subject to stream and wave grinding.

In the third beach, then, irrespective of any greater differences which may have occurred in the meantime, we have definite proof that the land now stands not less than 79 feet higher than it did when the beach formed the coast line. Further evidence of elevation, though of lesser amount, is furnished by marine

shells taken from various shafts between the second and third beaches. Such shells in an almost perfect state of preservation are found on Center Creek and suggest that in that locality they accumulated in comparatively quiet water. They occur in gravels 32 feet below the surface and at an elevation of about 20 feet above sea level. Numerous marine shells from Otter Creek were obtained at approximately the same height above sea but at a depth of 50 feet below the surface. They are in a good state of preservation.

As a rule the deposits of the beaches and of the tundra in general are frozen from top to bottom, but there are places where this is not the case. One such area is located near the intersection of the third beach and Holyoke Creek and has caused difficulty in working the Bessie Bench claim because of the large amount of water circulating through the gravel. The boundary between the thawed and frozen ground was here located by drilling, and care was taken not to bring the workings too close. Thawed ground is in some places overlain by frozen ground and here and there is underlain by it also. The reason for the presence of unfrozen areas is not entirely understood, but they are probably due in part at least to the circulation of water through the gravel.

* * * * * * *

To those who year by year have followed the development of mining in the region adjacent to Nome it is a noticeable fact that during the summer of 1906 the attention of mining men was largely given to operating within the area of the Nome tundra. This is a condition which may probably continue for some years, until the gold of the beaches begins to fail or until all the available



FIG. 10.—Diagram showing the manner in which gold is concentrated north of Nome in shallow depressions or on sides of cusps of the third beach.

ground is opened up. If, in addition to the operations on the tundra, those of Glacier Creek, Anvil Creek, and Grass Gulch are included, all the most important workings will have been taken into account, although elsewhere within the area shown on the Nome and Grand Central maps minor operations were conducted on a few scattered streams, probably the most extensive being on Buster Creek.

At present the buried beaches of the Nome tundra occupy the center of the mining stage, and the efforts of all operators have been given to the exploitation of the old placers or the search for new. Litigation touching the rights of property, however, has seriously obstructed the development of much of the most valuable ground, and may be expected to continue to do so as long as the present methods of acquiring and holding mining property are in force.

Mining is carried on most actively just now along the two ancient shore lines whose locations and principal features have already been described, but there has been more or less work on different streams, such as Dry and Bourbon creeks, and extensive drilling in various other parts of the tundra. On the first or present beach practically all work was suspended. Along the second beach many of the old properties were worked and some very good new ground was discovered in the vicinity of Otter Creek. The third beach is the principal producer of the region.

where.[a] During the winter of 1905–6 the eastward continuation of the beach was located to a point within a short distance of Nome River. Between Moonlight Creek or the railroad and McDonald Creek it is traced continuously. To the west and east of these localities it is not definitely known. Remarkably rich ground was exploited near Little Creek and between Holyoke and Bourbon creeks, and nearly all the claims between Little and Dry creeks have shown good values in gold. East of Dry Creek less work has been done, but most of the shafts have struck good pay. Nevertheless, some claims or parts of claims are of little value with the present cost of mining, for while the beach gravel deposits are continuous the pay in them is not so. There are intervals along the line where gold is present in small amount or is almost lacking. These places are sometimes referred to as "blanks." Further, the gold is not evenly distributed through any of the gravel. The writer was informed that in the shallow depressions such as occur at intervals along the beach a much greater concentration of gold took place on the east ends [see fig. 10], and that in one or two places where low ridges or rolls of bed rock reached the surface and projected slightly beyond the ancient beach exceptional amounts of gold were found on their west sides, a position of maximum concentration corresponding to that in the indentations just mentioned. This would indicate that the distribution of gold in the gravels was largely influenced by the prevailing direction of the ocean waves and currents. It is probable also that very rich deposits, such as occur at Little Creek and Bessie Bench, are due to their nearness to the source of gold or to streams which brought it to the sea. The character of both the gold and the gravel accumulations would indicate the same thing. On the western part of the beach the gold is, on the average, much coarser than at the east end, where it resembles in appearance and approaches in fineness that of the present beach. The gravels of the west end are more variable in character and exhibit a larger amount of coarse, angular stream wash than those toward the east, showing that the conditions under which the western gravels accumulated were less uniform—at one time stream deposits, at another sea deposits, being laid down.

Some ideas concerning the eastward and westward continuations of the third beach are suggested by an examination of the topographic map. The shore line must formerly have extended from the hills west of Cripple River to Cape Nome, and if one may judge by the portion now known it had the form of a broad arc of fairly uniform curvature, like the present beach, but with smaller radius. It is the belief of not a few miners at Nome that the third beach did not, like the first and second beaches, keep to the seaward of Cape Nome, but that it passed to the north through the broad, low depression between Saunders Creek and Flambeau River, thus forming an island of the Cape Nome granite area. The elevation of the depression between Cape Nome and Army Peak is only 115 feet, and the possibility of the cape being an island at the time when the third beach was formed can not be refuted by any evidence now at hand, although it appears improbable. Bed rock is traced northwestward from Cape Nome for a distance of nearly 5 miles, and in the low rounded hill between Hastings and Saunders creeks has an elevation of 297 feet. Between this point and the Army Peak schist mass, still farther to the northwest, is an interval of about 3 miles across a broad, low saddle where no rocks are exposed. As stated, the elevation of this flat at its lowest point is about 115 feet, but the depth of gravel is unknown. If it has a thickness of 40 or 50 feet it is possible that the third beach passes through. It seems far more probable,

[a] Moffit, F. H., Gold Mining on Seward Peninsula: Bull. U. S. Geol. Survey No. 284, 1906, p. 134.

however, that the controlling influence in determining the coast line here was exercised by Cape Nome, since it must have been a factor in directing the ocean currents and consequently the accumulation of sands and gravel. To judge from present conditions, it appears more likely that the sea would have built a connecting bar between Cape Nome and Army Peak rather than wash between them. At any rate, the force of the waves due to southerly and southeasterly winds would have been greatly diminished through the protection offered by Cape Nome, and the amount of concentration would have been thereby decreased.

Another idea which is maintained by some and may lead prospectors astray is that wherever bed rock can be found at an elevation of 79 feet above sea level the third beach will be present. The fallacy of this idea is immediately apparent when it is remembered that, so far as known, the old beaches were not laid down on a cleanly swept, somewhat uneven rock floor, but were formed over a surface whose inequalities had already been reduced by a filling of gravel and sand. This is shown by the fact that in many places they do not rest on bed rock, but are underlain by a variable thickness of loose deposits.

Further evidence of a somewhat negative character is afforded by the fact that neither the third beach nor either of the others is known to have formed reentrants at such places as their intersections with the valleys of Snake and Nome rivers, but rather that in each place where the river valleys lie below the beaches at such intersections the beaches end abruptly, for the present valleys through the loose deposits have been cut since the beaches were formed.

Another fact which must not be lost sight of in prospecting for the third beach is the possibility of recent warping. When formed, a beach is at sea level, and if raised uniformly throughout its length all parts will continue to have like relations to the sea. But changes of level do not always nor even usually take place in a uniform manner throughout all portions of an affected area. One part may be raised or lowered more than another, or one part may even be raised while another is sinking. It does not follow, therefore, that because one point of the beach has an elevation of 79 feet all other parts will have the same elevation, although in a small area such as this it is probable that they will not differ greatly.

Since, however, we now have no evidence that warping of any consequence has taken place, and since so far as we know it the third beach does maintain a fairly constant level, it is not to be expected that it will be found in any locality whose surface elevation is less than 75 or 80 feet above tide, even if such an area lies directly between or in line with points where it is known to be present.

Some probabilities concerning the distribution of gold in the known beaches or in others which may be found are gained from a consideration of its distribution in the gravels so far exploited. The richest gold-bearing gravels mined in the Nome tundra have been found in that portion of it which lies between Nome and Snake rivers. This corresponds also with the richest part of the first or present beach, whose greatest values were taken from the neighborhood of the mouth of Snake River and from sands to the east toward the mouth of Nome River. This area lies directly south of the mineralized area from which it is believed that the gold has been chiefly derived, and it is the locality toward which weathered material from the near-by hills may properly be expected to migrate, since it lies immediately between them and the sea. There appears, therefore, to be warrant for the assumption that in the future, as in the past, the most valuable placers will be found within the limits given. One apparent exception is to be noted in the old beach placers of Hastings Creek. There is a

Cape Nome, and that the gravels from which they were derived may not originally have carried any very notable amount of gold.

UNCONCENTRATED GRAVEL-PLAIN PLACERS.

Under this heading will be described a number of localities at which gold has been mined from deposits not directly traceable to wave action or to reconcentration in stream beds. Though there is undoubtedly some gold disseminated throughout the gravels of the coastal plain, only a few small areas have been prospected and mined and the extent and nature of the workable deposits are not known.

Mining is in progress in a locality not visited by members of the Geological Survey, on the east side of Nome River about 2 miles below Osborn Creek. A ditch 4 or 5 miles in length has been constructed from Osborn Creek for hydraulicking. No details are known, but the pay streak is believed to belong to the class of unconcentrated gravel-plain deposits.

It is reported that $2,000 was taken out near the head of Peluk Creek about 2 miles from the coast during the winter of 1901–2, since which time only grubstakes have been obtained. The pay gravel consists of angular schist pebbles and clay resting on a clay seam 2 to 4 inches thick. Mr. Hess measured the following section:

Section near head of Peluk Creek.

	Ft.	In.
Gravel and clay	1	6
Sandy clay and muck with some angular gravel	5–6	
Angular gravel with some clay	4	
Clay seam	2	4

Mining was by shafts and drifting without timbers. The gold is coarse, rough, and iron stained, and the largest nugget was worth $1.25. It is reported that 15 prospect holes, sunk with an 8-inch churn drill, reached gravel at 6 to 10 feet below the surface and bed rock at 72 to 82 feet. The bed rock is gray mica schist and has a nearly level surface about 30 feet above the sea. The owners of the property report that the lower 40 feet of gravel carry from $2 to $8 in gold per cubic yard, which appears to be a surprisingly high tenor.

On Holyoke Creek, a small tributary of Bourbon Creek, at a point about 3 miles from the coast, a shaft 118 feet deep was sunk, in which it is reported that a layer of beach sand carrying 10 cents to the pan in fine gold and containing fragments of sea shells was encountered.

In 1903 a company attempted, without success, to mine the gravel plain with a bucket dredge at a point 3 miles from Nome, south of Cooper Gulch and half a mile from the foothills. The mine is about 100 feet above sea level, but a shaft 65 feet deep did not reach bed rock. The deposit from the surface down carries some gold, but the parts that have been mined consist of small pay streaks resting upon

layers of clay. It is reported that the clay layers are of small extent and irregularly distributed, like the clay seams of the beach placers described on pages 152–153. The pay streak, as mined, is said to have carried from $2.50 to $3 per cubic yard.

In 1902 and 1903 numerous drill holes to bed rock were sunk between Anvil and Dry creeks. The depth to bed rock ranges from 80 to 120 feet, and although no well-marked stream channels were located, broad depressions or hollows were found under some of the present stream channels, and nearly everywhere the bed rock was found to be above sea level. The method of prospecting used was to sample the gravel systematically by taking pans every 2 feet. These samples were panned down and the concentrate, consisting mainly of black sand, garnet sand, and fine gold, was assayed. It is claimed that a large area, believed to lie along an ancient beach line, was located, in which the whole deposit from the surface down to bed rock contained enough gold to pay if an economic plan of working on a large scale could be devised.

From other reliable sources the existence of an extensive body of rather low grade auriferous gravel near the foot of the hills south of Anvil and Newton peaks is reported at an average elevation of about 100 feet above the sea. In the practical working of such deposits some unique problems are presented to the mining engineer on account of their great thickness, frozen character, and poor drainage. One plan proposes to place a large dredge of unusually strong construction on Snake River, and, after testing the river bars and the deposits in the river bed, to dig out a channel into original gravels under the tundra. It will be necessary to make the dredge strong enough to excavate the frozen ground. A dredge was built on Snake River in 1904, but the results obtained are not yet known. Frozen ground, however, will yield to hydraulic processes, and, if dredging should fail, some combination of the hydraulic giant and dredge or hydraulic elevator may ultimately be devised, which will render these deposits productive. An ample supply of water with sufficient head can be obtained from Nome River.

RECONCENTRATED GRAVEL-PLAIN PLACERS.

Nearly all the streams which have trenched their beds across the coastal plain contain some gold derived from the original deposits by reconcentration. On the smaller streams, which lie wholly within the coastal plain, all the placers are obviously of this origin, whereas the larger streams, which rise in the upland region, may contain gold derived directly from the bed rock. Bourbon and

tration from the coastal-plain gravels. The amount of concentrated gold which their beds contain, when compared with the cubical dimensions of their channels, affords a basis for estimating the amount of gold contained in portions of the gravel plain.

A small amount of gold has been mined about 4 miles from the coast on Hastings Creek. The locality, which is comparatively unimportant, was not visited and the details regarding the occurrence of the gold are not known, but the reports indicate that it is of reconcentrated type.

Bourbon Creek, whose valley lies within the coastal plain, is about 3 miles long and joins Dry Creek near Nome. It carries from 20 to 100 miner's inches of water. Two miles above its mouth it forks, the west fork being called Holyoke Creek. Its trench probably will average 15 feet deep and 500 feet wide. Mining began on Bourbon Creek in 1900, and small amounts of gold have been taken out along nearly the entire length of the creek.[a] Its output during 1900 has been estimated at $5,000; in 1903 the output of Bourbon Creek and its tributary, Holyoke Creek, was probably not far from $40,000. The total output up to 1903 was probably about $100,000.

Near the head of the creek two sections of the gold-bearing deposit at points half a mile apart have been noted. One about a mile from the head is as follows:

Section 1 mile below head of Bourbon Creek.

	Feet.
Moss and muck	2
Rock and blue clay	6
Gravel	1
Blue clay	1
Schist gravel, pay streak	1
Clay (of unknown thickness).	

About half a mile from the head of the creek another section was measured, as follows:

Section one-half mile below head of Bourbon Creek.

	Feet.
Blue and red clay	4
Gravel, the pay streak	2
? Sand (of unknown thickness).	

On a claim near the head of the east branch a dump containing 25 cubic yards of gravel mined in the winter of 1901-2 yielded $300, or $12 per cubic yard. On a claim about one-fourth mile farther down the creek a pay streak 10 or 12 feet wide and 5 feet thick has been sluiced, yielding about $4 to the cubic yard. These

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 69, 83–84.

figures show that some of the gravels of Bourbon Creek are rich enough to work by shoveling into sluice boxes. Owing to the low gradient and small flow of water, however, machinery is required to work the deposits at a profit. In 1903 three bucket dredges, each with an estimated capacity of 250 yards in ten hours, were installed. These machines were not successfully operated because they were too small and light. Late in the fall of 1903 one of these dredges was placed near the mouth of the creek, where it was successfully used for removing the tailings from a small hydraulicking plant.

Saturday Creek is the name given to the upper part of Center Creek, which flows into Snake River about a mile above Nome, and Wonder Creek is the middle part of the same stream. This diversity of names is due to the fact that under the local rules, established by the prospectors, one claim only was allowed to each man on a creek. This rule was often circumvented by changing the name of a creek at each tributary and locating a claim with each change of name. Only a small amount of work has been done on Saturday Creek since 1900, and it was not reexamined in 1903. In 1900 one claim was being operated. The section showed 2 or 3 feet of muck, below which was 3 feet of schist gravel containing the gold. This was generally bright yellow, though some was dark, and all was rather coarse. The largest nugget found here was worth $14.50. Nuggets worth from 25 cents to a few dollars were common. Some of the gold was smooth and some rough. Quartz was attached to much of the gold. The concentrates consist of magnetite and garnets, with some scheelite.

Dry Creek and Newton Gulch, where they are intrenched across the gravel plain, resemble the streams just described, but as their headwaters are in the upland it is evident that their gravels may carry gold brought directly from the bed rock. It is probable, however, that most of their placer gold has been reconcentrated from the gravel plain.

Newton Gulch, an eastern branch of Dry Creek, 3 miles from the coast, is about 1½ miles long and carries less than a sluice head of water during the summer months. Its source is on the south slope of Newton Peak, but it flows across an elevated portion of the gravel plain through most of its length. Considerable gold is reported to have been taken out of the creek, but it appears that the rich gravels were of no great extent and that those which could be worked at a profit by primitive methods have been exhausted.

A section exposed on Newton Gulch just above Left Fork is as follows:

Section on Newton Gulch above Left Fork.

	Ft.	In.
Sandy clay	3	6
Schist gravel, somewhat cross-bedded		6
Sand	2	6
Gravel		7
Sand and gravel		3
Pay streak, consisting of schist gravel	3	
Clay (thickness not known).		

Dry Creek heads between Anvil and Newton Peaks and flows southward about 6 miles to Snake River. Its upper 2 miles lie within a narrow valley cut in schists and limestones, but below it flows in a shallow trench across the coastal plain. At its mouth it carries from 50 to 150 miner's inches of water. Mining in the reconcentrated placers of Dry Creek began in 1900,[a] and the reported production for that year was $2,500. In 1903 the creek bed was mined at several places within a few miles of the foothills, but the whole production did not exceed a few thousand dollars. The gold is light colored and of varying coarseness, and nuggets $1 in value are the largest reported. The concentrates in the sluice boxes consist of much black sand and considerable scheelite.

The following section was measured on Dry Creek about 1½ miles from the foothills, an eighth of a mile above the mouth of Newton Gulch:

Section on Dry Creek above Newton Gulch.

	Feet.
Moss and muck	3
Sandy clay	3
Gravel composed of mica schist, limestone, etc. (the pay streak)	8
Clay (thickness unknown).	

The depth to bed rock at this place is not known. At other places the gravels are worked to a somewhat less depth. A prospect hole 1 mile from the hills has a depth of 92 feet, but does not reach bed rock. Three-fourths of a mile above the mouth of Newton Gulch a steam shovel has been used, but most of the mining has been done by drifting in the winter. Near the point where the valley of Dry Creek debouches on the coastal plain there is a series of productive bench claims situated along the course of an old channel on the east side of the creek. These are described in connection with the creek and bench placers of the upland region (p. 185).

Anvil Creek, which in its valley portions is one of the richest in Seward Peninsula, flows across the coastal plain for about 2 miles before it joins Snake River. In this distance little mining has been done, but in view of the rich placers found above (see p. 186) there

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 69–82.

is good reason to expect workable deposits of fine gold in this part of its valley. As in all the streams of the tundra belt, its bed rock is deeply buried and it can not be mined profitably by the simple methods employed in the creek and bench placers.

Nome and Snake rivers carry large volumes of water and flow across the gravel plain in broad trenches. Their placers, which are of the river-bar type, have probably been derived as much from the upland as from the plains gravels.

Nome River is trenched across the coastal plain for about 5 miles. No attempts have been made to work the bars or river bed on a commercial scale. Should the dredging plants recently installed on other rivers of the peninsula prove successful, the bed of Nome River will doubtless soon receive attention.

The lower 6 or 7 miles of the Snake River Valley is intrenched in the coastal plain, and it here receives as tributaries Dry, Center, Anvil, and Glacier creeks, the gravels of all of which have yielded placer gold.[a] Snake River has also many productive tributaries north of the coastal plain. A small dredge was operated on Snake River near its mouth as early as 1900, but it was a primitive affair and the work was soon abandoned. A larger and stronger dredge was placed on the river in 1904, but the results obtained with it were not learned.

BAR, CREEK, AND BENCH PLACERS OF THE UPLAND.

The greater part of the Nome region, as here defined, lies north of the coastal plain and comprises uplands from 800 to 1,800 feet in height, bounded on the north by the Kigluaik Mountains, which reach elevations from 3,000 to 4,700 feet. Many of the lower hills are flattened on top, suggesting a dissected plateau, and their sides are benched at various levels. Near the seaward margin of the upland are systems of broad terraces about 500 feet in height, deeply buried in gravel, and these contain the high-bench placers described elsewhere. The upland is dissected by the valleys of Nome and Snake rivers and their many tributaries, and in these valleys lie the creek and low-bench placers described in the present section. Below the extensive high gravel-covered bench or plateau already mentioned the walls of the valleys show many minor benches, some of which are stream terraces and others products of differential weathering of the bed rock and of local creeping or sliding movements of the soil.

NOME RIVER BASIN.

Introduction.—Nome River has a broad valley for 20 miles above the coastal plain, in most places with one or two terraces not over

pocket.) The floor of the valley is deeply gravel filled, and in some places the gravels rise in bluffs from 20 to 50 feet above the present flood plain. The flood plain ranges from 100 feet to a mile in width and at its lower end merges with the coastal plain. For 14 miles the gradient is about 10 feet to the mile and for 10 miles above this it is about 50 feet to the mile; the upper 5 or 6 miles are torrential.

Colors of gold have been found on the river bars for 20 miles from the mouth and are reported from prospect holes in the flood plains 10 or 12 miles from the coast, but as yet no attempts to extract the gold have been successful. Placers have been worked on many of the tributaries from both sides. The placers of the tributaries from the east, which are first described, are of less importance than those on the west, which include some of the richest diggings on the peninsula.

Osborn Creek.—Osborn Creek, the first large tributary of Nome River from the east, occupies a rather broad valley, the upper part of which is cut in siliceous chlorite schists and limestones of the Nome group. The mountain north of the mouth of Osborn Creek is composed almost entirely of greenstone, great blocks of which have rolled into the creek, forming bowlders of all sizes up to 10 feet in diameter. The gravels also contain many pebbles and bowlders of granite, which have probably been transported southward from the Kigluaik Mountains. (See pp. 94–99.) Similar granite bowlders are found up to an elevation of 800 feet on the mountain west of the creek. Although gold was discovered on this creek as early as 1900, very little development work has been done. It is reported that during the season of 1903 about 40 men worked on the creek. The workings are scattered along the creek for about 1½ miles above a point 5 miles from the mouth.

Along the right bank of the creek there is a gravel bench from 8 to 20 feet high, which is probably a remnant of a more extensive deposit filling the valley. This bench had not been prospected in 1903. The gravel deposits of the creek bed average about 100 feet in width and have been excavated to a depth of 5 or 6 feet, where a clay seam forms a false bed rock; the real bed rock has not been reached. The gravels are rather coarse, pebbles 3 or 4 inches in diameter being common. Some gold is found from the surface down, but the richest pay lies just above the false bed rock. The gold is coarse, bright, and most of it well rounded, though some of the pieces are angular. A considerable portion is in nuggets worth from $1 to $20. When sluicing was in progress, a daily yield of $10 to $18 to the shovel was claimed, which, if true, would require an average gold content of $2.50 to $4.50 a cubic yard. Apparently there are on Osborn Creek extensive deposits of gravel containing low values, which can barely be worked at a profit by the primitive methods now

in use. It is estimated that 1,000 miner's inches of water can be brought from New Eldorado Creek and the head of Osborn Creek to these diggings, with a head of 100 feet, for which 6 miles of ditch would be required. Should such a ditch be constructed, a large part of the gravels of the lower creek can probably be worked at a profit, but thorough prospecting of the ground to determine the gold tenor should precede any extensive ditch building.

Buster Creek.—Buster Creek, a tributary of Nome River from the east about 7 miles from the coast, is about 4 miles long. In the upper 3 miles of its course it flows through a narrow V-shaped canyon; below it is trenched across the floor of Nome River Valley. About 1¼ miles from its mouth the creek forks, the northern fork being called Lillian Creek.

Mining has been in progress here since 1899. The mines are easily reached, as the wagon road from Nome to Venetia and Iron creeks follows up Buster Creek from Nome River. The freight rate from Nome does not exceed 3 or 4 cents per pound.

The bed rocks are calcareous and chloritic schists and limestones of the Nome group. No intrusive greenstones have been found in place in the creek valley, though pebbles of such rock, which probably come from the greenstone on the south side of the creek, occur in the gravels. The gravels are from 2 to 3 feet thick and contain pebbles of schist, quartz, greenstone, and some granite. Some claims on this creek made good returns in 1899 and again in 1900. Much of the gold extracted was coarse, and the largest nugget found was worth $18. The assay value of the gold is said to be $18.60 to the ounce. In 1903 some of the operations included a reworking of the gravels that had been sluiced in 1900; others were in virgin ground. In the earlier operations the bed rock, some of it carrying the richest pay, was not cleaned up, so that it has been found profitable to strip the old tailings and to take out the bed rock to a depth of 1 to 2 feet. About 2 miles from the mouth of the creek some undisturbed ground was to be seen in a gravel deposit about 100 feet wide and 3½ feet thick, in which the richest pay was on the bed rock and not in it. A ditch half a mile long raised the water about 30 feet above the creek bed, and a hydraulic apparatus, consisting of a canvas hose and sheet-iron nozzle, throwing a 4-inch stream was used. The tailings were removed by a team of horses and scraper. The plant required three men to operate it and handled about 100 cubic yards per day of ten hours.

The bed rock and gravel of Lillian Creek, which joins Buster Creek 1 mile from its mouth, are similar to those of Buster Creek, but the gravel is more deeply covered by soil and muck. The gravels

and the output probably little more than paid wages. Some of the gold is so coated with iron oxide that the nuggets might easily be mistaken for small pebbles of hematite. About a mile from the mouth the pay was said to be evenly distributed through the gravel, which was here 3 to 4 feet thick, and the output was from $12 to $13 per man shoveling in.

Union Gulch, not over a mile long, joins Buster Creek from the north about a mile above Lillian Creek. Its bed rock is a gray schist broken up by many small faults. The gravel deposit is from 10 to 20 feet wide and about 30 inches thick and has been estimated to carry from $3 to $4 a cubic yard. The values are nearly all on bed rock. The gold is coarse and rusty, and the largest nugget found was worth $16.

Gold-bearing gravels have been discovered in a bench 100 feet above the creek bed on the south side of Buster Creek, about 2 miles from its mouth. This bench has been traced for about 700 feet and is crescent shaped, with the ends pointing toward the present creek bed. A section of this deposit from the surface down is as follows:

Section of bench 2 miles above mouth of Buster Creek.

	Feet.
Muck and slide rock	18
"Low-grade pay gravel"	10
Glacial mud (probably frozen slide deposit)	10
"High-grade pay gravel"	3
Iron-stained schist bed rock.	

The width of the upper pay streak is reported as 140 feet, and of the lower pay streak 25 feet. The lower pay streak is inclosed by well-defined bed-rock rims, and pay is found in the decomposed schist to a depth of 18 inches. At the west end of the deposit the rim on the creek side is wanting, and the gold-bearing gravels are spread over the hillside below the old channel, probably by local sliding. A section here, probably in the end of the old channel, shows 18 feet of ill-assorted gravel and muck, containing many bowlders of gneiss, granite, and greenstone, but a few feet down the hill the deposit is not more than 4 or 5 feet thick. Pans are said to average from 10 to 18 cents, and from a pit 75 by 30 feet and 18 feet deep $4,000 is said to have been taken. The gold resembles that of Buster Creek, and is reported to assay $18.97 to the ounce. It is coarse, but has few nuggets of any considerable size, and is mostly well worn, though some is rough. About half a mile east of this place a smaller deposit at approximately the same elevation is cut by Grace Gulch, a small tributary of Buster Creek. This was worked in the winter of 1902–3, yielding about 60 ounces of gold similar to that of Buster Creek. The working of these benches is difficult on account of the small water supply. A ditch along the hillside from Grace Gulch brings

to the first-described locality about 50 miner's inches of water, which is mostly seepage from the hillside above the ditch.

From the above facts it seems evident that this deposit was formed in an old channel of Buster Creek. After the lower and older pay was formed the channel was partly filled with material sliding in from the hillsides and raising the creek bed. In the higher bed thus formed the thicker and wider upper pay streak was deposited. The creek then deserted this channel, which was afterwards covered by slides from the hills above. These slides at the upper and lower ends of the deserted channel have continued and either carried the gold-bearing gravel down to Buster Creek or scattered it in the form of a hillside placer.

Dewey Creek.—Dewey Creek is a small eastern tributary of Nome River about 11 miles from the coast. During the summer of 1903 very little mining was done on the creek, and it was not visited by members of the Geological Survey. The following description is quoted from Brooks:[a]

> This stream rises in the limestone hills a mile and a half north of the head of Lillian Creek and flows into Nome River about 4 miles above Buster Creek. At its head Dewey Creek has cut a gorge, from which it emerges to flow through the gravels adjacent to Nome River. Some gold has been taken from this creek, but not very much. A claim at an elevation of 300 feet has probably yielded the most. The section in the creek bed, to which work has been confined, is 1 foot muck, 1 foot sandy blue clay, 3 feet gravel, with pebbles of schist, quartz, greenstone, limestone, and granite. The gravel carries gold. Below is a false bed rock of sandy clay. The gold is rather light in weight, the largest piece being worth only a dollar. Considerable scheelite and garnet are associated with the gold, and not much magnetite. It has been reported that a natural amalgam occurs in the gravels of Dewey Creek, but it was not found by us nor did we find any cinnabar. Colors have been found in the high gravels which run up to 800 feet in the neighborhood.

Basin Creek.—Basin Creek, an eastern tributary of Nome River 13 miles from the coast, is about 3 miles long and flows westward. On the east side of the valley of Nome River at this point the hills rise to an elevation of 1,400 to 1,775 feet above the sea. Basin Creek through the upper 2 miles of its course occupies a deep valley in these mountains; in its lower half mile it flows across the broad valley of Nome River. At the edge of this valley the creek flows in a sharply cut gorge for half a mile, but above the gorge the creek valley widens somewhat, making a sort of basin, from which it takes its name. Early in June, 1903, the volume of the stream was probably not far from 500 miner's inches. The gradient is comparatively high, exceeding 100 feet to the mile. Gold was discovered and some mining was done on this creek as early as 1900. The amount of gold pro-

$30,000. In June, 1903, a great many loads of freight, consisting of pipes for hydraulic work, were being hauled to Basin Creek over a road which follows the gravel bars of Glacier Creek nearly to its head, then crosses Banner Creek and Nome River and follows the bed of Basin Creek up to the camps.

In the bed rock of Basin Creek limestone predominates and is interbedded with some calcareous and chloritic schist. The strike is generally north and south and the dip to the east at an average angle of about 20°. These rocks certainly belong to the Nome group, and it is believed that the limestones may be correlated with the Port Clarence, and they are so represented on the geologic map. The gravels consist mainly of limestone and calcareous-schist pebbles, with a few pebbles of greenstone. An average section of the gravel where it has been exposed by mining operations is as follows:

Section on Basin Creek.

	Feet.
Soil	2
Rounded creek gravel	3
Coarse angular material and clay (pay streak)	12
Bed rock containing gold in crevices	½–1½

In the pay streak over 30 per cent of the pebbles are more than 10 inches in diameter. The pay streak is about 150 feet wide, and it is said to extend along the creek for about 2 miles. The gold is bright, rough, and coarse. Nuggets worth from $1.50 to $2 are found, and many of the pieces are crystalline. The concentrates contain ilmenite, hematite, and scheelite. It is not probable that the gravels are of very high grade, for although mining began here about 1901 only a small area was worked previous to 1903. It appears that the gravels are not of sufficient value to pay wages if worked by the primitive method of stripping by hand and shoveling into sluice boxes. The limit of value can probably not be far above $6 to the cubic yard. Since 1903 mining on the creek has been done with hydraulic nozzles and elevators. The gradient of the stream bed is so great that the tailings need not be elevated more than 10 or 15 feet. With the hydraulic plants installed it is probable that the whole gravel deposit within the valley of the creek can be worked out in one or two seasons of continuous running.

Extra Dry Creek.—Extra Dry Creek flows into Nome River from the hills on the west side, about 7 miles from the sea. At its head it has a narrow canyon, but for most of its course it is trenched across the comparatively flat valley floor of Nome River. The creek gravels were being mined in 1900, when the workings were examined by Richardson.[a] In 1903 one man was working a rocker on the creek

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 76–77.

and probably making scant wages. The whole output of the creek has probably not exceeded $20,000.

A section in the creek bed about one-half mile from its head, where the richest placers were found, showed 1 foot of muck, 1 foot of sandy clay, and 6 feet of schist and quartz gravel on mica-schist bed rock lying nearly flat. Only the lower 2 feet of gravel were worked with rockers, the water being obtained from springs. The largest nugget found was worth $13, but there were several averaging from $3 to $6, some of which were attached to pieces of quartz. In the lower part of the creek the gold is fine and little work has been done.

Dexter Creek.—Dexter Creek is a western tributary of Nome River about 7½ miles from the coast. It forks about 2 miles from its mouth, the southern branch being called Left Fork and the west fork receiving the name Grass Gulch. (See sketch map, fig. 7, p. 150.) About 100 yards above the junction Grass Gulch forks again, the northern branch being called Deer Gulch. Another tributary mentioned in the economic descriptions is Grouse Gulch, which enters from the north about one-half mile below the mouth of Grass Gulch.

The mines on Dexter Creek are easily reached from Nome by a wagon road which follows Dry Creek to its head and, passing over the divide, comes down Left Fork. Freight may be hauled by wagon from Nome, and in 1903 was delivered at any point on the creek for 3 to 4 cents per pound. The mines are also easily reached from either Summit or Dexter station of the Seward Peninsula Railway, to which the freight rate from Nome is at the rate of 1 cent per pound. These two stations are both on the divide between the basins of Dexter and Anvil creeks. A considerable settlement, which includes several road houses and stores, is located at the forks of Dexter Creek, the oldest establishment there being known as the "Sour Dough" road house.

Through the 2 miles of its course below the principal forks the gradient of the stream is about 140 feet to the mile. Above this point, where the several branches converge, the gradient is higher. The amount of water in the creek during the dry season is less than a sluice head, but in the spring when the snow is melting and after the late summer rain there is sufficient water for sluicing in a small way. The creek valley has a V-shaped cross section and in its floor the creek flows in a shallow trench or gorge, leaving benches along its sides from 10 to 50 feet above the bed.

The bed rock of Dexter Creek consists of limestones and mica and chloritic schists of the Nome group. The strikes are in general nearly parallel with the course of the creek. Although schists are

extensive gravel deposits have been found along the bed of the creek from its mouth to the sources of its several tributaries, and these range from 2 to 20 feet or more in thickness. Where the bed rock is limestone the gravels gradually pass into the decomposed bed rock and extend downward in crevices and fissures. Gravel deposits also occur at a number of places in benches lying parallel with the creek bed, and several of the tributary streams head in high-bench gravels covering the divides.

Dexter Creek was staked and gold on it discovered as early as 1899. In 1900 mining was in progress through the whole length of this creek and on each of its tributaries, the total output being estimated at $300,000. In many places water which passed through the sluice boxes was pumped back and used again and again. Elsewhere the gravels were washed with rockers, to which water was carried by hand or was hauled from Nome River in barrels. A criterion of the richness of the gravels lies in the fact that they were worked with rockers, using water purchased at $2.50 a barrel. In 1901 and 1902 the creek was almost abandoned, as the richest pay streak had been exhausted. With the completion of the Miocene ditch in the summer of 1902 the work on Dexter Creek was revived, and in 1903 the creek probably produced as much gold as in 1900. The water from the Miocene ditch was used over and over again as it passed from one claim to another along the creek. In general the work was done by shoveling the pay gravel into the sluice boxes, but in several places the gravel was hydraulicked. As a rule the head was only 20 or 30 feet, and canvas hose and a galvanized-iron nozzle were sufficiently strong to stand the pressure. The gradient of the creek throughout its length is such that tailings are readily disposed of. With the revival of mining along this creek a successful search for bench deposits has been carried on, and it is probable that the gravels of the creek will not be wholly worked out for several years.

At a point one-half mile from the mouth of the creek the workings in 1903 showed 6 feet of pay gravel containing many large bowlders mixed with finer sediments and clay. Most of the bowlders were of limestone and the clay is probably residual from the limestone and schist.

One-half mile farther up, on the right bank of the creek, pay gravel in the form of a bench about 150 feet long by 50 feet wide was found resting upon blocky limestone 10 feet above the present creek bed. The gold extended for some distance into crevices of the limestone, which was taken up and washed during the mining operations.

A short distance above, the pay streak in the creek bed consisted of broken limestone fragments that seem to have slid down from the

hillside on the southern bank of the creek. This deposit is about 7 feet thick and about 30 feet wide.

On the left bank opposite this point bench gravels have been found about 75 feet above and 200 feet north of the creek bed. A pit to bed rock showed the washed gravel to be 30 feet thick. The bed rock at the bottom of this pit is reported to have a well-marked rim on the side toward Dexter Creek, indicating an old channel parallel with the present channel. Gold was found near bed rock, but the deposit had not been thoroughly prospected.

About 100 yards above the mouth of Grouse Gulch the workings on the left bank of the creek extend into a great mass of gravel, which may mark the upper end of the old channel just noted. The bed rock was here stripped for 100 feet or more, revealing a nearly level floor, beyond which it rises toward the hill. This bed rock is a decomposed schistose limestone with an irregular surface, due to the fact that some parts of it apparently disintegrated more rapidly than others. Above this bed rock lies a gravel bed which on the north side away from the creek bed has a thickness of nearly 20 feet. The section shows a layer of several feet of yellowish clay, below which there is nearly 15 feet of gravel consisting of badly sorted schist, limestone, and granite pebbles, mixed with a large amount of yellowish sandy clay.

Near the forks of Dexter Creek the gravel deposits are wider than those exposed farther downstream, but nearly all of the gravel worked in 1903 had been picked over in 1900 and 1901, when, owing to the scarcity of water, only the richest parts could be handled. The mining was done here by means of a 2-inch hydraulic nozzle under a head of 60 feet, with which the surface was first piped off almost to bed rock and carried through the sluice boxes, after which the remnant of the gravel and the loose bed rock were shoveled into the boxes by hand. The deposit worked covered an area about 60 feet wide and 250 feet long by 6 to 10 feet deep, and about half the bed rock was schist, the remainder being limestone. Gold was not found in the schist bed rock to a depth of more than a few inches, but in the fissures of the limestone the gold had penetrated to an indefinite depth. Some holes in the limestone have been found in which the gold-bearing gravels are mined to a depth of 20 or 30 feet. Though the bed rock rises on the south side of the deposit, the limits of the pay gravel had not been reached. The gold here is all waterworn, the pieces are smooth, and no corners or angles remain.

About a quarter of a mile above the forks, in Grass Gulch, is one of the richest of the Dexter Creek mines. Here a pit 150 feet wide by 300 or 400 feet long, mostly on the south side of the original creek bed, had been worked out in 1903. At the upper end of this pit a

A. ANGULAR GOLD-BEARING GRAVELS ON GRASS GULCH.

B. CREVICED LIMESTONE BED ROCK ON GRASS GULCH.

within a few feet of the surface down to the bed rock. Above the gravel there was a strip of moss and soil not over 2 feet thick. The section from the surface down is as follows:

Section in Grass Gulch.

	Ft.	In.
Moss and soil	2	
Brown gravel of rounded pebbles and clay	6	
Dark streak, probably stained with manganese		3
Brown gravel of rounded pebbles and clay	9	
Fissued limestone bed rock.		

The gravels consist mainly of pebbles and bowlders of limestone and schist, but contain also some pebbles of granite. The pebbles are well rounded and range from one-half inch to 10 inches in diameter. They are not well sorted in layers, though the whole deposit appears to be water-laid, and is cemented by a cinnamon-colored, rather sticky clay sediment. Shingling is not very distinct, but seems to indicate a current flowing toward the east.

The bed rock exposed by mining is chiefly limestone that has been fissured, and the erosion along the fissures has left a very irregular surface. (See Pl. II, *B*.) The sticky brown sediment extends into fissures and crevices for an unknown distance. These fissures connect with deep-seated channels in the body of the limestone, as is shown by the fact that they can not be filled with water, and that in the deeper excavations the sound of running water can be heard. A thin bed of decomposed schist included in the limestone forms a reef across the floor of the mine, into which the placer gold has not penetrated more than a few inches. The gravel above the schist reef is not as rich as that resting upon the limestone. These deposits are only partly frozen, and after hydraulicking the frozen parts remained as pinnacles. The gravels are angular and gold occurs in them from the surface down (Pl. II, *A*) and in the fissures of the bed rock as far as the excavations have gone, but the greatest values occur in the gravel layer resting upon bed rock. Many of the residual bowlders have been found to be spangled with alluvial gold. The gold is comparatively coarse, but ranges from fine dust to large nuggets. The largest nugget found, worth about $412, was well worn and apparently consisted originally of a sheet of gold surrounded by quartz, but the quartz has worn away and the edge of the gold has been worn smooth.

The mine was worked with water from the Miocene ditch, which has an elevation above the mine floor not exceeding 20 feet. About 700 feet of sluice boxes, with riffles through the whole length, were used, and the pay streak was, for the most part, handled with shovels.

Above this mine the valley of Grass Gulch is not well defined. Extensive prospecting has been done here and the limestone bed rock,

which underlies the valley, has been penetrated to a considerable depth, exposing a series of fissures and crevices probably connecting with underground channels similar to those just described, but no large body of gold-bearing gravel is known to have been discovered. The mine workings of the Summit bench, north of Anvil Mountain in the divide between Grass Gulch and Specimen Gulch, lie from one-fourth to one-half mile west of the highest workings on Grass Gulch and are described on page 206. From their position it seems quite possible that the upper gravels on Grass Gulch are connected with these bench deposits, but the bed rock on Grass Gulch appears to lie 50 or 60 feet lower than that of the bench.

On Deer Gulch, a northern tributary of Grass Gulch, a succession of schists and limestones is exposed and some gold has been obtained. The gravels were worked to a small extent in the early part of 1903, but operations had been abandoned before September.

The gold-bearing gravels of Dexter Creek also extend up Left Fork and probably connect with the gravels in the high-bench deposit on the divide between Dexter and Dry creeks. About one-fourth mile above the mouth of Left Fork a force of men were employed in the fall of 1903 exploiting the creek gravels with a hydraulic giant supplied with water from the pumping station on Nome River. The bed rock here consists of limestone and thinly bedded calcareous schists. The pay streak is not more than 50 feet in width and the gradient of the stream is such that the sluice boxes could be laid along the stream bed and the gravels above readily piped into them.

Grouse Gulch, a tributary of Dexter Creek from the north side, heads in the deep gravels of the Snow Flake and Sugar mines, from which it has a steep gradient southeastward to the creek. In 1901 and 1902 some mining was done along Grouse Gulch and a bed rock consisting principally of limestone but containing also some thin beds of schist was exposed. In the upper part of the gulch the bed rock is mainly schist. About one-fourth mile above the junction of Grouse Gulch and Dexter Creek a pit had been excavated on the left bank of the gulch, in which a face of gravel 10 feet thick was exposed, showing 6 inches of moss and muck; 4 feet of yellow sandy clay, containing a few rounded pebbles; 6 feet of stratified gravel and sand, consisting mostly of flat schist pebbles arranged parallel to the stratification, and yellowish-red and brown sand containing a great deal of fine mica. The bottom of this layer contains some large, flat pieces of rock, which show little if any rounding. It rests upon a very much decomposed schist bed rock. Near bed rock is a layer of vein-quartz pebbles. The bedding of the gravel dips toward

to show any granite in the face of the cut. About half a mile from Dexter Creek considerable gold has been obtained from a tunnel extended from the bed of Grouse Gulch into a gravel bed, which is described in connection with the high-bench deposits (p. 199).

Banner Creek.—In 1900 Brooks wrote as follows concerning Banner Creek:[a]

> This is a small tributary to Nome River from the west, about 3 miles above Dexter Creek. Its bed rock is schistose greenstones and limestones. Colors have been found on this stream, but no paying placers. It must be said, however, that but little prospecting has been done. The stream is a small one and during dry weather does not furnish a sluice head of water.

In 1903 the writers traversed the creek, but, though some evidences of old workings were seen, no miners were on the creek and it is doubtful if it has even produced grubstakes.

Hobson Creek.—Hobson Creek joins Nome River from the west, about 18 miles from the sea. It has a rather narrow valley and southerly course. The bed rock is massive limestone with greenstone schist near the head of the stream. Considerable prospecting was done in 1900, but very little gold has been produced. The creek, which carries about 1,500 miner's inches of water, is one of the feeders of the Miocene ditch.

Dorothy Creek.—Dorothy Creek, a western tributary of Nome River, 24 miles from the coast, flows through a small canyon having a general northerly course. Above the canyon the valley broadens out to a small basin having a gravel floor. The bed rock is limestone, tentatively correlated with the Port Clarence, and greenstone intrusives, which strike in a northeasterly direction and dip to the northwest. Mineralized quartz veins are very plentiful. The creek is reached by a wagon road from Nome, and the cost of hauling freight in 1903 was less than 10 cents a pound. Where it emerges from its canyon into the valley of the Nome, Dorothy Creek has a broad delta, in which the gravel is about 3 feet thick and overlies a greenstone-schist bed rock. The gravel deposits of the creek bed have been mined since 1900, and, according to T. A. Campion, who in 1903 owned most of the claims, have produced in all $44,000, but at small profit to the numerous operators. Most of this gold was obtained from claims within 1 mile of the mouth. The gold is light colored and said to assay between $14 and $15 to the ounce. In 1902 the Campion ditch was completed to this creek from Buffalo Creek, near the head of Nome River, and it was proposed to hydraulic the whole gravel deposit of the creek bed.

Above Dorothy Creek on the west side of Nome River some extensive gravel deposits lying in the divide between Nome River and the

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 79.

head of Stewart River have been developed in excavating for the Campion ditch. Boer Mountain, which lies west of Nome River between the heads of Sinuk and Stewart rivers, is composed of green quartz-chlorite schists containing many veins and stringers of clear glassy quartz. Some pieces of float quartz resembling that in the mountain, but containing large pieces of free gold in one side of the specimen while the other side is barren, were found along this ditch. One nugget was found which weighs three-fourths of a pound and which is nearly all gold, but includes some quartz similar to that from the mountain. It is proposed to hydraulic the benches along the west side of Nome River after the Dorothy Creek placers are exhausted.

Divide Creek.—Divide Creek rises in the broad divide at the head of Stewart River and flows eastward into Nome River. It is a small stream flowing over deep gravel deposits that may be in part of glacial origin. At the head of the creek these deposits are very deep. Some sluicing was done on the creek during 1903. It is proposed to hydraulic these gravel deposits with water from the Campion ditch.

Boer Creek.—Boer Creek is a small stream which rises in Boer Mountain, between the headwaters of Stewart and Sinuk rivers, and flows northward to Hudson Creek, which flows into Buffalo Creek, a tributary of Nome River. The distance from Nome is about 30 miles. It is reached by a wagon road, and freight rates in 1903 were not less than 10 cents a pound. About $2,800 was produced in 1901 and 1902, but the creek was not worked in 1903.

The bed rock is green chloritic schist containing many veins of clear glassy quartz, and the pay streak is reported to be narrow and confined to the creek bed. The thickness of the gravel ranges from 18 inches to 8 feet.[a] In the upper part of the creek the bed rock is covered with a deposit of conglomerate composed mainly of subangular schist pebbles firmly cemented by hydrous iron oxide. The nature and limits of this conglomerate have not been determined, but it is reported to carry values in placer gold and in this respect resembles the uncemented pay gravel of the creek. Two grades of gold are obtained—one light-colored gold assaying $16 to the ounce, the other assaying $18 to the ounce. Mining on the creek has been shut down pending the completion of the Campion ditch.

SNAKE RIVER BASIN.

Introduction.—There are many placer-bearing streams tributary to Snake River, which heads in the upland region about 20 miles north of Nome and flows nearly southward to Bering Sea (Pl. VIII, in pocket). The lower 7 miles of its course in the coastal-plain belt is

miles wide, and here the river has trenched the valley floor, leaving low terraces along the sides. The flood plain is about half a mile in width, beyond which the slopes rise gently 300 or 400 feet and then become very much steeper. It is a noteworthy feature that all bench gravels and placers thus far discovered occur below the level of these steeper slopes. The bed rock of the greater part of the Snake River basin is composed of undifferentiated schists and limestones of the Nome group, which are here locally more highly mineralized than the average rocks of this group, for gold-bearing quartz veins and stringers are of more abundant occurrence.

No attempts at mining the river bars have been made above the coastal-plain belt, but the bars are known to be more or less auriferous throughout the length of the stream.

The low benches that occur along both sides of the Snake River valley are in part rock cut and in part built up of gravel. At a locality on the east side of the valley about 10 miles from the coast, strippings of the sloping valley floor made in a search for quartz veins have revealed a rock surface covered to a depth of 4 or 5 feet with muck and residual schist fragments, with here and there some washed gravel. Here in some places gold believed to be derived directly from the disintegration of quartz veins has been found on bed rock. The average-sized pieces of this gold are worth not more than one-twentieth of a cent and are not in the least rounded or water worn. Some of these deposits doubtless carry placer-mining values, and they are well situated for ground sluicing or hydraulicking, but they have thus far been neglected.

Pioneer Gulch.—In 1903 a company was preparing to mine the gravels of Pioneer Gulch, near the mouth of North Fork of Snake River, about 16 miles from the coast. A 4½-mile ditch bringing about 500 miner's inches of water from Last Chance Creek to this company's property had been completed, and actual mining operations commenced in September, 1903, but the results obtained since that time have not been learned.

Newton Gulch.—Newton Gulch is a small valley with smooth, grassy walls incised in the south side of Newton Peak, whose slopes are gentle and moss covered up to an elevation of 400 feet, above which they are steep and bare. The stream is about 2 miles long and carries less than a sluice head of water into Dry Creek. Its head lies in a sharp canyon well up on the mountain, but most of its valley is only slightly trenched into the more gentle slopes at the edge of the coastal plain. The gravels are here from 30 to 150 feet wide and from 6 to 27 feet deep, but the deepest pay streak reported is 10 feet beneath the surface and rests upon a clay seam. At the mouth of the gulch, where the valley floor merges with the coastal plain, the bed rock is 27 feet below the surface.

Claims near the mouth of the gulch are reported to have produced $75,000 from 1901 to 1903; the pay streak was from 2 to 6 feet thick and averaged over 100 feet in width. The gold is coarse, mostly bright and rather rough. Estimates of the gold tenor of these deposits are rather indefinite, but a large part of the pay streak must have run over $15 to the cubic yard.

About three-fourths of a mile north of the mouth of Newton Gulch a pay streak has been found in a gravel deposit on the slope of the hill above the creek bed, and a large area has been worked to a depth of 10 feet without finding either bed rock or definite limits to the pay streak. An average section of the deposit is as follows:

Section near mouth of Newton Gulch.

	Feet.
Tundra vegetation and peat	2
Sandy subangular gravel (pay streak)	6–8
Blue clay (thickness not known).	

The pay streak contains a few bowlders as large as 18 inches in diameter. The gold in the pay streak is said to average above $2 to the cubic yard. It is bright and mostly smooth, but some of it is very rough. It is coarse and easily saved, though the largest nugget found was worth only $1.50.

In 1904 this mine was worked by hydraulicking with pumped water from a 2-inch nozzle under a head of about 100 feet and the tailings were dumped into Newton Gulch. Though the deposit was frozen it was easily worked in this way after the tundra growth had been removed. The origin of this deposit is difficult of explanation, with the meager data available regarding it. As noted, it lies upon a gentle slope which continues upward to an elevation of 400 feet. Similar gentle slopes rising to about the same elevation surround the bases of many of the hills and are features of the larger valleys of the Nome region. It seems likely that they represent remnants of an old eroded surface. If this be true, bench gravels may be expected to be found up to an elevation of 400 feet, and below these gravels hillside deposits would probably result from the destruction of such benches by the creeping movement of the soil and loose bed rock down the slopes.

Dry Creek.—Dry Creek heads in the flat divide separating it from Left Fork of Dexter Creek, and joins Snake River near Nome, after traversing the coastal plain. The lower part of the creek has already been described (p. 169). In its general form it much resembles Dexter Creek, as its source lies in a high gravel terrace, in which it has cut a basin and below which the valley contracts. Much of the valley is deeply filled with gravels that are probably not rich in placer gold.

tive, and in 1903 all the creek placers were idle. Most of the gold produced has been obtained from an old channel on the east bank 1 to 2 miles above Newton Gulch, about 50 feet above the creek bed, which has been traced for about three-fourths of a mile. This channel is about 600 feet east of and parallel to the present creek channel. It has a grade of about 100 feet to the mile. The pay streak is from 20 to 60 feet wide and the gravel is shingled in the same direction as that of the present stream. It is covered by about 50 feet of gravel, slide rock, muck, and silt, and consists in general of slightly rounded schist pebbles, but contains a few pieces of greenstone and bowlders of granite. In some places the pay gravel is cemented with iron oxides, but most of it is uncemented. On the gently sloping hillside above there are many evidences of creeping movements in the surficial layer. At both the upper and lower ends of the portion mined prospecting has been done to locate the continuance of the channel, but so far without success. Near the north end of the channel the rim is wanting on the west side and the pay streak pinches out where the surface of the bed rock dips down toward the present creek bed. The bed rock, of schist, is 20 to 50 feet below the surface and the pay streak, 4 feet thick and 60 feet wide, rests upon it. It is reported that the pay dirt mined during the winter of 1902–3 yielded between $9 and $12 to the cubic yard. About one-fourth mile south of this locality the depth to bed rock is 50 feet, the section being as follows:

Section on Dry Creek about 1½ miles above Newton Gulch.

	Feet.
Muck and fine dark-colored silt	45
Fine sand	5
Pay gravel	½–2
Schist bed rock.	

The pay streak is here 20 feet wide and is defined by well-marked rock rims. Six thousand 8-pan buckets of pay dirt are reported to have yielded $16,000, which is approximately equivalent to $50 a cubic yard, 150 pans being considered equal to a cubic yard. The gold of this bench is not greatly waterworn and many of the small nuggets contain quartz. The gold is comparatively coarse, the average-sized pieces probably being worth about 1 cent, but it ranges from fine dust to coarse nuggets. Magnetite, garnet, ilmenite, scheelite, and quartz are associated with the gold in the concentrates. A sample of the concentrate from which the free gold had been separated by panning and treating with quicksilver was assayed, yielding 13.76 ounces of gold and 2.64 ounces of silver to the ton.[a] Some of this gold was undoubtedly contained in small quartz grains remaining in the concentrate, though a part must have been held by some other minerals. Mining is done by the shaft and drift method, and

[a] Assay by E. E. Burlingame & Co., Denver, Colo.

the dump is washed early in summer with water collected from melting snow on the hillside above.

Cooper Gulch.—Cooper Gulch, which in general characteristics much resembles Newton Gulch, is a small valley cut out of the south slope of Anvil Peak, at the base of which there is a well-marked bench between 325 and 400 feet above the sea. Cooper Gulch is trenched across this bench and below it spreads out in a fan-shaped delta, beyond which its waters are not again collected in a definite channel. In 1900 a few men worked here with rockers, making bare wages, but early in 1903 a pit about 100 by 300 feet was hydraulicked with water from the pumping plant on Snake River. In September of that year the place was found abandoned and the machinery removed. The bowlders in the tailing piles are principally limestone, but there are also some of granite and greenstone. The edges of the cut show from 2 to 4 feet of brown, sandy, stratified material overlying gravel of unknown depth.

Anvil Creek.—Anvil Creek, an eastern tributary of Snake River, has a length of about 6 miles. The upper 4 miles of its course is in a valley lying between Anvil Peak on the east and a lower flat-topped ridge on the west. This valley is comparatively broad and is not symmetrical in cross section, as the east side rises by a gentle grass-covered slope to an elevation of 400 or 500 feet above the sea, whereas the slope on the west side is much steeper. The creek bed is trenched to a depth of 20 or 30 feet in the valley floor, leaving a sloping bench on the east side, with no corresponding bench on the west side. (See fig. 11, p. 189.) This bench is more or less covered with gravel and slide material, and near its lower edge a series of old channels rich in placer gold have been discovered.

The bed rock of the creek is composed of various schists belonging to the Nome group. In general these rocks strike approximately parallel with the creek bed and dip at a high angle both east and west. They are faulted in many places, a majority of the fault planes striking a little east of north, parallel with the general course of the valley. At the lower end of the valley the bed rock for about half a mile is graphitic schist. Above this for half a mile it is a gray chloritic calcareous schist, and above this there are belts of both graphitic and quartz-chlorite schist. All these rocks contain small stringers and veinlets of quartz and calcite, some of which are mineralized with pyrite and other sulphide minerals, while others contain free gold. No veins of economic importance had been discovered up to 1903.

In the last five years the creek has produced over $5,000,000 in gold. The discoveries of gold which first attracted attention to the

its gravels have not produced placer gold in notable amounts, and this part of the valley had been only cursorily examined by geologists. Within the upland the flood plain of Anvil Creek ranges in width from 300 feet at its lower end to about 50 feet near its upper end. The gold of the valley-floor gravels has practically been exhausted, though it is proposed to rework some of the gravels by more refined methods and extract the small values that may be left. Present mining operations are confined to the gravels found in bench deposits along the east wall of the valley. These deposits have been described by Brooks[a] as follows:

> The gravels of the creek floor have all been derived from within the basin and include the various types of bed rock which have been described. They have a thickness varying from 3 to 5 feet, and are usually covered by 2 to 3 feet of muck and clay. The gravels generally carry pay throughout their thickness and are all put through the sluice boxes. In the mining operations from 1 to 2 feet of the underlying weathered bed rock is usually found to carry values and is sluiced with the gravels. The richest deposits are found at and in the bed rock. Where the creek valley broadens out, about a mile above its mouth, bed rock has not been reached in the prospect holes. Some gold has been found on a layer of blue clay about 8 feet below the surface. This gold, however, is finer than that found on the bed rock on the stream above and the deposit is not nearly so rich.
>
> Anvil Creek has produced gold throughout its length and all of the claims have paid profits. They are, however, not all of equal richness, and this is probably due to the fact that some of the gold has been contributed by the old terraces, which, being dissected by smaller tributaries, have contributed their gold to the main stream.
>
> The bed of Anvil Creek for nearly 3 miles has been practically all worked over once during the last two years. Future developments will be directed toward the bench claims, which up to 1900 were practically untouched, and toward reworking the creek gravels with more refined methods of separation. In the lower course of the creek, dredging may also be found profitable.
>
> Anvil Creek gold is both coarse and fine. Nuggets up to $300 in value have been found, and $2 and $3 nuggets are very common. It is irregular, generally chunky rather than flat, and has a dark-yellow, sometimes almost brown color. The fineness of the gold, according to Dr. Cabell Whitehead, is 0.890, or $18.33 per ounce. Quartz and fragments of a schistose rock are often found attached to nuggets. Among the heavier minerals in the concentrates magnetite and garnet are most common and occasionally scheelite is found.

More detailed examinations show that although nearly all the gravels of the creek bed have been derived from points within the basin and consist of the various types of rock that make up the Nome group, together with much vein quartz, they also include some granite pebbles and bowlders that are found in place only in the Kigluaik Mountains.

The irregularity in the distribution of the gold is no doubt in part due, as Brooks has indicated, to a reconcentration from older chan-

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 73–74.

nels, but it is also a result of the inequalities of occurrence of the gold in the bed rock. The rich placers on the upper part of the creek, for example, can be attributed partly to the reconcentration of high-bench gravel washed down by Nekula Gulch, and the richness of the placers near Discovery claim is in all probability due to veins in the local bed rock, for it is there that all the phenomenally large nuggets have been found, and these could not have been transported far. The facts necessary for estimating with any degree of exactness the gold tenor in the Anvil Creek placers are not at hand, but the average for all the gravels mined along the creek can not have been less than $5 a cubic yard. In the richer spots much of the gravel contained more than $50 to the cubic yard. The gravels of the benches worked at the present time are of lower grade and many of them could not be worked by the expensive methods employed in the first few years of mining.

The richest of the creek gravels were within half a mile both above and below the site of the original discovery, which is near the point where Anvil Creek emerges from its valley and enters the coastal plain. From Discovery claim the gold is progressively finer downstream, a condition to be expected, as no gold is here derived directly from the bed rock and the placer contains only that brought in by the creek.

Discovery claim was one of the richest found in Alaska. The gold was generally coarse and included two very large nuggets, one worth $1,500 and the other worth $1,700. Although many of the smaller pieces are rough and angular, these large nuggets are battered smooth. During the season of 1903 no mining was done immediately on the creek at this place, but there were extensive operations on a bench lying about 10 feet above the creek bed and extending 500 or 600 feet eastward to the foot of Anvil Peak. Gold was discovered on this bench several years ago, but sluicing was not undertaken, on account of the lack of water. In 1902 prospect holes were sunk to the bed rock and a small amount of gold was obtained with rockers, but the great richness of these gravel deposits was not manifest until the summer of 1903, when the water of Anvil Creek, no longer needed to work the creek claims, was brought to the bench by a ditch. An area of more than 1 acre was worked over in 1903. This led to the finding of the largest nugget so far discovered in Alaska, weighing about 170 ounces. If pure gold, this nugget would be valued at about $3,200, but it contains considerable quartz and its gold content is estimated at about $2,600.

On a part of this claim there is reported to be a covering of moss and yellow clay from 12 to 14 feet thick, below which the gravel also

peaty muck about 3 feet thick. The pay gravel ranges in thickness from 4 inches to 4 or 5 feet, and the bed rock to a depth of 6 inches also contains placer gold. In the thin places the clay layer from the top penetrates the gravel, which there resembles an old channel filled with mud. The bed rock is graphitic schist, similar to that found in the creek bed. Although it has an irregular surface, it shows no well-marked rim or evidence of a definite channel limiting the pay streak. The limits of the gold-bearing gravels had not yet been reached in 1903. About three-fourths of a mile above Discovery claim the bed-rock rim of the present channel forms an abrupt escarpment about 50 feet high on the east side of the creek, and above this a bench rises in a gentle slope toward the foot of Anvil Peak. In the face of the escarpment black schist is overlain by gravel. About 300 feet back of the rim, at an elevation of at least 50 feet above the present creek bed, a deposit of gravel about 100 feet long has been excavated. When the gold was discovered here it was supposed that there was an extensive bed of gravels, but the whole body bounded by rock walls was worked out in three weeks. The prospectors describe the occurrence as a

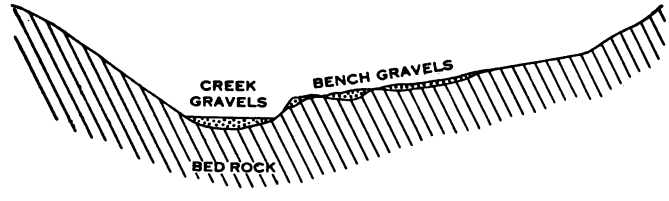

FIG. 11.—Diagrammatic section of Anvil Creek valley, showing bench gravels.

"pothole." This deposit (see fig. 11) was evidently the remnant of a more extensive channel of Anvil Creek formed at some earlier stage of the creek's development. It is similar to the other old channels described in the next paragraph, and as it lies at about the same elevation, 200 feet above sea level, it may represent the same period of erosion. This placer was very rich and in three weeks yielded sufficient gold to pay for the machinery used in extraction, consisting of an engine, pump, and pipe.

From a point about 1 mile above Discovery claim an old channel, or series of old channels, in the main less than 20 feet above the creek bed and parallel with it, has been traced for about a mile and a quarter. These, as has been stated, are old channels of Anvil Creek. They are characterized by well-defined bed-rock rims, but are everywhere narrower than the present creek bed. The overburden is for the most part slide material from the hillside above, and the surface contour gives no indication of the existence of the channels. At the lower end of this series of channels the rim on the creek side is wanting. The

face of the workings shows about 10 feet of rather fine gravel containing more or less sand and clay, through which gold is somewhat uniformly distributed. Some of this gold is coarse, but the greater part is very fine. The section from the surface down is as follows:

Section in old channel of Anvil Creek.

	Feet.
Brown clay and soil containing some angular pebbles	3
Fine gravel containing sticky clay sediment	6
Coarse gravel and sand	3
Bed rock, not exposed.	

Mining was done here with a hydraulic monitor, having a head of only about 20 feet and supplied with water taken from Anvil Creek about a mile above. About 200 feet of 14-inch sluice boxes supplied with pole and Hungarian riffles throughout were used. The bed rock rises gently toward the hill on the east, and sluice boxes laid directly on the bed-rock floor have the proper grade. The tailings are dumped into the present creek bed.

Above this point the old channel is from 60 to 80 feet wide for about a quarter of a mile. Its east rim toward the hills is well marked and comparatively abrupt; the west rim between it and the present channel has been partially destroyed and is in places wholly wanting. The bed rock here differs from that at Discovery claim, as it consists of a light-gray calcareous schist, which is very much crumpled, but in a general way strikes parallel with the creek bed and dips to the northwest at a high angle.

About 100 yards above the upper end of these workings and one-half mile below Specimen Gulch an excavation about 300 feet east of the present channel of Anvil Creek exposes an old channel for a distance of 500 to 800 feet. This claim was worked by a hydraulic monitor; a hydraulic elevator raised the gravel about 20 feet to the sluice boxes, which dumped the tailings into the present bed of Anvil Creek. The face of the excavation showed about 6 feet of light-brown sand and angular gravel at the top; then a 1-inch seam of brown clay overlying 15 to 20 feet of gravel containing some large bowlders near the bottom and resting upon bed rock, in which there is a channel about 20 feet wide and 10 or 12 feet deep. The pay gravel extends over the rims of the bed-rock channel. A smaller channel about 8 feet wide and 7 feet deep runs into it from the side toward the present bed of Anvil Creek. What appears to be the same channel is exposed about one-fourth mile below Specimen Gulch, where it had been excavated for about 300 feet. It is here 50 feet wide by 20 feet deep and extends parallel to the creek. The bed rock here consists of graphitic schist striking north and south and dipping

of quartz, some of which are mineralized. No mining was in progress here in September, 1903.

Specimen Gulch, a small easterly tributary of Anvil Creek, cuts across the old channel and was probably the source of some of its gold. The floor of the gulch, made up of eastward-dipping graphitic schist, is about on a level with the floor of the old channel. The workings showed the following section:

Section in Specimen Gulch.

	Feet.
Moss and muck	1
Coarse gravel	8
Clay bed	1

The best pay lay on the clay bed, though the whole deposit carried some gold. The gold is bright and coarse, the average-sized pieces being worth not less than 5 cents. It is not greatly waterworn, though some of the edges and corners are rounded.

The old channel of Anvil Creek is also exposed north of Specimen Gulch, 400 feet east of the creek, in a pit 70 feet wide, 200 feet long, and 20 feet deep. The channel is here 70 to 120 feet wide and several feet lower than the bed rock in the workings on Specimen Gulch, just described. On the east side the rim is steep, but on the west side, facing the present channel of Anvil Creek, it rises very gently and is mantled by a gravel bed that probably extends all the way to the creek. The bed rock in the channel is a soft graphitic schist containing many small stringer veins of quartz. Overlying this is a gravel pay streak 7 feet thick, succeeded by about 12 feet of sandy clay. Neither the clay nor the gravel is frozen. The pay gravel contains pebbles and some large bowlders of mica schist, greenstone, and granite. All of the gravel is shingled, indicating a current running nearly south. A bowlder of galena coated over on the outside with a yellow alteration product and weighing about 40 pounds was found in the pay gravel. The gold has not worked deeply into the bed rock. It is fine, occurring chiefly in grains about the size of a pin head, though the largest nuggets were worth about $20. This mine was worked by a hydraulic monitor and elevator. The clay and gravel above the bed rock were piped down through a flume to a sump, where they were raised by a hydraulic elevator to the sluice boxes, which dumped into older excavations. The lowest gravel, together with the loose bed rock, was shoveled into the flume.

Between the north end of this pit and Anvil Creek a smaller channel about 150 feet east of the present creek, and probably more recent than that described above, has been opened. This channel, which is cut in decomposed chloritic schist, is about 20 feet wide and 12 feet deep, and in the workings of the mines makes a bend in the form of

the dump is washed early in summer with water collected from melting snow on the hillside above.

Cooper Gulch.—Cooper Gulch, which in general characteristics much resembles Newton Gulch, is a small valley cut out of the south slope of Anvil Peak, at the base of which there is a well-marked bench between 325 and 400 feet above the sea. Cooper Gulch is trenched across this bench and below it spreads out in a fan-shaped delta, beyond which its waters are not again collected in a definite channel. In 1900 a few men worked here with rockers, making bare wages, but early in 1903 a pit about 100 by 300 feet was hydraulicked with water from the pumping plant on Snake River. In September of that year the place was found abandoned and the machinery removed. The bowlders in the tailing piles are principally limestone, but there are also some of granite and greenstone. The edges of the cut show from 2 to 4 feet of brown, sandy, stratified material overlying gravel of unknown depth.

Anvil Creek.—Anvil Creek, an eastern tributary of Snake River, has a length of about 6 miles. The upper 4 miles of its course is in a valley lying between Anvil Peak on the east and a lower flat-topped ridge on the west. This valley is comparatively broad and is not symmetrical in cross section, as the east side rises by a gentle grass-covered slope to an elevation of 400 or 500 feet above the sea, whereas the slope on the west side is much steeper. The creek bed is trenched to a depth of 20 or 30 feet in the valley floor, leaving a sloping bench on the east side, with no corresponding bench on the west side. (See fig. 11, p. 189.) This bench is more or less covered with gravel and slide material, and near its lower edge a series of old channels rich in placer gold have been discovered.

The bed rock of the creek is composed of various schists belonging to the Nome group. In general these rocks strike approximately parallel with the creek bed and dip at a high angle both east and west. They are faulted in many places, a majority of the fault planes striking a little east of north, parallel with the general course of the valley. At the lower end of the valley the bed rock for about half a mile is graphitic schist. Above this for half a mile it is a gray chloritic calcareous schist, and above this there are belts of both graphitic and quartz-chlorite schist. All these rocks contain small stringers and veinlets of quartz and calcite, some of which are mineralized with pyrite and other sulphide minerals, while others contain free gold. No veins of economic importance had been discovered up to 1903.

In the last five years the creek has produced over $5,000,000 in gold. The discoveries of gold which first attracted attention to the

its gravels have not produced placer gold in notable amounts, and this part of the valley had been only cursorily examined by geologists. Within the upland the flood plain of Anvil Creek ranges in width from 300 feet at its lower end to about 50 feet near its upper end. The gold of the valley-floor gravels has practically been exhausted, though it is proposed to rework some of the gravels by more refined methods and extract the small values that may be left. Present mining operations are confined to the gravels found in bench deposits along the east wall of the valley. These deposits have been described by Brooks[a] as follows:

> The gravels of the creek floor have all been derived from within the basin and include the various types of bed rock which have been described. They have a thickness varying from 3 to 5 feet, and are usually covered by 2 to 3 feet of muck and clay. The gravels generally carry pay throughout their thickness and are all put through the sluice boxes. In the mining operations from 1 to 2 feet of the underlying weathered bed rock is usually found to carry values and is sluiced with the gravels. The richest deposits are found at and in the bed rock. Where the creek valley broadens out, about a mile above its mouth, bed rock has not been reached in the prospect holes. Some gold has been found on a layer of blue clay about 8 feet below the surface. This gold, however, is finer than that found on the bed rock on the stream above and the deposit is not nearly so rich.
>
> Anvil Creek has produced gold throughout its length and all of the claims have paid profits. They are, however, not all of equal richness, and this is probably due to the fact that some of the gold has been contributed by the old terraces, which, being dissected by smaller tributaries, have contributed their gold to the main stream.
>
> The bed of Anvil Creek for nearly 3 miles has been practically all worked over once during the last two years. Future developments will be directed toward the bench claims, which up to 1900 were practically untouched, and toward reworking the creek gravels with more refined methods of separation. In the lower course of the creek, dredging may also be found profitable.
>
> Anvil Creek gold is both coarse and fine. Nuggets up to $300 in value have been found, and $2 and $3 nuggets are very common. It is irregular, generally chunky rather than flat, and has a dark-yellow, sometimes almost brown color. The fineness of the gold, according to Dr. Cabell Whitehead, is 0.890, or $18.33 per ounce. Quartz and fragments of a schistose rock are often found attached to nuggets. Among the heavier minerals in the concentrates magnetite and garnet are most common and occasionally scheelite is found.

More detailed examinations show that although nearly all the gravels of the creek bed have been derived from points within the basin and consist of the various types of rock that make up the Nome group, together with much vein quartz, they also include some granite pebbles and bowlders that are found in place only in the Kigluaik Mountains.

The irregularity in the distribution of the gold is no doubt in part due, as Brooks has indicated, to a reconcentration from older chan-

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 73–74.

The bed rock throughout the Glacier Creek valley is nearly all ıloritic mica schist, containing small beds of limestone and having me graphitic phases. Small veins of mineralized quartz are com- on. Opposite the mouth of Snow Gulch there is a mineralized zone the schist, in which a number of stringers of highly mineralized ıartz follow the schistosity of the bed rock. Some of these string- 's are 6 inches thick and the schist between them is also impregnated ith sulphides. A picked specimen of the ore yielded one-half ounce f gold to the ton. The source of the placer gold of Glacier Creek probably in such veins and its local distribution is an indication f their relative number and richness in different parts of the bed ock.

The first placers found in this basin were those on Snow Gulch, a mall southerly tributary about 2 miles from the mouth of Glacier reek. This gulch carried some of the richest placers found on the eninsula, but they were practically exhausted before 1903. The bed Glacier Creek for 3 miles from the mouth is floored with gravel, nerally more than 100 feet wide and ranging from 5 to 20 feet or ore in depth. The lower 2 miles of this flood plain are known to rry gold values and extensive operations have been inaugurated. o reliable estimate of the amount of gold to the cubic yard of avel was obtained. Some of the deposits mined previous to 1903 ust have contained more than $5 a cubic yard, though the gold nor of the gravels worked in 1903 was probably much less. Hy- aulic monitors and elevators supplied with water from the Miocene tch were being operated at two places in 1903.

A mile from the mouth of the creek the gravel deposit had a thick- ss of about 20 feet and rested upon a bed rock consisting of chloritic hist. The exposure shows 2 or 3 feet of muck and soil resting upon or 12 feet of gravel. The pay streak is said to be 300 feet wide id to overlie a nearly even rock floor. It carries gold through a ickness of 10 to 15 feet and extends downward in the crevices of the d rock to a depth of 1 to 3 feet. The gold is fine, bright, and well unded. Opposite the mouth of Snow Gulch the gravels of the creek d have been worked since the summer of 1900 and have probably l been handled at least once. A hydraulic plant was installed in e summer of 1903 for the purpose of rewashing these gravels. (See l. III, *A*.)

In 1903 mining was also in progress about one-half mile above the outh of Snow Gulch, where a force of men was shoveling the gravels ato sluice boxes, to which water was supplied from the bed of Glacier reek by a short ditch. The gravels were loose and probably had een already worked over once, but still carried sufficient values to arrant sluicing them again. Above this point, although prospect

holes, short ditches, and crosscuts indicate that some mining has been done in the creek bed, all operations had ceased by 1903 and, so far as known to the writers, no values have been found in the gravels.

Hot Air Bench.—The "Hot Air Bench," situated on the right bank of Glacier Creek opposite the mouth of Snow Gulch, is an old channel deposit resembling those of the Anvil Creek valley. This old channel of Glacier Creek was probably abandoned on account of slides from the hill above. The workings are about 100 feet above the bed of the creek, to which they are nearly parallel for a distance of 400 or 500 feet. Although the surface contour gives little evidence of a bench at this place, the excavations have disclosed a well-defined channel which runs parallel to Glacier Creek and whose bed lies about 20 feet below the surface. The exposures show 4 to 5 feet of vegetable matter and clay resting upon 4 to 5 feet of gravel made up of schist and limestone, with a few pebbles of granite; this gravel overlies chloritic schist similar to that in the bed of the creek. The channel in the bed rock where best defined has a width of about 100 feet, with well-marked rims on both sides. Near the east end of the deposit the southwest rim is broken down and the pay streak mantles the slope toward Glacier Creek. Before the end of 1903 the greater part of the channel deposit had been worked out. A cut was made through the south rim and through this cut a long line of sluice boxes carried the gravel and tailings to Glacier Creek. A 12-inch sluice box was used and the gravel was washed into it by means of a hydraulic nozzle and canvas hose. Water was obtained through a ditch about 3 miles long from Divining Creek, a tributary of Snake River. During the melting of the snow in the spring this ditch carried about 150 miner's inches of water. The penstock was about 150 feet above the mine, but the amount of water in the ditch was not sufficient to maintain this head with a 2-inch nozzle, and the pressure actually used in the mine was probably not far from 30 feet. A part of the deposit was hydraulicked with water brought in from Glacier Creek with a pressure of not more than 50 feet. At the east end the boundary of the deposit has apparently been reached where the pay streak turns toward Glacier Creek, but at the west end the boundary is not so sharply defined, for the pay streak thins out. The gold is similar to that of Glacier Creek. The total production is generally thought to have been not less than $600,000, but no very definite figures have been obtained. If this estimate is anywhere near right, the pay streak must have averaged more than $50 to the cubic yard. Auriferous gravels are said to have been found on the hill slopes above the Hot Air Bench to an elevation of several hundred feet, which suggests that there may be higher channels.

mile long, has a fall of about 200 feet, and, except in the spring when the snow is melting, carries only a few inches of water. The bed rock is chloritic schist and where exposed by mining operations is much fractured and sheared. An area 150 feet long and 10 or 12 feet wide has been mined out. Here 2½ feet of auriferous gravel is overlain by 5 or 6 feet of sandy clay and a foot of moss and muck. The prospecting indicates that the pay streak extends for about a quarter of a mile along the gulch bed and that it probably connects at the lower end with the pay gravel of Glacier Creek. The gold is nearly all very fine and well rounded. This gulch has been worked in the early summer by the use of snow water, with which the overburden is sluiced off, and the pay gravel is shoveled into sluice boxes. If a proposed plan to hydraulic the deposits with water from the Miocene ditch be carried out, the whole gulch bed could probably be easily mined out in one season.

Snow Gulch.—Snow Gulch joins Glacier Creek about 2 miles from Snake River. In 1900 Brooks[a] described this gulch as follows:

> Snow Gulch is the only tributary of Glacier Creek which has thus far produced gold. It joins Glacier Creek about 3 [2] miles from Snake River. Its source lies in a shallow basin, which is gravel filled, while its lower course is through a rather sharply cut gorge; the total length is about a mile.
>
> The bed rock near the mouth of Snow Gulch is chloritic schist, and the strikes are about at right angles to the course of the stream. Near its head some blue limestones are exposed. A quartz vein near the divide has been found to carry some gold. The gravels are 3 or 4 feet in thickness and are chiefly quartz and mica schist.
>
> Its topographic form makes Snow Gulch almost ideal for the concentration of gold. In point of fact it has proved the richest stream of its size so far discovered, for in the two seasons that it has been worked it has produced upward of a million dollars. At present the stream gravels have been practically all worked over, so that the gulch has reached its maximum production.

Stringer veins of quartz are common in the bed rock, and near the head of the gulch some calcite veins showing free gold have been opened up. In a tunnel which pierces the divide between Snow Gulch and Anvil Creek the chloritic schist and limestone bed rock is faulted at numerous places and contains many small stringers and veins of mineralized quartz and calcite, assays of some of which showed a small gold content. Veins of this kind are believed to be the source of the placer gold of the gulch. As stated by Brooks, the bed rock has been swept clean of gravel, and no further placer mining is possible.

Rock Creek.—Rock Creek rises in Mount Brynteson, north of Glacier Creek, and flows southwestward to Snake River, in a narrow trench incised in the sloping valley floor. Its bed rock is gray mica

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J.: Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 75.

schist, with some interbedded limestone. A number of mineralized quartz veins have been found here, some carrying values. These veins strike a little north of east.

Gold was discovered and some mining was done on Rock Creek in 1900. During the season of 1903 five claims were being worked on the creek, all by one company. Though the gravels of this creek have been exploited since 1900, the total production has not been large, but no estimate can be given.

The gravels on Rock Creek are about 5 feet deep and range in width from 50 to 100 feet. The gold is distributed throughout the gravel. It is rather fine and is saved with mercury, but a few rough nuggets have been found. One nugget was seen which included a piece of black graphitic rock, and another held a mineral resembling scheelite. In the concentrates scheelite occurs in subangular pieces, and it is reported that a vein of this mineral, 3 or 4 inches wide, has been uncovered in the bed rock. In addition to the scheelite the concentrates contain magnetite, limonite, and garnet. The concentrates are saved and worked over in an arrastre with mercury.

Lindblom and Balto creeks.—Lindblom and Balto creeks are two small streams which, like Rock Creek, are trenched across the Snake River valley floor. The occurrence of the gold is similar to that on Rock Creek. In 1903 only one claim on each of these creeks was worked, and the total production was small. A ditch was then under construction to bring water from Grouse Creek for hydraulicking on Balto Creek.

Boulder Creek.—Boulder Creek, about 5 miles long, empties into Snake River from the west about 8½ miles in a direct line from the coast, and can be reached by wagon road crossing Glacier and Rock creeks. Its lower course for about a mile traverses the gently sloping valley floor of Snake River, above which it occupies a deep V-shaped valley cut in limestones and calcareous graphitic schists of the Nome group. It carries between 50 and 200 inches of water. Twin Mountain Creek, its most important tributary, joins it from the north 2 miles from Snake River. The gravels carry many bowlders of mica schist up to 3 feet in diameter. Several quartz veins, the largest 5 inches wide, were seen cutting a flaggy limestone that outcrops near the mouth of Boulder Creek. The best assays from them are said to have shown from $3 to $4 to the ton in gold. Attempts to develop quartz veins have been made at several places, but without success.

Colors of gold were found here in 1900, but in 1903 only a few men were at work, and they claimed to be making no more than wages. The gold is coarse and easily saved; the largest nuggets have a value up to $13. Besides the gold the concentrates contain hematite, mag-

On Twin Mountain Creek the gravel deposit is shallow and not more than a few feet wide. Mining here seems to have been unprofitable, as the miners left their claims during the season of 1903 to work for wages.

Last Chance Creek.—Last Chance Creek empties into North Fork of Snake River from the west side, about 16 miles from Nome in a direct line, but the distance by the wagon trail, which follows the bed of Snake River above Prospect Creek, is much greater. The creek is between 3 and 4 miles long, and occupies a V-shaped valley between hills about 2,200 feet high. The country rocks are graphitic, calcareous, and chloritic mica schists. Gold was discovered on the creek in 1900 and rather extensive prospecting was done in 1901 by a company that disposed of its holdings at the end of the season. In 1903 a small force of men worked on the creek during a part of the season. The small amount of gold obtained is coarse, rather rough, and bright.

Grub Gulch.—Grub Gulch, a small stream running into Snake River from the east, about 1½ miles above the mouth of North Fork, carries about 50 inches of water. It can be reached by a rough wagon road over a low divide from Nome River. The gulch has a narrow valley cut through mica schists, and its gravel consists of schist and vein-quartz pebbles. On a claim worked in 1903 the pay streak is said to have had an average width of about 40 feet, and a thickness of 5 to 6 feet, and to have yielded 2½ cents to the pan. The gold is rather rough and coarse, the largest nugget reported being worth about $1.75.

Goldbottom Creek.—Goldbottom Creek, which joins Grouse Creek about 16 miles from the coast to form Snake River, rises west of Mount Distin and flows in a southerly direction. It has not been examined by members of the United States Geological Survey, but it is reported that some claims were worked in a small way during the season of 1903, and that the results were not encouraging. A sample of the concentrates obtained from A. W. Lane contained a few pieces of stream tin.

Grouse Creek.—Grouse Creek rises on the east side of Mount Distin and flows southward to its junction with Goldbottom Creek. It carries a large volume of water and is the objective point of several proposed ditches. Its valley is V-shaped and has a grade of about 200 feet to the mile. The bed rock at the mouth is chloritic mica schist of the Nome group; its headwaters are in massive limestone. One claim, about a mile from the mouth, was worked during 1903. Here three men were employed and report taking out more than $2,000. The gold is mostly bright and rough, ranging from very fine dust to nuggets weighing 2 pennyweights. The pay streak,

about 40 feet wide and from 1 to 3 feet thick, is made up of coarse gravel, chiefly limestone pebbles, and rests upon a limestone bed rock. The concentrates are composed mostly of hematite pebbles.

HIGH-BENCH PLACERS.

INTRODUCTION.

Under this heading will be described the placers occurring at altitudes ranging from 500 to 600 feet above the sea. (See fig. 7, p. 150.) These placers are the elevated remnants of deposits made by an older drainage system, which have been dissected, and, for the most part, removed. Although the workable placers of this kind so far found are limited to the Anvil and Dexter Creek region, the evidence of the epoch of erosion during which they were formed has been found in various parts of the peninsula, and there is a strong probability that other workable high-bench placers will yet be found.

The discovery of these high gravels must be credited to Schrader and Brooks, who also forecasted that they were likely to prove auriferous. The following passages are quoted from the first report on this region:[a]

> Some 8 miles north of Nome, between the heads of Anvil and Dexter creeks, in the region of Mount King, some benching and gravel terraces, seemingly marine, were observed on the lower slopes of the mountains up to a height of about 1,000 feet [estimated]. They occur at irregular intervals and mark successive stages in an elevation of the land which is probably still in progress.
>
> * * * * * * *
>
> The gravels of the terraces on the mountain slopes which have already been described, have a similar origin to those of the coastal plain and are probably of a similar character. We can judge of this only by inference, as we unfortunately found no section of these gravels exposed.
>
> * * * * * * *
>
> As has been explained, these benches and terraces have a similar origin to that of the tundra plain and, as their material has a similar source, they are likely to contain gold.

The above was published before a single high bench had been prospected. Two claims were opened up in 1900 and yielded about $150,000. At the close of the second season's investigations, Brooks said:[b] "Comparatively little investigation has been made of these high gravels, but they will probably become important gold producers."

These predictions have been abundantly verified, for during the last five years these high-bench placers have produced probably

[a] Schrader, F. C., and Brooks, A. H., Preliminary report on the Cape Nome gold region, p. 37.

$2,000,000 in gold. They have contributed especially to the prosperity of the district because they have afforded a field for winter work. Nearly all the mining operations on the high-bench deposits have been made by sinking shafts and drifting on the pay streak, with the aid of steam thawers. If water could be brought to this high level at not too great a cost, there is no question that all these deposits of gravel could be sluiced at a profit.

GENERAL DESCRIPTION.

The high-bench placers occur in alluvial deposits forming terraces and flat saddles at altitudes of 500 to 800 feet in the divides which separate Anvil and Dexter creeks and Dry and Dexter creeks. This same level of erosion and deposition has been recognized in other parts of the region, but the deposits elsewhere have not yet been proved to carry workable placers. They have, however, been but little prospected.

Some of the high benches are cut on bed rock; others are deeply buried in gravel, as on the Anvil-Dexter Creek divide. In the region lying west of Nome River rounded granite and gneiss bowlders from the Kigluaik Mountains are strewn over many of the benches up to this level. These bowlders have, in part at least, been brought in by floating ice during a period of submergence. In two of the localities under discussion such pebbles and bowlders of foreign origin are distributed throughout the gravels; in a third the foreign material is found only at the surface, and the greater part of the deposit, including the pay streaks, is of local origin. No fossil remains have been seen in any of these deposits, although marine fossils have been reported from one of the prospect holes. In one or two places a shingling in the gravel has been observed, which indicates deposition by stream action.

HIGH-BENCH PLACERS OF KING MOUNTAIN.

On the south slope of King Mountain a broad, sloping bench lying between 600 and 650 feet above the sea stretches from the head of Nekula Gulch S. 60° E. for about half a mile, crossing the Anvil-Dexter Creek divide at right angles. (See fig. 12 and topographic map, Pl. VIII, in pocket.) At the west end of this bench the surface slopes down to Nekula Gulch, a tributary of Anvil Creek; to the east the level surface breaks off to a slope which stretches to Nome River.

Gold-bearing gravels have been found in several deep shafts and open cuts along the line of this bench for a distance of about 3,000 feet. The productive mines of this belt are known as the Caribou Bill, Mattie, Madeline, Lena, Snowflake, Honey, and Sugar. During the summer of 1903 only the workings of the Caribou Bill, Mat-

tie, and Snowflake were accessible. Although the surface of the bench varies slightly in elevation and at the west end is dissected by Nekula Gulch, the shafts penetrating to bed rock reach a pay streak at a nearly uniform elevation above the sea, thus indicating that the floor on which most of the deposits were laid was approximately horizontal and had an elevation of 650 to 700 feet.

The bed rock is principally much-decomposed chlorite-mica schist, with which are interbedded some comparatively massive beds of limestone whose relation to the schist has not been determined. (See pp. 71–73.) The upper few feet of the gravels of the bench contain scattered waterworn bowlders of granite, but lower down the gravels include only pebbles derived from the schist and the limestone of the adjacent bed rock. They are in general not greatly waterworn, a slight rounding of the edges and corners being the only evidence of water erosion. All the pebbles are deeply weathered and partially decomposed. The surface of the bed rock upon which the gravel deposits rest is more or less irregular and some gravel deposits have been found below masses of schist that appear at first sight to be in place, but are evidently slides from the hill slopes above. In some places the limits of the pay streak are well defined and lie in a bed-rock channel; in others no definite channel rims have been found, and in one place at least the pay streak leaves the schist bed rock and mantles an older deposit of gravel. A sketch map and profile of this bench showing the relative elevations of the surface, pay streaks, and bed rock at the various openings, is given in fig. 12.

At the Caribou Bill mine, near Nekula Gulch, the bed rock of the bench crops out at an elevation of about 525 feet above the sea. It consists of limestone and decomposed calcareous schist. Gold-bearing gravels fill a great cavern or crevice in the bed rock. Here a pit about 30 by 50 feet and 20 feet deep has been excavated. The lateral dimensions of the deposit are well defined, but it extends nearly 90 feet in depth and its origin is difficult of interpretation from the evidence in hand. It seems probable, however, that the gold-bearing gravels have been carried into a cavern of the limestone and calcareous schist and deposited by a stream of water. The gravel consists of slightly rounded pebbles of schist and limestone cemented with yellow clay. This placer is of extraordinary richness, and $20 to the pan was not uncommon in the material excavated. Collier saw one pan of the material which yielded about $7. This sample consisted of fragments of schist bound together by yellow clay, and the colors of gold could be readily seen before panning. It is estimated that the excavated material carried about $100 in gold to the wheelbarrow load, which

The lower workings of the Mattie claim lie about 100 yards southeast of the pit just described. At the west end the bed rock outcrops at an elevation of about 525 feet and the surface of the ground rises toward the east, so that the excavations, which followed the horizontal surface of the bed rock, exposed a face of gravel about 30 feet high at the east end. This pit is about 50 feet wide and 150 feet long.

The Mattie claim was the first of the high-bench claims to be developed in the Nome region. The lower end of the claim touches

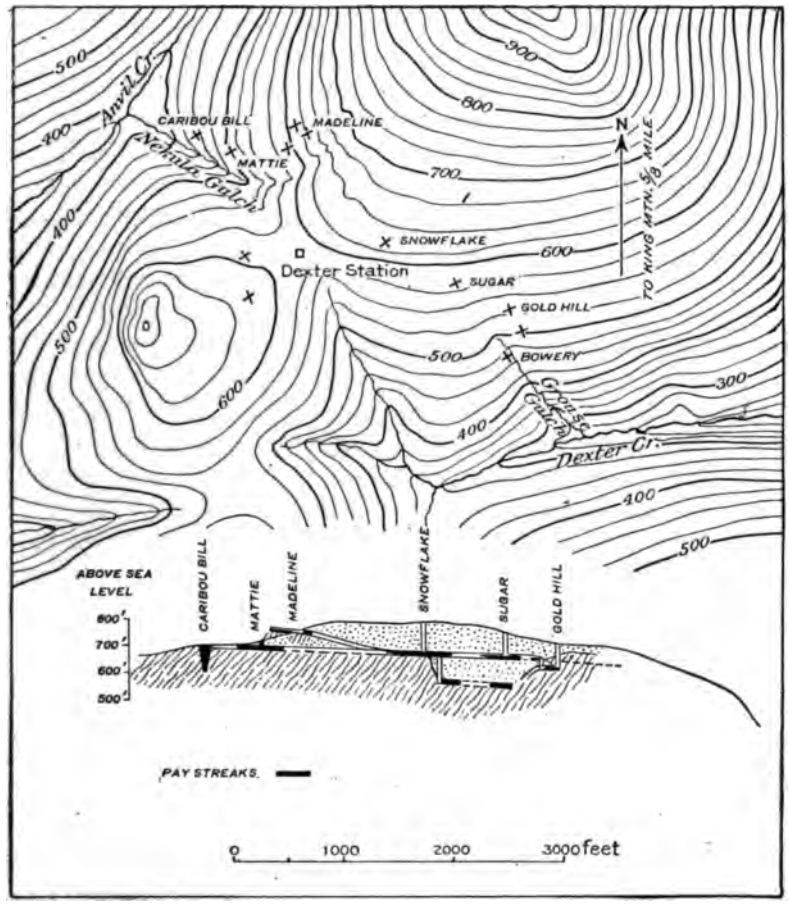

FIG. 12.—Sketch map and profile of high-bench gravels south of King Mountain.

Nekula Gulch, a small tributary of Anvil Creek, which was staked and prospected to some extent in 1899. Early in 1900 rich pay gravels were discovered on the Mattie claim and during that season about $90,000 in gold was taken out; the claim then sold for $100,000. One of the original owners of the claim informed Mr. Collier that the gravel mined in 1900 averaged about 35 cents to a 6-pan bucket, which is about equal to $9 per cubic yard.

The bed rock is faulted and otherwise so much disturbed that in the small area exposed by mining operations it varies greatly in dip and strike. It consists of alternating thin layers of mica or chlorite schist, graphitic schist, and calcareous schist, with some beds of limestone. There is little doubt that it is chiefly of sedimentary origin, but it may contain some igneous material. Many small veins of quartz are present, some of which cut across the bedding, following the fault lines, while others lie parallel to the bedding planes. The largest of these veins is a lenticular mass which thins out rapidly and does not extend far. Samples of quartz from several of these veins when assayed were found to contain traces of gold.[a]

In the face of this mine about 30 feet of gravels are exposed, showing the following sections from the surface down: Light sandy wash, containing some pebbles, 5 or 6 feet; gravel, 25 feet; and schist bed rock. Two kinds of gravel could be distinguished; one, comprising a body of gravel near the west end of the cut, was well stratified and consisted of ligh-brown clayey sediment, with flat pebbles arranged parallel to the stratification. Near the east end of the cut the gravel deposit was more irregular and contained more clay. About 10 feet above the bed rock at the east end there was a body of well-stratified sandy clay or silt clear of all pebbles. The rich pay streak lies upon bed rock and the gold was found in crevices of the schist to a depth of several feet. The gold is mostly bright and not waterworn, and averages 10 or 12 pieces to the cent.

This mine was worked by hydraulic methods, with water from a ditch about 100 feet above the rock floor, supplied from the pumping plant on Snake River. The gravel was piped into a 200-foot length of sluice box, placed in a bed-rock drain about 6 feet deep, near the lower end. After most of the gravel had been washed through this flume, the bed rock was picked up by hand to a depth of about 2 feet and, after washing in the sluice boxes, the larger slabs were stacked in the cut. The upper workings of this claim, opened in 1904, are about 300 yards northeast of the opening just described, at an elevation of about 625 feet above the sea, and are reached by a shaft 65 feet deep, indicating that the bed rock here is about 50 feet higher than that in the lower workings, where it is about 510 feet above the sea. This section is as follows:

Section at upper workings of Mattie claim, King Mountain.

	Feet.
Turf	1
Sand and gravel	60
Pay gravel	4–9

The pay streak lies in a definite bed-rock channel from 15 to 150 feet wide. It has been traced for about half a mile and is identical with the pay channel of the Lena, Honey, and Snowflake mines.

The main shaft of the Snowflake mine is located on the south flank of King Mountain about 1,200 feet S. 60° E. from the workings of the Mattie and 625 feet above sea level. The surface is here nearly level and appears to be a bench. A shaft 130 feet deep reaches bed rock, which has an elevation of about 495 feet. The section from the surface down is as follows:

Section at Snowflake mine, King Mountain.

	Feet.
Muck and gravel containing granite and gneiss bowlders	5
Silts and gravels of local origin	125
Quartz-chlorite schist bed rock.	

The lower 3 to 9 feet of the gravel is gold bearing. The pay gravel is of local origin and consists of pebbles of chloritic schist, limestone, and vein quartz. Many of the pebbles, as well as the upper part of the bed rock, are much weathered. From the bottom of the shaft the mine workings extend about S. 60° E. and N. 60° W. toward the Mattie mine on the one hand and the Sugar mine on the other. The pay streak has an average width of about 100 feet and is bounded on the north and south by appreciable rises in the bed rock, regarded by the miners as the rims of an old channel. On the north side the rim merges with the slope of the hill; on the south side it rises only a foot or so above the level of the pay streak. About 70 feet east of the foot of the shaft the bed rock disappears below a layer of barren gravel, which is called by the miners "old run gravel," on account of its position underlying the pay streak and the more weathered condition of the pebbles. A winze has been sunk below the main pay streak 70 feet east of the main shaft. Bed rock, overlain by a second pay streak, was reached at a depth of 100 feet. This lower pay streak had not yet been developed nor its limits determined in 1903. The lower part of this winze descends for 15 or 20 feet along a wall of decomposed schist that marks the southwestern limit of the gravel deposit. Near the contact between this schist and the gravel the schist shows slickensiding, indicating a fault striking approximately northwest and southeast. This fault possibly antedates the deposited gravel, as the main pay streak has not been affected by it.

The gravels outside of these pay streaks are known to carry some gold, which is probably not very regularly distributed through them. The zone of perpetual frost extends from the surface downward to a depth of 90 feet. The workings of the mine on both the 130-foot and 230-foot levels are in unfrozen ground. At these depths the gravels are comparatively dry, and water penetrates only along the

shaft. The gold is bright in color and comparatively coarse, the average-sized pieces being not far from 1 cent in value. The largest nugget thus far found weighed 9 ounces and 9 pennyweights. This gold shows little evidence of stream erosion; the points and corners of few pieces are battered, and many small octahedrons are preserved. A few of the nuggets still include pieces of quartz and calcite. The gold in nearly all the larger nuggets is porous and honeycombed, probably by cavities from which the associated minerals have been weathered out. Many of the large nuggets are so porous that they can be readily broken with the fingers.

In the workings of this mine a gangway was driven as nearly as possible along the center of the pay streak to the boundaries of the property, and crosscuts were then driven at intervals to the limits of the pay. The mining began at the remote end of the gangway, and as the pay gravel was removed the timbers were withdrawn. The pay gravel was moved to the foot of the shaft in cars and raised by a steam hoist. On the surface the cars were run on an elevated track to a high dump. This dump was sluiced early in spring with water obtained from melting snow. In order to procure sufficient snow water for this purpose fences were built on the hillside above the mine during the winter, causing drifts to form. By this means sufficient snow was accumulated to furnish water to wash the dump mined during the winter. It is probably impossible to mine gravels at less than $6 or $7 a cubic yard by this method, and only the richest part was taken out.

The main shaft of the Sugar mine lies about 600 feet southeast of the Snowflake shaft, at an elevation of 600 feet above the sea. During the summer of 1903 the deep workings of this mine were not accessible, for the mine had been developed in winter from a temporary shaft, which had caved in. At a depth of about 100 feet a 10-foot pay streak of what is reported to be rather low-grade gravel was encountered. This pay appears to rest upon an older deposit of gravel that is similar to that in the Snowflake mine and probably continues with it. The gravel below the main pay streak of the Sugar mine has been prospected by means of drill holes, which reached bed rock at a depth of 205 feet. Above this bed rock some gold-bearing gravel was found, but no details in regard to the deposit are known to the writers. Gold was discovered on the Sugar claim in 1901, and since then considerable auriferous gravel has been taken out and washed with snow water in the spring. Up to the time of visit (1903) only the pay streak on the 100-foot level had been worked.

Considerable prospecting has been done to determine the extension of the pay streak on other claims to the southeast of the Sugar

or 25 feet lower than the surface of the Sugar mine, a 100-foot shaft shows the following section:

Section in shaft 300 feet southeast of Sugar mine, King Mountain.

	Ft.	In.
Muck and silt	4	
Loose blue gravel containing a few colors	25	
Decomposed chlorite schist	51	
Washed gravel and schist		10
Schist	20	

At the 80-foot level the decomposed schist contains a 10-inch streak of washed gravel, below which the schist is very hard all the way to the bottom of the shaft. This gravel bed is about 495 feet above sea level and not far from the level of the upper pay streak in the Sugar and Honey mines. From the bottom of the shaft a tunnel was driven westward through hard schist for 15 feet, beyond which the rock shaded into a soft, decomposed schist containing some washed gravel. The drift was continued for a distance of 85 feet to the boundary of the property, where an upraise was made and at the 80-foot level a layer of washed gravel, 3 feet in thickness and containing one-half cent in gold to the pan, was found. Above this gravel there were 10 inches of decomposed schist underlying 3 feet more of gravel, above which the hard schist was again found. A tunnel was also driven for 35 feet north from the bottom of the shaft, encountering nothing but schist. An upraise from the end of this tunnel revealed no gravel. From the 80-foot level a tunnel was driven northward following the thin layer of gravel mentioned above, but this bed pinched out in 10 feet. A tunnel was also driven southward for 60 feet, but here the washed gravel also pinched out in a distance of 20 feet, and at the end of the drift only decomposed schist was found.

About 100 feet southwest of this shaft a prospect hole has been sunk to a depth of 40 feet in washed gravel without reaching the bed rock. The gravels thrown out consist of waterworn material mixed with sand. The section reported is as follows: Brown gravel, 20 feet; gravel and blue clay, 4 feet; gravel and yellow sandy clay, 16 feet. No pay streak was located.

A tunnel has also been driven northwestward, starting on bed rock in Grouse Gulch, 480 feet above the sea, toward the workings of the Sugar mine, which are about 500 feet away. It is reported that the bed rock here showed some irregularities, and the gravels carried values in the depressions, but also carried some colors of gold on the raises. On the dump from this tunnel, which has caved in, were found gravels made up of schist, limestone, and vein quartz. Some of the schist pebbles carry small veins of quartz.

To summarize, auriferous gravels have been found more or less continuously from Nekula Gulch westward to the head of Grouse

Gulch, a distance of about half a mile, but have not been trac beyond. An upper pay streak, in part confined to a definite be rock channel and in part resting upon an older gravel bed, has be traced almost continuously throughout this distance. This pay stre has an elevation of 568 feet at its west end and 490 feet at the ea end. A lower pay streak near the west end of the bench lies at elevation of about 525 feet, and one near the east end at about 4 feet, but the two localities are half a mile apart and their continui has not been established. The lower deposit at the east end is, course, older than that overlying it, but there is at present no eviden available to show the relative ages of the upper and lower pay strea near the west end. The overburden of these deposits is distribut over a much larger area than that covered by the pay gravel. It made up of material which was probably contributed mainly slides from the surrounding hills and only to a slight extent roll and sorted by water action, but its upper part contains alluviu transported from a distance. The pay gravel is all of local orig and the gold has probably been derived from small mineraliz veins in the adjacent bed rock.

HIGH-BENCH PLACERS NORTH OF ANVIL PEAK.

A second high-bench placer lies on a divide 525 feet above t sea, between Grass Gulch, a tributary of Dexter Creek, and Specim Gulch, which discharges into Anvil Creek. The development he consists of several shafts located along an east-west line for 600 700 feet. Prospecting was begun on this bench in the summer 1900, but pay gravel was not discovered until 1901 or 1902. Abo 300 feet of the pay streak had been worked out in 1903. The su face of the ground slopes toward the head of Grass Gulch.

On the Summit claim the shaft is 106 feet deep, making the elev tion of bed rock about 420 feet. From the foot of the shaft tunn have been driven N. 82° E. and S. 82° W. along the pay streak, whi lies on bed rock sloping slightly to the east. The whole deposit is froz and the material thrown out in sinking the shaft contains a gre deal of fine sand and silt, but only a few details regarding the se tion were obtained. In the gold-bearing gravel there are many bow ders and pebbles of well-rounded granite and gneiss, which mu have come from a great distance and seem to indicate that the strea which deposited them was a long one. The pay streak of the cla is 6 or 7 feet thick and consists of gravels that contain many lar flat pieces of schist and schistose limestone. In places there is a la of stratified clay above the pay streak, and at the west end of the m some false bedding was observed and also small seams of graph

The width of the pay streak is from 50 to 80 feet. On the south side a well-marked rim in the bed rock has been noted, but on the north side the bed rock gives no indication of the limits of the pay streak. In general these gravels are more waterworn and fresher in appearance than those in the bench south of King Mountain; they also contain material transported from a distance. As a rule the gold is coarse and contains many well-rounded nuggets. The pay streak is reported to average about $1 to the bucket, which would probably be equivalent to $7 or $8 per cubic yard. Some spots in the gravel have been found to be very rich, and pans containing $150 are not uncommon. One nugget worth $138 is reported to have been found.

DRY-DEXTER CREEK DIVIDE.

The third notable high-bench deposit lies between Anvil and Newton peaks in the saddle which forms the divide between Dry Creek and Left Fork of Dexter Creek. The surface of this divide has an elevation of 570 feet above the sea. It is developed by a line of shafts extending nearly north and south for a distance of about 2,000 feet. The gravels were found in 1900 and some deep shafts were sunk nearly to bed rock, but the pay streak was not located until the following year. In 1901 some auriferous gravel lying west of the main pay streak was worked out. The richest ground was found during the winter of 1902-3 and considerable material was taken out, the richest of which was washed with rockers during the winter. In the following spring the tailings from these rockers and the waste material not rich enough to be rocked were sluiced with water obtained from melting snow and yielded fair returns.

The surface of the ground here is nearly level, but by careful measurement is found to be about 25 feet lower at the south end than at the north end. In the shafts near the north end of the deposit the depth to bed rock is reported to be from 70 to 75 feet, making the elevation of the bed rock nearly 500 feet above the sea; at the south end the shafts are only 35 feet deep, showing that the bed rock lies about 10 feet higher than at the north end. The prospect holes between these points show that the bed rock has a nearly uniform slope to the north. Prospect holes sunk several hundred feet to the east of this main line indicate that the bed rock there has a higher elevation, for most of the holes are not more than 30 feet deep. The material from these excavations is chiefly light-brown sand containing some well-rounded schist pebbles, as well as some pieces of vein quartz and limestone and a few granite bowlders. The following section is reported in a shaft near the middle of the bench:

Section in shaft on Dry-Dexter Creek divide.

	Feet.
Muck and slide rock	16
Well-washed gravel carrying some gold	12
Soft sandy soil	2
Soil, peat, and slide rock	22
Stream gravel	10
Decomposed schist bed rock.	

None of these layers are permanently frozen. Most of the bed rock is very much decomposed chloritic mica schist, but in the northernmost shaft of the group broken limestone bowlders were encountered and penetrated to a depth of 40 feet. More or less brown clay sediment containing some waterworn material was found throughout the crevices of this limestone, indicating that the bed rock consists of bowlders of limestone formed in place by decomposition along the walls of the crevices. The bed rock exposed in the hills surrounding this area consists of alternating beds of limestone and chloritic and feldspathic schists. The sandy part of the deposit resembles the decomposition products from these schists and limestones. It is often difficult to distinguish between the bed rock decomposed in place and the brown sandy part of the gravel which overlies it, but this difficulty is not encountered if even a few rounded waterworn pebbles are present. The granite bowlders occurring here and there in these deposits indicate that a part of the gravel has a distant source, and the rounded character of the gold also indicates transportation.

As a general rule, the bed rock rises more or less gradually east and west of the bottom of the shafts, indicating the presence of a rock channel. Toward the south end of the deposit the rim is wanting, and it is probable that if followed far enough to the west the bed rock will be found to dip down beneath the floor of Dry Creek, which heads only a few hundred feet away. In many places the eastern rim is well defined and in some of the workings it has been followed for 50 feet up a 30° slope. The pay streak lies immediately on the bed rock, ranges from 2 to 3½ feet in thickness, and consists of light-brown sandy material containing well-rounded pebbles of schist, with some vein quartz and limestone. In general appearance it does not differ materially from the gravels that overlie it, which are not rich enough to work under present conditions. The pay streak probably averages from $6 to $12 a cubic yard and occasionally pans yield from $3 to $4. The gold is rather coarse and occurs in well-rounded pieces. The gold-bearing gravel is not closely confined to the pay streak indicated by the line of mine workings, for a number of shafts to the east have also yielded profits, though these placers

line of holes, are said to have reached gravels that yielded fair returns.

There is an area of not less than 10 acres on this divide below which the bed rock seems to be approximately level, and through this area there is a bed-rock channel running north and south. The gravels carry gold on bed rock over the whole area, but the richest pay streak is along the incised channel. The unfrozen condition of the deposit is accounted for by the fact that the gravels and sands are porous and well drained throughout.

In working the deposit, shafts were sunk to bed rock at intervals of about 100 feet and were cribbed and timbered sufficiently to make them stand for a few months. From these shafts the gold-bearing gravel was mined out in all directions. Very little timber was used underground and the roof was supported by pillars of pay gravel, which were removed before the workings were abandoned. These claims were worked both in winter and summer, as owing to their unfrozen condition the gravels stood as well in one season as the other. Sluicing was done early in spring with water obtained from melting snow. In the underground workings no cars were used. The buckets were dragged to the foot of the shaft, where they were hoisted to the surface by a windlass. Usually two men worked underground and a third operated the windlass at the surface.

GENERAL CONCLUSIONS.

The occurrence of these high-bench gravels is difficult of explanation. The most plausible theory as to their general origin is that they are stream-channel deposits formed during an earlier epoch of erosion. When these channels were formed, the land probably stood considerably lower and their beds were not far above sea level. The overburden was contributed mainly by slides from the hills. After most of the overburden was deposited subsidence occurred and the granite and other foreign bowlders were floated over the surface by icebergs or ice floes.

CRIPPLE RIVER BASIN.

GENERAL DESCRIPTION.

Cripple River, which is about 25 miles long, flows nearly southward into Bering Sea 12 miles west of Nome. (See topographic map, Pl. VIII, in pocket.) It drains an area of about 90 square miles and has an average fall of 20 feet to the mile. Where it traverses the coastal plain, here 3 miles wide, the river takes a meandering course, with banks 30 feet or more high. About 4 miles from the coast the valley becomes very narrow for a mile and the hills rise abruptly on either

side. The source of the stream lies in a broad basin, with gentle slopes and a wide flood plain. The upper end of the valley is separated by a low, flat divide from the flood plain of Stewart River, a tributary of the Sinuk. The upland surrounding the valley is characterized by flat ridges and hilltops having an average elevation of about 800 feet, and the higher hills rise above this level as dome-shaped buttes. In a few places broad gravel-covered gaps interrupt the continuity of the ridges. Though these gravels are attributed to old drainage channels, none of them as yet have been found rich enough in placer gold to justify mining. On some of the valley slopes there are broad gravel-covered benches, in the main less than 400 feet above the sea, some of which contain placers of economic value. Erratic granite bowlders strewn over the surface occur up to elevations of 800 feet. These have already been described (p. 95), and are attributed to the action of floating ice during a comparatively recent period of submergence. In several of the tributary stream beds along Cripple River these bowlders are so plentiful as to interfere seriously with the working of the placers.

The rocks of the region are mainly interbedded limestones and schists belonging to the Nome group. (See Pl. X, in pocket.) They include some massive crystalline limestones, which are differentiated on the geologic map and are provisionally correlated with the Port Clarence, though none of them have yielded fossils. Along the channel of Cripple River granite bowlders from the Kigluaik Mountains are mixed with gravels of local origin.

On Cripple River itself almost no successful mining has been done, though colors are found in many places, and some areas which will probably pay if worked by economical methods have been located in the bed and low terraces of the river. A ditch 4½ miles long was built in 1903 to bring water from Willow Creek for hydraulicking at a point just below the mouth of Elizabeth Creek. The capacity of this ditch is 3,000 miner's inches and the head for hydraulicking 157 feet, but its maintenance has been almost impossible, as in many places it runs over beds of ground ice, which melts away under the water. To avoid the ground ice, a new ditch is proposed to run a a level 100 feet higher. This will necessitate an extension of abou 11 miles to the head of Cripple River, where, it is claimed, abou 3,000 miner's inches of water can be obtained.

At the mouth of Stella Creek some sluicing, yielding not more tha wages, has been done in gravels that contain many granite an gneiss bowlders. The deposit lies in an old channel cut in a bed ro of quartz-chlorite schist about 10 feet above and parallel to the pre ent river bed. A small ditch to bring water from the head of Stel Creek has been constructed, but as it was built across ground ice t

bottom soon gave way and no mining was done at this place during the season of 1903.

OREGON CREEK.

Oregon Creek, the most important tributary of Cripple River, is between 5 and 6 miles long and drains about 15 square miles of territory. It joins Cripple River 10 miles from the coast. The valley is broad, flat, and gravel floored for the lower 2 miles, above which it gradually narrows to its head.

Gold was discovered on Oregon Creek in the winter of 1898–99, but it was not worked systematically until 1900. In the latter year Collier made a hasty examination of the placers of this region,[a] and in 1903 it was visited by Hess. Eight creek claims and two or three bench claims were in operation on the creek and its tributaries during the season of 1903. The production up to the end of 1903 had probably not exceeded $100,000. Supplies are hauled from Nome by a wagon road along the beach to Penny River, thence up Penny River to Willow Creek, and across the hills to Oregon Creek.

Along the lower 2 miles of the creek's course bed rock is not exposed. One-half mile below Nugget Creek decomposed chlorite schist is reached at a depth of 2 to 5 feet. From Nugget Creek to Mountain Creek the bed rock is heavy limestone, dipping downsteam and jointed and broken into irregular fragments. Frequently at stages of low water the creek is nearly lost in underground channels through this bed rock. At Mountain Creek there is a narrow belt of chloritic schist, but above that point the creek runs through massive limestone which seems to form an anticline.

The placers of the creek are said to be "spotted" and on some claims small portions pay well, while the remainder will not yield expenses. This is probably due partly to the varying character of the bed rock, rich spots being found on that which affords good natural riffles, and partly to local origin of the gold. All the paying claims of the main creek lie in its middle part in a belt about 2 miles long. In the lower 2 miles the creek is spread over wide gravels and a number of claims that have been worked by primitive methods have failed to pay. Half a mile below the mouth of Nugget Creek there is some ground that has been fairly productive.

The gravel is from 1½ to 6 feet thick and is composed of schist, limestone, and granite pebbles. Most of the pay lies upon a tough yellow clay immediately over the bed rock, but some gold is found in the crevices of the limestone to a considerable depth and is difficult to obtain. The gold is bright, coarse, and slightly worn; the

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 92.

largest nugget found was worth about $4.50. The concentrates contain a large amount of octahedral magnetite, some hematite, scheelite, bismuth, and garnet.

One-fourth mile below the mouth of Nugget Creek a strip of gravel about 20 feet wide along the creek bed was worked in 1900. Here the bed rock is hard, thin-bedded limestone, in the crevices of which the gold is found. About 2 feet of washed gravel, consisting principally of rounded limestone pebbles and a few granite bowlders, lies upon the bed rock. This gravel forms the pay streak, and, together with about a foot of the bed rock, was put through the sluice boxes. At the mouth of Nugget Creek the limestone bed rock is broken and irregular. Some gold has been taken from a "false bed rock" consisting of fragments of limestone embedded in reddish clay. Preparations were being made in 1903 for hydraulicking this claim. The following section was measured in a cut bank shown on the south side of the creek:

Section on Oregon Creek at mouth of Nugget Creek.

	Feet.
Moss and muck	1½
Yellowish red sandy clay	6
Gravel, consisting of broken fragments of limestone	2
False bed rock, consisting of clay with fragments of limestone embedded.	

Near the mouth of Mountain Creek the bed rock is chloritic schist dipping downstream, and the pay gravel is from 2 to 5 feet thick. It is reported that in 1900 two men, with rockers, obtained 2 pounds of gold in less than a day, getting as high as $27 in one pan. About one-fourth mile above Mountain Creek, on a claim worked in 1900, the pay streak was confined to the creek bed and was not more than 20 feet wide and less than a foot thick. Here the best pay occurred in the crevices to a depth of 18 or 20 inches. The gold is coarse, but most of the grains are well rounded and bright. One nugget, worth $130, and two smaller ones, worth $42.60 and $13.20, were obtained. Above this point, which is 3½ miles from the mouth of Oregon Creek, no gold has been mined and there is probably little, if any, to be found, for the bed rock consists of massive limestones in which there is little evidence of mineralization. The rounded form of the gold in the upper claim worked indicates that it may have been brought down from this part of the creek; but in swift flowing streams with shallow gravels nuggets may be quickly rounded by battering pebbles, without themselves traveling far.

On the east side of Oregon Creek a broad gravel-covered bench,

an old valley floor of Oregon Creek and is partly covered with flood-plain gravels. Several claims on this bench have been productive, but only in a small way. One of these claims was in operation in September, 1903. The pay streak, which seems to follow a definite channel, is about 65 feet above the present bed of Oregon Creek and is 70 feet wide. It is about 6 inches thick and rests upon bed rock, but very little gold is found in the crevices. The overburden is gravel containing some bowlders of granite, gneiss, and greenstone and is from 3 to 10 feet thick. The gold is smooth, bright, and coarse, averaging probably from one to three pieces to the cent. One nugget weighing about 38 pennyweights has been found. In the concentrates there is much magnetite and hematite, with some bismuth, garnet, rutile, and scheelite.

On several of the claims worked by drifting during the winter the gravel is from 20 to 25 feet thick. One claim is said to have yielded $4,500 at an expense of $4,000. Mining here has been done mostly by pick and shovel, under heavy costs, and has probably barely paid expenses. The ground is well situated for hydraulicking, but water for this purpose can probably not be obtained without a long and expensive ditch.

NUGGET CREEK.

Nugget Creek, less than 2 miles in length, heads in a limestone mountain and flows northwestward, joining Oregon Creek 2½ miles above its mouth. The prevailing bed rock is limestone, but a dike of decomposed pyritiferous greenstone cuts the limestone near the mouth of the creek. A second greenstone dike is reported to occur a mile above. On a claim at the mouth the gravel is composed largely of angular limestone fragments, with some rounded schist and greenstone pebbles. The gravel lies from 6 to 20 feet below the surface, in a channel not more than 25 feet wide. The pay rests upon a stiff yellow clay above a limestone bed rock and does not extend into the crevices of the limestone. The gold is all coarse enough to be easily saved, but contains few nuggets as large as a pennyweight.

The concentrates are made up largely of octahedral magnetite in small grains. One specimen obtained has a small piece of gold attached. The concentrates also contain garnet, specular hematite, rutile, scheelite, bismuth, and scattered crystals of pyrite partially oxidized to hematite. One piece of bismuth the size of a pea was collected in which a fleck of gold is embedded. The claim was economically worked as follows: Ten men were worked in two shifts of five each. The gravel was piped to the sluice box by a stream from a 2-inch nozzle under a head of less than 20 feet, and water from a lower ditch was allowed to run over the upstream edge of the bank, thawing and washing down the gravel and supplying more water to the

sluice boxes. One string of 18-inch sluice boxes, with pole riffles, was used. The tailings were removed by a scraper pulled back and forth by wire cables from drums run by a 4-horsepower gasoline engine, a man being required to guide the scraper.

One other claim, about a mile above the mouth of Nugget Creek, was worked during 1903. Several men were employed part of the season, but the pay streak "pinched out" before the end of the season and operations were suspended. The gravel deposit is from 3 to 6 feet deep and from 30 to 50 feet wide. The average size of the gold pieces is about 1 cent, and the concentrates are similar to those at the mouth of the creek.

MOUNTAIN CREEK.

Mountain Creek heads in a limestone mountain and flows southward, emptying into Oregon Creek about 3½ miles from its mouth. It carries less than a sluice head of water. It is reported that along the lower part of the creek there are extensive deposits of schist gravel carrying values in gold. No mining has been done along this creek, but it is said to prospect well and preparations had been made to work one claim during the season of 1904.

HUNGRY CREEK.

Hungry Creek, about 2 miles long, flows in a northwesterly direction and joins Oregon Creek 1 mile from Cripple River. Its valley is broad and gravel filled and the creek has trenched its floor to a depth of about 20 feet in gravel and bed rock. Gold was discovered on this creek in July, 1900, and three mines were in operation in September, 1903, although previously the creek had been worked unsystematically throughout nearly its whole length. The following section was exposed in one of the mines:

Section at mine on Hungry Creek.

	Feet.
Moss and muck, about	1
Gravel, consisting mainly of chloritic schist fragments, and containing bowlders; pay dirt of mine	4
Decomposed chloritic schist which can be cut with the shovel	1
Chloritic schist, containing no gold in crevices.	

The bowlders are largely of gneiss and granite from the Kigluaik Mountains and reach 2½ feet in diameter. Associated with the gold there was a small amount of bismuth in well-rounded nuggets, some of which weighed as much as an ounce. The concentrates were about half magnetite, the remainder being mostly garnet, in large, well-rounded pieces and small crystals, with some limonite, pyrite,

MAY GULCH.

May Gulch, the south fork of Hungry Creek, heads in a broad, low divide about 700 feet above the sea. Near its head prospect holes have been sunk to a depth of 20 feet through washed gravel without finding bed rock. Colors are reported all the way from the surface down.

TRILBY CREEK.

Trilby Creek, a small tributary of Hungry Creek from the northeast side, about a mile from Oregon Creek, is reported to have yielded $5,000. It does not cut down to the bed rock, and it seems probable that the gold has been reconcentrated from the bench gravels. During 1903 nothing more than assessment work had been done, on account of lack of water.

STREAMS TRIBUTARY TO BERING SEA BETWEEN CRIPPLE AND SINUK RIVERS.

Three small streams—Rodney, Sonora, and Quartz creeks—flow into Bering Sea at distances of 13, 15, and 17 miles, respectively, from Nome, or 1, 3, and 5 miles from the mouth of Cripple River.

The hills rise steeply from a narrow coastal plain, which is here from a quarter to half a mile broad. The bed rock exposed along the beach and in the face of the bluffs consists mainly of chloritic mica schist, but contains some beds of graphitic schist and limestone. Small quartz veins are common in the face of the bluff and some prospecting has been done, but nothing of economic importance has been discovered. A short distance west of Quartz Creek a large irregular vein several feet thick at the widest place occurs between beds of chlorite and graphite schist. The vein thins out rapidly. It contained a thin streak of highly mineralized quartz in which gray copper ore seemed to be predominant. A specimen obtained from one of the men interested in the development was assayed by E. E. Burlingame & Co., of Denver, Colo., who found only a trace of gold and silver. No placer mining is in progress on either Rodney or Sonora creeks, though colors of gold have been found and some development work was done on Sonora Creek in 1901. On Quartz Creek sluicing is reported about 1 mile from the coast, where two men were making a little more than wages in 1903, but the claim was not visited by members of the Survey party.

SINUK RIVER BASIN.

GENERAL DESCRIPTION.

Sinuk River rises in the Kigluaik Mountains, flows westward in a valley parallel with them for about 10 miles, and then, turning south, reaches Bering Sea 25 miles west of Nome. The lower

course of the river lies within the area of chloritic schists and limestones of the Nome group that are the source of placer gold in other parts of the precinct.

Colors of gold have been reported from many localities in the Sinuk basin, and in 1900 some sluicing was reported to have been done on Charley Creek, a tributary from the south near its headwaters. No gold has been produced along the main channel of the river. Of its tributaries Washington, Rulby, Charley, Boulder, Independence, and Coal creeks are reported to have produced small amounts. Extensive gravel deposits carrying low-grade values, mantling the hills between Sinuk and Cripple rivers, are reported to occur from 12 to 18 miles from the mouth. These deposits have been staked for hydraulic mining, but most of them lie at such high elevations that it will be a difficult and expensive undertaking to bring water to them, as the only sources of supply are the streams of the Kigluaik Mountains, and pipes would be required in crossing the Sinuk and Stewart valleys. Washington and Rulby creeks cut across these high gravels and probably reconcentrate their gold from them.

WASHINGTON CREEK.

Washington Creek, about 6 miles long, enters Sinuk River from the east 12 miles from the mouth. The placers of this creek have not been visited by members of the United States Geological Survey, but they are reported to consist of high-bench gravels surrounding Irish Hill, a mountain about 1,300 feet high, in the Sinuk-Cripple River divide. Good prospects, including one $10 nugget, are reported to have been found in this bench several hundred feet above the level of the river.

RULBY CREEK.

Rulby Creek, which enters Sinuk River from the east 18 miles from the mouth, is also reported to cut across high gravel deposits. A small amount of gold has been produced here in prospecting, but the gravels lie at high elevations, are of low grade, and can probably be worked only by very economical methods.

CHARLEY CREEK.

Charley Creek, a southern tributary of Sinuk River, entering 28 miles from its mouth, flows with a steep gradient in a narrow valley cut in chloritic schists. When the creek was examined in 1903 no mines were found and the workings had evidently long ago been abandoned, but a few colors of gold were panned from the gravels. It is reported that when this creek was worked a great deal of pay

BOULDER CREEK.

Boulder Creek, which enters Sinuk River about 9 miles from the coast, is reported to have yielded a small amount of gold in 1902 and 1903, but it has not been examined by geologists.

INDEPENDENCE CREEK.

Independence Creek, another tributary of the Sinuk about 10 miles from the coast, is also reported to have produced some gold though it was not worked in 1903. The creek is cut for the greater part of its length in a massive limestone bed rock and along it there are many evidences of attempts at mining and prospecting, such as crosscut ditches and bed-rock drains.

COAL CREEK.

Coal Creek, which joins Sinuk River about 15 miles northeast from its mouth, rises in the plateau region and flows down the gentle slope of the valley, exposing the bed rock in only a few places. The bed rock for about half a mile consists of coal-bearing sediments younger than the Nome group, which are described on page 83. In exploiting the coal deposits gold has been found in the gravels of the creek, which are believed to be rich enough to justify hydraulicking, and a ditch for this purpose will probably be constructed from the Kigluaik Mountains. About 2,000 miner's inches of water can be obtained from Glacial Lake at an elevation of about 400 feet above the sea. If it is found that a higher elevation is required, smaller amounts can be obtained from other sources in these mountains. The placer on Coal Creek must be regarded as in part a reconcentration from sediments of Tertiary or Mesozoic age.

REGION WEST OF SINUK RIVER.

GENERAL DESCRIPTION.

West of the lower waters of Sinuk River lies a triangular area comprising about 100 square miles, bounded by the Sinuk on the southeast, Bering Sea on the southwest, and the Port Clarence precinct on the north, which has received some attention from prospectors and has produced a small amount of gold, probably not exceeding a few thousand dollars. Topographically this region is made up of (1) a coastal plain along Bering Sea about 4 miles wide, (2) a number of high ridges to the northeast, attaining an elevation of 1,600 feet and extending in a northwest-southeast direction approximately parallel to the coast, (3) between these ridges and the Kigluaik Mountains an undulating surface that has an average elevation of 1,000 feet and has been correlated with the Kougarok Plateau. The coastal

plain is covered by gravel deposits which may be of considerable depth, but in some places are known to be only a thin layer not over 30 feet thick, resting upon a limestone bed rock. The ridges parallel to the coast are made up of limestone and schists. The more massive limestones, which are crystalline, but, as a rule, not so highly metamorphosed as those in the immediate vicinity of Nome, have been provisionally correlated with the Port Clarence. The schists are in places graphitic, but the larger masses are feldspathic, chloritic schists of a character similar to the larger bodies exposed in Anvil and Newton peaks near Nome.

The surface of the plateau region is, for the most part, mantled with moss and muck, beneath which there are gravels that contain, as a rule, a great many bowlders of granite derived from the Kigluaik Mountains and probably directly or indirectly of glacial origin. (See pp. 94–99.) The bed rock where it is exposed consists of limestones and schists, which are almost as highly metamorphosed as those at Nome. In the northwestern portion of the region under discussion they contain many intrusions of greenstone. At a point near Sinuk River a basin of younger sediments of Mesozoic or Tertiary age is infolded, and it is possible that rocks of this character have a considerable extent underneath the surficial deposits. Except for the fact that the bed rock in general is slightly less metamorphosed than in the Nome region there is no reason why workable placers should not exist here. Colors of gold have been found in a number of small streams, and mining for gold is reported at several places, though no active mines were seen by members of the survey party. Of the small streams which flow into Sinuk River from the plateau several are known to carry colors of gold, but none have yet been found to contain gold in paying quantities for small outfits working with sluice boxes or rockers. It is probable, however, that some of the gravels may be worked by more economical methods, if water be brought from the Kigluaik Mountains.

IGLOO CREEK.

Igloo Creek rises in a range of hills back of the coastal plain and flows westward to Bering Sea, which it enters just north of Cape Woolley. Although colors of gold have been reported from this creek it has not produced gold in commercial quantities, and was deserted by prospectors during the season of 1903.

FAIRVIEW CREEK.

Fairview Creek, a large stream having a length of about 12 miles,

lagoon north of Cape Woolley. The bed rock of this creek consists of graphitic and feldspathic schists and some massive limestone. For about 4 miles the stream flows in a trench cut across the coastal plain, and it is not known whether it cuts the bed rock at any point within this belt. The bed of the creek contains many bowlders of granite, which came with the glacial drift from Kigluaik Mountains. Colors of gold have been reported in the gravels at various points, though no pay streak has been found.

TOMBOY CREEK.

About 6 miles from its mouth several small tributaries enter Fairview Creek from the north side. Some mining has been done on one of these, known as Tomboy Creek, which has a length of about 2 miles and flows in a westerly direction. About 1 mile above its mouth a deposit of several feet of gravel containing a great many bowlders and pebbles of granite rests upon soft chloritic mica schist bed rock dipping to the northeast at a high angle. Two shovelfuls of the loose decomposed bed rock were panned, yielding two colors of gold, each equal to about one-half cent. This test, so far as it goes, would seem to indicate a layer of decomposed bed rock, carrying about 1½ cents to the pan, or $2.25 to the cubic yard. Evidently some mining was done here in 1902, but early in 1903 no one was seen on the ground and the claims appeared to be abandoned.

FEATHER RIVER.

Feather River, which also enters Bering Sea through the lagoon north of Cape Woolley, has a length of about 16 miles. Six miles from the coast it forks, the north fork being called Johnston Creek and the south fork Livingston Creek. Johnston Creek is the larger stream and derives its water from a number of tributaries which head in glacial valleys in the Kigluaik Mountains. Livingston Creek, the southern tributary, heads in a broad basin-shaped depression in the plateau already described. The gravels of both streams are made up largely of pebbles and bowlders of granite and other rocks derived by glacial agencies from the Kigluaik Mountains. It is reported that colors of gold have been found along these streams, but no mining has been done.

The gravels of the coastal-plain belt of this region are not known by the writers to have been prospected for gold. It is certain that no promising deposits of gold have been found in them. The beaches that border these coastal-plain deposits on the west would afford an excellent opportunity for determining whether or not the coastal-plain gravels carry gold values. So far as known, no gold has been found in paying quantities at any point along this beach and no min-

ing has been done on the beach northwest of the mouth of Sinuk River, although a few colors of gold can be found at many places.

TISUK CREEK.

Tisuk Creek, which heads in the west end of the Kigluaik Mountains and flows southwestward to the lagoon north of Cape Woolley, carries a large volume of water, and its channel is trenched from 100 to 200 feet deep, across a low plateau between the mountains and the sea. The bed rock in the plateau portion of the creek's course consists of chloritic schists, limestones, and greenstone intrusives. These rocks belong to the Nome group, but are much less metamorphosed than those in the Nome region. No gold has been produced along the main stream and scarcely appreciable amounts in its drainage basin. However, some production is reported on two tributaries that were lying idle in 1903.

HUME CREEK.

Hume Creek is a small northern tributary of Wesley Creek, which enters Tisuk Creek from the south side, 4½ miles from the coast. Two men who worked here with rockers in 1901 are said to have made from $2 to $3 per day. The workings were abandoned when examined in 1903. A section of the deposit exposed in a cut bank of the creek and in a drain ditch is as follows:

Section on Hume Creek.

	Feet.
Moss and black muck	6
Angular gravel, composed of chloritic and graphitic schist, gneiss, and granite	5
Chloritic mica schist bed rock.	

On a small southern tributary of Tisuk Creek, name not known, 6 miles from the coast, there is said to be near the level of the river's flood plain 5 feet of gravel which carries from 3 to 10 cents a pan. It has been worked with rockers, yielding from $3 to $10 per day to the man. The ground was idle in 1903 and was not examined.

In addition to these, several other small streams tributary to Bering Sea north of Tisuk Creek are reported to yield colors of gold, but none of them have been worked. On one of these, Sourdough Creek, which enters the north end of the lagoon south of Cape Douglas, Collier panned in 1901 and raised one color of gold. The bed rock consists of dark slaty schist containing many intrusions of greenstone.

ELDORADO RIVER REGION.

GENERAL DESCRIPTION.

Eldorado River has its source within a few miles of Salmon Lake, from which it is separated by a low divide. (See topographic map, Pl. VIII, in pocket). It flows southward through a broad gravel-filled valley and empties into Port Safety Lagoon. The bed rock of the whole basin consists of the schists and limestones of the Nome group, but its headwaters are in limestones correlated with the Port Clarence.

Placer gold has been reported from a number of the tributaries of Eldorado River. Some mining is said to have been done on San Jose, Mulligan, and Fox Creeks, but in 1903 mining was confined to Venetia Creek, though large areas staked for placer-mining purposes are said to be held by assessment work in other parts of the drainage basin.

VENETIA CREEK.

Venetia Creek is an eastern tributary of Eldorado River, which it enters about 23 miles from the coast, and can be reached by a rough wagon road from Nome. Gold was discovered and some mining was done on this creek in 1900. Since then it has been worked every year and the total production has probably not been far from $6,000. Although nearly all the claims are owned by Italians, the name Venetia is not after the historic Italian city, but after the discoverer of gold on the creek.

In the lower 2 miles of its course Venetia Creek flows in a sharply cut, narrow gorge, whose walls rise almost perpendicularly for 100 feet to a series of comparatively narrow benches. Above this gorge the valley widens and flood plains 100 to 300 feet wide border the stream bed. In the productive portion of Venetia Creek the bed rock is limestone and calcareous chloritic schists, into which the limestones appear to grade. The strikes of these rocks are variable, but mainly northeast. The dip also is not constant, the bedding being in many places nearly horizontal. The rocks contain small veins of quartz, in general parallel to the foliation, but locally cutting across it. The creek gravels consist of fragments of schist and limestone, a few pebbles of greenstone, and some vein quartz. Little gold has been mined on the lower part of the creek, but for 3 miles above the canyon the gravels have been productive.

The placers are all of the creek type, and though the topography indicates that there are terraces along the valley slopes, it is not known whether they carry gold. The flood plain above the canyon is from 100 to 200 feet wide, but the pay streak is only 10 to 50 feet wide. A large part of the placer gold is found in the crevices of the

bed rock. In the lower claims the gravel and overburden have a thickness of 5 or 6 feet and a considerable amount of gold is obtained from the gravel, but in the claims near the upper end of the productive portion practically all the gold is contained in the crevices of the bed rock to a depth of 3 or 4 feet.

The mining has all been done by the "shoveling in" method. Near the lower end of the productive portion the whole creek has been turned out of its bed and confined in a ditch along one side of the valley. A system of well-built ditches, which are practically sod flumes, is one of the interesting features of the workings. The gold obtained along Venetia Creek is mostly fine, with some nuggets worth several dollars. In general it is bright and is characterized by flat pieces shaped like pumpkin seeds. The assay value is said to be $19.40, the bright-yellow color being indicative of the high percentage of gold. Most of the nuggets are sold to jewelers in Nome for souvenir making.

SOLOMON RIVER REGION.

INTRODUCTION.

Solomon River heads close to the Casadepaga, from which it is separated by a low divide, and, flowing southward for 20 miles, empties into Port Safety Lagoon about 30 miles east of Nome. Its more important tributaries, Shovel Creek, Big Hurrah Creek, East Fork, and Coal Creek, enter at right angles and flow approximately east or west. The placer mines of the region are accessible from the settlements of Solomon and Dickson, at the mouth of the river. Dickson is the terminus of the Council City and Solomon River Railroad. The harbor facilities here are no better than at Nome, and at the present time landings are fully as difficult, but it has been planned to dredge out the inlet to Port Safety Lagoon, through which Solomon River discharges, in order to permit the entrance of lighters, and to construct docking along the land side of the lagoon. If the other openings into Port Safety Lagoon should be closed, compelling all the tributary waters to pass out by the inlet at the mouth of Solomon River, a fair channel might be maintained at small expense. It should be borne in mind, however, that with the development of hydraulic mining that is almost certain to occur along Solomon River, much sediment will be contributed to the stream, and this will make it difficult to keep a channel open.

For 5 miles above its mouth Solomon River flows across the coastal plain in a broad trench. Its gradient here probably does not exceed 6 or 8 feet to the mile. Above the coastal plain the river occupies a

feet to the mile. In the floor of this valley the river is entrenched, leaving a system of gravel terraces from 20 to 50 feet above the water. Gravel bars from 100 to 500 feet wide, only partially covered at ordinary stages of the water, fill the river bed.

The river was named by Pierce Thomas,[a] who staked Discovery claim in June, 1899. In the same season the river and its tributaries were prospected, and in 1900 probably $10,000 worth of gold was mined in this district.

The bed rocks along Solomon River are limestone and schist of the Nome group. The strikes generally have a north-south direction, but the dips are low and in some places the rocks lie nearly flat. On the eastern side of the valley a number of intrusive masses of green igneous rock have been observed.[b] Veins and stringers of more or less mineralized quartz are common in the schists, both parallel with and cutting across the schistosity. Many of them carry gold, and at Big Hurrah Creek a quartz mine is in successful operation. The following assays made for the Survey from specimens collected in 1900 and 1903, none of which are to be regarded as commercial samples, are useful as indicating the sources of the placer gold.

Three samples were obtained from float quartz found on the surface near the cropping of a large, partially developed quartz vein in graphitic schist on the hill north of the mouth of Big Hurrah Creek. Of these, one carried a trace of gold and no silver, another carried 16 ounces of gold and 1 ounce of silver, and the third contained 1.6 ounces of gold and 0.24 ounce of silver to the ton.[c] The material is bluish-white quartz, with black bands, and some of the specimens show free gold in fine grains. A specimen taken from a large vein in the Big Hurrah quartz mine yielded an assay return of 2.56 ounces of gold and 0.24 ounce of silver, and a specimen of the graphitic-schist wall of this vein contained 0.16 ounce of gold and 0.08 ounce of silver.[c] Most of the gold is free, and picked specimens showing large amounts of free gold have been obtained both in the mine and in the wash of Big Hurrah Creek below the mine. A specimen from a stringer of quartz and pyrite nearly a foot thick exposed in the bed rock of the placers about a mile below the Big Hurrah mine yielded an assay return of 0.02 ounce of gold and a trace of silver, and some ore rich in antimony said to have come from a vein on Last Chance Creek, a tributary of Big Hurrah Creek, was found to contain only traces of gold and silver.[c] Quartz obtained from a small

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 100.

[b] Brooks, A. H., et al., op. cit., pp. 29–31.

[c] Assay by E. E. Burlingame & Co., Denver, Colo.

stringer in the schist near the mouth of Nugget Creek, a tributary of Solomon River, contained no trace of either gold or silver.[a]

Although gold has been found along Solomon River through its whole length, the placers operated in 1903 and 1904 are all located within 12 miles of the coast. The workings are in benches along the river, where ordinary mining methods are employed, and in the gravel bars of the river bed itself, where several dredges have been used. The mines along the lower part of Solomon River, where it crosses the coastal plain, have not been examined in detail by the writers, but data regarding them were furnished by Messrs. Purington and Paige, who visited them in 1904. These placers are of the river-bar and gravel-plain type.

A system of ditches to bring water from the head of the river and its tributaries to the placers located near the mouth is in construction, and it is probable that about 1,000 miner's inches of water under a head of from 250 to 400 feet will be available.

SOLOMON RIVER VALLEY.

The excavations indicate that most of the gravels of the coastal plain are comparatively shallow and that the bed rock under the river bars is not deeply covered. A river-bar deposit about 3 miles from the coast has been worked for two seasons by a dipper dredge. The pay streak here has an average width of about 200 feet and a thickness of 9½ feet, most of the gold being concentrated in the lower part. It rests upon a soft mica-schist bed rock which is mined by the shovel to a depth of about 1 foot. Overlying the bed rock is a layer of clay several inches thick that carried good values. The pay streak is said to be spotted, but has been estimated to contain from 12 to 30 cents to the cubic yard.

Near this point mining is in progress in the river's flood plain, which is about 400 feet wide. The deposit, which resembles that just described, rests upon a bed-rock floor about 3 feet higher than that of the river bed, and the gold is mostly contained in a soft clay that overlies the bed rock. Two ditches, one 3 miles, the other 9 miles long, supply about 1,000 inches of water. Mining is done by the shoveling-in process, but it is proposed to use the water for hydraulicking in the future.

In 1903 mining was done on a bench on the left side of the river about 6 miles from the coast. The section exposed shows 4 or 5 feet of muck and sand above 4 feet of pay gravel resting upon bed rock about 8 feet above the water of the river. The placer gold has penetrated the crevices of the limestone bed rock to a depth of about 4 feet. The gravels carry values for about 200 feet away from the

river. The gold is described as consisting of coarse nuggets mixed with fine gold, all of which is worn smooth.[a]

A deposit worked by a dredge near the mouth of Big Hurrah Creek, about 8 miles from the coast, was examined in September, 1903, after work had closed for the season. The river bed here is about 150 feet wide and consists of gravel bars, most of which are above water except during floods. The gravel is from 2 to 6 feet thick. Several pans tested by Mr. Collier yielded 3 or 4 cents in comparatively coarse gold. These can not be regarded as average samples, however, as they were taken from parts of the gravel known to be rich. One cut about 40 feet wide and several hundred feet long, in the middle of the channel, has been dredged out. In dredging below the river bed frozen gravel, which the dredge was unable to handle, was found in some places, and on this account the dredge was moved near the end of the season, but the gravels at the new location were not found to contain sufficient gold to pay for mining. The machine was equipped with 18 or 20 buckets, having a capacity of 1 cubic foot each, on an endless chain, and gravel from the buckets was dumped first into a revolving trommel from which the finer gravel and sand fell into two lines of sluice boxes, each about 60 feet long, supplied with ordinary iron riffles. This plant was said to have a capacity of 400 to 500 yards a day of twenty-four hours.

Near the mouth of East Fork, about 15 miles from the coast, the river bed and flood plain have a width of 300 to 500 feet, and the gravels, which are from 5 to 8 feet thick, rest upon schist and limestone bed rock. The gold is fine, flat, and smooth and is said to be uniformly distributed through the gravel, which is reported to carry upward of $1 to the cubic yard. A ditch taking water from Solomon River at the mouth of Coal Creek has been constructed, and mining with a hydraulic nozzle and elevator began late in the season of 1904.

Above Coal Creek, near the point where the trail leaves Solomon River to cross the divide to Ruby Creek and the Casadepaga, several claims were worked in 1900. In the bed of the river about 4 feet of gravels overlie a calcareous mica schist. The gold is fairly coarse. Several $3 and $4 nuggets were found, but few of the larger pieces exceeded 25 cents in value.

JEROME AND MANILA CREEKS.

Jerome and Manila creeks are two short western tributaries of Solomon River within a few miles of the coast, heading within the coastal plain. Some development work on these creeks was reported as early as 1900.[b] The localities were not again visited in 1903.

[a] This information was obtained by Joseph Edge, packer for the Survey party.

[b] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 100.

These occurrences of gold, even though they were not worked profitably, are of interest, because they go to prove that there is gold in the coastal plain. They suggest that this tundra belt may contain placers of the gravel-plain type.

SHOVEL CREEK.

Shovel Creek flows into Solomon River from the west about 4 miles from the coast. It heads in a divide about 2 miles from the Casadepaga and flows nearly southward to its junction with Solomon River. Although not a very long stream, it has a large drainage area and carries during ordinary seasons about 500 inches of water. The topographic map shows that the creek has a gradient of about 100 feet to the mile. Through the greater part of its course it spreads over wide gravel bars, none of which have produced placer gold up to the present time. The bed rock of the Shovel Creek basin consists for the most part of limestones and calcareous mica schists. Near the head of the creek there are some intrusions of greenstone. No pebbles that could not be traced to these bed rocks have been found in the creek gravels. Mining operations in the Shovel Creek basin are confined to three small tributaries—Mystery, West, and Kasson creeks.

MYSTERY CREEK.

Mystery Creek flows into Shovel Creek about 2 miles from Solomon River. In 1900 mining in this basin was limited to Problem Gulch, a small tributary 2 miles above Shovel Creek, and the placer was confined to the bed of the gulch, in which 2 to 3 feet of gravel rested upon a decomposed schist bed rock containing placer gold to a depth of about 3 feet. The gold was rather coarse and of a bright yellow color. Crosscuts in an ill-defined bench on both sides of the gulch for about 20 feet were said to pay, but not so well as the creek bed. Mystery Creek was not visited by Collier in 1903, but it was reported that three or four outfits of about six men each were sluicing along its course.

WEST CREEK.

West Creek, a tributary to Shovel Creek, 4 miles from the Solomon Valley, flows across the strike of the schist and limestone bed rock, here dipping to the northwest at an angle of 45°. In the creek bed from 3 to 4 feet of gravel overlies bed rock. The gold near the mouth of the creek is rather fine, but increases in coarseness toward the head. Garnet, magnetite, and some pyrite, chalcopyrite, and arsenopyrite are associated with the gold in the sluice boxes. It is reported that in 1903 work was in progress on nine claims, with probably only three or four men employed in shoveling in on each claim.

KASSON CREEK.

Kasson Creek, which enters Shovel Creek from the east, flows over a limestone bed in which the water sinks so that throughout much of its length it is dry, even after heavy rains. In 1903 mining was being carried on in the creek bed for about 1 mile up from its mouth. The bed rock here is massive limestone fissured and broken up into fragments. The gold-bearing sediments lie upon this limestone and penetrate the crevices to an unknown depth. During the mining operations excavations have in some places penetrated the bed rock to a depth of 20 or 30 feet, giving the workings the appearance of quarries rather than of placer mines. The pay streak, which is in the main confined to the creek bed, has a width of 16 to 100 feet. For about a mile along the creek the claims are under one control and are worked as a unit. Water is supplied from Shovel Creek by means of a ditch about 2 miles in length, and the bed rock, in which the gold occurs in crevices and fissures, is quarried out in irregular blocks and washed in sluice boxes, together with the sediments from the fissures.

PENNY CREEK.

Penny Creek is a small tributary to Solomon River from the west side, about 5 miles from the coast. Its valley floor is about 200 feet wide, and the creek has cut its channel in this floor to a depth of 20 feet, leaving a series of benches. The volume of the stream during wet weather is equal to about a sluice head, but in dry seasons the water sinks beneath the bed rock.

The creek deposits are limestone and mica-schist pebbles cemented with clay. The gravel in some places rests directly upon broken limestone bed rock that has been penetrated by the alluvial gold, but more commonly a bed of clay intervenes between the limestone and the pay streak. In a placer 2 miles above the mouth of the creek 2 feet of gravel was observed resting upon a mixture of broken limestone and clay that had been excavated to a depth of 4 feet. Although the creek has produced considerable gold since 1900, the scarcity of water makes it difficult to work. Nearly all the gold has been obtained by the use of rockers, and sluicing can be done only for a few weeks each year after periods of heavy rain.

BIG HURRAH CREEK.

General description.—Big Hurrah Creek, which has produced more gold than any other tributary of Solomon River, is a confluent from the east about 7 miles from the coast. At its mouth it carries over 500 inches of water. Through the lower 5 miles of its course the gradient of the stream does not exceed 50 feet to the mile. The

creek flows in a comparatively straight, narrow canyon incised to a depth of 100 feet in the floor of a broad valley that represents an older period of erosion. The gravel deposits of the older valley are left as bench deposits resting upon a bed-rock floor 10 to 30 feet above the creek.

The schists and limestones composing the bed rock have low dips, and though the strike is not uniform it is generally parallel with the course of the valley. Quartz veins are of common occurrence, both cutting across the bedding and parallel with it. Some of these veins which are of economic importance are described on page —. The creek bed ranges in width from 100 to 500 feet, and is filled with gravel deposits derived in part from the immediate bed rock and in part from the older gravels of the benches. Gold was discovered and mining operations begun on Big Hurrah Creek in 1900, but the production of that year was comparatively small. In 1903 mining was confined to the wide gravel bars and flood plain for 3 miles above the mouth, but some prospecting was done farther upstream.

The methods of mining along Big Hurrah Creek have been extremely primitive, most of the mining having been done by laymen, who leased small areas by the season. The waters of the creek are usually turned to one side of the valley while the shallow gravels are worked either with rockers or by shoveling into sluices. As a general rule the laymen who have worked for 75 per cent of the returns have taken out hardly more than $5 per day. The creek placers appear to be well adapted for exploitation either with steam shovel or with horses and scrapers, but hydraulicking is not to be recommended, because of the low gradient of the stream and the thinness of the deposit.

Some mining was done in 1903 in the creek bed and on a low bench about 10 feet above the creek bed at the mouth of Lion Creek. The bed rock is a soft schist which dips about 20° NE. The pay streak in the creek bed was from 10 to 20 feet wide and consisted of 2 or 3 feet of gravel overlying the decomposed bed rock, in which most of the gold was found. The pay streak probably does not average more than $1 to the cubic yard. On the bench claim the bed rock was overlain by 2 or 3 feet of black gravel. Mining on the creek claim was done by shoveling in, but an attempt had been made to hydraulic the bench with water brought in a ditch from the south fork of Big Hurrah Creek with a head of about 200 feet. In September, 1903, operations had been suspended.

Quartz veins.—Since mining began on Big Hurrah Creek a great many specimens of vein quartz containing free gold have been found in the placer gravels. Some of these have been traced to their source.

Hurrah Creek, near the mouth of Little Hurrah Creek. This bench, which is from a quarter to half a mile wide, is not covered with gravel and rises very gently toward the hills to the southeast. The country rock at the mine is hard, siliceous, graphitic schist, lying nearly horizontal, and the quartz veins seem to be confined to bed rock of this type, for they have not been traced into the schists and limestones that overlie them about a quarter of a mile to the east. In the graphitic schist the quartz veins fill fissures that cut across the bedding, are more nearly vertical than horizontal, and strike northwest and southeast. In 1903 three veins were being developed

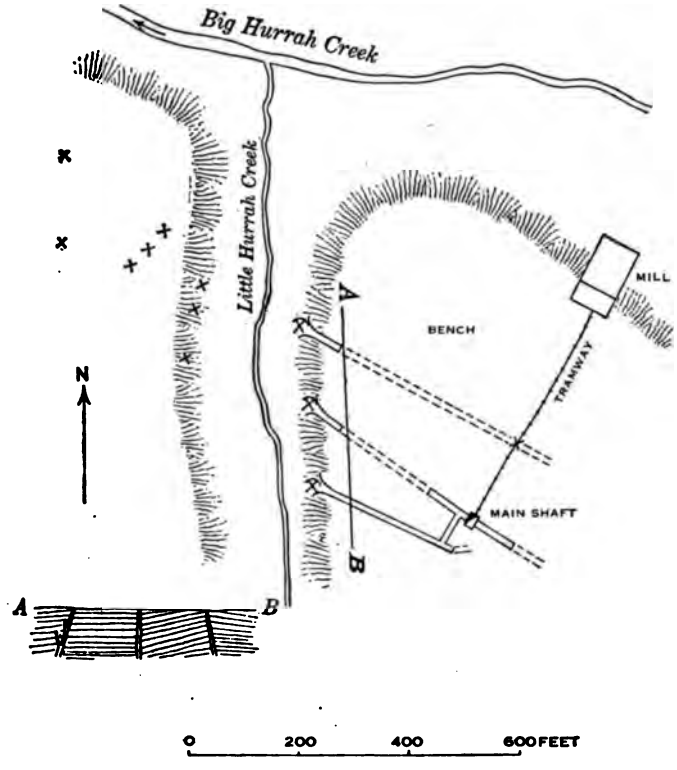

FIG. 13.—Sketch map and section of Big Hurrah mine.

on this property by short tunnels. (See fig. 13.) The southernmost vein strikes N. 60° W., the middle vein strikes N. 55° W., and the north vein strikes N. 60° W. These directions were determined, however, from short exposures of not exceeding 100 feet, and they may be more nearly parallel than the notes indicate. The distance between the south vein and the middle vein is about 100 feet, and between the middle vein and the north vein about 125 feet.

The main shaft of the mine is located on the bench east of Little Hurrah Creek, 60 feet above the level of the creek bed, close to the

middle vein, and has a depth of 135 feet (1904). On the 60-foot level the main drift follows the vein for about 70 feet on each side of the shaft. Apparently there has been some movement along this fissure since the quartz was deposited, for there is slickensiding on the hanging wall and a gouge of crushed schist and quartz. The lode itself, which is from 4 to 5 feet wide, consists of quartz arranged in ribbons and bands, some of them more than 1 foot wide. Here and there are horses of what appears to be black schist in the vein and these are deformed parallel to the banding of the quartz. Both the hanging and foot walls show some irregularity. Along the foot wall of the vein there is no gouge like that of the hanging wall, but the quartz is in close contact with the apparently unaltered schist.

A crosscut near the main shaft leads to the south vein, which was found to consist of many small stringers running through the bed rock. A drift follows this vein for about 250 feet from its outcrop on the bank of Little Hurrah Creek. Here it shows 4 or 5 feet of ribbon ore in one body and dips to the south parallel with the dip of the middle vein.

The third vein, which is the most northerly one, has been developed by a tunnel from the bank of Little Hurrah Creek. It ranges in width from about 4 to 7 or 8 feet. The dip is to the northeast, but the vein seems to be more irregular than either of the others and the hanging wall is cut by many small seams of quartz. At the outcrop a large stringer leads off on the hanging-wall side and is separated from the main vein by 2 or 3 feet of schist. At the end of the tunnel the vein splits into smaller veins on either side of a mass of black schist. Where exposed in a crosscut on the surface about 150 feet southeast of the mouth of the tunnel this vein is broken up into many small stringers, but here also carries values.

A number of prospect holes and open cuts were made west of Little Hurrah Creek for the purpose of tracing the lode to the northwest, and it is believed to have been recognized for 1,000 feet along the strike. On the west bank of Little Hurrah Creek, in what appears to be the outcrop of the northern portion of the lode, the quartz occurs in small irregular veins, having a maximum thickness of 2 feet and a dip to the northeast parallel to that of the same vein on the west side of the creek. Excavations on the line of extension of the middle vein had caved in, so that it was impossible to see the rock in place, though there was considerable ore on the dump. For about 400 feet west of Little Hurrah Creek excavations have been made on the surface of the bench, exposing many small masses of vein quartz from 2 to 6 inches thick, which seem to represent the western extension of the lode, but the whole surface is covered with

that are so broken up on the surface may be found to be united into larger masses in depth.

No statement of the assay value of this ore has been given out by the operators of the mine and no attempt was made to take commercial samples. A large part of the gold is free and before the mine was developed the outcrops yielded many specimens in which free gold could be seen. A specimen that did not show any visible gold was assayed and found to contain 2.56 ounces of gold and 0.24 ounce of silver to the ton.[a] The ore does not appear to contain pyrite or other metalliferous impurities, but is banded with layers of graphite, which seem to have been derived from the graphite schists forming the walls. It is reported that this graphite interfered with milling operations, so that it was difficult to save all the gold. A sample of the tailings from the stamp mill was found by assay to contain 0.92 ounce of gold and 0.16 ounce of silver to the ton,[a] indicating that the milling process had not extracted all of the gold.

The ore from the main shaft of this mine, as well as that from the various prospecting tunnels and holes, is crushed in a 20-stamp mill. Water power for the mine is supplied from a ditch leading from the south fork of Big Hurrah Creek to a penstock 100 feet above the creek, from which the water is conducted in a sheet-iron pipe to a Pelton wheel at the level of the creek. The free gold is amalgamated in the battery and on copper plates, after which the coarser and heavier tailings are caught on iron-wire riffles and the finer slimes are held in a large pool made on level ground near Big Hurrah Creek by a dam.

On the summit of the hill between Big Hurrah Creek and Solomon River, about three-fourths of a mile northwest from the Big Hurrah mine, similar veins outcrop and have been developed by a prospecting shaft, about 7 feet square, wholly within the ore body. In September, 1903, the only exposure of the quartz in place was in this shaft, and attempts to trace the course of the lode had not been very successful. From this opening the Big Hurrah mine bears S. 61° E., and it is believed that the course of the vein or lode is toward this mine. Some shallow trenches that have been cut across this course, several hundred feet to the southeast of the main opening, fail to show any defined vein, though a great deal of ore has been thrown out. The prospect holes have not penetrated the deep cover of partially decomposed schist débris, and they offer little evidence with regard to the course of the quartz ledge. Much of the quartz here is coated with iron rust, but shows a banded or "ribbon" structure similar to that at the Big Hurrah mine, and many specimens showing spangles of free gold were obtained.

[a] Assay by E. E. Burlingame & Co., Denver, Colo.

Three assays made from material collected at this place, none of which can be regarded as representative, as the small amount of development made it impossible to obtain an average sample, are as follows:

Assays of gold ore from prospect holes on hill between Big Hurrah Creek and Solomon River.

	1.	2.	3.
Gold.....ounces per ton	1.6	trace	1
Silver.....do	.24	none	1

There appeared to be sufficient gold-bearing quartz here exposed to justify further search.

The discoveries of gold ore already made have encouraged prospecting for quartz and many claims have been staked. One of these, which cuts across Big Hurrah Creek about a mile above its mouth, is on a vein about a foot wide, parallel with the bedding of the schist, which here strikes nearly north and south. The ore consists of quartz strongly mineralized with pyrite, and when assayed was found to contain an ounce of gold to the ton and a trace of silver. A specimen rich in antimony, reported to have come from a vein on Last Chance Creek, a tributary of Big Hurrah Creek on the north side, yielded a trace of both gold and silver. Another specimen, which consisted largely of some mineral in which antimony was predominant, contained 0.24 ounce of gold and 1.10 ounces of silver to the ton.

LION CREEK.

Mining was going on in 1903 in the basin of Lion Creek, a tributary to Big Hurrah Creek, 5 miles from its mouth. Throughout the workings the gravel averaged about 4 feet in thickness and carried gold more or less irregularly distributed from the surface down. Though generally richer on the bed rock, the gold was not found in the crevices to any considerable depth. The gravels at a point half a mile from the mouth of the creek are reported to have yielded about $1.70 in gold to the cubic yard, and 2 miles above the tenor was about $2 a cubic yard. A prospect tunnel 100 feet long, driven into the bench deposit on the north side of the creek 2 miles from the mouth, follows the surface of the bed rock, which here lies about 20 feet above high water. This tunnel shows that the bed-rock floor upon which the bench gravel rests is nearly horizontal. Though colors of gold were found in these gravels up to 1905, no pay streak yielding as much as 1 cent to the pan had been located.

DREDGING ON SOLOMON RIVER.

PINE AND CACHE CREEKS.

Pine and Cache creeks flow into lagoons connected with Bering Sea about 5 and 10 miles, respectively, east of Solomon. They are both relatively small streams which head in the highland and take tortuous courses across the coastal plain. These streams have not been examined, but their gravels are said to be auriferous, and some prospecting has been done along their valleys.

NOTES ON RECENT DEVELOPMENT.

In 1906 the Solomon River region was hastily visited by Philip S. Smith, of the Geological Survey, just before the freeze-up, when mining was almost at a standstill for the season. The following notes furnished by him give the latest facts regarding the work in progress on Solomon River below East Fork:

At the mouth of Quartz Creek two small outfits had been working the gravels lying from 10 to 30 feet above the river level. The size of the dumps indicated that not much ground had been turned over in the last season, but data were not available as to values, etc., as all the camps had closed down at the time of my visit. During the season a drill had been used in prospecting the gravels near Quartz Creek, but was not in operation when I passed.

A short distance above the mouth of Penny Creek a small amount of work was in progress on gravels which occur near the contact of chloritic schist and limestone. Downstream, between Penny and Shovel creeks, an outfit was hydraulicking gravels. Two pipes were in operation and four two-horse scrapers. It is reported that a steam shovel has been in operation on Solomon River this season, but at the time of my visit it had been removed to Shovel Creek.

The most active work in the district was at the dredge on Solomon River near the mouth of Rock Creek (Pl. IV). Mining had been in progress all summer and was being carried on, owing to the late date of the freeze-up, even as late as the first of October. The lode mine on Big Hurrah Creek was not visited, but, although continuously in operation, no new developments from that place have been reported during the last season.

COUNCIL PRECINCT.

INTRODUCTION.

The Council precinct includes all the drainage tributary to Golofnin and Norton bays as far east as the divide between Kwiniuk and Tubutulik rivers. This is an area of extensive lowlands and flat-topped uplands from 800 to 1,000 feet high, together with some mountains from 2,000 to 3,500 feet high. (See map, Pl. VIII, in pocket.) A broad, gravel-covered plain extends up Fish and Niukluk rivers for 25 miles from tide water and another depressed area, almost surrounded by hills, lies on upper Fish River. The Bendeleben Moun-

tains form the northern boundary of the district and the Darby Mountains, a lower group, lie to the southeast. The deposits of these lowland areas have been described under the heading "Gravel-plain deposits" (pp. 86–92), in the section on general geology, and the origin of the basins themselves has been briefly discussed. The flat-topped hills form the dominant topographic type in the district and are the remnants of a partially base-leveled area that was uplifted and later dissected into a system of benches that break the valley slopes and mark erosional surfaces intermediate between the plateau and lowland levels. Most of the precinct drains into Fish River, which heads in the Bendeleben Mountains and empties into Golofnin Sound. Its principal tributary, the Niukluk, in whose drainage basin lie nearly all the placer mines now being operated, joins Fish River from the west about 20 miles from Golofnin Sound.

GEOLOGY.

Two larger subdivisions of the bed rock have been recognized in this region, the Kigluaik group being the older and the Nome group the younger. (See geologic map, Pl. X, in pocket.) The Nome group contains a massive limestone of Silurian age, called the Port Clarence, which has, however, only in part been differentiated on the map from the rest of the terrane. Intrusives are plentiful in the older series and greenstones are found everywhere in association with the rocks of the Nome group. The Kigluaik group occupies a broad east-west belt in the northern part of the precinct. It consists of dark-colored biotite schists, quartzites, and very highly crystalline limestones interbedded with sills of acidic igneous rocks which have been altered to gneiss. The whole series is again cut by dikes and sills of unaltered granite. Although these rocks also contain some quartz veins the region underlain by them has not been found to include workable placers.

A broad belt of granite touches the southeastern part of the precinct and has been described by Mendenhall[a] as an intrusive in the metamorphic rocks. This granite is not known to be gold bearing and hence lies outside of the province of the present discussion.

The bed rock of the greater part of the placer-bearing region consists of metamorphic schists and limestones of the Nome group lying south of the Kigluaik Mountains. The schists are of various kinds, including siliceous mica schist, calcareous mica schist, feldspathic chloritic schists, and graphitic schists. The limestones vary in their degree of metamorphism and purity, ranging from moderately altered fossiliferous rocks to marbles and calcareous schists. The

schists include sills and dikes of basic rocks, whose igneous origin is evident. In many places these appear to shade off into chloritic schists, but this has not been certainly determined.

Within the region here under discussion are several areas of limestone correlated with the Port Clarence (see geologic map, Pl. X, in pocket) of irregular outline. These rocks vary in character from blue fossiliferous limestone to highly crystalline marbles. While they are not generally believed to be gold bearing, and the unaltered masses certainly are not, zones of mineralization are often found at their contact with the schists.

The metamorphic rocks of the Nome group in this region contain numerous small veins and stringers of mineralized quartz and calcite, many of which carry gold, some of it visible but more commonly inclosed in sulphide minerals. In a few places the schists contiguous to the quartz veins also carry free gold. In these veins and mineralized zones the placer gold has its source. Copper ores have also been found in some of the veins and veinlets. No veins of either gold or copper large enough for mining have yet been developed, but in the northeastern part of the precinct, in crystalline limestone, there is a deposit of silver-bearing galena which was discovered and to a certain extent developed before the placer deposits were known. During the epochs of erosion that have been referred to, great quantities of rock were broken down and carried away, and their gold content, together with other heavy minerals, was left as concentrates in the valley, and bench gravels form the present placer deposits. Most of the placers are of the creek and bench types, though river-bar and gravel-plain deposits have received some attention. No high benches assignable to abandoned drainage systems have yet been discovered.

DEVELOPMENTS.

Although colors of gold were found in the gravels of Niukluk River by members of the Western Union Telegraph survey as early as 1865, the first discoveries of gold in paying quantities were made in March, 1898, on Melsing and Ophir creeks, tributary to the Niukluk. In 1899 probably $40,000 in gold was taken from the Ophir Creek placers, but the season of 1900 practically marked the beginning of active mining in the district.[a]

Council, the principal town and recording office, is situated on the north bank of Niukluk River 15 miles from Fish River. Both these streams are navigable for small power boats as far as Council, but the usual method of freighting supplies is by steamer to White Mountain, at the head of tide water, and thence by flatboat. A narrow-

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 112.

gage railroad leads from Council to the junction of Dutch and Ophir creeks, the latter of which is the most important gold-bearing stream in the precinct.

The placer mines of this region were examined and reported on by the Brooks party in 1900, but by 1903 the operations had been greatly extended and many additional facts bearing on the occurrence of placer gold were gathered. Although auriferous gravels occur on a majority of the streams of the district, the producing placers are confined to Fox River and to Niukluk River and its tributaries, Mystery, Melsing, Ophir, Goldbottom, and Elkhorn creeks and Casadepaga River. The total production of gold up to 1903 was between $5,000,000 and $6,000,000, but the many undeveloped placers in this field give promise of a greater production in the future. Many large ditches are under construction, and mining machinery is being rapidly introduced, which will greatly increase the area of profitable mining. When completed the railroad from the mouth of Solomon River to Council will lower the cost of transportation and thereby increase the placer-mining operations.

DESCRIPTION OF PLACERS.

FISH RIVER AND ITS EASTERN DRAINAGE.

Fine colors of gold may be found everywhere on the bars of Fish River, both above and below the mouth of the Niukluk, but up to the present time no successful attempts at mining have been made along the main stream. The eastern tributaries of Fish River have also been so far nonproductive of placer gold, though the first attempts at mining on the peninsula were at the Omalik silver mine, which is located on an eastern tributary near the head of the river.

FOX RIVER.

In the region south of Niukluk River there are a number of small creeks and rivers tributary to Fish River and Golofnin Sound, which have received some attention from prospectors, but have as yet produced very little placer gold. This region is marked by a rolling plateau surface, about 800 feet above the sea, in which the river valleys are incised. It is traversed by a well-beaten trail from Council to Solomon River.

Fox River is the only stream in the region south of Council that has been examined in detail by Geological Survey parties. It heads about 20 miles north of Topkok Head, and after flowing northeastward to the Niukluk lowland turns southeastward and skirts the

and gravel bars, making the water shallow and navigation for small boats difficult. Above this portion the valley narrows down and the river channel has nearly a straight course. The gradient of the valley from the head of the river to the mouth is very slight. Where the stream is confined by valley walls its fall does not exceed 20 feet to the mile, and below, where it crosses the lowland, the grade is probably less than 10 feet to the mile. The valley of Fox River is broad, with the bed trenched from 50 to 100 feet below the valley floor, leaving a system of benches. The river bed itself is a broad expanse of gravel and sand bars, not entirely covered by water except at times of freshet.

The bed rock consists of a series of light-gray chloritic micaceous schists, interbedded with which are limestone and graphitic schists. Sills and dikes of rather massive greenstone are very generally distributed along the creek. The alluvium includes pebbles derived from bed rock, light micaceous sands, and in some places quicksands. Prospecting has not been carried on systematically, and there is little evidence of such work.

Some prospecting has been done near the mouth of I X L Gulch in the margin of one of the many benches common along the Fox River valley. In this bench, which is 50 feet above the river, a hole was sunk 17 feet through the gravel to bed rock, consisting of broken limestone and clay. Colors of gold were found on the bed rock. A pit about 50 feet square in the edge of the bench near this place yielded $150 in gold. The section exposed in this pit shows 3½ feet of muck and soil, and 6 feet of gravel resting upon decomposed schist bed rock, which was pierced through to broken limestone about 11 feet below it. On the surface of the bench, about a quarter of a mile west of the river, there is what appears to be a well-marked old channel about 100 feet above the present river bed. This channel, which can be traced for at least a quarter of a mile, is probably worthy of investigation. Preparations were being made in 1903 for working claims here on a more economical scale with water brought in a ditch from another tributary of Fox River, known as Blue Rock Creek. The plan was to use this water for ground sluicing the muck from the surface, after which the pay gravel could be shoveled into sluice boxes. No successful mining has been done in the creek gravels of the main river bed, though the whole stream has been staked and is held largely by one company.

I X L Gulch is a small tributary which heads about a mile southwest of Fox River. The bed rock is mica schist underlain by limestone, probably a thin lenticular mass interbedded with the schist. Above the bed rock the gravels are from 2 to 6 feet deep. In the bed of the gulch near its mouth 2 ounces of gold were taken in 1903

from about 4 cubic yards of pay dirt. A layer of muck and soil about 2 feet thick above the pay dirt had been ground sluiced off.

No definite information of the occurrence of placer gold in other creeks of the neighborhood could be obtained.

NIUKLUK RIVER BASIN.

As has been noted, nearly all the productive placers of the Council precinct are found within the drainage basin of Niukluk River. Deposits of the river-bar, gravel-plain, creek, and bench types are represented, but nearly all the gold obtained comes from the latter two. The lower course of this river is entrenched in the broad gravel plain of the Niukluk lowland. (See "General geology," pp. 60–69.) Above this lowland portion the stream flows for some distance in a narrow valley along the sides of which there is a system of benches or terraces. The bed rock consists of the limestones and schists of the Nome and the Kigluaik groups, and the gravels therefore include pebbles of many varieties of rocks—of limestone and schist as well as of greenstone, granite, and vein quartz.

NIUKLUK RIVER PROPER.

River bars.—Although the first discoveries of gold in Seward Peninsula were probably made on the gravel bars of Niukluk River and small grubstakes were obtained with rockers from some of the richer bars, no systematic attempt to work them was made until the summer of 1903, when the bed of the river for a number of miles was controlled by a company which operated a dredge a short distance below Council.

The gold is well distributed through the bar gravel, but it was found to be somewhat richer near bed rock. There are no data at hand for estimating the gold content of the gravels in any particular place, but the operators near Council report that they carried from 50 cents to $1 to the cubic yard. The gold is, as a rule, bright in color and of a character approaching flour gold. A sample gave 96 colors to the cent. Associated with the gold are many fine particles of pyrite, magnetite, and garnet. Although some of the gold may have been derived from the local bed rock, most of it was probably contributed by the great number of streams which flow into Niukluk River, the light flaky gold being easily carried by running water.

The dredge operating near Council was reported to have a capacity of about 3,000 cubic yards in twenty-four hours. Gravel was elevated by buckets on an endless chain, and dumped into a sluice box

box it passed to a grizzly 20 feet long, which was constantly shaken. The fine material thus separated was distributed to a number of sluice boxes having an area of 10 by 24 feet. These sloped off on each side from the center of the boat and emptied into two 20-foot sluices running parallel with the boat and discharging into the river at the stern. The coarse material, sorted out by the grizzly, passed onto an endless belt and was stacked about 40 feet away. Water for the sluice boxes was raised by a centrifugal pump. Except for the railroad-iron riffles used where the coarse unsorted material was dumped, Australian riffles were used in the sluice boxes, as it was found that the sand packed less in these than in the Hungarian riffles with which the machine was first equipped. Although this machine was not able to penetrate the bed rock to any great depth, loose pieces were often brought up in the buckets. A large amount of black sand was associated with the gold in the riffles and sluice boxes at the clean-up, which showed about 50 per cent of magnetite, 20 per cent of garnet, 10 per cent of pyrite, and 10 per cent of limonite from which the gold had to be separated. No scheelite or stream tin is reported. Only one dredge has been used on Niukluk River, and though this machine has demonstrated the possibility of working low-grade bar gravels, it is probable that only by the most careful management can profits be obtained from gravels of as low grade as 50 cents a yard.

During the summer of 1904 this machine was moved from the bars near Council up Niukluk River to the mouth of Ophir Creek, where somewhat richer bar gravels have been reported, but the result of the operations there is not known.

Gravel plains.—An attempt was made in 1903 to work a placer in the gravel plain south of Niukluk River near the point where the dredge was located. The surface of the plain is about 15 feet above high water in the river and the excavations show several feet of sandy gravel overlain by several feet of sandy silt, muck, and vegetation. A steam shovel was used to dig the gravel and dump it into a large sluice box that was supplied with water by a ditch from Bear Creek. The shovel had a capacity of about 3 tons of gravel and sand a minute, but the gravel was dumped in large masses into the sluice and was probably not thoroughly washed before it passed out of the boxes. The work could be more economically done by first ground sluicing the deposits nearly to the level of the river. A more thorough washing of the gravel could be easily obtained by the use of a hopper, from which the gravel could be fed into the sluice more gradually. Although the enterprise was not successful and work was suspended before the end of the season, it is evident that the gravels here contain a considerable amount of fine gold.

MYSTERY CREEK.

Mystery Creek, 5 or 6 miles in length, empties into Niukluk River from the north about 5 miles below Council. It carries from 50 to 200 miner's inches of water and flows in a southerly direction through a wooded valley cut in calcareous mica schist with local thin beds of graphitic siliceous schist. Both of these rocks contain small stringers of quartz. The prevailing dip is to the southeast and in places is as high as 34°. The gravels of Mystery Creek are made up of calcareous mica schist with some vein quartz. The placers are all of the creek type, and are of no great extent.

One mile above the mouth of the creek the gravel is about 7 feet thick, but most of the pay is in the lower 3 feet. Nuggets of values up to $6 and $8 have been obtained, but the greater part of the gold is much finer. Part of it is bright and part is rusty, but all is rough and angular. About 2 miles above the mouth of the creek the gold is nearly all coarse and bright.

Most of the mining on Mystery Creek is done by shoveling into sluices, though horses and scrapers have been used on one claim. The gold was evidently derived from the calcareous mica schist bed rock and its uniformly angular character shows that it has not been transported far from its source. In the schist it probably occurs mainly in the small quartz or calcite veins and blebs. No veins containing gold are known to have been discovered.

MUD CREEK.

On Mud Creek, a small rivulet flowing into Mystery Creek from the west side, about 2 miles from the mouth, one claim was worked in 1903. Here about 2½ feet of muck overlies 3 or 4 feet of angular schist gravel. The bed rock is decomposed calcareous mica schist. Gold is found both in the gravel and to a depth of 3 or 4 feet in crevices of the bed rock. It is very rough, spongy, and somewhat rusty, and is coarse and easily saved.

MELSING CREEK.

Melsing Creek flows into Niukluk River at Council. It is about 7 miles long and flows in a southwesterly course. It occupies a broad asymmetrical valley whose western side slopes gently from the creek up to the flat-topped hills, the eastern side rising more abruptly. This creek carries possibly from 100 to 300 miner's inches of water. The gradient for the first 4 miles from the creek's mouth is probably not over 50 feet to the mile; farther up it increases to more than 100

Gold was discovered on Melsing Creek in 1898 by Libby, Melsing, Mordaunt, and Blake, the four pioneer prospectors of the region, and since that time some mining has been done every season. In the summer of 1900 40 men were employed on the creek near the end of the season.[a] Although no bonanzas have so far been developed on this creek, it has probably yielded grubstakes and wages to many prospectors and miners. It is impossible to estimate closely the amount of gold produced, but it has probably not exceeded $50,000 all told.

The valley of the creek, from the water's edge to the tops of the hills on both sides, is well wooded with spruce. Some of these trees grow to 14 or 16 inches in diameter and 30 to 40 feet in height, and although not large enough to make first-class lumber, they were whipsawed to make the first sluice boxes of the region, and are used as saw logs in a mill at Council.

The country rock on Melsing Creek is largely a gray calcareous mica schist, showing in places very little calcite and in other places passing into limestone. In a low terrace on the north side of the creek, half a mile above the mouth, there are gravels which have yielded some gold. The workings show the following section:

Section on Melsing Creek one-half mile above the mouth.

	Ft.	in.
Sandy muck	4	
Gravel	3–4	
Clay seam (bed rock)		4
Gravel.		

The gold is found in the gravel within a few inches above the clay seam, below which it is reported there are no values. The smaller pieces of gold are nearly all smooth and bright, but the larger pieces are round and iron stained. In a placer 1 mile above the mouth the gravel ranges in thickness from 18 inches to 5 feet, and the sandy muck above it also varies in thickness. Here also the gold lies on a clay seam, and it resembles that just described, except that it is less iron stained. About 1¼ miles from the mouth of the creek the workings show the following section:

Section on Melsing Creek 1¼ miles above the mouth.

	Feet.
Moss and muck	1
Gravel	6–8
Calcareous mica schist.	

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 112–114.

The pay is confined to the lower part of the gravel and extends about 1½ feet into the crevices of the bed rock.

At the mouth of Basin Creek, which joins Melsing Creek 1½ miles from the mouth, the placer is confined to the creek bed and flood plain, and the workings show gravel 3 to 4 feet thick resting upon calcareous mica schist bed rock. Gold is distributed through the gravel, but is more abundant near bed rock and has penetrated the crevices to a depth of 12 to 18 inches. The average yield in gold to the man was reported in 1903 to be about $50 a day. If we estimate 4 cubic yards per day to the man, the pay gravel on this claim must carry not far from $12 to the cubic yard. The gold is mostly coarse, nuggets as large as a dollar being common. The largest nugget found was worth about $10. The nuggets are as a rule well rounded and iron stained. One of the nuggets examined showed a small square hole filled with hydrous iron oxide, probably left by the weathering out of an iron-pyrite crystal, and this indicates the probable occurrence of the gold with pyrite, which is widely disseminated through the schists and limestones of the valley.

Above the mouth of Basin Creek no gold in paying quantities has yet been found on either Melsing or Basin creeks and no mining has been done. The waterworn condition of the gold at the mouth of Basin Creek indicates that it may have been carried for some distance, and suggests the possibility of there being other placers farther up the creek, although the wearing may be due entirely to re-sorting or reconcentration of the gravels or exposure to the pounding of rolling pebbles. No auriferous quartz veins or stringers are reported in this basin.

OPHIR CREEK.

Ophir Creek is a northern tributary of Niukluk River, about 2 miles in a direct line above Council. For about a mile above its mouth Ophir Creek flows parallel to and within 100 yards of the Niukluk. A channel has recently been cut through this neck, called "the portage," turning the creek water directly into the river. This point is probably not more than 100 feet above sea level. Above this point the general course of Ophir Creek is north and south, and for a distance of about 8 miles it flows in a broad valley with gently sloping sides. Above this stretch the valley contracts to a narrow canyon, 3 miles long, extending to a point 12 miles above the portage. (See Pl. V, A.) The slopes of the valley are for the most part mantled with talus and gravel deposits to an elevation of about 600 feet above the sea. Within the broad part of the valley the creek winds back and forth with long, sweeping meanders, which, especially in the lower reaches, are incised below the general valley level, leav-

A. CANYON OF OPHIR CREEK, SHOWING PART OF THE WILD GOOSE MINING COMPANY'S DITCH.

B. PLACER MINING WITH TRACK AND INCLINE ON OPHIR CREEK.

of the meanders to the valley walls. (See fig. 14, p. 247.) The gold placers of Ophir Creek are of the creek and bench types.

Although gold was discovered on Ophir Creek during the summer of 1898, yet in 1900, when the region was first visited by a party from the United States Geological Survey, placer mining was still in its initial stages.[a] Since 1900 developments have been rapid and the deposits of gold-bearing gravel have been found to be of large extent, making the stream second in importance in Seward Peninsula only to Anvil Creek, and giving it a rank among the first gold producers. In 1900 only a few claims were worked, but in 1903 the entire creek from the mouth to the head of the canyon had been prospected. Though the immediate creek bed has been mined out, and in some places yielded only moderate returns, large deposits of auriferous gravel have been found in benches, and the indications are that they will yield a considerable output of gold.

In 1903 more than 1,000 men were employed on Ophir Creek and its tributaries. The mines are accessible from Council by two wagon roads—one up Niukluk River to the mouth of the creek, and one over the hills to the claims above Dutch Creek. A narrow-gage railroad, 7 miles in length, runs from Council to claim No. 15 Ophir, at the mouth of Dutch Creek.

The bed rock on Ophir Creek, from the mouth to the head of the canyon, belongs to the Nome group, and consists of limestone which in places has graphitic phases and shades off gradually into graphitic mica schist. Though the strikes and dips of the rocks are variable, the prevailing strikes are approximately parallel to the general course of the creek valley and the dips in almost all places where they have been observed are to the east at angles ranging from 10° to 90°, the average being not far from 45°. The hills along the river rise to 600 or 800 feet and mark a surface of erosion above which rise dome-shaped buttes. Most of these buttes consist of limestone in which it is at many places difficult to determine the structure, since the rock is so jointed and fissured as to obscure the bedding. The limestone of the buttes is apparently similar to that interbedded with the schists along Ophir Creek itself. This rock may be thick lenticular masses in the more thinly bedded schists, or perhaps closely folded portions of comparatively thin limestone beds. There was no opportunity to settle this question.

In the schists and limestones exposed in the valley many quartz veins, in general occurring as stringers parallel with the bedding or schistosity, have been observed, and similar quartz veins have been found in the limestone buttes just described. Assays of the stringers

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 111–113.

show that as a rule they carry small amounts of gold and silver. A stringer several inches thick exposed in the bed rock of a claim at the mouth of Crooked Creek consists of quartz heavily mineralized with pyrite. An assayed sample of this ore yielded 0.06 ounce of gold and a trace of silver to the ton.[a] Samples were taken near the mouth of Ophir Creek from several small stringers of quartz that showed no mineralization and from the schist contiguous to them. When assayed the quartz showed no trace either of gold or silver, but the schist was found to contain a trace of gold and no silver.[b] Samples from this locality crushed in a hand mortar and panned were found to carry free gold. The prospectors who have searched for quartz veins in the Ophir Creek basin have not infrequently found quartz carrying free gold. Although no deposits of auriferous quartz large enough for mining have yet been found, these small veins and stringers are sufficient to account for the origin of the placer gold.

In the schists and limestones of the lower part of the Ophir Creek basin no rocks of proved intrusive origin have been found in place. The nearest occurrence is a greenstone outcrop on the divide between Warm and Sweetcake creeks.

For 2 miles above the canyon of Ophir Creek no bed rock is exposed, the prevailing formation consisting of Pleistocene gravels. The bed rock at the head of the creek consists of the schists, limestones, and gneisses of the Kigluaik group, with characteristic sills and dikes of granite. The Pleistocene gravels of the upper basin consist largely of materials derived from the Kigluaik group, and some pebbles and bowlders of this kind have been carried down Ophir Creek and are mixed with its gravels all the way to the mouth. In the lower portion of the creek such transported pebbles occur in the bench as well as in the creek gravels and have been found at an elevation of at least 100 feet above the creek bed.

The gravels proved to carry gold values occur from the mouth of Ophir Creek to the head of the canyon, a distance of about 12 miles in an air line, or following the bends of the creek probably not less than 20 miles. It is probably true that throughout this length there is no part of the creek-bed gravel which was entirely barren of placer gold. Above the canyon the bed rock lies at a greater depth and no gold deposits that have warranted development have yet been found, although considerable prospecting has been done. Of the tributaries, Sweetcake, Dutch, Crooked, and Oxide creeks have been producers of gold. As in many places along Ophir Creek the stream-bed and bench deposits merge, they will be described together, beginning at the mouth.

Near the mouth the bed rock lies at considerable depth, and until the waters were diverted it was not practicable to mine the gravels in the creek bed. Colors of gold are plentiful in these gravels, and it has been estimated that in some places they carry as much as $3 or $4 in gold to the cubic yard. The gold is finer than that found farther upstream. In the summer of 1903 no mining was in progress, but small grubstakes had previously been taken out with rockers. It is believed that the whole area between the old bed of Ophir Creek and the south bank of Niukluk River will be found rich enough to pay for dredging

The Ophir Creek valley for one-fourth mile above the portage is from 300 to 350 feet wide. On the west side, 30 to 50 feet above the creek bed, there is a bench, which rises gently toward the west and continues up the creek to the mouth of Sweetcake Creek, a distance of about half a mile. About one-fourth mile from the portage the creek has been confined to a ditch along the west valley wall, and here excavations in the old creek bed showed 4 feet of sand and muck underlain by 6 feet of auriferous gravel lying upon bed rock. In an upper pit this bed rock consists of blue clay, probably derived from decomposed graphitic limestone or calcareous schist, in a lower pit limestone was exposed. Although the horizontal extension of the pay gravel had not been determined, it is believed that it covers practically the whole of the valley floor and has a width of 300 to 400 feet. The bed rock where exposed has a very irregular surface, with some deep holes that have to be bailed out before the gold can be obtained. Where the bed rock is made up of schist it is soft and can readily be shoveled into the sluice boxes. The limestone is fissured, and the placer gold has penetrated along the crevices, but it has not been found profitable to mine it to a depth of more than 1 or 2 feet. Though the basis for estimate is indefinite, it is probable that the gold tenor in these gravels will average about $5 to the cubic yard.

The mine excavations at this place are about 10 feet below the creek bed, and the seepage water collects in a sump, from which it is pumped by means of a gasoline engine. Three lines of 12-inch sluice boxes were used in each pit. Usually two men shoveled the pay dirt from the bottom of the pit to a table about 5 feet above the pit floor, and a third man, standing on this table, shoveled the dirt into the sluice boxes.

About a quarter of a mile above this place, near the mouth of Sweetcake Creek, the gravel appears to be less extensive, for limestone crops out on the left bank. No mining was in progress here in 1903.

The gravels on the bench 300 feet west of Ophir Creek and south of the mouth of Sweetcake Creek have been mined with water brought

in a ditch from the latter stream. Here the following section was measured:

Section of bench gravels on Ophir Creek near mouth of Sweetcake Creek.

	Feet.
Moss and muck	1½
Brown sandy soil	3
Gravel	2
Decomposed mica schist.	

The gravel is made up of schist fragments mixed with rounded pebbles of granite, vein quartz, quartzite, and greenstone similar to the wash of Ophir Creek.

At a point about a mile above the mouth of Sweetcake Creek the valley of Ophir Creek widens and the stream flows in a succession of deeply incised meanders. (See fig. 14.) The placers of the creek bed, which appear to have been mined out, are shallow and not more than 100 to 200 feet in width. Several large forces of men were at work mining gravels that occur in a spur bench covering an area of about 30 acres, almost surrounded by the meanders of Ophir Creek. This bench slopes gently down from the west side of the valley to the apex of the meanders, where it stands about 20 feet above the creek. The section is as follows:

Section of bench gravels on Ophir Creek 1 mile above Sweetcake Creek.

	Ft.	in.
Black loam		3
Brown soil with some sand and a few pebbles	2	
Sand and gravel	10	
Broken and fissured limestone bed rock.		

The gravel is generally not well sorted, but contains angular pieces mixed with well-rounded material ranging from fine sand to bowlders one-half foot in diameter. The pebbles, many of which are much weathered, consist of schist, vein quartz, limestone, and some pieces of coarse-grained greenstone. The gravel layer is reported to yield from 10 to 15 cents to the pan, which would be approximately the equivalent of $15 to $20 a cubic yard. At the time the claim was visited nine men were shoveling into a 10-inch sluice box and the tailings were being removed by a team of horses and a scraper.

The gold is bright in color. One nugget worth $3.75 had been found, but nearly all the gold is fine and flaky. The limestone bed rock is broken and fissured and along the fissures has weathered out to such an extent that its upper part consists of large, more or less angular residual bowlders. The pay dirt penetrates between the bowlders and in some places has been worked to a depth of 3 or 3

At another locality on this bench a pit showed 1 foot of moss and soil resting upon about 8 feet of gravel and sand. Here the pay gravel was being shoveled into sluice boxes and the tailings dumped over the edge of the bench into the stream bed. Near by about 1½ acres of the bench had been ground sluiced, leaving in the pit about 2 feet of concentrated gravel. A section here showed 1½ feet of brown sandy clay and moss resting upon about 6 feet of gravel. In some of the bench workings a considerable number of granite and other pebbles of distant origin were mixed with the gravels; in others only pebbles of local origin were seen. This is a fair sample of a number of the bench deposits that are being mined along Ophir Creek. For 1½ miles above these bench workings the only mining carried on at the time of visit was on a small scale, and was confined to the creek bed proper. The bench gravels had not been opened up and it is not known whether they are auriferous.

About 4 miles from its mouth Ophir Creek winds back and forth

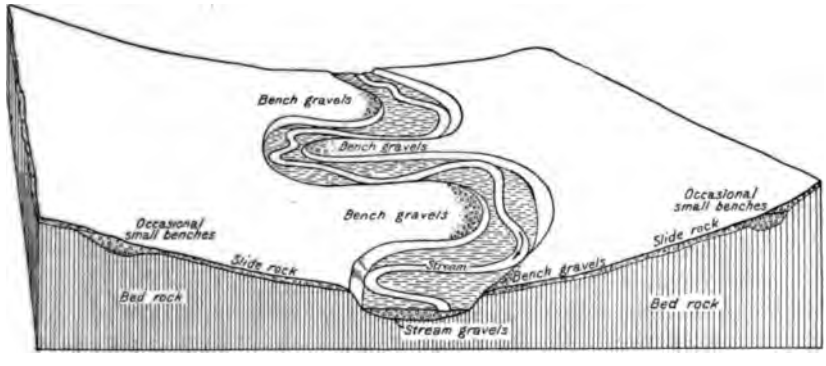

FIG. 14.—Diagram of part of Ophir Creek valley, showing position of bench-placer deposits.

across its valley to such an extent that a ditch crosses the stream four times within a mile. Between these meanders are bench deposits of gravel similar to that described above. An account of one of these will suffice. A meander of the creek channel includes a bench of about 20 acres lying 15 or 20 feet above the water on the left bank. Bed rock lies at the surface near the valley slope, but at the other end of the meander the bed-rock surface is only slightly above the creek bed. The nature of the deposit and its relation to the meanders are shown diagrammatically in fig. 14. A section was measured as follows:

Section of bench gravels on Ophir Creek ¼ miles above its mouth.

	Feet.
Tundra, muck, and soil	5
Pay gravel	5
Bed rock, partly limestone and partly schist.	

The gold has penetrated the crevices in the bed rock to an unknown depth, the limit to which it is mined being determined by the cost of extraction. The pit was drained by a gasoline pump that raised the water from the sump at one side of the workings. Two strings of sluice boxes were used, and the gravel was shoveled first to tables and then reshoveled into the boxes.

About one-half mile above this point, or 4½ miles above the portage, is a bench of somewhat different contour, not being outlined by the meanders of the stream, which here flows nearly straight. This bench is on the east side and probably about 30 feet above the creek bed. An area about 250 feet square had been ground sluiced in 1903. The section exposed shows a thin layer of vegetable matter resting upon about 6 feet of silt or light-brown soil above the pay gravel, the full thickness of which was not disclosed, nor was the bed rock exposed. This pay streak consists of sand and gravel, containing an abundance of rounded granite pebbles from 1 to 3 inches in diameter and many rounded pieces of schist, all much decomposed. The mining method employed was as follows: A strong stream of water flowed through a sluice box, about 2 feet wide, which was set in the ground on a level with the surface of the pay streak. The pay dirt was carried to the sluice boxes by a number of scrapers, which completed their circuit by passing the lower end of the sluice box and scraping away the tailings.

The hill rises rather steeply above this bench and at an elevation of about 120 feet above the creek there is another deposit of gravel of the pocket-bench type. Of this deposit an area 300 feet square had been ground sluiced off to an average depth of 6 feet. At one place 7 feet of muck and soil were observed overlying 4 feet of gravel that rested upon 2 feet of decomposed gray calcareous mica schist containing some gold. The gold is fine, but round, and may be described as "shot gold." It is easily caught in the sluice boxes.

About 6 miles above the portage the creek bed is entrenched to a depth of only a few feet, the creek-bed gravels merging with those of the terraces. For a mile or more above there was much mining in progress, in which probably more than 500 men were employed. At the lower end of this strip a pit 300 feet long, 100 feet wide, and 17 feet deep was examined. Here 2 to 6 feet of sandy muck and soil rested upon 12 to 16 feet of well-stratified and some cross-bedded gravel. The gravel contained many well-rounded pebbles and bowlders of granite up to 8 inches in diameter. The bed rock was limestone with some thin beds of schist. The limestone was weathered and fissured and the gold-bearing sediments penetrated it to an undetermined depth. In schist bed rock, however, the gold has not pene-

A quarter of a mile above this point a section was measured showing 2 feet of muck and soil underlain by 12 feet of gravel containing well-rounded pebbles of schist, limestone, and granite, mixed with yellow or brown sand. The limestone bed rock is mined to a depth of 4 to 6 feet, and some holes have been dug to an even greater depth. The deepest reached open crevices filled with water, in which there was a slow current. It is reported that the sinking of the water into underground channels on Ophir Creek has decreased since its bed has been filled with silt from the mining operations, and that the stream now carries more water than it formerly did.

About 6½ miles above the portage, excavations show from 5 to 14 feet of gold-bearing gravel resting upon a broken limestone bed rock. Three-fourths of a mile to the north 6 feet of sand and muck rest upon about 12 feet of gravel, of which the upper 2 or 3 feet carry very little gold. A section 1¼ miles further upstream shows about 1 foot of muck and soil over 6 feet of gravel that lies on a graphitic calcareous schist. This schistose bed rock on decomposition yields a clay called by the miners "hard pan," into which gold does not penetrate.

These deposits extend along the creek for nearly 2 miles and include a pay streak ranging from 4 to 20 feet in thickness and probably from 200 to 1,200 feet in width. It seems probable that this pay streak underlies an area of at least 160 acres. It has been impossible to obtain the facts necessary to determine even approximately the average gold content of this gravel, but in some places it is known to have been very rich. It seems conservative to estimate the average at between $3 and $5 to the cubic yard.

In this part of Ophir Creek nearly all the mining is done by mechanical devices of various kinds, including several track and incline systems (Pl. V, *B*), derrick systems, and hydraulic elevators. Such devices have been described in detail by Purington.[a]

Above this large area of rich gravel Ophir Creek flows over a comparatively broad bed bordered by flood plains, making the total width of the valley floor over 300 feet. In a few places along the margins of the flood plains there are benches, some of which are rock cut and others covered with gravel. In absolute elevation they correspond with the high pocket benches along the lower part of the valley, but are only 30 feet above the creek bed. On the east side one of these benches has been opened up, exposing bed rock about 10 feet above the creek. This bed rock forms the rim of a channel parallel with Ophir Creek. It is reported that the rich gold-bearing gravel lay on top of the rim and not in the old channel. The section shows 3 or 4 feet of muck and clay, below which is 10 feet of gravel containing pebbles of granite, resting upon a pay streak of gravel 4 or 5 feet

[a] Purington, C. W., Methods and costs of gravel and placer mining in Alaska: Bull. U. S. Geol. Survey No. 263, 1905.

thick, chiefly made up of pebbles of local origin. Along its margin some of the pay streak was strongly cemented.

In 1903 no work was being done for about a mile above this point, and the next working mines were found near the mouth of Crooked Creek. Here terrace gravels on the left bank 10 to 15 feet above the creek were being exploited. The bed rock of the deposit is probably little above the present creek. A section showed 2 or 3 feet of muck overlying 5 or 6 feet of gravel, which rested upon calcareous schist. The gravel was being washed down by a hydraulic giant to a hydraulic elevator. After the gravel was stripped the bed rock was cleaned by hand to a depth of 1 foot. Mining was also in progress at the mouth of Crooked Creek and is described in the account of that stream (p. 252).

For about 4 miles above Crooked Creek there was no mining in 1903, though some of the gravels doubtless carry gold. In the canyon, 3 miles long, whose lower end is a mile above Crooked Creek, the creek bed has an average width of 100 feet and contains shallow deposits of gravel, in which very little mining has been done. A characteristic view of this canyon is given in Pl. V, *A*.

On the left bank of the creek, near the upper end of the canyon, a small body of gravel is exposed on a bench possibly 20 feet above the water. Here a cut shows 5 feet of muck and soil, resting upon 2 to 3 feet of pay gravel. The bed rock is calcareous mica schist, some of it graphitic. Mining was done by stripping the muck by hand and then shoveling the pay gravel into sluice boxes. No estimate of the gold content of the pay streak was obtained, though it must have yielded at least wages to the seven or eight men employed. About one-half mile above this point the valley of Ophir Creek merges with the gravel plain of the upper Fish River lowland. So far as known no mining has been done above this point, but there has been some prospecting, and the claims all the way to the head of the creek are held by annual assessment work. The gravel deposits of the lowland consist mostly of pebbles derived from the mountains to the north, a region believed not to be auriferous, and it does not seem likely that workable placers will be found in them.

SWEETCAKE CREEK.

Sweetcake Creek, a tributary to Ophir Creek from the west a mile above the portage, is about 3 miles long. Near its head the creek flows through a narrow valley incised in the upland, but it widens out below, and near its mouth a flat bench already described (p. 245) separates it from Niukluk River.

Credel, and what was probably the first successful placer mining in the precinct was begun there. About $36,000 is said to have been taken in that year from one claim. The pay streak was found to be confined to a narrow strip along the creek bed. The following section was measured near the mouth of the creek:

Section on Sweetcake Creek near mouth.

	Feet.
Fine micaceous sand	5
Gravel and sand	2
Angular schist gravel (pay streak)	1
Bed rock exposed	1

The gravels contain much mineralized quartz and calcite, and the gold was formed in a layer made up of angular pebbles from the immediate bed rock. Average pans taken on bed rock ran from 25 to 50 cents and a $9 nugget was the largest found. By 1903 the richest gravels on this creek had been exhausted, and little, if any, mining was in progress. It is reported, however, that there is still considerable gold left along the creek, which will be reclaimed on the completion of the ditch now in construction from the head of the Ophir Creek canyon.

DUTCH AND SNOWBALL CREEKS.

Dutch Creek joins Ophir Creek from the northeast about 5 miles from the portage, in the center of the most extensive mining operations on the main creek. It forks about 2 miles up, the west branch being called Snowball Creek. Both forks rise on the surface of a plateau about 800 feet above the sea, on the south side of the Fish River lowland. They have not been studied, but it is reported that the heads of their valleys are incised in gravel deposits resembling those of the Niukluk lowland. Not much gold has been produced on Dutch Creek, though there has been some mining, and prospectors report that colors of gold are to be found both in the creek and on benches. A bench resembling one on the headwaters of Crooked Creek, described below, has been located near the source of Snowball Creek.

CROOKED CREEK.

In 1903 there was more mining on Crooked Creek than on any other tributary of Ophir Creek. Crooked Creek has a length of about 3 miles and a general southeasterly course, joining the main stream 8 miles from the portage. Two small tributaries, known as Balm of Gilhead and Albion Gulch, enter Crooked Creek from the southwest about 1 and 2 miles, respectively, from its mouth. The valley walls, which are covered with talus and gravel, rise gently from the creek floor to altitudes of 200 or 300 feet, where limestone crops

thick, chiefly made up of pebbles of local origin. Along its margin some of the pay streak was strongly cemented.

In 1903 no work was being done for about a mile above this point, and the next working mines were found near the mouth of Crooked Creek. Here terrace gravels on the left bank 10 to 15 feet above the creek were being exploited. The bed rock of the deposit is probably little above the present creek. A section showed 2 or 3 feet of muck overlying 5 or 6 feet of gravel, which rested upon calcareous schist. The gravel was being washed down by a hydraulic giant to a hydraulic elevator. After the gravel was stripped the bed rock was cleaned by hand to a depth of 1 foot. Mining was also in progress at the mouth of Crooked Creek and is described in the account of that stream (p. 252).

For about 4 miles above Crooked Creek there was no mining in 1903, though some of the gravels doubtless carry gold. In the canyon, 3 miles long, whose lower end is a mile above Crooked Creek, the creek bed has an average width of 100 feet and contains shallow deposits of gravel, in which very little mining has been done. A characteristic view of this canyon is given in Pl. V, *A*.

On the left bank of the creek, near the upper end of the canyon, a small body of gravel is exposed on a bench possibly 20 feet above the water. Here a cut shows 5 feet of muck and soil, resting upon 2 to 3 feet of pay gravel. The bed rock is calcareous mica schist, some of it graphitic. Mining was done by stripping the muck by hand and then shoveling the pay gravel into sluice boxes. No estimate of the gold content of the pay streak was obtained, though it must have yielded at least wages to the seven or eight men employed. About one-half mile above this point the valley of Ophir Creek merges with the gravel plain of the upper Fish River lowland. So far as known no mining has been done above this point, but there has been some prospecting, and the claims all the way to the head of the creek are held by annual assessment work. The gravel deposits of the lowland consist mostly of pebbles derived from the mountains to the north, a region believed not to be auriferous, and it does not seem likely that workable placers will be found in them.

SWEETCAKE CREEK.

Sweetcake Creek, a tributary to Ophir Creek from the west a mile above the portage, is about 3 miles long. Near its head the creek flows through a narrow valley incised in the upland, but it widens out below, and near its mouth a flat bench already described (p. 245) separates it from Niukluk River.

Credel, and what was probably the first successful placer mining in the precinct was begun there. About $36,000 is said to have been taken in that year from one claim. The pay streak was found to be confined to a narrow strip along the creek bed. The following section was measured near the mouth of the creek:

Section on Sweetcake Creek near mouth.

	Feet.
Fine micaceous sand	5
Gravel and sand	2
Angular schist gravel (pay streak)	1
Bed rock exposed	1

The gravels contain much mineralized quartz and calcite, and the gold was formed in a layer made up of angular pebbles from the immediate bed rock. Average pans taken on bed rock ran from 25 to 50 cents and a $9 nugget was the largest found. By 1903 the richest gravels on this creek had been exhausted, and little, if any, mining was in progress. It is reported, however, that there is still considerable gold left along the creek, which will be reclaimed on the completion of the ditch now in construction from the head of the Ophir Creek canyon.

DUTCH AND SNOWBALL CREEKS.

Dutch Creek joins Ophir Creek from the northeast about 5 miles from the portage, in the center of the most extensive mining operations on the main creek. It forks about 2 miles up, the west branch being called Snowball Creek. Both forks rise on the surface of a plateau about 800 feet above the sea, on the south side of the Fish River lowland. They have not been studied, but it is reported that the heads of their valleys are incised in gravel deposits resembling those of the Niukluk lowland. Not much gold has been produced on Dutch Creek, though there has been some mining, and prospectors report that colors of gold are to be found both in the creek and on benches. A bench resembling one on the headwaters of Crooked Creek, described below, has been located near the source of Snowball Creek.

CROOKED CREEK.

In 1903 there was more mining on Crooked Creek than on any other tributary of Ophir Creek. Crooked Creek has a length of about 3 miles and a general southeasterly course, joining the main stream 8 miles from the portage. Two small tributaries, known as Balm of Gilhead and Albion Gulch, enter Crooked Creek from the southwest about 1 and 2 miles, respectively, from its mouth. The valley walls, which are covered with talus and gravel, rise gently from the creek floor to altitudes of 200 or 300 feet, where limestone crops

out and the ascent steepens. The placers are generally confined to the creek bed and the immediate flood plain, but some occur in benches near the head of the creek.

The flood-plain deposit at the mouth of Crooked Creek widens out and merges with that of Ophir Creek. The gravels from the two sources are readily distinguished, as those of Ophir Creek contain granite pebbles, whereas those from Crooked Creek are made up entirely of limestone and schist. The gravels of Ophir Creek extend about 400 feet up the valley of Crooked Creek, and the deposit here is wider than that which belongs wholly to Crooked Creek. It is said that the limits of the Ophir Creek gravels are marked by a distinct rise in the bed rock which has been channeled by Crooked Creek. The bed rock is graphitic calcareous schist, much of it mineralized, and stringers of vein quartz carrying graphite were observed at a number of places. One of these is a mineralized belt 12 feet wide, which strikes northwest. In this impregnated zone vein quartz is associated with pyrite. It is reported to assay as high as $8 to the ton, but a specimen obtained by Mr. Collier showed only traces of gold and silver.[a] At the lower end of this claim the pay streak has a width of 250 feet, but one-fourth mile above it narrows down to about 6 feet. It has been worked out and no section could be measured, but its average thickness is reported to have been about 6 feet. The gold tenor of the gravel mined is estimated at $4.50 to the cubic yard.

The gold is comparatively coarse and the pieces well rounded. Some are bright and others iron stained. In the sluice boxes are found heavy concentrates consisting principally of garnet and magnetite, but including some topaz. It is impossible by ordinary means to separate all of the gold from this concentrate, for after all of the apparent free gold has been removed it still contains from 40 to 60 cents to the pound. An assay of some of these concentrates shows 89.4 ounces of gold and 11 ounces of silver per ton.[a] In these concentrates the gold is probably contained in limonite, an alteration product of pyrite. The pay streak along Crooked Creek from the upper end of this claim is in the main not more than 24 feet wide, and the excavation along it shows it to be nearly straight. About three-fourths of a mile up the creek the pay streak is 20 feet wide, and the section shows 6 feet of black mucky clay, 2½ feet of yellow sandy clay, 2½ feet of black clay mixed with broken limestone, resting upon schistose limestone. The gold is found in the lower black clay and yellow sandy clay.

About 1½ miles above the mouth of the creek the pay streak is from 150 to 200 feet wide and the bed rock is calcareous mica schist.

A. ROUGH BOWLDERS IN THE PAY STREAK OF A PLACER MINE ON CROOKED CREEK.

B. MINING WITH HORSES AND SCRAPERS ON GOLDBOTTOM CREEK.



that appear to have reached their present position by a landslide from the side of the valley. These limestone bowlders are of large size and a derrick is required to move them. (See Pl. VI, A.) Here the pay streak rests either on a yellow clay above the schist or directly on and in schist. Very little work was in progress in 1903 above this place and the creek was not examined.

Above Albion Gulch the valley of Crooked Creek broadens out into a comparatively wide basin and the slopes on the side of the valley become very gentle. Between Albion Gulch and the main fork of Crooked Creek there is a broad bench, nearly level in some places but generally sloping gently to the southeast, on the surface of which gravels and sand have been found at a great many places. Prospecting had not in 1903 gone far enough to determine definitely the limits of this gravel deposit, though it apparently extends from the mouth of Albion Gulch and covers the whole hillside to the northwest for nearly half a mile; its upper limit is marked by a sort of swale that extends from a point near the head of Albion Gulch northeastward to Crooked Creek.

Prospect holes have been sunk in many places and in all of them colors of gold have been found, while in a few the gravels contain sufficient gold to warrant mining. One open cut showed 7 feet of yellow and blue sandy clay, containing pebbles of quartz and schist, resting upon a nearly flat floor of limestone. In another prospect the bed rock slopes to the northwest and appears to be the rim of an old channel. Concentrated gravel taken from a space that had been ground sluiced yielded about 2 cents in bright angular gold to the pan. On the basis of 150 pans to the cubic yard, this is equivalent to about $3 in gold a cubic yard. Between the point where this gold was obtained and Crooked Creek a hole has been sunk to a depth of 82 feet without reaching bed rock. The shaft passed through sand and gravel beds, some of which were deemed to be low-grade pay streaks.

Prospecting has not gone far enough on this bench to determine the origin of the deposits. The fact that the pebbles and the gold are angular points toward a very local source for all the material. In some places, however, the deposit appeared to be distinctly waterlaid. It seems probable that the greater part of the material was derived from the decomposition of the bed rock almost in place, but these decomposition products have been in part sorted by water. In a few claims the surface deposit of the bench has been ground sluiced and the gravels underneath shoveled into sluice boxes. Water is brought in a ditch from the head of Crooked Creek and also collected from the seepage of the hillside, but the supply is insufficient for mining purposes.

BALM OF GILEAD GULCH.

Balm of Gilead Gulch, which enters Crooked Creek from the west about 1 mile from its mouth, is only one-half mile long. Some work done in 1903 exposed a section of 5 feet of brown soil resting upon 2 to 4 feet of broken limestone that gradually became more solid in depth. Gold occurs here from the surface down, but is richest in the crevices of the limestone. The gold is rough and angular, with sharp corners. Three or four men were employed and the gravel was washed in sluice boxes, which were supplied for a few hours each day with a small sluice head of water collected by a dam across the gulch above.

ALBION GULCH.

Albion Gulch, which enters Crooked Creek from the west side about 1½ miles from its mouth, is about three-fourths of a mile long and flows across the strike of a series of schists and limestones. The gravels of this gulch are auriferous throughout its course. Near the mouth an exposed section revealed 3 feet of soil overlying 3 feet of gravel, resting upon limestone; the gravel consists of pebbles derived from the immediate bed rock. The claims along this gulch were worked by stripping the soil and muck from the top, either by horses and scrapers or by hand, and then shoveling the gravel into sluice boxes.

GOLDBOTTOM CREEK.

Goldbottom Creek joins Niukluk River from the north about 9 miles above Council. It is about 10 miles long and drains an area of about 50 square miles. Its floor is comparatively flat and from 500 to 1,000 feet wide, and the valley slopes rise more gently on the western than on the eastern side. The stream has a grade of about 100 feet to the mile and at its mouth carries about 1,000 inches of water. Warm Creek, which joins Goldbottom Creek 1½ miles from its mouth, is the largest tributary and at present the only one on which mining is in progress.

Goldbottom Creek is reached from Council by trail along the Niukluk, but most of the supplies are towed up the Niukluk in flat-boats to the mouth of the creek, whence they are hauled to the claims in wagons. Though mining was begun on this creek as early as 1900, the total output is small.

The bed rock is green and gray schist with interbedded, crushed, and crumpled limestones, which in general strike a little west of north and dip to the east; below the mouth of Warm Creek the strike is east of north. Many coarsely granular pebbles and bowlders of greenstone occur in the gravels of the creek and seem to have been

lenses of quartz, both parallel to the schistosity and cutting across it at various angles. Many of these are mineralized with pyrites and other sulphides, but no samples have been assayed by the Survey.

The placers are confined to the creek bed and flood plain, and only two claims were in operation in 1903. One of these, near the mouth of Warm Creek, had been worked since 1900. A section here shows 5 to 6 feet of fine gravel resting upon decomposed chlorite schist. The values are contained in the lower 2 feet of gravel and about 1 foot of the schist bed rock, which are passed through the sluices. The gold is coarse, well rounded, and mostly bright, though some of the pieces are stained with iron oxide. There are not many nuggets, and the largest was valued at $6. The concentrates consist of garnet, hematite, and ilmenite, with some scheelite in small rounded white grains. In mining a sluice box 2 feet wide is used, into which the gravel is dumped by horse scrapers, as shown in Pl. VI, *B*.

On a claim near the head of the creek about 2 feet of soil and muck were removed by hand and about 3 feet of gray mica-schist gravel was shoveled into the sluice box. The gold is fine and angular. Although no other claims were in operation, a large amount of prospecting has been done in the neighborhood and colors of gold have been obtained at many places.

WARM CREEK.

Warm Creek, the principal tributary of Goldbottom Creek, joins it from the east side to about 1½ miles above the Niukluk. It is about 6 miles long and occupies a V-shaped valley that gradually widens from its head to its mouth. It carries possibly 60 inches of water.

Supplies for the placer mines which lie in the upper part of the valley are hauled from Council, a distance of about 8 miles, by a trail crossing the hills from the mouth of Ophir Creek. All the placer deposits yet discovered are of the creek type.

The bed rock, which is limestone and schist, with some greenstones, has in most places an easterly dip. Mineralized quartz veins occur at a number of places along the creek. Near the mouth of the creek there are two quartz veins, one about 3 feet wide and the other about 1 foot wide, striking N. 30° E. and standing nearly vertical. These veins cut a gray siliceous mica schist near its contact with a greenstone mass. They show little mineralization and no sample was taken for assay. The creek gravel has all been derived from rocks exposed within the drainage basin.

The workings show a thin layer of muck and moss overlying about 7 feet of barren gravel, below which some gold is found in the crevices of the weathered bed rock. In places the lower foot of the gravel also carries gold.

Mining was begun on this creek in 1900, and though no bonanzas have been found and the distribution of the gold seems rather irregular, yet many claims have yielded fair profits, and the entire output is probably about $100,000.

Most of the gold is rough and iron stained, and some of it is almost black. One nugget, worth $45.10, at $16 per ounce, was found in 1902; and one worth $12.33 in 1903. The concentrates contain ilmenite, scheelite, magnetite, garnet, and some hematite and rutile. A sample of these concentrates, from which the free gold had been extracted by panning, was assayed for the United States Geological Survey, yielding 22.40 ounces of gold and 4.20 ounces of silver to the ton.[a] This result is suggestive, as Warm Creek heads near Crooked Creek, from which similar rich concentrates are obtained.

It is reported that a number of claims near the mouth of the creek have been bought by a company that purposes to work them with a dredge. The gravel deposit is several hundred feet wide and is said to be from 6 to 9 feet thick; the bed rock is mainly a soft mica schist, but there is also some limestone. The weathered surface of the schist could be easily cut by a dredge, but to obtain the gold in the limestone would probably be more difficult.

CAMP CREEK.

Camp Creek flows into the Niukluk from the south about a mile below Goldbottom Creek. Several claims were worked on this creek in 1904. The auriferous gravel is from 50 to 100 feet wide and about 3 feet thick, with an overburden of about 3 feet, and is said to carry from 75 cents to $1 a cubic yard. Most of the mining was done by the shoveling-in process, but one claim was hydraulicked with a canvas hose carrying water under a 70-foot head.

ELKHORN CREEK.

Elkhorn Creek, a small stream which joins the Niukluk from the south about 5 miles above Ophir Creek, is incised in a broad terrace bordering the river. Its trench ranges from 150 to 500 feet in width. Mining here began in 1900 and the placers were then examined by Richardson, who reported as follows:[a]

> Near the mouth of the creek 2½ feet of gravel overlie 6 inches of clay and disintegrated bed rock. It is reported by miners that the pay streak is in patches and that the average yield of pans is 5 cents. The bench near the mouth gives colors but has not been developed. The bed rock is mica schist, interbedded with limestone, and the strike is at right angles to the course of the stream, with almost vertical dip, giving favorable conditions for concentration of gold.

[a] Assay by E. E. Burlingame & Co., Denver, Colo.

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 110.

The gold is medium coarse and bright yellow in color. Some very coarse gold has been found stained with iron. The average assay shows its value to be $19.12 per ounce. Quartz is often found attached to the placer gold, and one nugget was attached to a piece of mica schist. This goes to show that it is of local origin. One nugget worth $55 has been found and several worth from $12 to $16.

Since 1900 the placers for about half a mile have been entirely exhausted, but farther up the creek work is still in progress both in the creek bed and on the benches. It is estimated that the total production of the creek up to date has been from $110,000 to $120,000.

CASADEPAGA RIVER.

Casadepaga River,[a] the largest southern branch of the Niukluk, has a length of about 30 miles and a general northeasterly course. The writers have had no opportunity to examine this basin and the following notes are compiled from the published report of A. H. Brooks[b] and from additional data kindly furnished by C. W. Purington and Sidney Paige, who made a hasty trip through the Casadepaga Valley in 1904.

The gradient of this river does not exceed 13 or 14 feet to the mile and from its mouth to a point within 2 miles of the head of its longest tributary the whole fall is not more than 400 feet. The drainage area is large and the stream is navigable for small boats and canoes for a distance of about 15 miles. The upland in which the Casadepaga Valley is incised ranges in elevation from 800 to 1,800 feet. The bed rock of the whole basin consists of the limestones and schists of the Nome group, including many veins and stringers of quartz, some of which are known to be auriferous. Though none of these yet discovered are large enough to mine, they are ample to account for the origin of the placer gold in the basin.

The river occupies a broad and deeply gravel-filled valley, in the floor of which the present stream bed is trenched to a depth of 30 to 150 feet, leaving well-marked gravel terraces and benches through nearly the whole length. In the lower part of the valley the stream has cut to bed rock through the gravel deposits in only a few places, but in the headwaters region the gravels overlie broad rock-cut benches on both banks.

Although the gravels of the river bed undoubtedly contain considerable gold, it has probably not been successfully extracted, both because of the volume of water and the slight grade of the river bottom. The placers that have been operated up to the present time are in the small tributary streams at points where they cut the gravel

[a] By a recent decision of the United States Geographic Board, the correct name of this river has been declared to be Casadepaga instead of Koksuktapaga.

[b] Op. cit., pp. 107–110.

terraces and benches. These are creek placers that have derived most of their metallic contents by reconcentration from the benches and terraces. The gravels of the benches are auriferous, but their tenor does not appear to be high enough to mine under the present cost of labor and supplies. There is a well-marked terrace 30 feet above the river bed and there are traces of others up to altitudes of 600 feet. The following is quoted from Brooks's report already cited:

The Koksuktapaga [Casadepaga] was first prospected in 1898 by Mordaunt, Libby, Nelson, and Blake. These pioneers are known as the Big Four, from whom the largest tributary of the Koksuktapaga receives its name. Claims as far up as Goose and Quartz creeks were located in 1898, but most of the staking on the Koksuktapaga and its tributaries was done in 1899. Quartz, Boulder, Dixon, and Spruce creeks are reported to have yielded a few thousand dollars in 1899. This was taken out in the course of prospecting rather than in systematic mining.

In 1900 there was a general delay in getting into the country, and later on the low water, consequent to the dry season, delayed transportation of supplies. In the fall, but a short time after sluicing had begun, floods washed away many dams, ditches, and sluice boxes. The season of 1900 must be regarded chiefly as a period of further prospecting. It is expected that the actual possibilities of the country will be more clearly shown in 1901. The output of the Koksuktapaga region for 1900 is estimated to be $15,000. This has been taken mostly from the tributary streams, as little mining has been done on the main river. * * *

Dawson Gulch joins the river nearly opposite Big Four Creek. The 30-foot bench of the river valley across which the gulch flows carries colors. On the mica-schist bed rock, which was reached by test pit, fine gold is found associated with garnet.

Several gulches on the east side of the creek between Big Four and Dixon creeks were reported to give good prospects. Of these Thorpe Gulch, opposite Dixon Creek, was being worked. Four men had dug a ditch about 40 feet long by 4 feet deep in the bed of the gulch, which is a channel across the terrace of the Koksuktapaga. Bed rock was not reached. Mica schist, graphitic quartz schist, and limestone are exposed at the head of the gulch. The gold is fine and is associated with quartz and magnetite. The claim was reported to be paying small wages.

Dixon Creek was dry in July and no work was being done on it. A claim near its mouth is reported to have yielded a few thousand dollars in 1899. The workings were at the base of the terrace in the creek channel. Massive gray crystalline limestone caps Mount Dixon, north of the creek. Below the limestone is mica schist carrying small quartz veins.

Dry Gulch is a small channel incised in the terrace of the main valley. No measure was obtained of the thickness of the terrace gravels, but it may reach 50 feet. The workings in the terrace have reached a depth of 8 feet, and colors have been found from the grass roots down. The gold is usually fine; one $2 nugget was obtained. Pans are said to average 3 cents.

An important consideration relative to the gold resources of the Koksuktapaga is the fact that the gold of Dry Gulch and similar streams is not found on bed rock, but occurs in the gravels of the terrace and is usually concentrated on clay

At the time of Mr. Richardson's examination the lower valley of Spruce Creek was buried in a remnant of ice of the previous winter and no work was being done. It was reported that 40 or 50 ounces of gold were taken from this creek in 1899.

Some development was made on Penelope Creek during 1900, but in the lower part of the creek bed rock had not been reached. Pans are said to average 5 cents. The adjacent country rock is quartz-muscovite schist and graphitic quartz schist. This creek seems to have ample water for sluicing at all times.

Goose Creek, which joins the Koksuktapaga opposite the mouth of Penelope Creek, was dry in July. Mining operations were going on, however, to be ready for the fall rains. Gravel is from 4 to 8 feet thick. The lower 2 to 3 feet usually carry values, and pans are said to run from 2 to 5 cents. Quartz Creek is a tributary of Goose Creek. The gravel is about 3 feet thick and is said to average about 8 cents to the pan. Mr. Richardson saw one pan taken from bed rock which yielded 80 cents. The gold is flat and coarser than Goose Creek gold. Mint receipts give its value at $18.60 an ounce. The concentrates from sluices carry much garnet and magnetite. Bed rock is quartz-muscovite schist with thin-bedded limestone.

A mass of ice averaging 10 feet high filled the mouth of Canyon Creek and extended up its bed for a mile. The lower course of the creek lies in the river terrace, through which it has cut its valley into the quartz-mica schists. About 2 miles from its mouth some work has been done, exposing 3 feet of gravel on bed rock.

Boulder Creek, a northerly tributary of Canyon, is said to have yielded 50 ounces in 1899 as a result of a few days' work. In July work on one claim showed about 2 feet of gravel on bed rock, of which about 18 inches are said to carry values.

Banner Creek had some water in it in July, but not enough for sluicing. One claim in 1899 is reported to have yielded $400 to four men who sluiced two days and a half. When Mr. Richardson visited this creek two men were at work near the mouth, where the gravel is 8 to 10 feet thick. The gold is rather coarse, though flattened, and assays $19.20 an ounce. Farther up the creek more or less work had been done and the prospects were reported good. Limestone is bed rock in the mouth of the creek and outcrops on the divide to the north. Graphitic quartz schist caps the hill at the head of the creek, and mica schist forms the divide between Banner and Ruby creeks.

Left Fork[a] of the Koksuktapaga is about 5 miles long. Like Canyon Creek, in its lower course it cuts through the wide terrace of the main river, while above the valley it is confined by adjacent hills. The rocks in the lower course of the Left Fork are mica schists dipping S. 65° W. at an angle of 30° to 60°, and jointed N. 70° E. Between Wilson and Willow creeks is a belt of gray limestone about 2,500 feet thick interbedded in the schistose series. Small quartz veins are frequent throughout this series. Pebbles of garnetiferous greenstone are common in the creek, but no outcrop of this rock was seen. No developments have been made on this stream.

Willow Creek is a small branch at the head of the Left Fork, from which good reports came toward the end of the season. A low, narrow bench, about 6 feet high, extends along the creek. Gravel is shallow in the creek bed. Preliminary development, it was claimed, showed that a man could average $10 a day with a rocker. One $8 nugget and another worth $4.35 have been found. The gold is coarse and dark. In the lower part of the creek, bed rock is limestone, while farther up it is mica schist.

[a] Now known as Lower Willow Creek.

Ruby Creek, so named for the numerous small garnets found in it, is about 3 miles long and flows in a comparatively broad valley. Bed rock is mica schist dipping S. 65° W. at an angle of 45°, and jointed east and west. Numerous small quartz veins parallel both to the schistosity and to the joints occur in the schists. Pebbles of garnetiferous greenstone are common in the creek, but the rock was not seen in place. At the head of the creek gray limestone and graphitic quartz schist are exposed. In July there were about twenty men on the creek. Almost every claim had at least one representative on it, though prospecting and preliminary work rather than actual mining was being done. Several ditches have been dug in the creek bottom, and crosscuts have been made into the adjacent bench. In the lower part of the creek there is a depth of 2 or 3 feet of gravel through which the gold is pretty well distributed. Many garnets and a little black sand are associated with the gold. The gold is coarse, rather dark colored, and is said to assay $19.35 an ounce. The largest nugget found was worth $5.50.

NOTES ON RECENT DEVELOPMENTS IN THE COUNCIL REGION.

By Philip S. Smith.

The following notes were gathered by the writer during a week's journey in the Council district in 1906. They are intended to supplement the descriptions given in the foregoing pages.

MELSING CREEK.

In 1906 but little work had been done on Melsing Creek, owing to the exceedingly dry season. Toward the last of September active operations were in progress only near the mouth of Basin Creek, although two outfits of three to six men each had been at work earlier in the season with scrapers below this point.

A force of six to ten men had been employed immediately below Basin Creek, but had ceased work, owing to frost, just before the visit of the writer on September 28. The course of the pay streak, which lies only a few feet above the present stream level, is very sinuous and suggests that these gravels were deposited by a stream of relatively small size meandering widely on a flat slope. A feature of some interest is the occurrence of large granite and quartzite bowlders, many of them 18 inches in diameter, in a layer of mud and decayed vegetable matter lying above the gravels. The granite is but slightly decomposed, and the bowlders are rather angular, suggesting a transporting agency other than running water. Associated with the auriferous gravels in many places are thin strata of cemented gravels, in which the cementing material is mainly calcite. The cemented character prevents the separation of gold, so that if much of this sort of gravel should be encountered recourse to some

a strip of canvas or cocoa matting on a plank slightly narrower than the bottom of the sluice box. On top of the canvas a strip of galvanized-iron screen, with about a one-fourth inch mesh and the same width as the plank, was fastened. In use the plank was placed in the bottom of the sluice box and the riffles laid on top, thus holding it in position. To clean, the plank was taken out of the sluice box, turned upside down and pounded with a hammer or mallet. Although no comparative figures were available to prove the added efficiency of the sluice boxes thus equipped, the operator was completely satisfied with the results, as he was convinced that the additional saving of gold was very great. It is not necessary that every box in a string should be equipped with such a false bottom. Individual practice and study will determine the most effective number for different kinds of gold.

Just at the mouth of Basin Creek work was in progress during the summer of 1906 on gravels that lie in the creek and on a bench a few feet above the stream. The pay streak seems to be a direct continuation of the one on the claim next downstream, already described. In addition, at points where these slightly higher benches are cut by the creek the present stream gravels contain values that repay working. The ground is developed by the use of horse scrapers and sluices. Operators all along the creek were much hampered owing to the lack of water in the early part of the summer. Another difficulty encountered in the district is due to the low grade of the creek.

OPHIR CREEK.

Since the date covered by the report on the Seward Peninsula (1903) the development of the Ophir Creek placers has continually called for additional water and additional head. To meet this demand high-level ditches have been constructed and maintained. It was recognized, however, that the basin of Ophir Creek could not, even under the most favorable circumstances, afford sufficient water to meet the growing demands. Consequently it has been necessary to lead water from other drainage areas into that of Ophir Creek. The largest operation of this kind projected has been successfully carried out, and undoubtedly permitted mining which the dry weather of the summer of 1906 would have otherwise prohibited. The ditch takes water from Parantulik River at Helen Creek, a small tributary, about 2 miles north of the summit of Chauik Mountain. It is 11 miles long, and in many places where the slopes are excessive a flume has been constructed. The water is led around the east flank of Chauik Mountain and then across the divide into the Ophir Creek basin. In order to obviate additional ditch construction, the water is discharged into Ophir Creek, and taken up again farther down-

stream by one of the existing ditches. It was estimated that about 8,000 miner's inches were available from Parantulik River, but during the dry period of 1906 only about 500 inches were delivered by the ditch.

Another project for leading water from Parantulik River to Ophir Creek is under way, but as yet actual ditch construction has made little progress. Up to the present time the work of this company has been mainly devoted to surveying the course of the ditch, making preliminary observations, and acquiring rights of way. The proposed ditch will take water from a point considerably below the completed one, and for that reason should have more water available.

A ditch of less size than either of the foregoing has been constructed to collect water from the northern tributaries of the Niukluk about 2 miles west of Ophir Creek. This ditch is at a low level, is of small cross section, has only a small available drainage area, and is to be used only by the properties near the mouth of Ophir Creek, below Sweetcake Creek.

In addition to the ditch building, another feature of interest in the district has been the location of a gold-bearing lode on the divide between Goldbottom and Ophir creeks, near the head of Crooked Creek. The lode occurs near the contact between limestone and schist, and the specimens show considerable free gold. Values of nearly $40 to the ton are reported, but it is not known that they were from commercial samples. This discovery seems to be significant in connection with the fact that the gold at many parts of Crooked Creek is very sharp and angular and much of it has quartz fragments attached. A specimen of gold seen near the mouth of Crooked Creek was of such fragile shape and crystalline form that it seemed impossible for it to have been carried more than a few feet from its source.

Work on Ophir Creek during 1906 was carried on less by individuals and more by large companies than in previous years. The most active work has been done by the dredge at the portage, by elevators near Sweetcake and Dutch creeks, by derricks a little above Dutch Creek, and by shoveling in near the mouth of Crooked Creek. No work was done on Ophir Creek above Crooked Creek during the summer of 1906. Some work was in progress on a few of the tributaries of Ophir Creek. A little mining has been done on Sweetcake Creek, but the values do not seem to run much more than a mile above its mouth. On Dutch Creek also a little mining has been done. The small stream joining Ophir Creek near claim "19 above" has been prospected, but does not seem to carry values above its mouth. Along Crooked Creek for a distance of 2 miles the creek was worked almost

of the main-stream gravels. Practically every one of the bonanzas of Ophir Creek has occurred at the junction of a side stream. The recognition of this feature, which prevails also on many other streams, should be of some assistance in prospecting undeveloped regions.

NIUKLUK RIVER.

Above Ophir Creek on the Niukluk very little work has been in progress in 1906. The placers on Richter Creek, the first tributary from the west, seem to be nearly exhausted. On the broad bench below the junction of Camp Creek and the Niukluk a company has been engaged in working gravels by means of a shaft 40 feet deep. The section of this shaft is as follows:

Section on bench below junction of Camp Creek and Niukluk River.

	Ft.	In.
Tundra	2	
Pure ice	10	
Sand and ice	15	
Rock fragments, etc.; much mica		2
Sand and ice	1	
Frozen gravel	12	

Owing to the ice and frozen ground, much difficulty has been experienced in maintaining the shaft. Water is not easily available at the mine. This property has evidently been developed to meet the increasing demand for winter work in the vicinity of Council, and is to be regarded in its present state as little more than a method of prospecting the gravels of the benches along the Niukluk.

On Elkhorn Creek a little desultory work has been in progress during the summer, but at the end of September none of the properties were in operation. The largest amount of work has been done near the mouth, where the section was as follows:

Section near mouth of Elkhorn Creek.

	Feet.
Tundra	2
Clay or muck	4
Sands and gravels	4

The lowest member showed considerable cross-bedding in the sands associated with the gravels, thus indicating the variable character of the water by which they were deposited. Numerous pieces of wood in a more or less decomposed condition were found in the gravels. The surface form and internal structure of the deposit at this point suggest that it is an alluvial fan of Elkhorn Creek rather than part of the flood plain of Niukluk River. Owing to the absence of miners from the creek, no estimate of the production or tenor of the gravels could be obtained.

One-half mile southeast of Post Creek, a tributary of the Niukluk from the north, a quartz vein carrying gold has recently been located. This vein occurs at the contact of schist and limestone and is about 8 feet in width. According to reports, it shows considerable free gold, and the values obtained by crushing and panning are from 25 to 75 cents a pan. If these figures are reliable, the vein should run nearly $35 to the ton. This vein serves as one more indication of the origin of the gold in mineralized zones near the contact of the limestone and schists.

CASADEPAGA RIVER.

The most important development in the Casadepaga basin was the extension of the Council City and Solomon River Railway to the mouth of Penelope Creek. This puts the district into close communication with the ocean transportation routes.

Work along the Casadepaga in 1906 seemed to be carried on more by prospectors than by active settled companies, so that the production would be small. In the lower course of the river, as far as Bonanza Creek, no mining has been in progress. Near Bonanza Creek two camps have been established to work low-bench gravels of the Casadepaga, but as these camps employed only from two to five men not much work has been completed A little work has also been done on Bonanza Creek, but it was not visited.

From Bonanza Creek to Penelope Creek the river gravels have been extensively prospected during the summer by a drill with a crew of six men, with a view to determine whether a dredge could be installed. No statement as to the results of this work can yet be made. One peculiar feature noted in drilling below the mouth of Penelope Creek was that on certain of the river bars gold occurs on the surface and not on bed rock. There is no false bed rock of clay at these places, and the surface concentration is due to the washing away of the gravels of the bars during periods of flood, the particles of gold previously contained in the gravels being left behind. On Big Four Creek, a tributary of the Casadepaga from the south between Bonanza and Penelope creeks, the summer of 1906 saw only assessment work. On Birch Creek, which flows into Big Four Creek about 5 miles above the Casadepaga, two camps have been engaged in working creek gravels below Shea Creek. At Dixon Creek, 2 miles above Big Four Creek on the Casadepaga, there has been some development work. The bed rock at this place is schist and limestone, the creek appearing to follow the contact more or less closely. As this contact is in many other places the seat of mineralization, it would seem desirable to investigate further the gravels of this creek and

Penelope Creek is now the terminus of the Council City and Solomon River Railroad, and by this line is about 32 miles from Solomon. There have been only two camps on this creek, one near the mouth and one about a mile above. The upper camp has been the most active this summer. Four men have been employed, and the gravel has been handled by horse scrapers. A short ditch has been constructed at a low level, but, as in other parts of the peninsula, considerable difficulty has been experienced from lack of water.

On Goose Creek only two men have been mining this summer, and, according to local reports, not much more than wages has been produced. Three-fourths of a mile above Goose Creek a broad bench of gravels trenched by the Casadepaga shows good values. Mining in this flat, however, has been inactive pending the completion of a ditch from Moonlight Creek. (See p. 266.)

No mining except assessment work was done in 1906 on Canyon Creek. On Banner Creek also work was practically at a standstill. It is reported that all the gravels on the latter creek have been turned over and that the only values left are those that have been lost by the primitive methods in vogue when the creek was first worked. Certain claims, however, are held by annual assessment work, though they seldom yield more than wages.

Willow Creek, which is noted on certain of the Survey maps as Left Fork, is now known as Lower Willow, in order to distinguish it from Upper Willow Creek, also a tributary of the Casadepaga. Upper Willow Creek enters the river from the south about a mile west of Johnson Creek; Lower Willow Creek has its mouth nearly opposite Ruby Creek. At the mouth of Lower Willow Creek two men have been mining all summer. A mile above the mouth two men have been at work, but have been much hampered by lack of water. A mile above Wilson Creek two men have been doing some work, but operations were suspended late in the season to allow the installation of a California grizzly. About 1½ miles above Wilson Creek two men had been employed all summer. They stated, however, that the claim had been previously worked out and that their operations this summer consisted merely in saving some of the values that had been lost in the earlier mining. A short ditch at a low level takes water from the upper part of the creek and carries it to the discovery claims, a distance of about 2 miles. The geology of the region at the mouth of Wilson Creek is complex, the bed rock consisting of limestone and chloritic and graphitic schists. The gold of this part of the stream has probably been derived from a near-by source. Mineralization is evident in at least two places at the schist and limestone contacts on the south side of Lower Willow Creek. At one point sulphides were recognized in a quartz vein, and numerous copper stains on weathered vein stuff were found on the summit of the divide

between Lower Willow Creek and the Casadepaga near the head of Ptarmigan Creek.

On Ruby Creek two parties have been at work during the summer, but the creek is now exhausted. It is said that the values have been more completely exhausted from the gravels of this creek than from any other stream in the Casadepaga drainage, so that reworking these gravels in the future will not be remunerative.

On Moonlight Creek the main activity during the last two years has consisted in ditch building. This creek heads in a series of bare limestone hills with steep slopes, so that the run-off is high. The ditch has an intake at an elevation of about 500 feet. It is proposed to carry the ditch across Canyon Creek to the broad bench of Casadepaga River about three-fourths of a mile southwest of Goose Creek. The supply from Moonlight Creek will be augmented from Upper Willow Creek by a ditch line that delivers water to the ditch at Moonlight Creek at an elevation of 500 feet. It is estimated that the ditch will have an average delivery of 1,500 to 2,000 inches.

An eighth of a mile below the junction of Moonlight Creek and Casadepaga River there has been some slight exploration of the bench gravels that occur a few feet above the level of the river. The gravels seem to be typical river gravels, but the floor upon which they rest is rather uneven. Old channels in this district have been reported, but the rumors could not be investigated. There have been no mining operations during the last season on the Casadepaga above Moonlight Creek.

KRUZGAMEPA RIVER BASIN.

GENERAL DESCRIPTION.

Kruzgamepa River[a] has its source in Salmon Lake, which lies in a broad valley at the southern base of the Kigluaik Mountains. It flows to the northeast and, sweeping around the east end of the range, reaches the head of Imuruk Basin by a northwesterly course.

The geology (compare the geologic map, Pl. X, in pocket) in this basin affords considerable variety. The core of the mountains is made up of massive granite, associated with crystalline limestone and schists. Above, a formation correlated with the quartzites of the Kuzitrin consists of schists and graywacke carrying much graphite. This formation is overlain by the Nome group, including a great thickness of flaggy limestones and calcareous schists correlated with the Port Clarence limestone. The rocks resemble those which in other places produce placer gold, and in many localities

[a] The drainage basin of the upper Kruzgamepa was first organized as the Golden Gate

show evidence of mineralization. Large quartz veins are abundant, and some of them carry gold, though probably none have been proved to contain commercial values. Two specimens taken from large veins near the east end of the Kigluaik Mountains were found on assay to contain traces of gold and silver, but a specimen from a large mass of quartz near the mouth of Slate Creek contained neither. A large ledge said to outcrop near the mouth of Iron Creek is heavily mineralized with iron and copper pyrites and specimens are reported to assay well in gold and silver; the deposit, however, has not been examined by members of the United States Geological Survey.

Kruzgamepa River flows in a broad gravel-filled valley. Above the mouth of Iron Creek broad gravel terraces occur on both sides of the stream about 50 feet above the water. Much of the gravel, as has been explained elsewhere (p. 94), was contributed by glaciers that flowed from the Kigluaik Mountains and probably does not contain placers of value. What little prospecting has been done has not led to encouraging results, though colors of gold are widely distributed throughout the Kruzgamepa basin, and it is quite possible that with a reduction in cost of transportation many of the low-grade auriferous gravels may be mined at a profit. Iron Creek, the largest eastern tributary of the Kruzgamepa and the most important from the standpoint of mining, is described on pages 329–336 by P. S. Smith.

WILLOW AND SLATE CREEKS.

Willow Creek, which is about 3 miles long, joins the Kruzgamepa from the south about 8 miles above Iron Creek. Near its mouth this stream flows through a small rock canyon about 50 feet deep, above which is a bench on either side covered with gravel. This bench represents an old valley floor into which the stream has cut its present valley. The bed rock consists of limestones with interbedded quartz schists of sedimentary origin and with intruded greenstones. The strikes are almost directly across the course of the stream and the dips upstream. Gold has been found on this creek, and pans from bed rock have yielded as high as 25 cents. The gravel deposits on the bench are of the same character as those in the stream, and therefore probably carry gold. During the dry months the creek would probably not afford a sluice head of water.

Slate Creek, which is about 2 miles long, joins the Kruzgamepa from the south 2 miles above Willow Creek. The character of the bed rock is the same as that of Willow Creek. Twenty-five cents to the pan has been obtained. The gold from both streams is bright colored and flat.

Both of these creeks have been worked to some extent every season since 1901, and some gold has been produced, though probably not

more than a few thousand dollars in all. A high gravel bench on the east side of the Kruzgamepa, between Slate and Willow creeks, was prospected in 1904 by a company proposing to bring water for hydraulicking from Salmon Lake. Colors of gold are reported to have been found, but the results of the prospecting operations are not known.

PORT CLARENCE PRECINCT.

INTRODUCTION.

The Port Clarence precinct embraces the west end of Seward Peninsula. It is bounded on the east (see fig. 2, p. 42) by a sinuous line, running first northward, then around the basin of Agiapuk River along the divide that separates that basin from streams flowing into Goodhope Bay, and then turning northward and reaching the Arctic Ocean at the west end of Shishmaref Inlet. On the north and west the precinct is bounded by the Arctic Ocean, and on the south by the summits of the Kigluaik Mountains. Recording offices have been established both at York, near the west end of the precinct, and at Teller, on Port Clarence, but the former office is now discontinued.

Within this area, which embraces about 2,000 square miles, are extensive gravel-covered lowlands and flat-topped uplands. (See topographic map, Pl. IX, pocket.) The uplands are clearly erosional surfaces that have been uplifted and dissected. They do not all represent the same epoch of erosion, but indicate a succession of cycles of degradation that have been separated by periods of uplift.[a] The intervals of erosion are marked in the present topography by plateaus, benches, and plains standing at different altitudes. The gold-bearing gravels have been deposited since the youngest of these features were formed.

The entire stratigraphic succession of Seward Peninsula, already presented in the account of the geology (p. 60), is found in the Port Clarence precinct. (See geologic map, Pl. XI, pocket.) To the south the Kigluaik uplift has brought to the surface the limestones, crystalline schists, and intruded granites, here called the Kigluaik group. North of these and forming the bed rock of the peninsula, between Imuruk Basin and Port Clarence, are the schists and limestones of the Nome group. These rocks stretch for about 10 miles north of Grantley Harbor to the region where they pass underneath the heavy limestones, here termed Port Clarence. To the west this limestone is succeeded by Devonian (?) slates, and these in turn at the apex of the peninsula by a Carboniferous (?) limestone. Intru-

sives are common throughout the district, with two dominant types—a granite, which occurs in large stocks, and a green basic rock, here termed greenstone, which occurs both as stocks and dikes. The Quaternary is represented by gravel deposits mantling the extensive lowlands that fringe the Arctic coast and form inland basins, and also by gravels of the present stream beds. Some of the terraces and plateau remnants are covered with thin layers of gravels, but high-bench deposits are relatively rare in this part of the peninsula. A few small areas of recent lavas occur north of Port Clarence and form outliers of the more extensive extrusives found to the east. Though few details are known, the bed-rock structures in general trend northeastward, and the folding is open. Variation from this type occurs along the margins of the intruded stocks.

Placer gold here, as in other parts of the peninsula, appears to be confined to the areas of mica schists and limestones belonging to the Nome group, which are more metamorphosed than any of the younger terranes, but less so than their equivalents to the east and south. The slates carry some gold, but the placers derived from them appear to be of no great commercial importance. The Port Clarence limestone is not a gold-bearing formation and the areas in which it forms the country rock should not attract the placer miner. Along the margins of some of the granite masses cutting this limestone mineralization has taken place in the form of veins carrying cassiterite, galena, etc. An account of these occurrences has been given by Collier.[a]

It was probably in 1898 that the first prospectors visited this region, but they confined their attention to the Agiapuk basin, where they found no workable placers. In the following year[b] auriferous gravels were discovered in Buhner Creek, a tributary of Anikovik River, in what was then organized as the York recording district. A little gold has been taken out in the York region, but it has now been practically abandoned as a gold placer district, though it is growing in importance as a tin producer. Practically all the gold-producing creeks are confined to the Bluestone and Agiapuk basins, except a few tributary to Grantley Harbor. The district has not been a large producer, the entire output up to 1903 being estimated at $200,000. With the introduction of better mining methods, no doubt many mining enterprises now abandoned will be revived and can be made to yield an adequate return.

Teller, located on a spit between Grantley Harbor and Port Clarence, is the recording office, the seat of a commissioner, and a general

[a] Collier, A. J., Tin deposits of the York region, Alaska: Bull. U. S. Geol. Survey No. 229, 1904.

[b] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 137.

supply point. It was founded in 1900, when the Bluestone placers, 15 miles to the south, were discovered. A town named Bering, on the shore of Port Clarence, 5 miles south of Teller, was the first settlement, but the newer town of Teller drew its people from it. The latter town, which, during the boom of 1900, had over 1,000 inhabitants, now has not over 100.

Port Clarence, the best harbor along the entire coast line of the peninsula, affords shelter to deep-sea vessels, but storms coming from different directions require changes of anchorage. Large vessels can anchor within about a mile of Teller. Grantley Harbor, almost landlocked, can be entered by vessels drawing not more than 12 feet of water.

CREEKS TRIBUTARY TO GRANTLEY HARBOR FROM THE NORTH.

Several small streams rising in the plateau on which Mukacharni Mountain stands and flowing southward into Grantley Harbor are all within a few miles of Teller and easily accessible. Prospects were found here in 1900, and mining has been done each year since, but no very rich placers have yet been developed and the amount of gold produced has been small. In 1903 very little mining was done on any of these streams.

In general, the bed rock can be described as a succession of chloritic mica schists and interbedded limestones containing some intrusive greenstone and small veins and stringers of quartz.

All these creeks have the same general features. They head in the upland, which they traverse through rather narrow valleys running nearly north and south. Below, they cross the coastal plain, made up of silts and gravels, in which they have trenched shallow channels. From west to east these streams are Bay, Sunset, Igloo, Dewey, McKinley, and Offield creeks. On all of them except Bay Creek, which has not been very carefully prospected, the stream gravels are known to be auriferous, and Sunset, Igloo, and Offield creeks have yielded a small gold output.

Some mining has been done on Sunset Creek since 1901, and the workings have been briefly described in a previous report.[a] The creek is about 5 miles in length. For several miles from its mouth the bed is about 700 feet wide, but the pay is in general confined to narrower channels. At one place three such channels are reported. The workings about 3 miles from the coast show from 2 to 7 feet of rather fine gravel overlying the bed rock. The gold is found both in the gravel and to a depth of about 1 foot in the crevices of the bed rock.

[a] Collier, A. J., Reconnaissance of the northwestern portion of Seward Peninsula

The gold, most of which is more or less iron stained, is coarse and rough in the upper claims and finer and smoother toward the mouth of the creek. The largest nuggets are worth about $4. A few well-formed crystals of spinel have been found in the concentrates.

No work was done in 1903 on Igloo, Dewey, and McKinley creeks. A small force of men worked during part of that summer on Offield Creek, 9 miles from Teller, but no estimate has been obtained as to the amount of gold produced. It is known that in two of these creeks there are deposits of gold-bearing gravels of commercial value, though no exact estimate of their gold content is available. It is probably true, as reported, that with economical methods of handling the gravels all these creeks could be made to pay. A large ditch 27 miles long to bring water from Agiapuk and California rivers was under construction in 1904. These rivers carry an abundance of water, which can probably be brought to Sunset Creek at an elevation of 250 to 300 feet above the sea. It is proposed to work the gravels of Sunset Creek by hydraulicking and elevating the tailings.

AGIAPUK RIVER BASIN.

INTRODUCTION.

Agiapuk River, which drains an area of 700 to 800 square miles, empties into the north side of Imuruk Basin 24 miles from Teller. Its headwaters are about 35 miles from tidewater. About 20 miles north of its mouth the river forks; the western branch, which is the smaller of the two, retains the name Agiapuk, and the northern branch is called American River.

Being easy of access and supporting a large Eskimo population, the Agiapuk was one of the first streams of Seward Peninsula to receive attention from prospectors, but up to the present time no rich or extensive deposits of auriferous gravels have been discovered in its basin. Colors of gold have been found in many of its tributaries and nearly all of them have been staked and prospected. Small amounts of gold have been produced on Allene Creek, a southern tributary of the western branch of the river and on Lawson Creek, a tributary of American River.

In general the rocks of the Agiapuk basin are less metamorphosed than the gold-bearing rocks in other parts of the peninsula. They consist mainly of Silurian limestones that are regarded as equivalent to the Port Clarence member of the Nome group and generally have not been so productive of gold as the lower members of that group. United States Geological Survey parties traversed part of the Agiapuk basin in 1901, and again visited the region in 1903, but very few prospectors were seen on either trip, though prospect holes, claim stakes, and other evidences of white men were everywhere abundant.

A somewhat detailed description of many of the tributaries of the Agiapuk has been published in a previous report[a] and need not be repeated. The western branch of the river rises in the limestone hills about 25 miles north of Grantley Harbor, and flows southward to a point within 10 miles of that harbor, thence eastward to its junction with American River. Through the east-west part of its course it drains a broad, gravel-filled lowland, but about the headwaters the valleys are narrower and the gravel deposits are of small extent.

Several tributaries which enter the Agiapuk from the south within 10 miles of Grantley Harbor have yielded colors of gold, but only one of them has been worked.

ALLENE CREEK.

Allene Creek heads within 4 miles of Grantley Harbor and flows northward into North Creek, tributary to the Agiapuk. Its comparatively broad valley is carved out of the plateau on which Mukacharni Mountain stands.

When visited in September, 1901, only one claim was in operation, although some mining had been done on several others. The pay dirt was confined to the creek bed and rested upon a clay foundation, below which the true bed rock had not been reached.

A prospect hole about halfway up the creek is said to have been sunk 65 feet without reaching bed rock. This shaft showed gravel at the top, below which there was blue clay containing bark and driftwood. The gold in Allene Creek is bright, flaky, and not much waterworn. Although it is generally fine, it includes a few small nuggets. It is reported that some sluicing was done in 1902 and 1903, but the production of the entire creek was probably not more than $2,000.[b]

AMERICAN RIVER.

American River rises about 40 miles north of Grantley Harbor and flows in a westerly direction for 15 miles, then turns and flows nearly southward for 30 miles to its junction with Agiapuk River. Through the last 30 miles of its course the stream flows in a comparatively broad gravel-filled valley, in which it meanders tortuously. It is navigable for small boats and canoes for about 30 miles.

The only tributary reported to have produced gold in 1903 was Lawson Creek, which joins American River about 35 miles from the mouth. In 1902, $1,000 to $1,500 in gold was obtained from its placers. The gold is of high grade, being reported to be worth $19 an ounce. A large quartz ledge from which samples assayed $2 a

ton in gold is reported to have been discovered on Collin Creek, a tributary of Portage Creek, which enters American River from the north. Neither of these localities have been visited by members of the Geological Survey and the information in regard to them consequently is very scanty.

BLUESTONE RIVER BASIN.

INTRODUCTION.

Bluestone River flows into Tuksuk Channel, which connects Grantley Harbor with Imuruk basin, about 13 miles from Teller. It drains the greater part of a region lying between Grantley Harbor and Bering Sea, usually referred to as the Bluestone region. This area is characterized by flat-topped hills on which two erosion levels can be recognized. The upper plateau encircles the west end of the Kigluaik Mountains, which rise rather abruptly from its surface and attain elevations of 3,000 to 4,000 feet. The streams have cut their valleys nearly to sea level. The very irregular drainage is due to causes which have not been studied in detail. For about 10 miles above its mouth Bluestone River traverses a rolling plateau that has an elevation of 400 to 600 feet. Through this part of its course the river valley is broad, and flood plains are developed to a width, in some places, of half a mile or more. Above this portion the valley contracts and for about 5 miles is a steep-walled canyon with sides rising from the river to flat-topped mountains 1,200 feet in height. Above the canyon the valley again broadens somewhat, but does not expand into a large flood plain. Here the river forks, the eastern branch being known as Gold Run and the western as Right Fork. Both branches are characterized by very crooked courses. For 6 miles above its mouth the valley of Gold Run has a nearly northwest course, then turns and has an east-west course for 6 miles to its head. Right Fork heads about 10 miles farther west and flows nearly due east to its junction with Gold Run; it has several large tributaries which enter it nearly at right angles. Below the forks Bluestone River carries approximately 3,000 miner's inches of water, derived about equally from the two streams. The average gradient of the river is about 30 feet to the mile.

Gold was discovered on Bluestone River early in the summer of 1900, and mining operations have been continuous since then. Gold has been produced on the main river below the forks, on Gold Run and its tributary, Alder Creek, and on Bering Creek, a small tributary of Right Fork. Both stream and bench placers have been

worked. The region was visited by United States Geological Survey parties in 1900[a] and in 1903.

The Bluestone basin contains mica and chlorite schists, with beds of limestone, some having graphitic phases and all belonging to the undifferentiated part of the Nome group. These schists contain numerous intrusive masses of greenstone which appear more commonly in the form of sills than as dikes. Generally these greenstones are only slightly altered, but in a few places they are schistose and are not always distinguishable in the field from the schists of sedimentary origin. Small quartz veins, both cutting across the foliation and running parallel with it, are common in the schists. Some of these veins are reported to carry values, but as yet none of them have been systematically developed. The results obtained from three assays of vein quartz collected by the Geological Survey seem to indicate that these veins are not so commonly auriferous as those of the Nome region. Two specimens, one from a quartz bowlder and another from a small stringer vein, carried no trace of either gold or silver. A specimen taken from the dump of a prospect hole sunk in the bed rock of Alder Creek yielded an assay return of 0.06 ounce of gold and a trace of silver. The material was soft and talcose and contained considerable nearly white pyrite.

BAR AND BENCH PLACERS.

Mining has been attempted at only one locality on Bluestone River, although there are evidences of prospecting in many places. Extensive preparations for mining were made in 1903 at a point about 4 miles below the forks of the river, to which the name Gilroy was given. In the canyon gravel deposits are of small extent, but below the canyon the valley widens and alluvium appears not only in the creek bed, but on low benches which at no very remote date were probably flood plains of the river.

Four miles below the forks the river bed is more than 150 feet wide and the pay gravel ranges in thickness from 2 to 20 feet or more. On the left bank at this place there is a flat about 20 feet above the river bed and nearly half a mile wide. The section along the river bank shows 10 feet of black schist bed rock underlying 6 to 7 feet of gravel. A series of samples taken across the river bed are said to have yielded from 2 cents to $1 to the pan. This gravel can possibly be worked by an extensive system of dams, which should turn the water from the river bed, but probably never will be on account of the volume of water and the occasional floods. It might also be handled by some form of dredge.

In 1903 mining operations were confined to the gravel deposit on a bench that has an area of about 60 acres. The surface is nearly level and deeply covered with moss and muck. A section of the gravel on this bench is as follows:

Section of bench deposits on Bluestone River.

	Ft.	in.
Black moss and muck		6
Blue muck		3
Yellow clay	1	6
Bluish gravel	4	
Bed rock: Graphitic schist very much weathered at the surface.		

The gravel is composed of pebbles of black schist and white and reddish vein quartz; next to the bed rock it carries a considerable amount of gold, which also extends into the fissures and crevices to a depth of about 1 foot. There is a smaller amount of gold in the upper part of the section, and the whole thickness of moss, muck, and gravel is said to carry sufficient to pay for shoveling into the sluice boxes. Although most of the gold is rather fine, it is heavy and easily saved. The largest nugget found was worth $12. It is proposed to bring water from a small western tributary of Bluestone River, called Ruby Creek, and to sluice the gravels near the river bank, dumping the tailings into the river. A ditch was built for this purpose about 1 mile in length, but near the middle of the season, when mining operations had well begun, the water from the ditch penetrated to a layer of ground ice beneath, which melted, undermining the ground for a distance of several hundred feet. This melting continued progressively and the ditch became wider as the season advanced, until finally it found an outlet to Bluestone River a quarter of a mile above the point where the miners had expected to use it. As the season was nearly spent and neither lumber for sluice boxes nor a supply of canvas hose for carrying water across the break could be obtained, work was necessarily suspended.

From the showing made here it seems probable that successful mining can be done over a part at least, if not all, of this bench, either by ground sluicing or hydraulicking. Ruby Creek is a small stream, but it is possible that sufficient water for a small hydraulic plant could be collected from several such tributaries on the west side of Bluestone River. The whole amount of gold produced during the summer of 1903 was probably not more than $300, and previous to 1903 the yield has been even less.

GOLD RUN.

Gold Run, the large eastern branch of the Bluestone, has a length of about 20 miles, but mining activities are confined to the lower 5 miles of its course. The principal settlement of the region is located

at the mouth of Alder Creek, and is known as Sullivan. It is reached by a wagon road from Teller, the principal shipping point of Port Clarence, about 18 miles distant. The road crosses the upland plateau surface, and is very soft and marshy in many places. Another road crosses the low divide from Gold Run to Tisuk Creek, then follows the gravel bars in the bed of that stream to the coast at the old Shea road house, where Tisuk post-office is now located. During the summer months stages run daily from Sullivan to both these points.

The gradient of Gold Run probably does not exceed 20 feet to the mile. Along the valley slopes there is a series of benches, which toward the headwaters of the creek approach the level of the present bed, while near its mouth they are about 100 feet above it. Though the valley is nearly straight, the immediate creek bed, which lies in a narrow trench cut in an old valley floor, has a meandering course. The bed rock of Gold Run consists of chlorite and mica schists, in many places of a light-green color, with calcareous phases that grade into limestone and graphitic phases that result in graphite schists and black slates. Sills of greenstone intruded in the schists are common. The gravels of the creek bed contain many bowlders of greenstone and granite, which have been derived from the Kigluaik Mountains in some previous drainage epoch.

The placers of Gold Run include both creek and bench deposits. The gravels of the creek bed had an average width of about 60 feet and were mined for about 3 miles. They were richest in gold near the mouth of Alder Creek, where some small spots yielded more than $50 to the cubic yard, but the average was much less than that. At the mouth of Gold Run gold was found in both the run and Bluestone River.

In 1900 and 1901 the creek bed was mined for several hundred feet above its mouth and about $2,500 was produced, but the operations were difficult on account of the trouble in controlling the waters of the stream.

About 1 mile above the mouth the gravel in the creek bed is about 100 feet wide and 2½ feet thick. It carries values through its whole width, but most of the pay is found within 6 inches of bed rock and in the bed rock to a depth of 6 inches to 2 feet. What is called bed rock at this place consists of a sticky yellow clay, which forms a layer 2 to 3 feet thick above the schist. The method of working was as follows: The creek was turned to its right bank by a wing dam, and by this means the greater part of the gravels of the creek bed were exposed and freed from water. Sluice boxes were set with a grade of 18 inches to the rod, and the gravel was shoveled in. It is

years ago, producing $1,200. If we assume a depth of gravel of 3 feet, this would give about $8 to the cubic yard.

The stream bed at the mouth of Alder Creek has all been worked out. This ground was the scene of many legal controversies, and before it was exhausted it had changed hands a number of times in obedience to the orders of the courts, passing from one claimant to another. It is impossible to tell the amount of gold produced, though it was probably not far from $50,000, which was obtained in the years 1900 to 1902.

Above the mouth of Alder Creek the amount of gold produced on Gold Run has probably not been proportionate to the development work that has been done, although at one time claims were held for fabulous prices, and men who are now working for wages along Gold Run could in 1900 have sold their holdings at prices that would exceed the total production of the whole region. Probably not more than $10,000 has been obtained from all the workings on Gold Run above Alder Creek. About a quarter of a mile above Alder Creek a well-defined pay streak, 40 feet wide, was found extending nearly 1,500 feet. At the upper end, however, this pay streak apparently passed under the left bank of the creek and was lost. The gold was found on a layer of clay above the true bed rock.

In the course of the prospecting along Gold Run above Alder Creek a number of rich spots in the gravel were found which produced considerable gold, but were quickly mined out. One of these, which was abandoned in 1903, was at the mouth of Quartz Gulch, about 4 miles above Sullivan. The workings covered an area about 30 by 100 feet and were 5 feet deep. No reliable reports of the amount of gold produced were obtained. Although the bed of Gold Run has been prospected all the way to its head, no extensive deposits of gravel carrying sufficient values to justify mining under existing economic conditions have been discovered. The gravels generally carry some gold, but in general not enough to pay for working with rockers; moreover, the necessity of extensive wing dams to drain the creek bed and the liability of the stream to sudden freshets that destroy all dams make the expenses of mining prohibitive.

At the present time the attention of prospectors is directed to the benches, many of which are conveniently located for economic mining. On the left bank of the Bluestone, opposite the mouth of Gold Run, gold has been found in two benches, one about 10 feet and the other 50 feet above the present river bed. Ground sluicing in progress on the lower bench showed a section from the surface down as follows: Muck and red-brown clay, 2 feet; gravel, about 5 feet, resting upon massive greenstone bed rock. The bed rock on the upper bench is also massive greenstone and the excavations show gravel

from a few inches to 7 or 8 feet thick. It is reported that on both these benches some of the gold is found in fissures in the bed rock.

On the right bank of Gold Run, near its mouth, there are also two benches in which placer gold has been found. One of these is only a few feet above the present creek bed, and was probably formed as a flood plain in a period not very remote. The other bench is about 100 feet above the creek bed and belongs to a well-defined system of benches that can be traced for several miles along the valley walls. Several prospect holes have been sunk on both these benches, showing 10 to 15 feet of well-washed gravel. The extent of the deposits had not been determined in 1903. From pannings seen by the writer it seems probable that these gravels may be made to yield $6 to $7 to the cubic yard. Attempts have been made to work them by use of a small stream of water collected from melting snow on the hillside above and also by carrying gravels down to the creek in wheelbarrows, but the claims are not at present in operation and can not be worked at a profit by either of these methods.

A bench 20 feet above the level of the creek bed, above the mouth of Alder Creek, probably also belongs to this system of benches. The bed rock, however, slopes gradually from the upper level of the gravels about 50 feet above the creek down to an escarpment only a few feet above the bed, producing a hillside placer. In 1903 this deposit was being worked by means of a ditch about 2 miles long, which brought water from the upper part of Gold Run to the hillside above, giving it an elevation above the Bluestone of about 50 feet. By the use of this water the surface materials were first ground sluiced off, after which the gravels were shoveled into the sluice boxes. At the upper end of the cut made by ground sluicing the section exposed was about as follows, from the surface down: Moss and muck, 1 foot; clear ice, from 6 to 10 feet; gravel of undetermined depth. At the lower edge of the bench, a few feet above the creek bed, several cuts had been mined out and sluiced. In these workings the gravels have a thickness of 2 to 6 feet and rest upon a bed rock consisting of graphitic schists with small sills of intruded greenstone. The gold-bearing gravels contain a large amount of sticky yellow clay sediment and the gold ranges in size from fine grains to comparatively large nuggets. Several nuggets worth more than $100 have been obtained. The gold is generally stained and coated with iron, and has a dark color. In one of the nuggets the gold was associated with green rock, probably decomposed greenstone. In the concentrates from this claim a great deal of limonite derived from the alteration of pyrite was found, but as the claim is located on the original camp site of the district a great many metallic things, such as nails and cartridges

trates containing no free gold and consisting mainly of limonite pebbles was assayed, giving 0.12 ounce of gold and 0.16 ounce of silver to the ton. The product of this bench claim during the season of 1903 is unknown, but a clean-up aggregating $5,000 was reported after a three days' run with ten men shoveling into the sluice boxes.

About 2 miles above Alder Creek a bench deposit on the east side of Gold Run, 200 feet above the creek bed, has been prospected by a shaft 120 feet deep. Bed rock was reached at a depth of 115 feet, and the material on the dump consists of well-rounded gravel, most of it rather fine, but including many bowlders of greenstone and vein quartz, the largest being 2 feet in diameter. Coarse colors of gold were found on bed rock, but were not abundant enough to pay. This deposit lies in a low divide between the valleys of Gold Run and McAdam Creek. It is probably part of an abandoned drainage channel.

Benches at various levels are common features of the Gold Run valley, and it is evident from the developments already made that they are worthy of the prospector's attention.

ALDER CREEK.

Alder Creek, a tributary to Gold Run from the east side 2 miles from the Bluestone, has a length of about 2 miles. It heads near the general level of the plateau, at a point about 2 miles east of the forks of Bluestone River, and flows in a southwesterly direction. The gradient of the creek is comparatively steep. Its valley has gently sloping sides which do not give any superficial evidence of benches. The whole surface is deeply covered with muck and moss, probably in large part underlain by ground ice. The creek in ordinary seasons probably does not carry over 50 miner's inches of water at its mouth. In fact, near its mouth the water is just sufficient for a fair sluice head. Where not disturbed by mining operations the creek bed has a width of only 7 to 8 feet, and a section of peaty soil and muck is exposed in the banks.

Some mining has been done along this creek for about 1 mile above its mouth. Gold was discovered in 1900, and the creek for a quarter of a mile was nearly worked out at that time. Since then the workings have extended more slowly upstream, but it is reported that 1 mile above the mouth of the creek there is not sufficient gold in the gravels to pay for mining. In a claim at the mouth the gravels have all been washed, and the bed rock has been stripped for several hundred feet. The bed rock consists of chloritic mica schists containing some stringers and small veins of quartz, as well as some small intrusions of greenstone. Although the claim was practically exhausted in 1900–1901, some pay was found in 1902 extending under the left

bank near the middle of the claim to a distance about 30 feet from the original creek bed. For this distance the bed-rock floor was found to be nearly on a level with the bed of the creek, but beyond this the bed rock gradually rose and the pay gravel thinned out on the edge. At the edge of the cut the section exposed consists of several feet of frozen moss and muck. In the bed rock of this claim there is a lode about 16 feet wide, which has been prospected to a depth of 60 feet. The ledge is made up of a gray talcose material containing some quartz in fine stringers and blebs. All of the ledge matter carries pyrite in streaks, and it is reported that fine colors of gold have been panned out of the ore taken from the bottom of the shaft. The hanging wall of this deposit is in a somewhat schistose limestone containing albite crystals; the foot wall is a graphitic schist. A sample of the ore assayed by E. E. Burlingame & Co., of Denver, Colo., yielded 0.06 ounce of gold to the ton and a trace of silver.

About half a mile from the mouth of the creek the pay streak is 25 feet wide and located under the left bank. The section shows 4 feet of muck above 4 feet of pay gravel resting upon a broken limestone bed rock. The gold on the lower half of the claim is coated with iron oxide; that on the upper half is bright. It is reported that a great many nuggets worth from 25 cents to $13.60 have been found, and that there is practically no fine gold. Although the concentrates in this placer contain cubes of iron pyrite that are not much waterworn, the gold is nearly all well rounded. Several pans of pay dirt washed by A. J. Collier yielded about 25 cents each.

During the season of 1903 a deposit of very rich pay dirt was found on one of the claims not far from the mouth of the creek, but probably $10,000 would be a fair estimate of the total produced on Alder Creek during the season.

RIGHT FORK.

Right Fork has been prospected from its mouth up, but though colors of gold have been found both in the creek bed and in a stream of benches like those on Gold Run, no placers that will yield profits by primitive mining methods have been discovered, except on one tributary, which was not examined.

BERING CREEK.

Bering Creek, a tributary of Igloo Creek, which enters the Bluestone from the south about 5 miles above Gold Run, is a short stream on which seven claims have been recorded. It is about 12 miles by

thousand dollars and in 1903 probably somewhat more, but no definite estimate of the total has been obtained. The gold is coarse, practically all in the form of nuggets, and it is reported that from $40 to $60 a day was often picked out of the gravel by the miners without sluicing.

ANIKOVIK RIVER.

Anikovik River, which enters Bering Sea at the town of York, about 12 miles east of Cape Prince of Wales, is 15 miles long. It heads in the York Mountains, and through the greater part of its length flows across the York Plateau, in which it has cut a comparatively broad valley. For several miles above its mouth the valley and river bed contain gravels several feet deep and 200 to 300 feet wide. In 1900 the whole of this river was regarded as gold-placer ground, but at the present time nearly all the workings have been abandoned. The conditions as they existed in 1900 were described in Brooks's report, already cited,[a] and further notes were published in the report of 1901.[b]

In 1903 only one party of prospectors attempted to mine the gravels of this river and the whole product for a month's work did not exceed $600. At a point about half a mile from the coast a ditch had been dug along the side of the valley, and the river was turned through this ditch by means of a dam, leaving the river bed exposed. The gravel was about 2½ feet thick and rested upon slate bed rock dipping at an angle of about 70°, which contained placer gold to a depth of 6 to 18 inches. In size the gold ranged from very fine to nuggets worth $10. The fine gold was generally bright, but the nuggets were iron stained. Cassiterite and magnetite were found with the gold in the concentrates. These gravels evidently carry a small amount of gold, and if they could be worked economically by a company holding several miles of the river bed it is possible that adequate returns could be obtained. Up to the present time, however, the efforts to mine gold on Anikovik River have not been successful. Small amounts of gold are also obtained from the tin placers of Buck Creek, about 15 miles north of the Anikovik, which have been described in a previous report.[c]

GOODHOPE PRECINCT.

The northern part of the peninsula, an area draining into the Arctic Ocean between the west side of Shishmaref Inlet and the head of Goodhope Bay is called the Goodhope precinct. More

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay Regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 134.

[b] Collier, A. J., Reconnaissance of the northwestern portion of Seward Peninsula, Alaska: Prof. Paper U. S. Geol. Survey No. 2, 1902, p. 48.

[c] Tin deposits of the York region, Alaska: Bull. U. S. Geol. Survey No. 229, 1904, pp. 29–35.

than half of this region is covered with the typical tundra, which skirts the Arctic Ocean. This coastal-plain area is built up of gravels and silts, but they are not known to be auriferous. Most of the streams are sluggish and flow in meandering courses over the plain. South of the coastal plain occur gravels, schists, and limestones of the Nome group, with one large area of granite, probably a stock. (See geologic map, Pl. XI, in pocket.) Devil Mountain, an isolated peak in the northern part of the precinct, is a basaltic lava mass rising to an elevation of nearly 900 feet above the coastal plain, whose gravels mantle its base on all sides. Placer gold has been found in a small area in the southern part of the precinct north of the divide at the head of Kougarok River. This region may be approached by a long overland trip up the valley of the Kougarok or by small boats up the rivers which flow into Shishmaref Inlet. It is one of the most difficult places of access in the peninsula and the cost of bringing in supplies is prohibitive to mining operations except on fabulously rich deposits. There has been considerable prospecting and a little mining here, and a small amount of gold has been taken out of Dick Creek, a tributary of Bryan Creek, which flows into Serpentine River. This locality has not been visited by Geological Survey parties, but from descriptions furnished by miners it seems probable that there is a considerable amount of rather low-grade auriferous gravel along Dick Creek and some of the neighboring streams. In general these deposits appear to be similar in character to those near the head of Kougarok River, described on page 326. A preliminary report on the placers of the Goodhope precinct has already been published.[a]

[a] Collier, A. J., Reconnaissance in the northwestern portion of Seward Peninsula, Alaska: Prof. Paper U. S. Geol. Survey No. 2, 1902, pp. 53–56.

THE BLUFF REGION.

By ALFRED H. BROOKS.

INTRODUCTION.

There is a deep bight in the southern coast line of Seward Peninsula, between Cape Nome on the west and Rocky Point on the east, and near the northernmost point of this reentrant, at the mouth of Daniels Creek, lies the small settlement called Bluff. The irregular group of buildings that makes up the settlement is already in part threatened with engulfment in the pit of the hydraulic mine close at hand (Pl. VII). Bluff is 50 miles east of Nome, with which it has a nominal weekly mail service and from which it can be conveniently reached by coasting vessels or by wagons along the beach. There is no harbor at Bluff, but it is a little more sheltered from westerly and easterly storms than many of the other settlements along the coast. The town, whose population is less than half a hundred people (1904), owes its existence to the rich gold placers of Daniels Creek, which are being systematically exploited by the Topkok Ditch Company. The total production of this region up to 1904 exceeds $1,000,000, practically all of which has been taken from Daniels Creek and the beach adjacent to its delta. Gold has, however, been found also on Koyana Creek to the east and on Eldorado, Ryan, and Little Anvil (sometimes known as Silver Bow) creeks to the west of Daniels Creek.

It is proposed to describe briefly the salient features of the gold placers of these creeks. This sketch is based largely on the writer's own observations, made during a few days' visit, but these have been supplemented by the results of G. B. Richardson's[a] examination, made in 1900.

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 102–106.

TOPOGRAPHY.

The Bluff region, which will here be defined as the area inc streams tributary to Bering Sea from Topkok Head to F Creek, is of the same topographic type as the rest of the pen Flat-topped highlands with gentle slopes are broken by broa and shallow valleys, many of the latter widening out into amphitheaters.

A moss-covered plain stretches westward from the head of nin Sound, through which Klokerblok River and many s streams meander in sluggish courses (Pl. VIII, in pocket). Th land is bounded on the west by highlands that constitute a nort erly extension of a range of hills trending along the seaward s of the peninsula west of Golofnin Bay. A similar highlan stretches northwestward from Topkok Head, and the two a nected by several flat-topped, serpentine ridges, which separ coastal from the Klokerblok drainage. The summits of al uplands are flat and of strikingly uniform altitude, rangin between 800 and 1,000 feet above the sea. This feature is ve gestive of a surface uplifted and dissected by erosion. The va Koyana Creek, the most easterly stream of the area here cons is a wide, shallow basin, presenting a broad delta front to t Steep, rocky bluffs, broken only by the small valley of Swede face the sea for 3 miles to the west. At Daniels Creek the hig recede and, with a roughly crescentic sweep, encircle the val Daniels, Eldorado, and Ryan creeks, touching the sea again a miles to the west. This crescentic lowland area has a gently surface, caused by the incision of the three above-mentioned valleys and their tributaries. So gentle are the stream slopes shallow are the valleys that, when seen from a salient, the di of the drainage is difficult to determine. The headwaters o streams are separated by broad, low gaps from the drainage Klokerblok, and one of these gaps is traversed by the Topkok which brings water to Daniels Creek.

West of Ryan Creek the highlands again retreat to encir small valley drained by Little Anvil Creek, and approach s once more at the rocky bluff that marks the eastern side of T Valley. Topkok River, the largest stream of the district, has defined, steep-sided valley, which is incised to a depth of 400 feet below the highlands. It has a gravel floor and presents a delta to the sea. No commercial placers have been found wit basin of Topkok River, and it lies rather outside of the field

HYDRAULIC MINING ON DANIELS CREEK.

GEOLOGY.

Investigations in this field have been confined to the gold placers, almost to the exclusion of the bed-rock geology, and even the auriferous gravels have not yet been adequately mapped. It is possible, therefore, to express the stratigraphic and structural geology in only the most general terms. Richardson, who through his acquaintance with adjacent areas had a broader knowledge of the Bluff region than the writer, divided the bed-rock terranes into three groups:[a] (1) A massive gray crystalline limestone; (2) a mica schist, with some interbedded graphitic limestone; and (3) a formation of massive limestone and mica schist. The writer's observations hardly bear out the correctness of this succession of beds, for it appears to him that there is only one massive white limestone, which is succeeded by a mica schist and graphitic limestone formation. Some facts also are presented below which would indicate that the mica schists are, in part at least, altered intrusives and hence do not mark any definite stratigraphic position. In the preceding pages

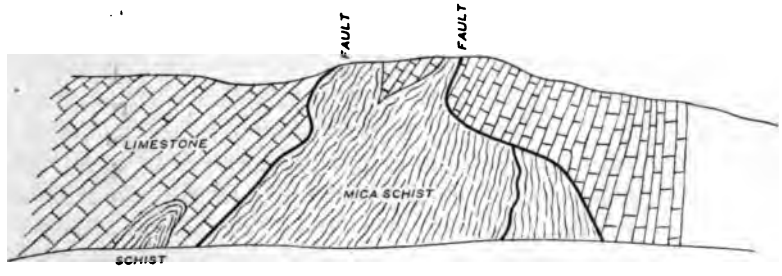

FIG. 15.—Diagram of cliff exposure near mouth of Daniels Creek.

Mr. Collier, in presenting the general geology of Seward Peninsula, includes this area as a part of the Nome group, and it is probable that the massive limestone belongs to the Port Clarence horizon. Mr. Collier's lower schist series is not exposed in the Topkok region, but his upper schists are probably represented by a belt of rocks which stretches northwestward from Rocky Point, and appears to overlie the limestone outcropping along the coast east of the mouth of Daniels Creek.

Mica schists occur as irregular masses within the limestone belts, and although they do not differ lithologically in any very essential way from the schists believed to be of sedimentary origin, their mode of occurrence strongly suggests that they are altered intrusives. The most striking example of this is seen in the cliff exposures just east of the mouth of Daniels Creek (fig. 15). Here an irregular mass of mica schist is inclosed in limestone walls. Lines of faulting have obscured the original relation of the two rocks, but the outline of the schist mass is very suggestive of an intrusion. The schist, what-

[a] Op. cit., p. 103.

ever its original character, has been intensely deformed and at this particular locality has been intruded by many quartz veins. It is now composed essentially of quartz and mica, with some chlorite, and its mineral composition might be that of either an altered sediment or an altered igneous rock. Further evidence of the intrusive character of some of these schists is found in the fact that at various localities the limestone walls near the contact with the schists are more or less metamorphosed. These facts, together with the irregular distribution of the schist, indicate an igneous origin, though it must be confessed that the evidence is by no means conclusive.

The larger structures of the Bluff region appear to be simple, but there are many minor complications. The heavy limestone has been uplifted into a low dome, whose longer axis stretches approximately N. 70° E. About 3 miles northeast of Bluff this structure carries the limestone underneath the younger mica schists, which probably mantle the limestones to the west also. The major folds are all low, the dips being from 10° to 30°, but locally there has been intense deformation. In this region, owing to the great scarcity of outcrops, few of the local features can be determined except along the sea-cliff exposures, and there minor faulting and folding can be seen in many places. These exposures plainly indicate that if the mica schists are intrusives they were injected previous to the deformation of the inclosing limestones. These mica schists appear to be the gold-bearing rocks of the district, and hence their mode of occurrence and their distribution are of economic interest. So far as observed, the schists appear to be mineralized only near their contact with the limestones. At these places quartz veins cutting the foliation of the schist are not uncommon. The individual veins appear to be of small extent, but at some localities a stockwork forms a considerable mass of low-grade ore. No assays have been made, and it is not known that these bodies carry commercial values, but the mineralization is of interest as showing the source of the placer gold. The ores appear to be chiefly iron pyrite, with some chalcopyrite and arsenopyrite. Three miles east of Daniels Creek attempts have been made to open up one of these ore bodies. The deposits in both structural and mineralogical character are closely similar to those of Anvil Creek. Though we have no direct evidence that there are lode deposits in the Bluff region which could be profitably mined, the occurrence of the phenomenally rich placers along Daniels Creek, the gold of which, as will be shown, is unquestionably of local origin, makes it not improbable that the stripping of the gravels may eventually reveal a workable ore body.

The distribution of the alluvium is of more immediate interest to the miner than the geology of the bed rock. The upper limit of the

along the valley slopes the waterworn material and the talus have intermingled. As the sands and gravels were, for the most part, laid down by streams, the upper limit is not a horizontal line but varies with the gradient of the streams by which they were deposited. For the same reason the alluvium, in many places, has a very perceptible dip, as on Daniels Creek, where the beds fall off to the west at an angle of 5°. The thickness of the alluvial deposit ranges from a minimum of less than 1 foot along the margin of the deposit to a maximum of 40 to 100 (±) feet on Daniels Creek. The character of the material also varies greatly, but clays and sands appear to dominate. Except in the old beach deposits near the coast and on some of the smaller creeks, much of the gravel is rather angular and appears to have been little waterworn. Near the mouth of Daniels Creek a well-defined beach deposit lies about 10 feet above the present beach (fig. 16). Much of this upper deposit has been removed by the mining operations, but enough remains to show the typical beach character of the gravels. The deposit dips toward the sea, contains some shingle, and is overlain by about 8 feet of clay and muck. With the alluvium just described is grouped a series of sands and sandy clays, which are the product of rock weathering and are almost in place. On Daniels Creek alone, so far as known to the writer, does the alluvium appear to reach a considerable thickness. Not more than 6 feet of gravels were found resting upon bed rock on the upper part of Eldorado Creek, and even on Daniels Creek the alluvium is only about 7 feet deep a mile from the beach. It should be stated, however, that at the time of the writer's visit (1904) the depth to bed rock had been determined at no other localities than those just described. It is reported that in the summer of 1907 excavations were made near the mouth of Daniels Creek to a depth of 60 feet. It is not clear whether these were in alluvium or in the decomposition products of the limestone, but the material is said to carry values.

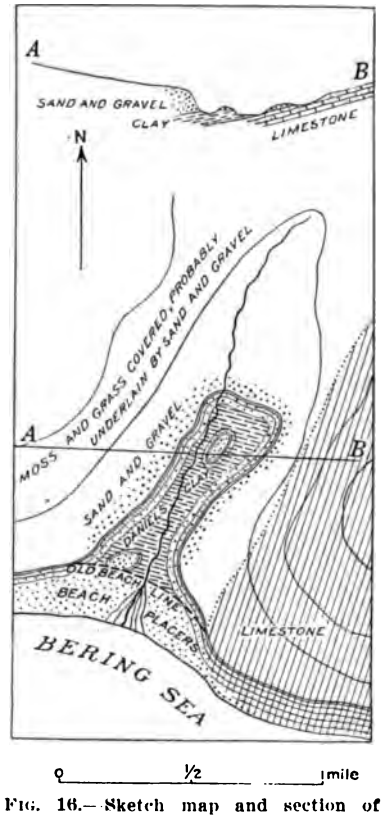

FIG. 16.—Sketch map and section of Daniels Creek placers.

THE PLACERS.

Gold is said to have been found at the mouth of Daniels Creek in September, 1899, by William Hunter and Frank Walker, but it was not until December that the first claims were staked.[a] These were located by J. S. Sullivan, George Ryan, and others. In the following January five claims were staked along the beach by H. C. Malmquist, William Hunter, and others, who organized themselves as the Black Chief Mining Company and obtained control of the Daniels Creek claims. In March the news of the discovery was published at Nome and many men found their way to Bluff. By this time the beach also had been found to be auriferous and, in accordance with the ruling of a miners' meeting, it was thrown open to all comers for a distance of 60 feet back from high tide. The exploitation of the beach placers by men who had gained their experience at Nome was energetically pushed till July 8, 1900, when military intervention put an end to beach mining. By that time, however, about $600,000 in gold had been taken out of the sands from a strip of the beach less than 1,000 feet long—probably the richest deposit of this kind ever found in the world.

Meanwhile the two lowest claims on Daniels Creek had been opened up and in 1900 yielded probably $200,000 in gold. Most of this, however, was taken not from the stream bed proper but from an old beach that stretches across the present mouth of Daniels Creek.

The beach placers were practically exhausted in 1900, yet the auriferous gravels of the lower part of Daniels Creek continued to be exploited during the following two years as far as the scanty amount of water available for sluicing would allow. Most of the gold produced here in 1901-2 came from Discovery claim, at the mouth of Daniels Creek, which was worked by the aid of a gasoline engine that pumped a sluice head of water from the sea. In the meantime gold had been found on Eldorado and Ryan creeks and on Swede Gulch, but lack of water prevented operations except on a small scale.

In 1902 a strong company called the Topkok Ditch Company began the construction of a waterway from the head of Klokerblok River to Daniels Creek. This work was completed late in the summer of 1903, and sluicing began. In 1904 the company had about 16 miles of ditch in operation, and in 1906 extended the conduit about 4 miles. (See Pl. VIII, in pocket.) This enterprise is a most successful hydraulic mining operation and demonstrates what can be done under favorable conditions and with intelligent and economical management. When the heavy gravel deposits of Daniels Creek

have been sluiced off, the water of the Topkok Ditch Company can be utilized to mine the shallower deposits of Eldorado, Ryan, and other smaller creeks.

The accompanying sketch map (fig. 16) shows the known distribution of the auriferous gravels in the vicinity of Bluff. The valleys of Swede Gulch and Koyana Creek should be regarded as part of this region, but as they contain relatively shallow deposits and have not proved very rich, they are probably of no great commercial importance.

The district embraces only two types of auriferous deposits—the beach placers and the creek placers. The former, however, include an old beach placer as well as that of the present beach. These beach placers have been described as follows in the previous report:[a]

> The rich part of the beach extended about 500 feet west of the mouth of Daniels Creek and about 50 feet east to a cliff that projects into the sea. The beach pay streak was 3 to 4 feet thick, overlain by a foot of barren sand and underlain by clay of undetermined thickness. Gold occurred disseminated in schist gravel, in which were scattered bowlders of mica schist averaging 10 to 15 pounds in weight and smaller pieces of limestone. The "ruby sand" so prominent about Nome is inconspicuous here, though some garnets are present in the gravels. The heavy minerals associated with the gold are magnetite, nodules of limonite, small pieces of ilmenite, and bits of cinnabar. Cinnabar is fairly abundant in the tailings, ranging from specks to rounded pebbles the size of marbles, but it has not been found in place. The beach gold is rather coarse, much coarser than that from the Nome beach. It averages about 12 pieces to the cent and assays show a purity of 0.870.

During the height of the excitement of beach mining it was common for a man to take out $100 to $300 a day, and three men are said to have taken out $10,000 in three days. It is estimated that the gold tenor of much of the pay streak must have averaged $150 to the cubic yard, or about $1 to the pan. This is far richer than the best part of the Nome beach sands, and, in fact, is the richest marine placer ever found. In gold content it has been equaled by only a very few claims in the peninsula.

Before considering the origin of the beach gold it is well to describe the other auriferous gravels of the vicinity. An uplifted beach placer which lies athwart the course of Daniels Creek has been mentioned. This deposit is less than 10 feet above the present beach, and the character of the material in both deposits is the same. It is believed, however, that the gold content of this older beach is not so great as that of the present beach. The sands of the elevated beach are about 6 feet thick, include some gravel layers, and are

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, pp. 104–105.

overlain by about 8 feet of sandy clay with fragments of limestone. The relation of the two deposits is well exhibited in the section (fig. 16). The overburden of sandy clay carries but little gold. The old beach has been recognized only at the mouth of Daniels Creek, and here much of it has been removed by mining operations.

Inland from this elevated beach there is a gradual transition to the gravels of Daniels Creek, which appear to lie in a broad, rock-floored basin with some corrugations parallel to the water courses. The sides of this basin slope toward the axis, and the whole is tilted toward the sea with a grade of probably 300 feet to the mile. The bed rock, so far as exposed, is a rather massive limestone, everywhere more or less crystalline. The surface is much pitted, and the original rock floor must have been one of great irregularity. Mining operations since the writer's visit have shown that there is more than one channel. Deep crevices penetrate the limestone and in some places make it appear like an aggregate of bowlders. So far as observed, however, all these so-called bowlders are practically in place.

The alluvial material is of two general types—that in which clay predominates and that which is chiefly sand. It ranges, however, from a micaceous but very stiff clay to a loose sand with gravel layers. In many places no structure can be made out in the clays; the bedding of the sands and gravels is of the greatest irregularity, locally changing its character every few feet. The indications are very strong that the layers of clay, which in general lie near the bottom of the deposit, are formed almost in place, whereas the sands and gravels appear to have been laid down in swiftly flowing water. Many fragments of angular limestone are found embedded in the clay, and in places the whole may be traced by gradual transitions into the limestone underneath. A pit about a mile from the beach showed the following section:

Section 1 mile from beach near Bluff.

	Feet.
Muck and vegetation	1½
Sand and clay, some stratification	1
Clay, with fragments of limestone, probably lying upon bed rock	5

A section about a quarter of a mile from the beach is approximately as follows:

Section one-fourth mile from beach near Bluff.

	Feet.
Muck and vegetation	1–2
Fine sands, some clay	10–12

This section shows that the alluvial deposit thickens very rapidly toward the sea. Near the head of the creek the surficial deposits consist chiefly of clay, but near its mouth sands and gravels predominate. No adequate data are at hand for determining the amount of the alluvium in this basin, because, except at the mouth of the creek, there are but few places where measurements can be made. Moreover, the bed-rock surface is so irregular that any generalization of the average thickness must leave a large range to chance.

The clays are mostly reddish, in some places blue, and generally contain considerable mica. Their tenacity is dependent on the absence of sandy material. By the addition of arenaceous matter they pass into sandy clays and thence into sands. The typical sands are dark gray and carry much mica. Many of the gravels are strikingly angular. Lithologically, they are made up of mica schist and vein quartz. They are as a rule iron stained and in many places carry sulphide minerals. Although there are great local irregularities in the bedding of the gravels, yet in general the planes of stratification dip away from the high eastern ridge. The maximum dip observed was 5 degrees.

Little can be said of the distribution of the pay gravels. The managers of the hydraulic mine report that in general the clay carries higher values than the sand and gravel. This is very significant, for it appears to be established that the sand and gravel have been far more sorted than the clay. It would indicate a large gold tenor for the rock from which the clay has been derived. In any event there can be no question that the gold is very near its bed-rock source, which appears to be at the contact of mica schist and limestone. Since the writer's visit high values are said to have been found at depths of 50 and 60 feet, near the mouth of the creek. This would suggest that there was either a deeper channel below the present stream or that the material in which this gold was found was a product of weathering, in part derived from the hill slope to the east. The facts available are inadequate to decide this question.

Generally throughout the peninsula the richest placers, except where there has been secondary concentration, occur at the contact of limestone and schist. These contacts appear to be zones of weakness where, in consequence of stresses, fissuring has developed and thus given opportunity for the ore-bearing solutions to penetrate. The Daniels Creek deposits are no exception to this statement, for the location of the placers with reference to the limestone and schist, as well as the character of the gravels, points to the conclusion that the zone of mineralization lies at the contact of the rocks of the two types.

An impregnated zone is well exposed along the sea cliff about three-fourths of a mile east of the mouth of Daniels Creek, and, as this is

very likely the type of lode deposit from which the placer gold is derived, it merits a detailed description, though its commercial value has not been established. At this locality a belt of mica schist about 60 feet wide is more or less impregnated by pyrite-bearing quartz stringers. The belt, including some irregular limestone masses, is bounded by graphitic limestone walls, which dip away from the schists and form a small anticline much broken by faults. The schist is silvery gray and appears to consist essentially of sericite and quartz. Its relations to the limestone suggest that it may be an altered intrusive. The deformation of the series has upturned and fractured the limestone beds and has rendered the intruded rock rather schistose. At the west contact a band of schist 20 feet in cross section lies between one of the included limestone masses and the country rock. In this band the mineralization is more intense than in the rest of the schist. Here a series of gash veins, the largest of which is 18 inches in width, cuts the foliation of the schist (fig. 17). A mass of crushed material or gouge forms the hanging wall of the deposit, and along this zone, which has been a plane of movement, the quartz veins are cut off abruptly. Stringers of quartz do, however, occur in the limestone on both sides of the schist. The ore appears to be chiefly iron pyrite and mispickel, with some chalcopyrite; the gangue is mostly quartz, with some calcite. It is reported that values as high as $3 to the ton in gold have been found in the ore, but the writer did not learn how the assay sample was taken.

FIG. 17.—Diagrammatic representation of character of impregnated zones, Bluff region.

As the source of the placer gold is at the contact of the schist and limestone, which is also the position of the above-described impregnated zone, all the gold may have its origin in one type of lode deposit. Though the existence of workable lode deposits must remain in question until systematic prospecting has been done, yet the finding of rich placers like those of Daniels Creek, whose gold appears to have been moved but little from its bed-rock source, makes it seem possible that a workable lode deposit may sometime be discovered.

The only locality in the district where an attempt at lode development has been made is 3 miles east of Bluff, near the shore. Here a ledge is said to be 14 feet wide and to yield up to $30 in gold to the ton. The ore is iron pyrite and mispickel. This occurrence is believed to be similar to the one above described, but it was not examined by

The Daniels Creek placers are the only ones in the Bluff region sufficiently opened up to permit study. Here several facts are evident: First, the source of the gold is entirely local; second, where it is richest, as in the red-clay deposits, there appears to have been little sorting action by water; third, the gold is so intimately associated with mica-schist débris that most probably the schist has a close connection with its origin. It has been pointed out that the gold in the district is probably derived from the impregnated zones in mica schist and limestones near their contact. If this mica schist is an altered intrusive, its distribution may be very irregular. It is probable that if the surficial deposits could be stripped off, the impregnated zones would be found not far from the present placers, but there is no evidence yet that these zones will be found to carry commercial values. This statement is supported both by the fact that the auriferous clays have not been moved far from their original position, where they were formed in place by the weathering of the bed rock, and by the fact that as a rule the gold-bearing gravels are angular. It is evident that the stream gradients must have been low during the period of the formation of the clay, or the water would have quickly removed it. The area was probably exposed for a long time to the agencies of weathering, and an irregularly pitted land surface was produced. The bed rock was probably deeply buried by the clay and other products of weathering. An uplift followed, as a result of which the carrying power of the streams was increased and the deposits of sands and gravels were laid down. At Daniels Creek this uplift gave the former level a slight westward tilt, as is shown by the bedding of the gravels. The elevated beach deposit appears to have been formed prior to this uplift, but it would require a very detailed survey to establish this fact. The gold, however, was certainly concentrated by wave action in the older beach, as in the present beach. The presence of gold at a depth of 60 feet near the mouth of Daniels Creek, reported in 1907, may indicate either a deep zone of weathering or a buried ancient beach line. Subsequent uplift, which probably did not exceed 8 feet at the coast, exposed this older beach in part to wave action, and thus led to a reconcentration of the gold in the gravels of the present beach.

The other creeks of the district besides Daniels Creek have been but little developed, for none of them carry a sluice head of water except in the early spring or during heavy rains. Eventually, however, they will all be hydraulicked with water from the Topkok ditch. Sluicing has been done on about half a dozen claims on Eldorado Creek, and some work has been done on Ryan and Little Anvil creeks. So far as the scanty exposures show, the mode of occurrence of the gold on these streams is similar to that of Daniels Creek, but the deposits are probably not so rich and the auriferous gravels not so extensive.

THE KOUGAROK REGION.[a]

By ALFRED H. BROOKS.

INTRODUCTION.

The name "Kougarok district"[b] is generally given to a gold-placer-bearing region in the central part of Seward Peninsula, drained mostly by Kougarok River. This paper describes both the drainage basin of this river and the other gold-bearing streams tributary to Kuzitrin River from the north. Kruzgamepa River, whose drainage basin lies in the Kougarok precinct (see fig. 18), is considered elsewhere in this volume (p. 266). Investigations were begun in this field in 1900 by the writer, assisted by A. J. Collier, soon after the first actual discovery of workable placers. This work was extended by Mr. Collier in 1901. In 1903 the district was again examined by Messrs. Collier and Hess, who prepared a paper for this volume, but the delay in publication enabled the writer to visit this field again before the volume was submitted for publication.[c] As many new facts have been developed by the mining operations since Mr. Collier's studies were made, it has seemed best to entirely rewrite this section of the report. The notes of Messrs. Collier and Hess have been freely drawn on, but the writer alone is responsible for the conclusions here advanced. Descriptions of the creeks not visited by the writer have been quoted directly from their manuscript. All the surveys thus far made have been preliminary, and the data obtained leave much to be desired as to the details both of the geology and of the distribution of the placer gold.

[a] An abstract of this paper is contained in Bull. U. S. Geol. Survey No. 314, 1907, pp. 164–181.

[b] The "Kougarok precinct" includes the entire drainage basin of Kuzitrin and Kruzgamepa rivers.

[c] The writer's task was rendered pleasanter and the work was much accelerated by the hospitality and courtesy shown him by the operators and prospectors in the region during his ten days' visit. Among the many that deserve special mention are the Irving Mining Company, the Northwestern Development Company, J. M. Davidson, Al Garvey, Joe Turner, Nels Leding, E. Anderson, R. Anderson, and Andrew J. Stone.

TOPOGRAPHY.

The area here considered is made up of three topographic provinces which, named from south to north, are (1) a mountain mass, (2) a

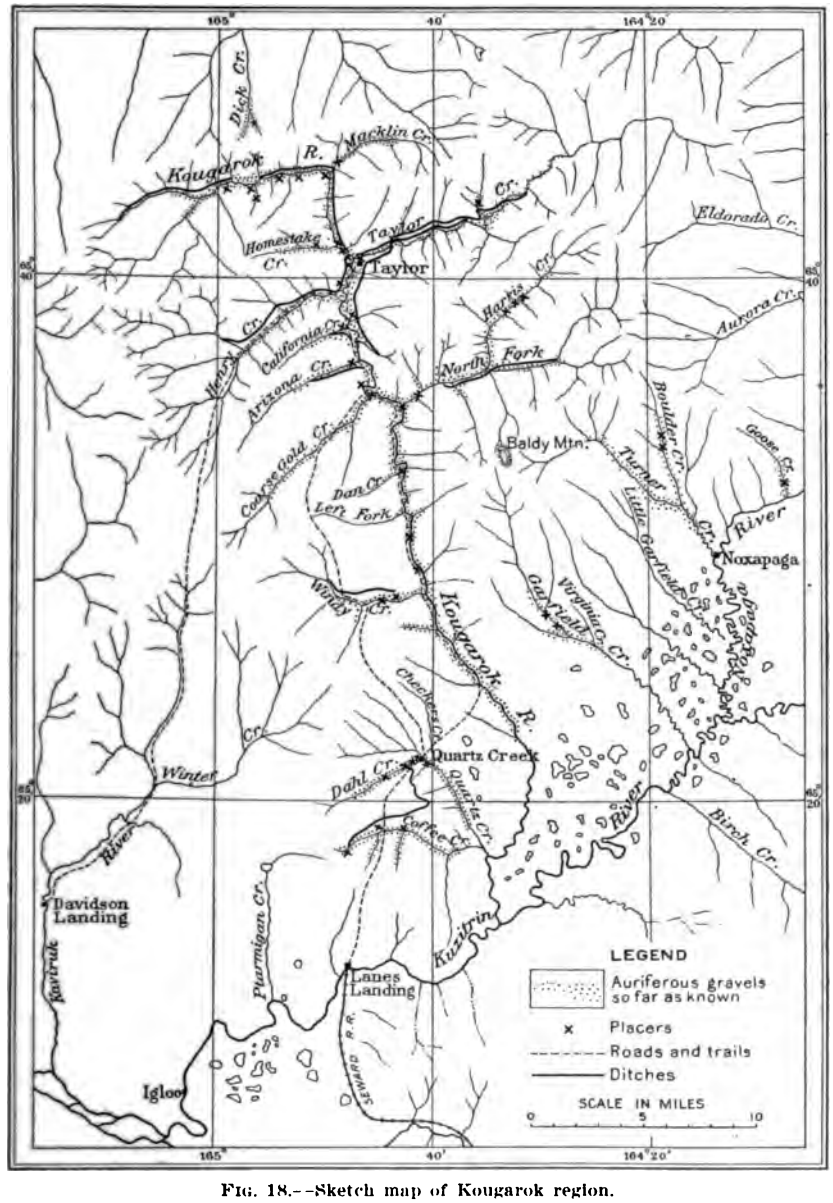

FIG. 18.—Sketch map of Kougarok region.

lowland, and (3) a dissected upland. It is bounded on the southeast by the Bendeleben Mountains, which stretch eastward from lower Kruzgamepa Valley and form with the Kigluaik Mountains the back-

bone of the peninsula. These mountains are sharply serrated, but attain no great height, the highest peak, Mount Bendeleben, being only 2,700 feet in altitude. They are deeply incised by streams, which occupy steep-walled valleys.

The northwestern slope of the Bendeleben Mountains descends to a lowland basin bounded on the north by an upland and drained into Imuruk Basin by Kuzitrin River. This lowland has a width of nearly 10 miles at its upper end, but gradually narrows to the southwest as the upland and the mountains approach, becoming a well-defined valley about 3 miles wide. This valley extends about 10 miles and broadens out again to a lowland which encircles the upper end of Imuruk Basin. The margins of the lowlands are indented by the low spurs which extend from the mountains and the upland.

To the north the Kuzitrin lowland rises gently to an upland, whose flat summits stand at altitudes of 800 to 1,600 feet. Here broad, interstream areas, with flat hilltops, diversified by some higher domes reaching altitudes of 2,500 feet, are separated by wide valleys. This upland level, as elsewhere in the peninsula, marks a former stage of erosion, when the entire region was planated. Subsequent uplift formed a plateau which has been greatly dissected by the present water courses.

Kuzitrin River drains the district southwestward to Imuruk Basin, a tidal inlet connected with the sea at Port Clarence. This river meanders sluggishly across the basin lowland already described, and receives numerous large tributaries from the north, the longest being Noxapaga and Kougarok rivers and Garfield Creek. Several smaller streams heading in the Bendeleben Mountains enter from the south, but these are outside of the region under discussion. The northern tributaries rise in the upland region and flow with tortuous courses through valleys of irregular form, here narrowing between steep rock walls, there broadening out with gentle slopes, which are broken at many places by gravel-covered benches. Heavy talus and extensive masses of ground ice cover many of the gentler slopes and obscure the bed-rock form of the valleys, in some places completely obliterating all topographic evidence of benches. Tributary to the larger water courses are many smaller streams flowing through narrow, steep-walled valleys or V-shaped gulches. Where the valleys are broad the floors are, in the main, gravel covered; where they are narrow, bed rock is exposed at many points. The characteristic topographic forms are smooth slopes and rounded domes and ridges, which, as a rule, are broken by outcrops only at their crests.

As elsewhere in the peninsula, the dominant vegetation is moss.

in favorable localities along the valley floors. The hill slopes are, for the most part, moss covered, with here and there some grass. As bed rock is exposed only on the highest summits and in the sharply cut valleys, it is exceedingly difficult to decipher the geology.

GEOLOGY.

BED ROCK.

The two main stratigraphic units described on pages 66–70 by Mr. Collier—the Kigluaik group and the Nome group, with its subordinate member, the Port Clarence limestone—are represented in the Kougarok region. The limestone schists and granites of the Kigluaik group make up the Bendeleben Mountains and stretch along the southern margin of the region here described. These rocks, so far as known, are not gold bearing in this district, and need no further description here. This older group is separated by the broad belt of alluvium that floors Kuzitrin Valley from the schists and limestones of the Nome group, which form the country rock of the uplands and are the source of the placer gold. Here the Nome group is clearly divisible into two members—(1) the Port Clarence (?) limestone and (2) a succession of graphitic phyllites and quartz schists,[a] mica and greenstone schists, and some beds of semicrystalline limestone. The Port Clarence limestone of this region is much more crystalline than that in the type exposures to the west. (See p. 73.) The schist series is closely folded and faulted, and its stratigraphic relation to the massive limestones has not been definitely established.

Whatever the stratigraphic relations are, the fact of the occurrence of two series, one essentially schistose and the other a massive limestone, is well established. The limestone forms the country rock in two large areas. One of these with an oval outline lies between Kougarok and Noxapaga rivers. The other, more irregular in form, lies to the west, partly in the Kougarok and partly in the American basin. Between the two is a belt of closely folded and faulted schists.

Besides these sediments there are several types of igneous rocks in this province or immediately adjacent. Greenstone schists, probably altered intrusives, occur with the schistose rocks. Dioritic rocks, some massive and some more or less schistose, are common among the schists as dikes and small stocks. A large stock of granite outcrops a few miles northeast of the Kougarok-Arctic divide. A noteworthy hot spring occurs near the margin of this granite mass. In upper Kuzitrin Valley a large area is occupied by a basaltic lava stream of recent age. (See Pl. XI, in pocket; also p. 101.)

[a] In former reports the graphitic schists, which form a well-defined east-west belt about 2 miles wide and parallel to lower Kuzitrin River, were mapped as a stratigraphic unit under the name "Kuzitrin series." These rocks are here included in the Nome group. See p. 70.

As in other placer districts of the peninsula, the schistose rocks appear to be the source of the placer gold. Quartz seams and small veins are common in the schists, and many are iron stained. Prospectors say that some of these veins carry gold, and it is reported that a copper-bearing lode has been found near the divide between Kougarok and Serpentine rivers, but, so far as known to the writer, no lodes of proved commercial value have yet been discovered. There appear to have been two generations of quartz intrusions. The earlier preceded the extensive deformation of the schists, for its veins are crushed and sheared. The later intrusion, which cuts the first system of veins and is comparatively little deformed, appears more mineralized than the first. The presence of a massive granite intrusion near the later quartz suggests a genetic relation between this quartz and the granite, but of this there is no proof.

The evidence in this district lends additional support to the opinion set forth elsewhere (p. 122), that the locus of mineralization is at or near the contacts between the schists and the limestones. The geologic map (Pl. XI, in pocket) shows a close correspondence between the contacts of the limestone and schist and the known distribution of the placer gold.

ALLUVIUM.

The genesis and correlation of some of the alluvial deposits of this province present problems whose solution must await more detailed surveys than have yet been made. The gravels of the present streams and associated benches are of simple genesis, but the origin of the deeper deposits of the Kuzitrin lowland and of Quartz Creek is less easily explained. The alluvial deposits fall into three groups, which in order of age are as follows: (1) The gravels, sands, and clays that floor the basin lowlands and underlie the modern gravels of a part of the Quartz Creek basin; (2) the bench gravels, such as occur along Kougarok Valley; and (3) the present stream gravels.

The gravels, sands, and clays of the basin lowlands—the oldest alluvium—are known only where exposed by river erosion. They consist chiefly of gravels and sands that are somewhat finer than those of the present streams. Fragmentary evidence from drill records indicates that much of the basin is filled by clays, which were probably deposited in a large body of water, such as a lake or an estuary. However, the surface deposits of gravel and sand in the Kuzitrin basin probably do not as a rule exceed 20 or 30 feet in depth. But outside of the basin, in the more constricted part of the valley, the gravel deposits are probably much deeper.

Bench gravels, the second type of unconsolidated deposits, are

gravels in benches at still higher altitudes are reported, but have not been examined. These bench gravels are of the same character as the alluvium of the present streams and appear to contain no material foreign to the basins in which they occur. Quartz pebbles usually predominate among the gravels, and much of the material on and close to bed rock is rather angular. A well-defined gravel terrace lies west of the Kougarok, extending from the mouth of Quartz Creek to the point where the river emerges from the upland. East of this point the terrace is traceable along the southern margin of the upland as far as Turner Creek by remnants of a gravel sheet, much of which has been removed by erosion. At the mouth of Quartz Creek the gravels are about 75 feet thick and can be traced up that stream nearly to Dahl Creek. This gravel bench on Quartz Creek includes at least two unconformable layers, and the uplift which raised it to its present position was differential. The genesis and physiographic significance of this deposit are considered on page 305.

The stream gravels constituting the third and latest type of alluvium are better known than those of the other two types. They vary in character according to their occurrence. Nearly all the developed placers are in these gravels. So far as known, they carry only material derived from the basins in which they are found. Much of the surface material is well rounded and very coarse, but many of the pebbles next to bed rock are subangular. Quartz is usually the predominant constituent of the pebbles. In some streams, as Kuzitrin River, the gravel bars are made up of iron-stained quartz, almost to the exclusion of other material. Sands and some clay are interbedded with the stream gravels, forming, however, but a small percentage of the bulk of the alluvium. In all the smaller streams and in parts of the larger ones a bed of clay or sandy clay, in which more or less vegetable matter is intermingled, forms the topmost layer. This surface bed, which is called "tundra" by the miners, ranges in thickness from 2 to 30 feet and appears to be a subaerial accumulation, due in part to the decay of vegetable matter and in part to the deposition of silt during the rainy seasons. Though sometimes explained as a lake deposit by the miners, its distribution and character seem to preclude lacustrine origin.

Another type of alluvial deposit which deserves mention is the ground ice, which occurs more extensively than in the Nome region. Along the northward-facing slopes of the valleys this ice forms in many places almost continuous layers for several miles. It ranges in consistency from a frozen mud to almost pure ice. Fragments of beaver-gnawed wood have been found in it at a number of places. The ice beds as a rule slope with the valley wall and in places extend up the hillside to a height of 100 feet above the stream. This ice can probably be explained best as the accumulation and subsequent solidi-

fication of winter snow, which has become buried by the talus and alluvium. The thick coat of moss, once established, effectually prevents its thawing. This ground ice is a constant source of trouble and expense to the ditch owners.

RECENT GEOLOGIC HISTORY.

INTRODUCTION.

The genesis of the present land forms, as well as of the alluvial deposits, is so closely related to the occurrence of the placers that reference to this phase of the geology in discussing the placers is unavoidable, though many of the conclusions advanced must be regarded as only tentative. In the foregoing description of the topography emphasis has been laid on its simplicity, yet when it is submitted to final analysis in terms of physiographic development, the succession of earth movements by which the present land forms were evolved is found to be complex.

Collier[a] has recognized four periods of erosion in this and the adjacent provinces. The topographic features constituting the evidence for these periods he has termed (1) the Nuluk Plateau (2,000–2,700 feet), (2) the "Kugruk"[b] Plateau (1,000–1,200 feet), (3) the York Plateau (100–700 feet), and (4) the lowland plains (0–200 feet). Collier's type localities for these topographic features are mostly west of the area here under discussion. Moffit,[c] who has studied the region to the northeast, recognized only two of these cycles of erosion, represented by remnants of an upper plateau standing at an altitude of 1,000 to 1,400 feet, which he correlates with the "Kugruk" Plateau, and a lower, which represents the same cycle as Collier's most recent—that of the lowland plains.

The writer was unable to find definite proof that four well-defined cycles of erosion have occurred in the Kougarok district. The indications are that most of the level and flat-topped ridges and domes are the product of one extended cycle of erosion and that their present differences of altitude are due to differential uplift. The suggestion made in a previous report[d] by the writer, that certain rock benches found at altitudes of 1,000 to 1,700 feet were of marine origin, has not been confirmed by later work, but the genesis of these land forms is still unexplained. However, the presence of well-defined stream

[a] Collier, A. J., Reconnaissance of the northwestern portion of Seward Peninsula, Alaska: Prof. Paper U. S. Geol. Survey No. 2, 1902, pp. 34–43.

[b] At the time Collier wrote Kugruk was the accepted spelling for the river now known as the Kougarok.

[c] Moffit, F. H., The Fairhaven gold placers, Seward Peninsula, Alaska: Bull. U. S. Geol.

benches in the existing valleys proves that the uplift after planation was intermittent, and it is possible that some of these benches were formed during one of the later cycles described by Collier. The problem is intricate, for if there were several cycles of erosion it is evident that the last extensive one must have largely obliterated the topographic evidence of any that preceded it.

Collier has correlated a plain of denudation, which he recognized in the flat-topped spurs of Midnight and Kougarok mountains, with a plain marked by the summit level of the York Mountains and associated domes, which he called the Nuluk Plateau, but the evidence hardly seems conclusive. It appears equally probable that there may be uplifted portions of the peneplain which is strongly marked in this district. In the opinion of the writer the only well-defined peneplain is recorded in the general summit levels of the upland that now stands at altitudes of 800 to 2,000 feet, and this he would correlate, as Moffit did, with Collier's "Kugruk" Plateau. At the west end of the peninsula a well-marked elevated surface of erosion, called the York Plateau,[a] was traced eastward by Collier along the seaward front of the York Mountains. With this he correlated certain low benches and flat-topped spurs in the Kougarok district. In the opinion of the writer the facts bearing on this point admit of different interpretation. The York Plateau throughout much of its extent is an uplifted plain of marine denudation, and no evidence appears that any considerable inland areas were base leveled at the time that it was formed. Therefore it would seem that the inland equivalent of this marine benching will be found among the benches along the present valleys rather than as a peneplain. If, then, the York Plateau can be correlated with any of the topographic features of the Kougarok district, the proper correlation is with the stream benches of the present drainage channels.

Collier's fourth epoch of erosion left its record in the coastal plains and inland basins, and these he grouped under the name, "lowland plains." There is but scant evidence as to the form of the rock floor of the lowland areas, but probably it is in general flat, with no great thickness of alluvial covering. The bed-rock floor of the coastal plains, in the lack of evidence to the contrary, might be ascribed to marine denudation; the extensive inland basins, however, such as that of the Kuzitrin lowland, must be the product of a long period of erosion. Though, as will be shown, the sea probably invaded this basin, yet this was but a minor event in its history and throws no light on the origin of the depression itself.

The relation of the northwestern margin of the Kuzitrin lowland to the upland is obscured by the presence of a heavy bed of gravel,

[a] Brooks, A. H., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 52.

already referred to (p. 298). It appears, however, quite possible that the rock floor of the basin merges with the gentle slopes of the upland, which has been described as a planated surface. Such a relation was suggested by the character of the topography along the trail from Dahl Creek to Kougarok Valley. Here the upland falls off to the north with a gentle slope from an altitude of about 800 feet to about 200 feet and then passes underneath the gravel terrace that bounds the Kougarok Valley. An extension of the same slope would carry it underneath the gravel-floored Kuzitrin basin. The writer explains this feature as an erosion surface that has been warped. If the basin lowland has such a structural origin, it is probable that its margin may be faulted in places. This would account for the abrupt local transitions from the valley floor to the upland. Warping may have influenced the formation of these basins also by causing local barriers that brought about headwater erosion. The evidence presented in Collier's reports as to the warping of the old land surfaces is conclusive, and only the extent and time of this warping can be called in question.

Both Moffit and Collier have called attention to the gradual transition between the coastal plains and the uplands of the northern part of Seward Peninsula. The topographic map (Pl. IX, in pocket) bears out this interpretation of the topography, for everywhere along the northern margin of the peninsula this gradual transition is evident.[a]

One feature of the rock floor of the Kuzitrin basin deserves special mention. Near the entrance of Dahl Creek into Quartz Creek, a tributary of Kougarok River, a shaft has been sunk to a depth of 187 feet and, although within 50 feet of sea level, has not reached bed rock. The exposures of bed rock in adjacent areas indicate that at this locality a depression exists in the bed-rock floor, but the data at hand are insufficient to define its limits. It is also impossible to account for this depression, but the suggestion may be offered that it is of structural origin. If it was a channel of erosion its outlet is not apparent, because so far as known it is cut off from the sea on all sides by higher bed rock. It may, however, be the remnant of a channel which formerly discharged into Norton Bay through Koyuk Valley and which was blocked by the recent lava flow at the upper end of the Kuzitrin lowland.[b]

[a] The writer has elsewhere discussed similar warped peneplains and their relations to coastal plains. See Geography and geology of Alaska: Prof. Paper U. S. Geol. Survey No. 45, 1906, pp. 276–280, 286–290.

[b] Compare Pl. XI, in pocket; also Pl. III of Bull. U. S. Geol. Survey No. 247, 1905.

SEQUENCE OF GEOLOGIC EVENTS.

This section treats only of the recent geologic history. The various periods of sedimentation, deformation, intrusion, and metamorphism from which the hard rocks have resulted have been discussed by Mr. Collier elsewhere in this report (p. 60).

In the opinion of the writer the present topography may be traced through four chief epochs—(1) planation; (2) general uplift, with local depressions permitting the invasion of the sea; (3) stream dissection, marine benching along the coast, and sedimentation in local areas; and (4) uplift, with dissection.

PLANATION.

It has been pointed out that certain high, flat-topped domes and spurs, ranging from 2,000 to 2,700 feet in altitude, may be the remnants of a dissected peneplain, as shown by Collier. Within the province here under discussion, however, the evidence of this old surface of erosion is too fragmentary to prove or disprove this theory. But it can be definitely asserted that if there was an earlier epoch of planation little indication of it is left in the present topography.

Throughout the peninsula the flat-topped ridges and domes, ranging in altitude from 800 to 2,400 feet, are among the most striking features of the topography, and they have been generally interpreted as the remnants of an uplifted and dissected peneplain. Some of the best examples of this feature are found in the Kougarok district, where extensive smooth, flat-topped interstream areas characterize the topography. To an observer standing on one of these prominences the old plain, represented now by the summit levels, appears to sweep off toward the horizon gently rolling and unbroken, save for an occasional dome or rocky crest which stands above it. In such a view the valleys, unless close at hand, are almost completely lost sight of, for their bounding ridges coincide with the general level. There can be little doubt that this is an uplifted erosional surface which had probably been reduced nearly to base-level, or at least to a mature state of dissection. The form of the valleys furnishes additional evidence of the base-leveled character of this upland. Their tortuous courses have evidently resulted from incised meanders inherited from the drainage system of a previous period.

This peneplain, for such it may be called, is gently rolling and contains many minor ridges and depressions. Some of these irregularities are without doubt an inheritance from the former cycle, but they are believed to have been largely caused by warping after the peneplain was formed.

DIFFERENTIAL UPLIFT.

After this period of planation came differential uplift with local depressions. The central axis of the peninsula, lying north of Kuzitrin River, was elevated to at least 1,000 feet, while depression probably took place along its border. The writer is not personally familiar with the coast along the Arctic Ocean, but the published descriptions and the topographic maps suggest at least that the peneplain surface lies underneath the gravels of the coastal plain. It has been shown that along the southern margin of the upland the old peneplain appears to pass underneath the alluvial filling of the Kuzitrin basin.

As this peneplain was formed under subaerial conditions, it is evident that the part of it now buried under alluvium must have been depressed when the rest of the area was uplifted. In other words, the movement was differential and the result was a warped land surface. In at least one locality (Quartz Creek valley) a sharp flexure of the old land surface is indicated.

But this movement did not take place at once, for the benches, both marine and stream, as well as the character of the sediments, indicate several stages of active deformation separated by periods of quiescence during which erosion and sedimentation took place. Because of these facts no sharp line can be drawn between this and the succeeding cycle. Some movement took place, but the first was the period of the more far-reaching orographic disturbances. It has been stated that the Kuzitrin lowland was at about this time invaded by the sea; this implies a submergence of the lowland surrounding Imuruk basin and of a portion at least of Kruzgamepa Valley. The evidence of this submergence lies both in the form of the basin and of the adjacent territory and in the character of some of the sediments which it contains. A log about 60 feet long, which must have been brought in by ocean currents, has been found in these sediments. The area submerged possibly included the upper part of the Kuzitrin basin, which is now covered by recent lava flows, and this inland sea may have been connected with Norton Sound by a strait through the depression now occupied by Koyuk River.

STREAM DISSECTION AND SEDIMENTATION IN LOCAL BASINS.

It is believed that at the close of the first and more intense period of deformation the land stood at a somewhat lower level (200 to 500 feet lower) than it does now and that a period of quiescence followed, permitting extensive stream dissection and marine benching along the coast. During this period most of the present valleys were

While the drainage channels were being incised sediment was deposited in the Kuzitrin basin, then an arm of the sea. It has been shown that the character of this sediment is but imperfectly known. Underneath Quartz Creek valley there are nearly 200 feet of white quartz gravels, which would appear to be the result of the denudation of the old planated land surface. Such quartz gravels, many of which are not greatly rounded, are most likely to have come from an area which had been long subjected to subaerial decay. Their accumulation was probably brought about by rapid erosion and sedimentation, which would indicate rapid uplift. It has been stated that both rounded gravels and sands occur on the lower part of Quartz Creek and in a terrace along the west bank of Kougarok River, and that these are believed to be of about the same age as the white gravels described above. They probably represent a somewhat later period of deposition, when the materials had become more waterworn by stream action and more or less sorting had taken place.

The explanation of the occurrence of the clay deposit underneath the Kuzitrin lowland proper is still more difficult. Perhaps an attempt to explain this deposit is useless when so few facts regarding it are available. If, as is probable, this clay bed is extensive underneath the Kuzitrin lowland, it is probably a deposit in deeper water, laid down at the same time as the gravels described above. In other words, it is the result of sedimentation in the central part of the embayment along whose margin the gravels and sands of fluvial origin were laid down. This clay may, however, be a glacial mud, derived from the valley glaciers of the Bendeleben Mountains, which were the locus of an ice accumulation in recent time. Opposed to this genesis for the clays is the fact that the glaciation, which was confined to a very small area, occurred at a somewhat later period. One additional fact deserving mention is that the few borings made in these clays encountered several layers of vegetable matter which is in every way similar to the present tundra growth. This indicates that deposition in that part of the basin where the clay has been found has been interrupted by periods when the land stood above water long enough to permit a covering of vegetable growth.

The gravels of Quartz Creek comprise two unconformable series. This indicates a period of erosion which interrupted sedimentation and must have been brought about by orogenic movement. Though the fact is important from the standpoint of the placer miner, as the upper gravels alone have thus far been found to be gold bearing, it is probably of no great physiographic import. It simply shows that there were repeated oscillations of the land. More detailed studies will probably disclose the identity of age of this uncomformity with one of the layers of vegetable matter in the clay deposits of the central part of the basin.

UPLIFT WITH DISSECTION.

The present topographic cycle was begun by general elevation, which through a series of intermittent uplifts brought the entire province to its present position relative to sea level. Like the preceding orographic disturbances, these uplifts were differential and in some localities were accompanied by downward warping. The best example of sinking is the Tuksuk Channel, a tidal waterway which connects Imuruk Basin with Bering Sea. Collier[a] has shown that in the York region there is indisputable evidence of warping since the York Plateau was cut.

It is shown in the description of the Quartz Creek placers that the fluvial deposits of this area have been locally depressed. The best evidence of depression is the northwest dip under the valley shown by the bench gravels on the southeast side of Dahl Creek. As a result, gravels of the same horizon are found in both the bench and the creek.

The presence of stream benches at various altitudes in Kougarok Valley and some of its tributaries is interpreted as signifying that the last uplift was interrupted by intervals of tranquillity long enough to permit considerable stream cutting. A discussion of this phase of the physiographic history will have to await more complete field studies. The relation of the stream cutting to the gold values in the placers is important, for in some places the dissection of the auriferous bench gravel has led to an enrichment of the placers of present stream gravels.

This last cycle resulted in the present topography. The streams are still lowering their grades and are actively at work extending their drainage basins.

THE GOLD PLACERS.

MINING DEVELOPMENT.

This district was probably visited by prospectors as early as the summer of 1899, but the first locations were not made until the winter of 1899–1900, and there was no actual discovery of gold until the following summer. A rush from Nome to the new field took place in March, 1900, and another in July of the same year. The first claim staking in March was on Harris Creek, and in July gold was found on Quartz and Garfield creeks. In August and September considerable gold was taken out of the shallow placers of these two creeks. Meanwhile gold had been found on the Kougarok and on many of its tributaries, but no claims were opened up. In 1901 there

rapidly exhausted and no very rich gold had been found on other creeks. The remoteness of this field from transportation facilities discouraged prospectors, unless they were heavily backed financially, and there were no bonanzas to give an impetus to mining. Probably the most important discoveries were those of Kougarok River, but these could be exploited only by individual miners during low stages of flow, and sudden freshets often destroyed the work of weeks of preparation. So mining interests in the Kougarok district may be said to have lain dormant for several years, though some gold, chiefly from Dahl Creek, was produced every year. When ditches were successfully constructed at Nome, a renewed interest in these outlying placer fields arose. In 1903 T. T. Lane constructed the first long ditch in the district, from the head of Coffee Creek to a bench at the mouth of Dahl Creek. In the following years many more ditches were planned and surveyed. In 1905 and 1906 ditch construction went on with feverish activity, and by the end of the summer of 1906 upward of 100 miles of ditch were planned, about half of which was completed.

One of the larger ditches is the North Star, which extends from Arctic Creek, on the east side of the Kougarok, to the mouth of Taylor Creek, and up that stream about 10 miles, a total length of 15.2 miles. The Cascade ditch takes water from Taylor Creek about 6 miles upstream and discharges at the mouth of the creek. Both of these ditches were completed in 1906. The Kougarok Mining and Ditch Company had one ditch in operation in 1906 and two more partly constructed. Of these the Homestake ditch, which heads on the Kougarok, 3½ miles above Macklin Creek and discharges at the mouth of Homestake Creek, with a head of 172 feet, was completed in 1905. Work has been begun on the Altoona ditch, which heads 1¼ miles above the mouth of Washington Creek and discharges at the intake of the Homestake ditch. A third has been located which is to be built up Macklin Creek, to take water from Schlitz and Reindeer creeks north of the Arctic divide. T. T. Lane has completed a ditch from Henry Creek, which discharges at Homestake Creek. All the above-mentioned ditches discharge within a few miles of each other on Kougarok River and represent a large aggregate outlay.

The Irving Mining Company has constructed a ditch from Washington Creek along the north slope of Kougarok Valley nearly to the mouth of Mascot Creek. Another ditch has been built by the Northwestern Mining Company, on North Fork, from the junction of Alder and French creeks; it is to be continued to the Kougarok, about 7 miles being complete in 1906. The Lane ditch, from Coffee Creek to the mouth of Dahl Creek, has already been mentioned. Smaller ditches have been built or surveyed at various places, includ-

ing Arizona, California, Coarse Gold and Windy creeks. Besides these there are many other schemes for ditch building, which in 1906 had not gone far enough to deserve individual mention.

The summer of 1906, being abnormally dry, was especially favorable for ditch construction, but was very unfavorable to those who were prepared to sluice. It is perhaps well, however, that the managers of the large companies should know what to expect and be able to include an allowance for a dry season in their estimate of cost. The records show that in the last seven years there have been two very dry summers, 1900 and 1906, and that therefore the last season is not by any means so abnormal as some promoters try to make the public believe.

The Kougarok district up to 1906 could be reached from Nome only by an overland journey of about 100 miles or by a very circuitous water route via Teller, Imuruk Basin, and Kuzitrin River. From Lanes Landing, at the head of scow navigation on the Kuzitrin, freighting by wagon to the creeks costs 6 to 15 cents a pound in summer, but the winter rates are much lower. J. M. Davidson and Andrew J. Stone, who are among the largest operators in the district, have established a transshipping point on Kaviruk (Marys) River called Davidson Landing and have built a road from that point to the upper Kougarok region, a distance of 40 miles. Small lighters can be towed directly from the ship's side at Port Clarence to Davidson Landing, so that at least one handling of freight is avoided.

In 1906 the Seward Peninsula Railway was extended northward to the head of Nome River, and thence down the Kruzgamepa to Lanes Landing. Surveys have been made looking to an extension of this line farther up Kougarok Valley. This railway will bring the district into close communication with Nome and will do much to accelerate its development. Two telephone lines connect many of the camps with Nome. The recording office is at Lanes Landing.

Mining operations in 1906 may be summarized as follows: One hydraulic plant was operated for a part of the season on a bench claim on Dahl Creek, and two plants on Kougarok River above the mouth of Taylor Creek. The two on the Kougarok removed the overburden and part of the pay streak by hydraulic power and cleaned the bed rock by hand. In both plants hydraulic lifts were operated. Considerable work was done on the lower four claims on Dahl Creek by shoveling into sluice boxes. Ground sluicing was done by a number of operators, notably on Windy Creek and on Solomon Creek, a tributary of Taylor Creek. Several claims were worked in a small

they were handicapped either by lack of water or by an excess of water that flooded them out. Below Taylor Creek on the main Kougarok attempts were made to exploit the bench gravels either by sinking shafts and drifting or by the aid of small hydraulic plants, but in most cases the equipment was insufficient to produce anything but meager results. Probably the most successful of these attempts consisted in the drifting on some benches on the west side of the Kougarok near the mouth of Taylor Creek. Harris, Garfield, and other creeks received some attention. In all, probably not more than 150 or 200 men were engaged in productive mining, chiefly because of the inadequacy of the water supply.

The amount expended in ditches and the purchase of claims during 1905 and 1906 probably exceeds $1,000,000—a sum hardly justified by the extent of placer ground actually proved. The total gold output to the end of 1905 is estimated at about $600,000. This amount is, however, only an approximation. The production of 1906 [a] appears to have been small, owing to the lack of water.

DISTRIBUTION OF THE AURIFEROUS GRAVELS.

Broadly speaking, the auriferous gravels thus far discovered in the Kougarok district fall into two zones, which converge toward the lower part of Kougarok River. (Pl. XI, in pocket.) The larger zone stretches northward from the lower Kougarok, embracing much of the Kougarok basin, and is here termed the "northern belt." The smaller zone, which appears less well defined, extends eastward from the Kougarok to the Noxapaga, embracing the streams tributary to Kuzitrin River. This second zone will here be called the "southern belt." The northern belt lies in a zone of schistose rocks, bounded on both sides by massive limestones. It is therefore consistent with the general rule that the gold has its source at or near the limestone and schist contacts. Nor does the second belt, so far as known, offer an exception to this rule. The types of placers in each of the two belts are described below.

SOUTHERN BELT.

GENERAL DESCRIPTION.

The auriferous gravels forming a broken fringe along the southern margin of the highlands that bound the Kuzitrin basin on the north and west have certain features in common, which justify describing them as a unit. This belt includes the placers of Quartz and Garfield creeks, as well as those of the Noxapaga basin. The bed-rock geology of the belt is obscured both by the extensive alluvial deposits

[a] Not a single operator in the district responded to a request for information in reference to production.

and by the products of deep rock weathering. However, a belt of graphitic phyllites and schists, including some calcareous beds, appears to stretch across the upland between Kaviruk and Kuzitrin rivers. Many of these rocks carry quartz veins, locally stained with iron. Schists occur north of these graphitic rocks, and farther north are succeeded by limestone. Though these formations can not be exactly delineated, because of the deeply weathered character of the rocks and the absence of outcrops, yet most of the gold-bearing creeks appear to cross the contact of the limestone and schist.

The unconsolidated formations embrace (1) the present stream gravels, (2) the deposits flooring the Kuzitrin lowland, and (3) the bench gravels. The first group, which embraces most of the working placers of the district, is fully described on page 299. Little can be added to the description of the second group already given. The bench gravels merit closer consideration.

The upland region descends by a gentle slope, here and there broken by a well-marked terrace, from an altitude of about 1,100 feet to the Kuzitrin Valley floor, 100 feet above sea level. The best-defined terrace is about 100 feet above the present water level and is traceable from the mouth of Quartz Creek northward along the western side of Kougarok River to the point where the valley of that stream emerges from the upland. A similar terrace is present along the northern margin of the Kougarok, and the lower part of Turner Creek and some of the tributaries of the Noxapaga are reported by Collier to be incised in deep gravel deposits, a fact which indicates an easterly extension of this terrace. The alluvium of these terraces in nearly every exposure is made up of the same kind of material—well-rounded and stratified brown sands and gravels. Certain exceptions to this are noted below. These benches are without doubt the remnants of an extensive gravel sheet, as is indicated by the hillocks of stratified gravels which stand here and there above the floor of the Kuzitrin lowland.

Near the mouth of Quartz Creek the top of the terrace is about 125 feet above the water, and the gravels rest upon clay of unknown thickness about 15 feet below water level. The exposed material consists of well-rounded gravel and sand. Along Quartz Creek the surface of the gravel dips with about the grade of the stream, and 1 mile below Dahl Creek about 100 feet of gravel and sand are exposed in the valley wall. Above this point the bed was not definitely recognized, but it is believed to be represented by a white quartz gravel exposed on Quartz Creek just below the mouth of Dahl Creek. On the north side of Dahl Creek valley a shaft was sunk to a depth of 187 feet entirely in this white gravel and did not reach bed rock.

face of the white gravels dips to the northwest under the trench occupied by Dahl Creek. In other words, the gravels underlying the pay streak at the Lane hydraulic mine and those on Dahl Creek are parts of the same bed. The surface of the same gravel deposit is believed to be exposed near the mouth of Joe Creek, a tributary of Quartz Creek. These relations are too complex to permit detailed analysis here, but they point to the following conclusions: (1) The auriferous gravels of the Lane hydraulic mine, Dahl Creek, and of Joe Creek belong to the same horizon; (2) they are underlain by barren alluvium, from which are formed the white gravels of Dahl Creek and the bench gravels of the lower part of Quartz Creek, of the Kougarok, and of the front of the upland near Garfield and Turner creeks; (3) this older gravel series is believed to carry no values, though it is known to be more or less auriferous. The last conclusion is supported both by the results of prospecting and by theoretical considerations. In general the rich placers of the peninsula occur in alluvium that was deposited under conditions of subaerial decay rather than during floods. Much of this bench gravel, however, is well rounded and stratified and appears to have been laid down during periods of flood, which are not favorable to a concentraton of values. Still, so far as known, these gravels next to bed rock have never been prospected. They may be gold bearing, and in the opinion of the writer the chances of finding gold at depth warrant the outlay of the cost of prospecting to bed rock.

QUARTZ CREEK BASIN.

The basin of Quartz Creek includes a dendritic drainage system lying in an elbow formed by the lower Kougarok and Kuzitrin rivers, and is incised partly in the upland and partly in the broad gravel terrace already described. The valleys cut in the gravels are steep-walled trenches; those cut in bed rock are broader, with gentler slopes. Placers have been found chiefly in the bed-rock portion of the valleys. So far as known this bed rock is phyllite or mica schist.

Throughout the basin the stream gradients are low, averaging probably less than 10 feet to the mile. The amount of water ordinarily available is very small, and in dry seasons, such as that of 1906, the supply fails entirely. Gold has been mined on Quartz Creek and on its tributaries Dahl, Joe, and Coffee creeks, but of these only Dahl Creek has been a considerable producer. The terrace gravels of the lower basin carry colors of gold, but no values have been found in them.

In 1900 and 1901 half a dozen claims were operated on Quartz Creek near the mouth of Dahl Creek, but these were quickly worked out. The flood plain here is not more than 50 to 75 feet wide, and the pay streak, which comprised only a part of this plain, was 2 to 3 feet

thick. No bed rock was found in this part of the basin, the values being concentrated on a layer of blue, sticky clay. The gold is medium coarse and probably came from the Dahl Creek basin.

Dahl Creek has been the center of mining interest since 1900, for the lower six claims have been the largest group of producers in the district. This stream flows in a shallow trench cut for about 15 feet in muck. Above this is a bench a quarter of a mile wide, from which the valley walls rise gently. From the mouth of the creek up to claim No. 6 the gold rests upon a clay seam, but on No. 6 the pay streak was found 10 to 20 feet below the surface, just above a mica-schist bed rock. Underneath the clay floor upon which the gold-bearing gravels below claim No. 6 lie are the white quartz gravels, already described; these have been penetrated by a shaft, which goes to a depth of 187 feet without reaching bed rock. The following section was measured on Dahl Creek about one-fourth mile above its mouth:

Section on Dahl Creek one-fourth mile above its mouth.

	Feet.
Frozen muck with impure ice lenses	15–20
Ferruginous gravels and sands (pay streak)	3– 4
Blue clay, carrying some sand	1– 2
White quartz gravel.	

Near the mouth of Dahl Creek the bench just described is about 20 feet above the present stream bed and has been found to carry values. A measured section at Lane's hydraulic mine is as follows:

Section of bench at Lane's hydraulic mine, Dahl Creek.

	Feet.
Frozen muck with lenses of ice	15–20
Ferruginous, gold-bearing gravel	3– 4
Sticky blue clay	½– 1
White quartz gravel.	

These deposits dip under the creek bed, and both bench and creek placers are of the same age, their difference in position having been caused by local warping. Similar bench gravels will probably be found to underlie the talus and muck that cover the lower slopes of the Dahl Creek trench, but so far values have been found only at Lane's mine. The possibility of finding values on bed rock underneath the white gravel has already been noted.

Placer gold has been found near the mouth of Joe Creek, on Coffee Creek, and on a number of other smaller tributaries of Quartz Creek. No gold is reported from Checkers Creek, a northern tributary of Quartz Creek. The course of Checkers Creek appears to be along the old planated surface, which dips under the gravels and from a theoretical standpoint should be a favorable place for gold concen-

Considerable prospecting has been done throughout Coffee Creek basin and a little gold has been mined in its upper part. The lower part of the creek is incised in the gravel terrace, and here also a little gold has been found. Prospecting on the upper part of the creek is expensive because the gravels are everywhere buried under 10 to 25 feet of muck. This is true not only of the floor of the valley, but also of the slopes and the tributary gulches. This overburden is too heavy to permit open-cut mining, and the cost of fuel has so far been too great to encourage drift mining or even prospecting. As a result much of the prospecting on Coffee Creek has been confined to cuts made by ground sluicing at favorable localities during floods, and few careful tests of claims have been made.

In the winter of 1906 some rich placer ground was found in the talus of the valley slope near the head of Coffee Creek. This peculiar auriferous deposit appeared to be almost in place. The gold occurs in 4 to 7 feet of angular schist and quartz débris and weathered schist bed rock covered by 18 to 20 feet of muck. The quartz is iron stained, but does not appear to be auriferous, and the gold probably came from the associated schist. The gold is angular, spongy, and bright colored. All these facts point to the conclusion that the material mined is a weathered part of a mineralized zone. The deposit has been traced about 1,000 feet, but is buried so deeply that its boundaries are not well known. It is indicative of the source of the gold and suggests the possibility of finding lode deposits that may carry values.

The other placers of the upper part of Coffee Creek are as a rule buried under an overburden of muck 10 to 20 feet thick. The gravels are chiefly schist and quartz, and range from 3 to 7 feet in thickness.

GARFIELD CREEK.

Garfield Creek heads near Baldy Mountain, flows in a rather broad valley through the upland, and in the last 5 miles of its course meanders across a gravel plain to join Kuzitrin River. The gold placers are confined to the upland parts of its valley, and may be reached by a trail crossing the tundra from the Kougarok, but such traveling is difficult and transportation is very expensive. The discovery was made here in 1900,[a] and considerable gold was produced in that year from a shallow pay streak confined to the creek bed and resting upon a white clay.

The valley of Garfield Creek is broad, the sides are benched, and gravels and talus with a thick layer of moss and muck cover the bed

[a] Brooks, A. H., Richardson, G. B., and Collier, A. J., Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900, a special publication of the U. S. Geol. Survey, 1901, p. 122.

Though the general trend of the different parts of the valley is in one direction, its course in detail is tortuous. Within the valley walls the river flows in a very irregular channel, and many of the meanders are separated by well-defined benches whose flat surfaces mark former stages of water level. This is especially evident above Taylor Creek, where the river flows through a continuous series of oxbow curves, which are separated by sloping benches.

At the point where the Kougarok enters the Kuzitrin lowland both valley walls show well-marked benches. Two levels are here noticeable—one 50 feet and one 25 feet above the stream. These can be traced for several miles above Windy Creek; the walls then become steeper and the river occupies a canyon-like valley up to Left Fork. From this point to Washington Creek, 20 miles above, some evidence of benching can be observed in most places, though the benches are not continuous. The individual levels have not been traced, but in the part of the valley below Taylor Creek there are at least two high-level gravels and possibly three.

Kougarok River is a swiftly flowing stream that carries at its mouth probably 5,000 to 8,000 miner's inches of water, and has an average gradient of about 20 feet to the mile. Most of the material transported is coarse, ranging from fine gravel to coarse cobblestone.

The most extensive deposits of auriferous alluvium yet discovered in the district are on the main Kougarok, both in the present stream bed and in the benches. Gold has been found in the gravels of this stream for about 40 miles of its length. It is not known how much of this stretch carries commercial values, but it is probably not more than 50 per cent.

Several placers of the present stream bed have been worked since 1901. Some gold has been taken out of the river bed with shovel and rockers near Coarse Gold Creek and at various points as far up as Taylor Creek. Much more work has been done at and above the big bend of the Kougarok, near the mouth of Macklin Creek and as far up as Washington Creek. Most of this mining was done during low-water stages. It should be stated that these placers are in no sense of the river-bar type, but carry coarse gold mingled with gravels and largely concentrated on bed rock.

The gravels are in the main fairly well rounded and stratified. The largest pebbles are not more than 1 or 2 feet in diameter, but a few larger bowlders have been contributed by the talus of the valley slopes. No general statement as to the thickness of the gravels can be made, as it varies greatly in different parts of the river. In the canyon already described bed rock is exposed throughout the river bed. In many places above the canyon gravels are almost entirely absent;

The width of the alluvial floor also varies; in some parts of the valley the entire floor is buried in gravels, but in others the stream has uncovered bed rock over a part of it. The actual flood plain of the river ranges in width from 100 feet in the canyon to 800 feet at the flat. At the mouth of North Fork it is 300 or 400 feet wide, at the mouth of Taylor Creek about 600 feet, and near the mouth of Trinity Creek about 300 feet. Below the flat at the mouth of Taylor Creek the alluvium is made up almost entirely of gravel, but above this flat the gravel is in places buried under a considerable stratum of muck. So far as the writer knows, the gold found in the stream bed below Coarse Gold Creek, except at the mouth of North Fork, is chiefly fine, but the auriferous gravels at and above the mouth of this creek are said to contain a large percentage of coarse gold. This indicates that in the upper half of the river the enrichment is of local origin, and therefore that the gold has not all been brought in by the main stream from its source. The gold of the flood plain is mostly dark, but that of the smaller tributaries is bright. In the flood plains the only placers yet opened up on a commercial basis are those at the mouth of North Fork, where little has been done, and at the mouths of Taylor and Homestake creeks and between Macklin and Washington creeks, where considerable gold has been procured.

The bench deposits of the Kougarok appear to afford an attractive field for the gold miner. Their position makes them easy of access and no hydraulic lifts are required to dispose of the tailings. Between Coarse Gold and Taylor creeks at least two distinct bench levels are well defined, one about 25 feet and the other 50 feet above the water. So far as observed, the gravels are from 8 to 10 feet in depth and are in most places covered with muck. No determinations of values are known to the writer, but the fact that some of the lower benches have been worked at a profit by crude means makes it seem probable that their gold content is sufficient to assure returns if handled by cheaper methods. Bench gravels have been reported at various places above Taylor Creek, and some are known to be auriferous, but they have not been developed on a commercial scale.

The following notes on the occurrence of the auriferous gravels are the basis for the generalizations which have preceded.

At the point where the river emerges from the upland two benches were observed—a lower, which is well defined, standing about 15 feet above the present flood plain, and an upper, about 35 feet higher, which slopes toward the axis of the valley. These benches can be traced upstream for about a mile; above this stretch the valley walls steepen and become rock bound. So far as known, this part of the river has yielded no placer gold.

From the mouth of Windy Creek up to a point within a mile of Left Fork the valley is broad and the slopes are interrupted by

benches, one at 20 and one at 50 feet being recognized. The gravels of Windy Creek are auriferous (see p. 320), but no mining has been done on the main river in this vicinity. Above this stretch the valley is a steep-walled canyon cut in hard diorite and there is practically no gravel on the rock floor. This topography continues nearly to Queen Creek, where the valley opens out again. Here there is a bench, covered by 4 to 5 feet of well-rounded gravel overlain by 6 to 10 feet of frozen muck. Near the mouth of Queen Creek two benches were observed—a lower one 20 feet above the river, covered by 4 to 5 feet of gravel, with an overburden of muck 10 feet thick, and an upper one 45 feet higher, carrying about 10 feet of gravel that is more or less auriferous. These benches, though not continuous, can be traced along the valley to Coarse Gold Creek, where the river makes a long curve, swinging around a bench 100 feet high, on which lies about 10 feet of river gravel. This bench, together with a lower one standing about 25 feet above the water, can be traced almost continuously between Coarse Gold Creek and North Fork. Similar benches occur along North Fork. Gold has been found in the river gravels at the mouth of North Fork and at the big bend above Coarse Gold Creek. A scheme is under way to drain the river bed at the big bend by tunneling through the neck of land. It is claimed that by building a 20-foot dam and driving the tunnel, water power with an 18-foot fall can be developed and 2½ miles of the river bed can be laid bare. This power is to be utilized in mining the river gravels, which are said to carry values. The bed rock, a schist, is exposed along a part of this stretch of the river, but in some places it is buried under gravels at a maximum depth of 8 feet. The bench gravels along this part of the river also are said to be auriferous.

Between Coarse Gold and Taylor creeks the Kougarok Valley maintains its open character, and benches are well marked in many places. A low bench 15 to 20 feet above the river bed is the most conspicuous of these features and is usually covered with 3 to 6 feet of gravel with an overburden of frozen muck. Here, as elsewhere in the valley, the benches are obscured in many places by the heavy talus, and therefore the absence of a topographic expression of the benches where the slopes are gentle does not necessarily prove their absence. About 2 miles below Taylor Creek a bench about 20 feet above the river carries 10 feet or more of gravel covered with frozen muck. The same bench is recognizable at the mouth of Arizona Creek and at other places. Some gold has been extracted from these bench gravels.

Several lower benches occur along the valley slope opposite the mouth of Taylor Creek. Here a measured section showed 6 feet of

is only a few feet above the present flood plain of the river, but, as the alluvium of the flood plain is 20 feet or more deep at this point, the bench deposit was originally at least 25 feet above the river bed. The slope of these benches suggests that they were formed by streams tributary to the Kougarok. They were mined during the winter of 1905-6 by drifting, and considerable gold is said to have been taken out. The largest nugget had a value of $1.80.

Considerable prospecting and some mining have been done in the flood-plain gravels between the mouths of Taylor and Homestake creeks. The bed rock is schist, and the gravels are from 8 to 10 feet deep, with an overburden of muck varying in thickness. The values are said to be chiefly concentrated on bed rock. The flood plain is several hundred feet wide, but the width of the pay streak was not learned. The largest plant at this locality includes in its equipment a hydraulic elevator.

No mining appears to have been done on the main Kougarok for several miles above Homestake Creek, though prospects are reported. In this stretch of the valley the river meanders from one side to the other, forming a series of symmetrical curves separated by sloping benches. These benches may carry gravels, but were not examined by the writer. A mile below Macklin Creek a little work was done in 1906 on the river gravels, here about 6 to 8 feet thick. An attempt to control the river by a small dam, so as to make the bed accessible to mining operations, was only partially successful.

Considerable mining has been done in the river bed about a mile above Macklin Creek, where the water has been diverted by a dam. The gravels here are about 6 to 8 feet deep, of which 18 inches to 3 feet 6 inches carries most of the gold. The pay streak is said to have in some places a width of 400 feet, but in these places the values are much less than where the pay streak is narrow. Values of 3 or 4 cents to the pan and pockets very much richer are reported. Most of the gold is dark, but a little bright gold is intermingled.

Several claims have been opened up at the mouth of Trinity Gulch. Here about 6 or 7 feet of gravel rests upon schist bed rock and is overlain by 4 or 5 feet of frozen muck. The gold from Trinity Gulch is bright; that of the river is dark. Above this group of claims the valley walls close in, forming a canyon. At the canyon an ill-defined bench lies about 20 feet above the river bed. At the lower end of the canyon the depth to bed rock is 12 feet, more than half of which is gravel. Above the canyon the gravels, which are 3 to 4 feet thick, are coarse and well rounded. The gold is dark and chiefly coarse, occurring in flat nuggets. Two miles above, at the mouth of Mascot Gulch, the river bed is about 300 yards wide, but the pay streak lies well toward the southern wall of the valley. The gravels in the river bottom are about 16 feet deep and have been mined by winter drift-

ing. The gold includes both the dark variety of the main river and the bright variety found in the tributaries. The pay streak is 2 to 3 feet thick and is said to have carried high values on the schist bed rock.

Considerable mining has also been done in Mascot Gulch, on a deposit similar to that at the head of Coffee Creek. (See p. 313.) Mascot Gulch has a steep slope toward the river and carries very little water. The bed rock is a blue mica slate or phyllite, with many quartz stringers. This is covered by 2 to 3 feet of subangular talus and decomposed bed rock much stained with manganese. The gold is distributed in patches irregularly on the bed rock. It is bright and angular, some of it showing crystalline faces. Much of it is attached to small fragments of quartz. Considerable cassiterite occurs in the concentrates. This gold is without doubt very near its source in the parent rock and is probably derived from a mineralized shear zone in the slates. Washed gravels are said to occur 100 to 150 feet above the river level on the slope of the ridge south of the Kougarok Valley at Mascot Gulch. A test pit at this locality is reported to have shown 40 feet of muck and talus overlying 10 feet of well-rounded gravel or "river wash." These gravels were found to be auriferous, but no values were discovered.

Above Mascot Gulch the valley floor widens out between gentle slopes and is entirely gravel filled. About a mile above Mascot Gulch some mining has been done with a hydraulic plant. Here the gravels are 3 to 7 feet thick, most of the values being on or near the bed rock. The valley floor is 400 to 500 feet wide. A series of prospect holes at this place showed washed gravels on bed rock 50 feet above the present water level. The bed rock of this bench is said to slope toward the axis of the valley. Gold has been found in the gravels above this point as far as Washington Creek, but no mining has been done. It is of interest to note that the limit of the distribution of the placer gold appears to be determined here, as elsewhere, by the limestone-schist contact.

The foregoing descriptions indicate a very wide distribution of gold in the Kougarok Valley, in both the bench and the flood-plain gravels. No high values are known to have been found, but many sections of the gravels of this valley can probably be mined at a profit. The bench gravels are easily workable by hydraulic methods where water is available.

WINDY CREEK.

Windy Creek, a western tributary of Kougarok River about 15 miles in a straight line above its mouth, is about 10 miles long and

along a small tributary from the south, called Anderson Gulch, which is merely a minor depression in the valley wall. A 4-mile ditch furnishes water under a 140-foot head. The gravels exposed in cuts and forming the pay streak are 2 to 3 feet thick, and in addition 1½ to 2 feet of bed rock carries some gold and is put through the sluice boxes. The bed rock is a silvery mica schist with much iron-stained quartz. These placers have been traced for 1,500 feet along the slope of the valley of Windy Creek. The known area of workable deposits is not large. Gold has been found in other parts of the basin, but not yet in paying quantities.

NEVA CREEK.

Some sluicing has been done in shallow gravels on Neva Creek, a tributary of the Kougarok from the east about one-half mile above the mouth of Windy Creek, but the production has been small.

NORTH FORK.

North Fork joins Kougarok River from the east about 25 miles above its mouth. It is about 10 miles long and flows nearly due west in a rather broad valley. Its important tributaries, from an economic point of view, are Harris and Eureka creeks. At its mouth North Fork carries in an ordinary season more than 1,000 miner's inches of water. The basin of this stream was the scene of the first gold discoveries in the Kougarok district, and some of the placers have yielded considerable values. The benches, of which possibly three different tiers are known, are prominent features, and their gravels are said to be auriferous. The following notes are by Collier and Hess:

The original discoveries of gold in the Kougarok region were made in 1900 on Harris Creek, a northern tributary of North Fork, about 7 miles from its mouth. Since then mining operations have been continuous, but the whole amount of gold produced up to 1903 probably did not exceed $50,000. The bed rock of North Fork and its tributaries consists of schists interbedded with limestones that are correlated on fossil evidence with the Port Clarence. A small amount of gold has been mined on Eureka Creek, a tributary of North Fork, about 1 mile above its mouth. The creek valley is narrow, but it contains some gravels consisting of schist and vein-quartz pebbles. The gold is mostly fine and the largest nugget found was worth only about 7 cents. Harris Creek, from the standpoint of gold mining, is the most important tributary of North Fork. The camp located here can be reached by pack train from Lanes Landing, which is about 30 miles distant, or, during high water, freight may be brought up Kougarok River in small boats within a few miles of the camp.

The plateau is well developed in this vicinity, but several limestone buttes rise above it. The largest of these buttes, known as Harris Dome, lies between Harris Creek and the main North Fork. The valley of Harris Creek is comparatively broad in its upper part, but within 2 miles of its mouth narrows to

a canyon. Through the upper 7 miles of its course the creek runs nearly southwest, then it turns somewhat abruptly and flows due south for nearly 2 miles to its mouth. It ordinarily carries from 200 to 300 miner's inches of water, but about 2 miles above its mouth the water sinks, and only after a heavy rain, when the creek is unusually full, does it carry water through its whole length.

The bed rock for 2 miles above the mouth of the creek is massive limestone, from which Silurian fossils have been obtained. It was impossible to make out the bedding of this limestone. Above the limestone area the creek flows for a number of miles over siliceous mica schist, which strikes to the northwest and dips to the northeast at a high angle, and which contains many small stringers of quartz. The headwaters of Harris Creek are in limestone somewhat similar to that near the mouth of the creek.

All the working gold placers are located within 3 miles of the mouth. For about 1 mile up the creek the valley is very narrow and, although the claims here have nearly all been worked, it is reported that they have yielded scarcely more than wages for the men employed. Above this stretch the gravel deposit is 4 or 5 feet thick and about 100 feet wide. A pit, 40 by 300 feet, 1 mile from the mouth, is said to have yielded $12 to $15 to the shovel. The bed rock is limestone, more or less shattered in some places, and the gold-bearing sediments extend downward in the crevices. Two miles from the mouth of Harris Creek the workings show a section about as follows: Brown sandy muck, 6 feet; gravel with values in the lower half, 4 feet, below which was broken limestone, in place, more or less weathered. It is reported that in one place this broken limestone material yielded on an average 2 cents to the pan from the surface down to a depth of 10 feet. When the claim was examined a strong stream of water was disappearing into a hole in the bed rock, indicating an underground channel. The fragments of limestone taken from this hole had a diameter ranging from a few inches to about 1 foot and the crevices between them were filled by a small amount of yellow clay sediment which carried the gold. The preparations for working claims near this point consist of two ditches, one from a small tributary called Left Fork and another from the main stream.

About 3¼ miles from the mouth the gravels have a considerably greater extent. The creek valley here is wider, and on the north side there is a gravel bench, slightly above the level of the creek, that has been prospected by a series of holes extending northward and is known to have a width of about 1,500 feet; throughout this distance good prospects of gold are reported. The workings at this point show 2 feet of muck above 6 feet of gravel resting upon 4 feet or more of broken limestone bed rock. The whole deposit from the surface down is reported to average 3 cents to the pan, which is equivalent to $4 or $5 a cubic yard. The best pay is not found in the present creek bed, but extends under the right bank. The claim here is worked by a short ditch that takes water from Harris Creek, and about 10 men were employed in 1903. Above this claim the bed rock of Harris Creek changes to a mica schist, and there are no more working claims. It is the common report that the gravels above this point do not carry gold in paying quantities, and certainly no pay gravel has yet been found.

To explain the origin of the gold placers on Harris Creek the following facts must be considered: The gold placers are confined to the part of the creek in which the bed rock is limestone and they have been found richest where the bed rock is broken up by fissures and crevices. A possible explanation of the distribution of the gold is that it was derived from small quartz veins contained in the limestone or from the limestone itself, but no evidence of such occurrence

was obtained by the writers, and no distinct veins in the limestone were seen, though they may have been overlooked. A second possible explanation is that an old channel crossed the ridge from Taylor Creek and entered the present valley of Harris Creek at the upper contact of the limestone area, where the present richest claim is found. A study of the topography fails to indicate that such a channel has existed, and no gold placers, which should exist in such a channel, have been found. A third and probably the true explanation of the occurrence of gold on Harris Creek is that it is derived from small quartz veins and stringers in the schist belt which crosses the creek above the limestone, and that it has been washed down the creek and concentrated in the broken bed rock of the limestone belt. This hypothesis is borne out by the facts that small quartz veins have been observed within these schists, that all the gold of Harris Creek is well rounded and waterworn, and that no large nuggets have been found. The failure to find gold in paying quantities within the schist belt may be accounted for by the fact that the schists do not form proper riffles for holding and concentrating fine gold.

The largest nuggets do not exceed $1 in value. The average value of the particles is less than one-tenth of a cent.

Gold in paying quantities has also been discovered in the gravels of North Fork itself, and in 1903 mining was in progress about a mile above the mouth of Harris Creek. North Fork here cuts across the massive Silurian limestone already described in connection with Harris Creek. In crossing this limestone belt the valley of North Fork is constricted, and a large part of the water sinks, but 300 to 400 miner's inches still flow on the surface. The stream gravel here consists mainly of limestone in more or less angular pieces. The workings are in the bed and under the north bank of the creek, and the gold is found partly in the gravel, but mostly in crevices between angular blocks of the limestone bed rock. These angular blocks are called "slide" by the miners, but are more probably residual bowlders from the weathering and solution of the limestone bed rock in place. This bed rock is mined to a depth of about 3 feet, below which there are still some colors of gold, but not enough to pay under present conditions. The gold is bright, clean, and well rounded. It is rather coarse, probably averaging 2 or 3 cents to the piece, and is easily saved in the sluice boxes. The concentrates consist mainly of hematite and magnetite.

A gravel bench a few feet above the present creek bed, on the north side, has also been prospected. The gravel consists of rounded schist and quartz pebbles and angular pieces of limestone, and is reported to yield fair prospects of gold, but it has not been mined. The occurrence of the gold here seems to be similar to that on Harris Creek, and it is more probably derived from small quartz veins in the schists, which outcrop farther up the creek, than from the limestones in whose crevices it is found.

COARSE GOLD CREEK.

The alluvium of Coarse Gold Creek is auriferous, but as yet little gold has been extracted. A hard diorite forms the bed rock of a part of the creek and does not afford a favorable surface for the concentration of values. The lower part of the creek is in schist and deserves the attention of prospectors.

ARIZONA AND CALIFORNIA CREEKS.

Arizona and California creeks are small streams near whose mouths are heavy gravel deposits. Both the flood plain and bench deposits have yielded gold. Considerable mining has been done on benches near the mouths of these creeks about 20 feet above the present water level.

HENRY CREEK.[a]

Henry Creek, which joins Kougarok River from the west about 35 miles from its mouth, is only about 15 miles long, but on account of its many tributaries it has a large drainage area and at its mouth carries between 1,000 and 2,000 miner's inches of water. One mile above its mouth the flood plain is more than 1,000 feet wide, and the creek flows in a very tortuous course. The bed rock consists mainly of graphitic and chloritic schists, containing many bodies of greenstone whose intrusive origin is evident. Limestone outcrops near the head of the creek. The gravels are made up of graphitic, chloritic, and calcite schist and greenstone pebbles.

Although there is evidence of some prospecting all along the creek, mining has been attempted at only one or two places. Two men were sluicing the gravel from the creek bed about 1 mile from the mouth in August, 1903. The gold is flat and comparatively coarse, the pieces probably averaging 5 or 6 to the cent, but it contains no nuggets worth more than 3 or 4 cents. All the gold is well rounded and iron stained. Half a mile farther up the creek three men were sluicing, but probably were not saving much gold, as work was suspended before the end of the season. From present indications it seems probable that there are low-grade placer deposits on Henry Creek which may be made to yield profits by more economical methods of mining than were in vogue at the time the examination was made.

DREAMY GULCH.[a]

Dreamy Gulch is a small depression, carrying little water at any season, which cuts across the hillside and benches on the east side of Kougarok River, about one-half mile above the mouth of Henry Creek. The whole hillside, as well as the head of the gulch, is gravel. Beneath the tundra, gravel from 3 to 5 feet thick rests upon a bed rock of dark, calcareous mica schist, 30 to 40 feet above the river bed. The gravel contains pebbles of mica and chlorite schist from one-half to 3 inches in diameter and large bowlders of well-rounded quartz up to 18 inches in their longer dimension. A few men worked here in 1903, and, although they had water for sluicing only when it rained, they probably averaged from $7 to $10 a day to the shovel. The gold is coarse, rusty, and well rounded. The largest nugget taken out was valued at $1.10.

TAYLOR CREEK.

Kougarok River forks about 38 miles from its mouth in two branches of about equal size. The eastern branch, called Taylor Creek, rises southeast of Midnight Mountain and flows westward to its junction with the Kougarok. The bed rock at its mouth is a dark

schist that extends northeastward to Midnight Mountain, but immediately south of that mountain, about 6 miles above the mouth of the creek, there are exposures of a massive limestone that is correlated with the Port Clarence. The creek cuts across the strike of the schists and limestones. Colors of gold are known to have been found on this creek and some of its tributaries, but not much mining has been attempted.

Some mining has been done near the mouth of the creek, where the placer deposits are similar to those of the flood plain of the Kougarok, of which they form an extension. Besides this the only mining attempted in this basin is on a small tributary called Solomon Creek. At the mouth of this stream there is a sloping bench, on which lies 3 to 7 feet of gravel covered by 8 to 10 feet of muck. The gravel is auriferous and has been mined in a small way, as have also the stream gravels of Solomon Creek one-half mile above its mouth.

HOMESTAKE CREEK.[a]

Homestake Creek enters Kougarok River from the west about 35 miles above its mouth, and is 4 miles long. It heads in the plateau at an elevation of 1,600 feet, and in the 4 miles of its length falls approximately 800 feet, averaging about 200 feet to the mile. Although gold was probably discovered here as early as 1900, active efforts at mining were not begun until 1902. In that year several thousand dollars in gold were produced along the creek. In general, the workings have yielded scarcely more than wages to the men employed.

The valley of the creek is broad. Nowhere along its course is a definite canyon developed. The bed rock consists of dark-colored graphitic and calcareous mica schist similar to that which prevails along this part of Kougarok River. In the creek bed and extending out from it for an undetermined distance are deposits of more or less stratified gravel, which in the bank are overlain by nearly pure ice covered by muck and moss. The creek bed is practically incised in the gravel deposits that cover the west wall of the Kougarok Valley. Some gold has been found in the gravel floor of Homestake Creek from its mouth to its head. One-fourth mile from the river the deposit consists of 4 to 5 feet of muck and fine sand resting upon bed rock. A pit about 20 by 50 feet in the creek bed has been mined out. The gold obtained is generally in larger and thicker pieces than the river gold and included one nugget worth $14.40.

Half a mile from the mouth a crosscut ditch showed about 5 feet of gravel resting upon bed rock. It is reported that on this claim some pans yielded as much as 25 cents each, and further tests show that all pans carried some gold, but that no continuous body of pay gravel was found.

One mile from the mouth a body of pay gravel 8 feet wide and 40 feet long has been worked out. The values in some places extended under the banks, beyond the limit of the workings, and probably some values have been left in the tailings. The owners of the claim estimated that the pay streak is possibly 40 feet wide. It is reported that near the head of Homestake Creek a pay streak 25 feet wide has been followed for a distance of 65 feet along the creek. The gold was coarse and the highest values were near the creek bed. It was not mined at the time of visit, as to work the claim economically a long drain ditch is needed.

[a] Description by Messrs. Collier and Hess.

In general, the pay streak along Homestake Creek is from 8 to 40 feet wide, and is confined to the valley floor, but not necessarily to the present stream bed. The gold is of a little lower grade than that from Kougarok River, and is in the main darkly stained.

MACKLIN CREEK.[a]

Macklin Creek joins the Kougarok at the great bend 40 miles above its mouth. The two valleys have the same axis, running about east and west, and the combined streams run southward, thus forming a T. An attempt to work placers along this creek in 1901 is described in a previous report,[b] but no work was in progress in 1903. Some spots of comparatively rich gravel have been found, but their development has been stopped by lawsuits. It seems probable that some of the gravels of Macklin Creek carry sufficient values to yield fair returns if worked economically.

COLUMBIA CREEK.[a]

Columbia Creek is another small tributary of Kougarok River about 6 miles above the mouth of Macklin Creek. It heads near Homestake Creek and flows northward. It is reported that twenty claims have been located along the creek, and that during 1903 one was being developed. The gold is said to be coarse, the largest nugget found being worth $10. Some of it is stained brown and black, but the rest is bright yellow. It is all more or less angular and some of it has quartz attached. Two men working on this claim obtained $220. There is probably considerable low-grade gravel along this creek that can not be worked profitably under present conditions.

CONCLUSIONS.

The investigations on which this report is based were entirely too inadequate to permit a final word on the value of the auriferous gravels of the district. That there are extensive alluvial deposits which may carry sufficiently high values to yield returns for economical mining no one can deny who has studied the field carefully. It is equally well known that as yet, with the exception of a few claims, no gravels of very high grade have been developed. Certain conditions already referred to are favorable to the probable extension of the placer-mining industry. One of these is the wide extent of the mineralization. If, as stated elsewhere in this report (p. 122), the zones of mineralization of the peninsula are most commonly found along or near the contacts of mica schist and limestone, then placers should be expected in the Kougarok region. As in other mineral-bearing districts of the peninsula, the bed rock is closely folded, faulted, and fractured, and mineralized quartz stringers are not uncommon, but have not been tested as to their gold content. In at least two localities the gold has been traced to its bed-rock source in the schists. So far as the present studies can determine, the bed

[a] Information by Messrs. Collier and Hess.

rock is no less favorable for the occurrence of gold here than in other districts of the peninsula.

The history of this province since it was last elevated above the sea, interpreted according to theories elsewhere presented, points to the concentration of gold in the alluvial deposits. The various epochs of erosion indicated by the bench deposits would promote the concentration of the heavier materials in the gravels. In several localities on Kougarok River the gold was probably derived by reconcentration from older elevated placers. Yet it must be said that, in spite of this reconcentration, the resulting placers have not been found to be as rich as those of similar origin in other parts of the peninsula. This fact points toward the conclusion that the bedrock source is not as heavily mineralized as in some of the other districts. The lower bench gravels of the Kougarok and of some of its tributaries are undoubtedly among the most important deposits of the district, if only because of their favorable position for cheap mining. The highest gravels (i. e., those above 50 or 60 feet) reported at various places have now little prospect of development unless they are far richer than any of the other deposits. Their topographic position makes it difficult, if not impossible, to hydraulic except at great cost. Experience has shown that the abundance of ground ice, the limestone masses, and the heavy talus all combine to make ditch construction and maintenance expensive.

The writer is unable to make a definite statement as to the gold tenor of the gravels in this field, for the results of the little prospecting that has been done are not available for this report. When the meager evidence is carefully weighed, it seems probable that $1 to the cubic yard must be considered high value for most of the placers of the district. Whether or not there are considerable bodies of gravel which carry such values, the writer is not prepared to state. While a gold tenor of $1 would be considered very rich in most placer camps, it is low compared with that of some of the auriferous gravels of Anvil and Ophir creeks. Nevertheless it is probable that gravels can be profitably mined at but a fraction of this amount in many places in this district.

The two dry summers of 1900 and 1906 make it evident that such climatic conditions must be reckoned with in counting cost, especially where large investments of money are made. Though during a wet season water is abundant, nevertheless the Kougarok region has no such reservoirs to draw on as the Kigluaik Mountains, which are being tapped by the Nome ditches, and this fact is emphasized by a dry season like that of 1906. At the present rate of ditch building every possible source of water supply will soon have been utilized. Here, as elsewhere, more careful prospecting of the ground would probably have curtailed some of the ditch building. It appears that

some operators have been too ready to believe without adequate prospecting that the values in the ground were sufficient to warrant large expenditures for ditch construction. This hit-or-miss style of mining has fewer odds against it in regions where the hope of finding bonanzas is better than in the Kougarok. It certainly can find no place in a region where the question of costs has to be carefully considered.

The Kougarok does not appear to be an inviting field for the miner without capital. Though considerable gold has been recovered by pick and shovel, on the whole the values thus far developed are not high enough to yield profits by such simple methods of mining. This is certainly true now, but conditions may alter with the reduction of costs of labor and supplies.

To recapitulate briefly, the following facts appear to be established: (1) Prospecting up to the present time, so far as known to the writer, has not established the existence of many bonanzas. (2) There are some extensive deposits of heavy auriferous gravels, yet it appears that but few of them have been sufficiently prospected to prove their values. (3) Water is far from abundant, but in many localities during most seasons is probably sufficient. (4) Mineralization, however, is widespread, as is also the gold in the alluvium. (5) Some of the bench deposits are very favorably located for profitable exploitation by hydraulic methods. (6) There is probably some ground which can be dredged, but as yet few facts in regard to it are available.

In the opinion of the writer the Kougarok district may become one of the important gold producers of the peninsula, though it is not to be expected that its output will ever be comparable to that of some of the older districts, such as Nome and Ophir Creek. It is a field where profits can be expected only by a careful counting of costs and conservative business management.

GEOLOGY AND MINERAL RESOURCES OF IRON CREEK.[a]

By PHILIP S. SMITH.

INTRODUCTION.

Iron Creek, one of the largest tributaries of the Kruzgamepa, joins that river near the great bend about 11 miles east of Salmon Lake. Although really continuous, Iron Creek bears three names in different parts of its valley; thus from its mouth to Left Fork, a distance of 7 miles, the stream is called Iron Creek; above Left Fork as far as Eldorado Creek, a distance of 1 mile, it is called Dome Creek, and from Eldorado Creek to the divide it is called Telegram Creek. This confusion of names is due to the interpretation of the mining laws which permits the staking of additional claims on different creeks—i. e., creeks having different names. There are four main tributaries, the three largest being from the south and the fourth and smallest from the north.

Owing to the fact that some errors occur in the reconnaissance map of 1900,[b] the only map prepared by the Geological Survey of this region, it has seemed advisable to correct such inaccuracies as were noted in a hasty trip along the stream in 1906. Much assistance in platting the district was afforded by the transit notes of a ditch survey made by J. M. Love, of the Gold Beach Development Company. A corrected map of the Iron Creek basin is shown in fig. 19. It will be noted that this basin is roughly triangular. The western side of the triangle forms the divide between the drainage of the Kruzgamepa and that of Iron Creek. The southern side of the triangle in the western part separates the Iron Creek drainage from the headwaters of Gassman and Venetia creeks, both tributaries of Eldorado River. The divide from Venetia Creek is low, being only about 800 feet above the mouth of Iron Creek, or 1,000 feet above the sea, so that it affords a good route for a road to Nome. The eastern portion of the southern side of the triangle forms the divide between the Iron

[a] Extract from Bull. U. S. Geol. Survey No. 314, 1907, pp. 157–163.

[b] Reconnaissances in Cape Nome and Norton Bay regions, Alaska, in 1900; a special publication of the U. S. Geol. Survey, 1901, pl. 17.

Creek and Casadepaga drainages. A low pass, with an elevation of about 1,000 feet, permits a fair wagon road to run up Telegram Creek and down Lower Willow Creek to the Council City and Solomon River Railroad, a distance from the junction of Iron and Canyon creeks of 13 miles. Now, however, that the Seward Peninsula Railway from Nome to the Kougarok has been completed beyond the mouth of Iron Creek, it is probable that with reasonable freight rates the use of the wagon roads will decrease, though freight is now

FIG. 19. Sketch map of Iron Creek basin.

delivered at Iron Creek by winter hauling from Nome for only 2 cents a pound. The northern side of the Iron Creek drainage basin forms the divide from Sherret Creek and several smaller streams which flow northward into the Kruzgamepa.

PHYSIOGRAPHY.

STAGES OF VALLEY CUTTING.

The physical features of the district are complex, and only the

slopes of the valley walls. In this portion the bed rock is so covered over that exposures are practically wanting. This is due to a period of erosion and the accumulation of a heavy mantle of waste that reaches nearly to the top of the divide. The higher portions of the divides are generally bare, consisting of fantastically curved pinnacles of rock from which taluses with steep slopes, practically uncovered by vegetation, descend, gradually merging with the smoother moss-covered slopes of the middle portion of the valley walls.

The streams in their lower courses flow in rock-walled canyons. In tracing any one of the streams headward the canyon is found to decrease in height and to merge gradually with the older topography previously mentioned. The history of these features suggests that the former topography of gentle slopes and wide, open valleys was produced by the long-continued erosion of rivers and weathering. Subsequently uplift of the region renewed the down-cutting power of the streams, so that canyons were carved in the floors of the old valleys. This erosion allowed rapid reassortment of the old gravels and waste and thus effected the concentration of any gold or other heavy minerals which may have been contained in the gravels.

The canyon cutting ceased, however, before it had progressed beyond the lower portions of the streams. The interruption was produced either by a movement of the land or, as is more probably the case, by a climatic change which decreased the amount of water transported by the streams. Such a change may have also been responsible for the disappearance of the local glaciers which were formerly present in the Kigluaik Mountains. Whether the climatic change had anything to do with the retreat of the glaciers or not is, however, of slight importance in this discussion. Some change must have occurred, for the streams are no longer down-cutting, but actually building up the floors of their valleys. The reason for believing that the change must have been one which affected the rainfall rather than the elevation of the district with respect to sea level is based on the shape of the rock canyon. The canyon has a broad, swinging course which is so symmetrical that it could not have been produced by the straggling present stream, which occupies only a small portion of the floor between the rock walls. Many other streams in different parts of Seward Peninsula show this same feature. The extensive development of this phenomenon suggests a widespread cause, such as climatic change, rather than a local cause, such as uplift.

EVIDENCES OF GLACIATION.

Another feature of some theoretical interest is the presence of granite bowlders on the divide near the low sag at the head of Mattis Creek. In the rapid reconnaissance it was impossible to examine the district with sufficient care to make a final statement as to the origin

of these bowlders. It is known, however, that there is no granite of similar character south of the Kigluaik Mountains. Furthermore, the granite bowlders are unweathered, showing that they have not been in their present position a very long time geologically. Although the question has not been carefully studied in the field, it is suggested that possibly these bowlders have been brought by glaciers from Kigluaik Mountains and carried into their present position by ice blocks floating on a lake formed by glacial obstruction of the drainage. This suggestion is to be regarded only as a working hypothesis, but it fits in with the known facts, which may be summarized as follows: The angular, unweathered form and foreign character of the granite and the presence of shore lines at considerable elevations. Lakes of this type are common in regions that are at present glaciated, and evidences of such lakes have been recognized in many places where glaciers have now disappeared.

GENERAL GEOLOGY.

The bed rock of the district belongs to the Nome series. It consists of a series of much faulted and contorted limestones and schists and some greenstones. The greatest development of limestone occurs in the lower part of Iron Creek, but a great number of thinner beds interlaminated with schists are encountered even up to the headwaters. It is believed that the numerous alternations of schist and limestone are indicative of the source of the Iron Creek gold. Although no extensive proof of mineralization at the limestone-schist contacts has been found in this locality, the fact that such contacts are the loci of mineralization has been very well established in other parts of Seward Peninsula.

The rocks of the Iron Creek district trend northeast and southwest and dip toward the southeast, but there are numerous exceptions to this general direction, as the rocks are complexly folded and faulted. The deformation and consequent shattering that the rocks have undergone has undoubtedly resulted in the formation of zones of pervious rock in which mineralization has taken place. The streams also have taken advantage of the northeast-southwest structure and practically all the tributaries are arranged parallel to this direction.

In lithologic character the rocks are similar to the Nome series as described for other parts of the field. The schists present two main lithologic facies, namely, graphitic and chloritic. No boundary between the two can be drawn at the present time, although it is believed that detailed study would solve their interrelation and structure. The chloritic schists are most extensively developed in Iron Creek

quartz are the only minerals distinguishable in hand specimens. Graphitic schists are most abundant on Telegram Creek above Eldorado Creek. These rocks are in general but slightly schistose and would better be described as dark, nearly black, graphitic quartzites, with here and there schistose phases. Hand specimens show considerable quartz and a little chlorite. The other constituents are not distinguishable by the eye, through the presence of graphite is recognized by its soiling the hands. Here and there some sulphides are found, especially in the places where dislocations occur.

The greenstones which occur in the Iron Creek region have not been studied in detail, but seem to be similar to those found in the adjacent country nearer Nome. If this correlation is correct, they are mainly of intrusive origin. Rumors were heard of an extrusive flow of greenstone south of Iron Creek, but neither was it found in place nor was any float of an extrusive greenstone seen, so that doubt is felt about the occurrence of a surface flow.

MINING DEVELOPMENTS.

GENERAL CONDITIONS.

Mining on Iron Creek has been much retarded by the inaccessibility of the region, but this obstacle is now disappearing with the building of railroads and wagon roads. Freight from Nome can now be delivered by the Seward Peninsula Railway at the mouth of Iron Creek, but the schedule of rates was not learned. It has already been noted that in winter supplies can be brought in by team at a cost of 2 cents a pound. The cost of summer hauling by team to Iron Creek is now, owing to the fair condition of the road to Nome, but little higher than the winter rate.

DITCH CONSTRUCTION.

In 1906 work on Iron Creek and its tributaries had almost ceased at the time of the writer's visit in the later part of September. With one exception the work for the season seemed to have been carried on by small outfits of only one to five men each, and a liberal estimate of the output of the creek and tributaries for the year would not exceed $50,000. The most important work during the last season has been ditch construction, about 13 miles having been built. One ditch taps Eldorado Creek at a point 1 mile above its junction with Telegram Creek and leads the water along the south wall of Iron Creek to a penstock near the junction of Discovery and Iron creeks. A second ditch takes water from Canyon Creek 5 miles above its mouth and leads it along the east wall of Iron Creek.

thence following the south slope of the valley to the west side of Discovery Creek, along which it runs southward to a point 2 miles above the mouth of the stream, where it crosses and extends along the east side of the valley to the penstock previously noted. Another ditch on the north side of Iron Creek, which takes its water from the junction of Telegram and Eldorado creeks, is also being constructed by the same company. Between sixty and seventy men at a time have been employed in the construction of these ditches. They were not completed until the latter part of September, so that water for washing the gravels was available for only about two weeks. The ground operated at present by the company is on Iron Creek at the mouth of Discovery Creek. A hydraulic elevator has been installed to handle the flood-plain gravels, and active mining operations will be conducted during the coming year.

MINING ON MAIN STREAM.

Between Discovery Creek and Left Fork on Iron Creek there is a fractional claim which has been worked for the last two years on a small scale. From one to five men have been employed on this claim all summer. The gold is coarse and easily saved. Both rusty and bright gold are found. The values occur in a thin pay streak on limestone and in the cracks and crevices of this bed rock. The small amount of ground in this claim has prevented any large-scale developments.

At the junction of Left Fork and Iron Creek three men have been continuously employed all summer working creek gravels. The method of working these gravels has been by means of a bed-rock drain and sluice boxes. Several nuggets worth $30 or $40 each have been found in this place. The bed rock is a much shattered limestone with thin bands of chloritic schist both above and below it.

A short distance upstream from Left Fork the largest nugget recorded from Iron Creek was found. This nugget weighed over 30 ounces and was valued at $600 on the assumption that the gold was worth $18.50 an ounce. It is a fact of some significance that upstream from this point, which is about half a mile above Left Fork, all the gold is rusty, whereas below both rusty and bright gold occur. The reason for the absence of bright gold above is believed to be that this point marks the place where the older and newer valleys merge. In other words, upstream the creek flows in the nearly unmodified old valley, while downstream it has cut below that level. The result of the down cutting has been to wear some of the gold and expose fresh, shiny surfaces, whereas the gold that has been practically un-

Between Left Fork and Eldorado Creek only one camp was in operation in 1906. Five or six men have been at work at this place, but as it is understood that this portion of the creek has already been worked over three times it is doubtful whether subsequent work will be remunerative. The gravels are apparently similar to those already noted.

Above Eldorado Creek the main stream, as has been previously stated, is called Telegram Creek. One man only has been at work on this stream during the last year. This claim is located at a point about a mile from the divide. The bed rock is mostly graphitic schist with some thin limestone and schist bands. Several nuggets, worth as much as $100 apiece, have been found on this claim, and it is reported that very coarse gold is found even on the crest of the divide from Willow Creek. The water supply of Telegram Creek is small, especially in a dry year, such as 1906. Often this lack has hindered or in large measure prevented exploration of the gold gravels that have been found by prospectors in this part of the Iron Creek basin.

MINING ON TRIBUTARIES.

On the tributaries of Iron Creek but little work has been done. Bunny Creek, the fifth stream which enters from the west below Canyon Creek, in not over three-fourths of a mile in length. Two men have done a little work on this stream last summer, but it probably produced not more than $100 or $200. On Bobs Creek, the next small stream south of Bunny Creek, the only work done during the last season has been on the upper part. This claim has been worked with water brought over the divide from Willow Creek, the first tributary of the Kruzgamepa east of Rock and Slate creeks. Considerable trouble has been experienced with the ditch, as a large part of it is built on frozen ground, which melts under the water. This ditch carries only about 400 miner's inches of water. Even this small amount is more than is yielded throughout the season by Willow Creek, and it is proposed to extend the ditch next year 3 or 4 miles to Slate Creek.

Easy Creek, which enters Iron Creek from the east opposite Bobs Creek, has shown good values in the lower portion. Three men were at work at this place last summer, but closed down rather early in the season owing to the drought. Little more than assessment work has been done on the other claims along Easy Creek. The next small stream to the south is Lulu or Benson Creek. Four men have been operating on this creek the entire summer. On Rapid, Rocky, and Rabbit creeks, the three other small tributaries of Iron Creek from the west below Canyon Creek, little more than assessment work has been done during the last season, although they are completely staked.

Except on Canyon Creek, no work has been done on any of the larger tributaries of Iron Creek. On a little tributary of Canyon Creek, called El Patron Creek, about 3 miles above the junction with Iron Creek, one man has been at work all summer. However, but very little gold has been produced, owing to the lack of water. It is expected that with the completion of the Canyon Creek ditch, water may be purchased, so that work will be pushed with greater activity in the coming summer.

SUMMARY.

In summarizing the Iron Creek region it may be said that the gold is mostly coarse and easily saved; that it has been derived from a relatively local source; that water for the economic development of the placers is at hand; and that the questions of freighting and transportation are rapidly being effectively and satisfactorily settled.

INDEX.

A.

Page.

Agiapuk River, basin of, placers in..... 271-273
description of..... 50, 271
gravels on..... 89
Alaska Gold and Silver Mining, Milling, and Trading Co., operations of..... 14
Albion Gulch, placers on..... 254
Alder Creek, placers on..... 273, 275-276, 279-280
Allene Creek, placers of..... 272
Alluvial deposits, age of..... 93
occurrence and description of... 92-93, 298-300
origin of..... 93
Alveolites sp., occurrence of..... 76
American River, placers of..... 272-273
Anikovik River, placers on..... 281
Antimony, occurrence of..... 223
Anvil City. *See* Nome.
Anvil Creek, placers of... 16-18, 31, 169-170, 186-192
section on..... 190
figure showing..... 189
Anvil Peak, placers on..... 206-207
Arizona Creek, placers on..... 324
Arctic coastal plain, gravels of..... 86
Attorney, power of, abuse of..... 19-20
Auriferous areas, extent and tenor of.. 135-139, 141

B.

Balm of Gilead Gulch, placers on..... 254
Balto Creek, gold on..... 196
Banner Creek, placers on..... 181, 265
Bar placers, description of..... 170-198
Barnard, E. C., work of..... 7-8
Basalts, occurrence and description of.... 101-103
Basin Creek, placers on..... 174-175, 261
section on..... 175
Batholiths, occurrence of..... 104
Beach, old lines of..... 36, 37, 157-165
old lines of, map showing..... 161
ownership of..... 22-23, 26
second line of, gold of..... 36, 158
third line of, gold of..... 37, 160-165
Beach placers, description of..... 142, 145, 151-156
gold yield of..... 151, 156
section of, figure showing..... 155
working of, method of..... 151, 155-156
Beach sands, character of..... 151-153
dredging of..... 26
gold in..... 22-26, 30, 152-156
source of..... 154-155
Bears, existence of..... 56
Becker, G. F., on southern Appalachian placers..... 126
Bed rock, gold deposits in..... 116-128
gold deposits in, relation of placers and. 121
gold deposits on..... 128-130
plate showing..... 178
separation of gold from..... 125-127

Page.

Bench gravels, gold in..... 27, 34
occurrence and description of..... 93-94, 112
section of, figure showing..... 189
See also High-bench deposits.
Bench placers, description of..... 142, 143, 170-198
position of, figure showing..... 247
Bendeleben, Otto von, exploration by..... 13
Bendeleben Mountains, description of..... 44
Benson Creek, placers on..... 335
Bering Creek, placers on..... 273, 280-281
Bering Sea coastal plain, gravels of..... 86-88
Berries, occurrence of..... 56
Big Four Creek, placers on..... 264
Big Hurrah Creek, lode mining on 38, 116, 223, 228-232
placers on..... 225, 227-228
Big Hurrah mine, description of..... 228-231
map and section of..... 229
Birch Creek, placers on..... 264
Blake, H. L., gold discovered by..... 15, 16, 17
Bluestone River, basin of, placers on. 28-30, 273-281
description of..... 49, 273
section on..... 275
Bluff, description of..... 58
use of churn drill near, plate showing ... 192
Bluff region, description of..... 283
geology of..... 285
impregnated zones of, character of, figure showing..... 292
placers of..... 288-293
production of..... 283
topography of..... 284
sections in..... 290
Boer Creek, placers on..... 182
Bonanza Gulch, placers on..... 194-195
Boulder Creek (of Sinuk River), placers of. 217
Boulder Creek (of Snake River), placers on 196-197
Boulder Creek (of Turner Creek), placers on. 314
Boulders, glacial, occurrence and description of..... 97-99
occurrence of, plate showing..... 252
Bourbon Creek, gold at..... 160, 162-163, 167
section on..... 167
Brooks, A. H., introduction by..... 7-9
on beach placers..... 151-156
on development of mining industry 10 39
on Bluff region..... 283-293
on coastal-plain placers..... 156-158
on drainage..... 48-50
on economic geology..... 111-139
on geology..... 61
on placers.....144-145, 174, 181, 187, 195, 258-260
work of..... 7, 8
Brooks, A. H., and Schrader, F. C., on high-bench placers..... 198
Brynteson, J. J., development by.... 15-16, 17-18
Buck Creek, tin and gold on..... 281

Page.

Buckland River, description of..... 50
Buhner Creek, gold on..... 269
Bunny Creek, placers on..... 335
Buster Creek, gold placers on..... 172–174
section on..... 173
Bythopora, occurrence of..... 76
Bythotrypa sp., occurrence of..... 75

C.

Cache Creek, gold on..... 233
California Creek, placers on..... 324
California placers, comparison of Seward peninsula placers and..... 11–13
comparison of Seward placers and, figure showing..... 12
output of..... 137–138
Calithium, occurrence of..... 75
Camp Creek, placers on..... 256
Candle Creek, gold on..... 30, 31
Canyon Creek, placers on..... 265
Caribou, extinction of..... 56
Caribou Bill claim, description of..... 126, 200
Casadepaga River, placers on..... 15, 27, 257–260, 264–266
lodes of..... 120
Cassiterite, occurrence of..... 109–110, 118
Cassiterite Creek, tin on..... 120
Charley Creek, placers on..... 216
Checkers Creek, gold on..... 312
Chicago Creek, lignite on..... 36
Churn drill, use of, view of..... 192
Cinnabar, occurrence of..... 118
Cladopora, occurrence of..... 75, 76, 77
seriata, occurrence of..... 76
Claim jumping, activity in..... 18, 20–22
Climate, description of..... 50–54
Coal, occurrence and development of..... 36, 83–85, 108, 418
Coal Creek, coal on..... 83–84
placers on..... 217
Coarse Gold Creek, placers on..... 323
Coastal-plain gravels, reconcentration of..... 166–170
Coastal-plain placers, description of..... 156–170
gold in..... 157
Coffee Creek, placers on..... 308, 312–313
Collier, A. J., on Boulder Creek placers..... 314
on geography and geology of peninsula..... 40–110, 112–113, 124
on geologic history..... 300–303
on occurrence of gold placers..... 133, 134
on tin lodes..... 120
work of..... 8, 9, 33, 285, 294
Collier, A. J., and Hess, F. L., descriptions of placers by..... 140–259, 321–326
Columbia Creek, placers on..... 326
Columnaria, occurrence of..... 75
Columnaris, occurrence of..... 76
Commercial features, description of..... 57–60
Concentrated gold deposits, description of..... 118–120
Conchidium coppingeri, occurrence of..... 76
Contacts, limestone-schist, mineralization

Page.

Copper ores, occurrence of..... 132
Council, description of..... 58, 235–236
Council district, gold of, yield of.. 30, 32, 34, 35, 37
Council precinct, description of... 233–234, 235–236
geology of..... 234–235
placers of..... 236–266
Creek placers, description of.. 142, 144–145, 170–198
Creek valley, typical, view of..... 58
Crim, Leslie, aid of..... 33
Cripple River, basin of, description of..... 209–211
basin of, placers in..... 210–211
placers on..... 211–215
Crooked Creek, bowlders on, plate showing. 252
placers on..... 251–253, 262
Cyrtoceras, occurrence of..... 78
Cyrtorizoceras, occurrence of..... 78

D.

Dahl Creek, placers on..... 307, 308, 312
sections on..... 312
Daniels Creek, cliff exposure near, figure showing..... 285
hydraulic mining on, plate showing..... 284
placers of..... 27, 29, 30, 283, 288–293
map and section of..... 287
Darby Mountains, description of..... 44
Deer, occurrence of..... 56
Deer Gulch, placers on..... 180
Dewey Creek, placers on..... 174
Dexter, John, enterprise of..... 14, 17
Dexter Creek, placers on..... 176–181
Dexter-Dry divide, placers of..... 207–209
section on..... 208
Dikes, occurrence and description of..... 99–100
Diller, J. S., on wave sorting..... 155
Diphyphyllum multicaulis, occurrence of... 76, 77
Disseminated gold deposits, description of..... 117–118
Districts, creation of..... 57
Ditch, view of..... 242
Ditch building, progress of..... 29, 31, 32–33, 36
Divide Creek, placers on..... 182
Dixon Creek, placers on..... 264
Doroshin, exploration by..... 13–14
Dorothy Creek, placers on..... 181–182
Drainage, account of..... 42, 48–50
Dreamy Gulch, placers on..... 324
Dredges, employment of..... 36, 37
employment of, plate showing..... 232
Dry Creek, gold on..... 160, 162–163, 168, 169, 184–186
section on..... 169, 185
Dry-Dexter divide, placers of..... 207–209
section on..... 208
Dutch Creek, placers on..... 251, 262

E.

Ear Mountain, description of..... 105
Easy Creek, placers on..... 335
Economic geology, account of..... 111–139
El Dorado mining district, organization of.. 17, 18
Eldorado River, description of..... 49

Page.

Endoceras ... 78
Erosion, epochs of ... 47
gold placers due to ... 125
levels of, figure showing ... 47
Extra Dry Creek, placers on ... 175–176

F.

Fairhaven district, gold of, yield of ... 30, 32, 34, 35, 37
schists of ... 79
Fairview Creek, placers on ... 218–219
Favistella reticulata, occurrence of ... 76
Favosites favosus, occurrence of ... 75
gothlandicus, occurrence of ... 75
niagarensis, occurrence of ... 75
sp. occurrence of ... 76
Feather River, placers on ... 219–220
Fish, occurrence of ... 56
Fish River, description of ... 48–49
gold on ... 14, 15, 236
gravels on ... 90
rocks on ... 68
Fish River mining district, organization of. 14
Fissure veins, character of ... 118, 119–120
Forage, character of ... 54–55
Fossils, occurrence of ... 75–79, 81–82
suggestions concerning ... 79
Fox River placers on. ... 236–238
Fracture, impregnated zones of ... 118–119, 120
figure showing ... 292
tenor of ... 119
Freight, landing of, at Nome, plate showing. 58
transportation of ... 60

G.

Galena, discovery of ... 14, 15
lodes of ... 120
occurrence of ... 109
Game, occurrence of ... 56–57
Garfield Creek, gravels on ... 309, 313–314
placers on. ... 306, 313–314
Geography outline of ... 41–60
Geologic history, outline of ... 300–306
Geologic maps of peninsula ... Pocket
description of ... 63–64, 134–135
publication of ... 61
Geology, descriptive, account of ... 60–107, 147–148, 297–300
Geology, economic, account of ... 111–139
Gerdine, T G., work of ... 8, 40
Gilbert, J J. work of. ... 8
Girty G. H., fossils determined by ... 81–82
Girvanella, occurrence of ... 75
Glacial action, relation of, to placers ... 131–132
Glacial deposits, occurrence and description of ... 96–99
Glaciation, nature and extent of ... 94–96
Glacier Creek, hydraulic elevator on, view of. 192
placers on. ... 18, 192–194
Gold, character of ... 153
deposition of ... 128

Page.

Gold, discovery of ... 13–19
distribution of ... 140–142
occurrence of, in bed rock ... 116–125
occurrence of, in placer deposits .. 109, 128–131
production of ... 11, 28, 31–38, 140
source of ... 112–113, 116–124, 121, 132
separation of, from bed rock ... 125–127
transportation of ... 128, 132
Gold-bearing regions, comparison of, with California and Klondike ... 11–13
comparison of, with California and Klondike, figure showing ... 12
extent and value of ... 135–139
Gold deposits, concentration of ... 129–131
occurrence of, in bed rock ... 116–128
in gravel. *See* Gold placers.
Gold-placer mining, future of ... 135–139
Gold placers, classification of ... 115, 142–146
descriptions of ... 146–282
distribution of ... 121–122
explanation of ... 131
genesis of ... 114–115
prospecting for ... 133–134
reconcentration of ... 129–131
figure showing ... 162
relation of bed-rock gold and ... 121
types of, descriptions of ... 116–120, 142–146
Gold placers, concentrated, description of. 114–115
Gold placers, residual, description of ... 114–115, 125–127
Gold placers, sorted, description of ... 114–115
Gold Run, placers on. ... 273, 275–279
Goldbottom Creek, placers on ... 197, 254–255
placers on, working of, plate showing ... 252
Golofnin Bay harborage in ... 43
Golofnin Sound, gravels of ... 89
Goodhope Bay, harbor at ... 43
Goodhope precinct, description of ... 281–282
placers of. ... 282
Goose Creek, placers on ... 265
Government, character of ... 57
Granitic rocks, intrusion of ... 124–125
occurrence and description of ... 103–108
Grass Gulch, bed rock on, plate showing ... 178
gravels of, plate showing ... 178
placers on ... 176–180
section on ... 178
Gravel-plain deposits, age of ... 91–92
gold in, estimate of ... 136–137
occurrence and description of ... 86–90, 111–112
origin of ... 90–91
plate showing ... 178
reconcentration of ... 166–170
Gravel-plain placers, description of ... 142, 144, 156–170
Green, J. C., exploration by ... 14
Greenstones, occurrence and description of. 99–101
Grouse Gulch (of Dexter Creek), placers on. 176, 180–181
Grouse Gulch (of Goldbottom Creek), placers on ... 197–198
Grub Gulch, placers in ... 197
Guarick, Tom, gold found by ... 17

H.

Page.

Haggalin, J. L., prospecting by 16
Halysites catenularia, occurrence of 75
catenularia fieldeni, occurrence of 76
Harbors, description of 43
Harris Creek, placers on 306, 321–323
Hastings Creek, gold at 159, 160, 164–165, 167
section at 159
Hayes, C. W., on quartz weathering 126
Hefty, H. G., work of 8
Henry Creek, placers on 324
Hess, F. L., on occurrence of gold 133
on tin lodes 120, 124
work of 8, 9, 33, 40, 41, 61, 76, 116, 294
Hess, F. L., and Collier, A. J., descriptions of placers by 140–259, 321–326
High-bench deposits, age and origin of 94
gold in 133–134
occurrence and description of 93–94, 133
section and map of 201
High-bench placers, character of 198–199
description of 199–209
Hillside placers, description of 142, 144
History, outline of 10–39
History, geological résumé of 112, 300–306
Hobson Creek, placers on 181
Hormotoma, occurrence of 76
bellicincta, occurrence of 78
Holyoke Creek, gold on 165, 167
Homestake Creek, placers on 325–326
Hot Air bench, placers on 194
Hot Spring, occurrence of 297
Hultberg, N. C., prospecting by 16
Hume Creek, placers of 220
section on 220
Hungry Creek, placers on 214
section on 214
Hunter, William, gold found by 288
Hydraulic lifts, use of 33, 34–35
view of 192
Hydraulic mining, plate showing 284

I.

I X L Gulch, placers on 237–238
Ice, prevalence of 53–54
Ice age. *See* Glaciation.
Igloo Creek, placers of 218
Igneous rocks, gold in 113
occurrence and description of 63–64, 99–110
Illænus tauricornis, occurrence of 75
sp., occurrence of 75, 76
Impregnated zones, character of 118–119
character of, figure showing 292
Imuruk Basin, drainage of 49–50
gravels of 88–89
Independence Creek, placers of 217
Iron Creek basin, description of 329–330
ditches on 333–334
geology of 332–333
gold in 51
map of 330

J.

Page

Jarvis, D. H., energy of .....
Jerome Creek, placers on 225–
Jess Creek, gold of .....
Johansen, —, gold found by .....
Judicial district, establishment of .....

K.

Kasson Creek, placers on .....
Kaviruk River, description of 49
Kenai formation, character of .....
Kiglualk group, occurrence and description of 66–69, 113,
unfavorableness of, for placers .....
Kiglualk Mountains, description of .....
Kiglualk series. *See* Kiglualk group.
Kingegan, description of .....
King Mountain, placers on 199–
section and map of .....
Kittleson, A. N., prospecting by 16
statement by .....
Klondike placers, comparison of Seward peninsula placers and 11
comparison of Seward peninsula placers and, figures showing .....
output of 11, 137,
Kotzebue Sound, gold on .....
Kougarok region, access to 59,
alluvium 298–
description of .....
ditches in 307–
geology of 297–306, 309–310,
recent history of 300–
gold of, source of .....
map of .....
placers of 306–
yield of 28, 30, 32, 34, 35
topography of 295–297, 309,
Kougarok River, description of 315–
placers on 27, 306, 308–309, 316–
Kougarok River (North Fork), placers on 321–
Koyuk River, description of .....
Kromchenko, survey by .....
Kruzgamepa River, basin of, placers in 266–
description of 50, 266–
gravels on 88
Kugruk group, correlation of 61
Kuzitrin formation, character of .....
occurrence and description of 69
Kuzitrin River, description of .....
gravels on .....
Kuzitrin series. *See* Kuzitrin formation.
Kwik River, description of .....

L.

Last Chance Creek, placers on .....
Lawson Creek, placers on 272
Libby, D. B., gold discovered by 1
Lightering freight at Nome, plate showing .....
Limits, for claims of .....

Page.
Limestone-schist contacts, mineralization at 121-122, 132
Lindblom, E. O., gold discoverd by 16, 17
Lindblom Creek, gold on 196
Lindeberg, Jafet, gold discovered by 16
letter from 16-18
Lion Creek, placers on 232
Lithostrotion, occurrence of 81
Little Creek, gold of 34, 36, 162-163
Lode mining, cost of 11, 33, 38, 116, 133
future of 138
Lodes, existence of 116, 132, 286
Lonsdalea, occurrence of 81
Lophospira, occurrence of 75, 76
Lower Willow Creek, places on 265-266
Lowlands, description of 44-48
gravels of 88-90
Lulu Creek, placers on 335

M.

McConnell, R. G., on Klondike region 137, 138
Macklin Creek, placers on 326
Maclurea magna, occurrence of 76
Maclurina manitobensis, occurrence of 75, 76
Manila Creek, places on 225-226
Map of Iron Creek basin 330
of Kougarok region 295
of Nome region, showing distribution of places 150
of Seward peninsula ..... Pocket
northern part of ..... Pocket
showing distribution of vegetation. 55
southern part of ..... Pocket
showing precincts 42
Map, geologic, of Ophir Creek region 123
of peninsula ..... Pocket
Marbles, occurrence of 74
Mascot Gulch, gold of 315, 320
Mattie claim, description of 201-203
section at 202
May Creek, placers on 215
Megalomus, occurrence of 77
Melsing, L. S., gold discovered by 15, 17
Melsing Creek, placers on 15, 17, 240-242, 260-261
sections on 241
Mendenhall, W. C., on Fish River gravels 90
on granite occurrences 106
on rocks of Fish River 68
work of 7, 8
Merrill, G. P., on rock weathering 126
Metamorphic rocks, description of 66-83
Mineralization, age of 124-125
belts of 117
distribution of 121-124
evidence of 132
Mining, costs of 39, 141
development of 10-39
future of 135-139
Miocene ditch, construction of 29
Moffit, F. H., on extent of auriferous areas 135-136
on Fairhaven rocks 107-108, 113, 124
on geologic history 302
on third-beach line 160-165
work of 8, 9, 40, 61, 101, 116
Moonlight Creek, placers on 266
Moraines, occurrence and description of 96-97

Page.
Mordaunt, A. P., gold discovered by 15, 17
Mountain Creek, placers on 212, 214
Mountains, description of 44
Mud Creek, placers on 240
Mukacharni Mountain, character of 102
Mystery Creek (of Niukluk River), placers on 240
Mystery Creek (of Shovel Creek), placers on 226

N.

Navigation, close of 53-54, 59-60
Nekula Gulch, placers on 200, 201, 205
Neva Creek, gold on 321
Newton Gulch, gold on 168, 183-184
section on 169, 184
Niukluk River, basin of, placers on 238-260
description of 49, 238
dredging on 238-239
gold discovered on 13
gravels of 89
placers on 238-239, 263-264
sections on 263
Nome, beach lines at 36, 37, 157-165
beach lines at, figure showing 161
conditions at 19-27, 38
description of 23, 25, 57-58
gold of, yield of 24, 28, 30, 32, 34, 35, 37
lightering freight at, plate showing 58
rush to 19, 24
Nome group, character of 62, 65, 113
gold in 113
occurrence and description of 70-82, 147
Nome precinct, description of 146-147
development of 149
geology of 83, 147-148
gravels of 86-87
history of 15-39, 148-149
organization of 18-19
placers of, description of 149-233
topography of 146-147
Nome region, beach placers of 151-156
beach placers of, yield of 151, 156
section of, figure showing 155
coastal-plain placers of 156-170
geology of 149-151
placers of, distribution of, map showing 150
Nome River, basin of, placers of 171-182
description of 49, 170
Nome series, correlation of 61-62
See also Nome group.
Novapaga, tributaries of, mining on 314
Nuggett Creek, placers on 212, 213-214

O.

O'Brien, W. J., aid of 33
Offield Creek, placers on 271
Omalik, galena at 15, 109, 120
Ophir Creek, canyon of, views of 242
ditches on 30
placers on 15-17, 31, 242-250, 261-263
yield of 24, 34, 35
region of, geologic map of 123
sections on 246, 247
valley of, diagram of, showing placers 247

Page.

Oregon Creek, placers on 211-213
section of 212
Orthis parva, occurrence of 75
Orthoceras, occurrence of 76
Osborn Creek, gold near 165, 171-172
Otter Creek, gold at 162

P.

Paige, Sidney, work of 40
Paluzruk, limestone near 81-82
Parantulik River, water from 261-262
Pay streak, average thickness and tenor of 135, 136
Peat, occurrence of 56
Peluk Creek, gold on 165
Penelope Creek, placers on 265
Peneplain, existence of 127
Penny Creek, placers on 227
Peters, W. J., work of 7
Pine Creek, gold on 233
Pioneer Gulch, placers on 183
Placer mining, future of 135-139
views of 192, 232, 242, 252, 284
Placers. *See* Gold placers.
Population, increase of 10
Porambonites interedens 75
Port Clarence, harbor at 43, 58, 270
Port Clarence limestone, character of 65, 71, 72
correlation of 61-62, 72, 74
fossils in 75-79
occurrence and description of 73-79, 147
Port Clarence precinct, description of 268-270
geology of 268-270
placers of 269, 270-281
Posepiny, F., on gold concentration 129
Post Creek, lode near 264
Pratt, J. F., work of 8
Precincts, creation of 57
map showing 42
Precipitation, description of 52-53
Price, G. W., prospecting by 16
Prospectors, hints to 131-135
Pumpelly, Raphael, on rock weathering 126
Pumping plants, construction of 29-30, 33
Purington, C. W., on Alaska mining 139
work of 40

Q.

Quartz Creek, gravels on 298-299, 305, 306, 309-313
placers on 215, 306, 311-313
Quartz veins, occurrence and description of 108-110
Quaternary sediments, occurrence and description of 87-99

R.

Railways, construction of 27, 29, 32, 35, 37-38, 58-59, 60, 148
cost of 60
Rainfall, description of 52-53
Ransit, Charles, aid of 33
Raphistoma 75

Page.

Relief, description of 44-48
Richardson, G. B., on Elkhorn placers 256-257
work of 8, 283, 285
Richter Creek, placers on 263
River-bar placers, description of 142, 145
Roads, cost of 60
Robertson, R. B., work of 8
Rock Creek, placers on 195-196
Rodney Creek, placers on 215
Ruby Creek, placers on 266
Ruby Creek, placers on 216
Russell, I. C., on rock decay 125-126
Russian-American Mining and Exploration Co., operations of 14

S.

St. Lawrence Island, coal on 85
description of 103
Saturday Creek, gold on 168
Schist-limestone contacts, mineralization at 121-122, 131
Schrader, F. C., work of 7
Schrader, F. C., and Brooks, A. H., on high-bench placers 198
Schuchert, Charles, fossils determined by 75-77
Sea-beach. *See* Beach.
Sedimentary formations, descriptions of 65, 83-85
Seward, W. H., peninsula named for 10
Shishmaref Inlet, harbor in 43
Shore line, character of 42-44
Shovel Creek, placers on 226
Silver, production of 140
Silver-lead. *See* Galena.
Sinuk River, basin of, placers of 216-217
coal on 108, 148
description of 49, 215-216
region west of, description of 217-218
placers of 218-220
Slate Creek, placers on 267-268
Smith, P. S., on Council region 240-246
on Iron Creek region 329-336
on Solomon River placers 233
work of 9, 61
Smyth, H. L., on gold concentration 129
Snake River, basin of, placers of 16, 17, 183-198
description of 182-183
Snow Gulch, gold on 17-18, 193, 195
Snowball Creek, placers on 251
Snowflake claim, description of 203-204
Solomon Creek, placers on 308
Solomon River, description of 49, 222-223
dredging on 30
view of 242
gold on 29, 34
region of, placers of 223-233
Sonora Creek, placers on 215
Specimen Gulch, placers on 191
section on 191
Spencer, A. C., on placer formation 129
Spruce, occurrence of 54
Spurr, J. E., on granitic rocks 124
Stella Creek, placers on 210-211
Storms, occurrence of 53

Page.
Streptelasma, occurrence of..... 75
Striatopora, occurrence of..... 75,76
Stromatocerium rugosum, occurrence of... 78
Stromatopora sp., occurrence of..... 75
Structure, discussion of..... 113
relation of gold and..... 113–114,121–123
Sugar mine, description of..... 204–205
section on..... 205
Summit claim, description of..... 206–207
Sunset Creek, placers on..... 270–271
Sweetcake Creek, placers on..... 250–251,262
section on..... 251
Syringopora sp..... 75,76,81

T.

Taylor Creek, placers on..... 324–325
Telegraph line, construction of..... 13
Teller, description of..... 58,269–270
Temperature, records of..... 51–52
Thompson Creek, valley of, view of..... 58
Timber, character of..... 54
Tin, occurrence of..... 11,33,38,104,105,135,140
relations of granitic rocks and..... 104–105
Tisuk Creek, description of..... 49
placers on..... 220
Tomboy Creek, placers on..... 219
Topographic provinces, description of..... 45–48
Topography, outline of..... 41–50,
93,111–112,146–147,295–297
Tornensis, John, prospecting by..... 16
Towns, descriptions of..... 57–59
Transportation, means of..... 58–60
Travel, cost of..... 60
means of..... 59–12
Trilby Creek, placers of..... 215
Trochonema, occurrence of..... 78
Tubutulik River, description of..... 48
Tundra, description of..... 55–56
Typhoid, occurrence of..... 24

U.

Page.
Ulrich, E. O., fossils determined by..... 78–79
Union Gulch, placers of..... 173
Uplands, description of..... 44–48

V.

Valley, typical, view of..... 58
Vegetation, character of..... 54–56
distribution of, map showing..... 55
Venetia Creek, placers of..... 221–222
Volcanism, prevalence of..... 101

W.

Walker, Frank, gold found by..... 288
Warm Creek, placers on..... 255–256
Washington Creek, placers of..... 216
Water, scarcity of..... 29,31,34
Waves, concentration of gold by..... 154–155
Weathering, processes of..... 125–127
West Creek, placers on..... 226
Willow Creek, placers on..... 267–268
Wilson Creek, placers on..... 265
Windy Creek, placers on..... 308,320–321
Winter mining, inception of..... 29
Witherspoon, D. C., work of..... 7,8

Y.

York, profile of coast line at..... 47
York district, description of..... 59
gold of..... 269
yield of..... 28
mineralization in, character of..... 117–118
organization of..... 23
slates of..... 70,79–80
tin in..... 27,33,38
York Mountains, description of..... 46–47

Z.

Zones, impregnated, character of..... 118–119
character of, figure showing..... 292

RECENT SURVEY PUBLICATIONS ON ALASKA.

[Arranged geographically. A complete list can be had on application.]

All of these publications can be obtained or consulted in the following ways:

1. A limited number are delivered to the Director of the Survey, from whom they can be obtained, free of charge (except certain maps), on application.

2. A certain number are delivered to Senators and Representatives in Congress for distribution.

3. Other copies are deposited with the Superintendent of Documents, Washington, D. C., from whom they can be had at prices slightly above cost.

4. Copies of all Government publications are furnished to the principal public libraries throughout the United States, where they can be consulted by those interested.

GENERAL.

The geography and geology of Alaska, a summary of existing knowledge, by A. H. Brooks, with a section on climate by Cleveland Abbe, jr., and a topographic map and description thereof, by R. U. Goode. Professional Paper No. 45, 1906, 327 pp.

Placer mining in Alaska in 1904, by A. H. Brooks. In Bulletin No. 259, 1905, pp. 18–31.

The mining industry in 1905, by A. H. Brooks. In Bulletin No. 284, 1906, pp. 4–9.

The mining industry in 1906, by A. H. Brooks. In Bulletin No. 314, 1907, pp. 19–39.

Railway routes, by A. H. Brooks. In Bulletin No. 284, 1906, pp. 10–17.

Administrative report, by A. H. Brooks. In Report on progress of investigations of mineral resources of Alaska in 1904: Bulletin No. 259, 1905, pp. 13–17.

Administrative report, by A. H. Brooks. In Report on progress of investigations of mineral resources of Alaska in 1905: Bulletin No. 284, 1906, pp. 1–3.

Administrative report, by A. H. Brooks. In Report on progress of investigations of mineral resources of Alaska in 1906: Bulletin No. 314, 1907, pp. 11–18.

Notes on the petroleum fields of Alaska, by G. C. Martin. In Bulletin No. 259, 1905, pp. 128–139.

The petroleum fields of the Pacific coast of Alaska, with an account of the Bering River coal deposits, by G. C. Martin. Bulletin No. 250, 1905, 64 pp.

Markets for Alaska coal, by G. C. Martin. In Bulletin No. 284, 1906, pp. 18–27.

The Alaska coal fields, by G. C. Martin. In Bulletin No. 314, 1907, pp. 40–46.

Methods and costs of gravel and placer mining in Alaska, by C. W. Purington. Bulletin No. 263, 1905, 362 pp. (Out of stock; can be purchased from Superintendent of Documents, Washington, D. C., for 35 cents.) Abstract in Bulletin No. 259, 1905, pp. 32–46.

Geographic dictionary of Alaska, by Marcus Baker, second edition by J. C. McCormick. Bulletin No. 299, 1906, 690 pp.

Topographic map.

Alaska, topographic map of; scale, 1:2500000. Preliminary edition by R. U. Goode. Contained in Professional Paper No. 45. Not published separately.

In preparation.

Methods and costs of gravel and placer mining in Alaska, by C. W. Purington. Second edition.

Map of Alaska showing distribution of mineral resources; scale, 1:5000000; by A. H. Brooks.

SOUTHEASTERN ALASKA.

Preliminary report on the Ketchikan mining district, Alaska, with an introductory sketch of the geology of southeastern Alaska, by Alfred H. Brooks. Professional Paper No. 1, 1902, 120 pp.

The Porcupine placer district, Alaska, by C. W. Wright. Bulletin No. 236, 1904, 35 pp.
The Treadwell ore deposits, by A. C. Spencer. In Bulletin No. 259, 1905, pp. 69–87.
Economic developments in southeastern Alaska, by F. E. and C. W. Wright. In Bulletin No. 259, 1905, pp. 47–68.
The Juneau gold belt, Alaska, by A. C. Spencer, pp. 1–137, and A reconnaissance of Admiralty Island, Alaska, by C. W. Wright, pp. 138–154. Bulletin No. 287, 1906, 161 pp.
Lode mining in southeastern Alaska, by F. E. and C. W. Wright. In Bulletin No. 284, 1906, pp. 30–53.
Nonmetallic deposits of southeastern Alaska, by C. W. Wright. In Bulletin 284, 1906, pp. 54–60.
The Yakutat Bay region, by R. S. Tarr. In Bulletin No. 284, 1906, pp. 61–64.
Lode mining in southeastern Alaska, by C. W. Wright. In Bulletin No. 314, 1907, pp. 47–72.
Nonmetalliferous mineral resources of southeastern Alaska, by C. W. Wright. In Bulletin No. 314, 1907, pp. 73–81.
Reconnaissance on the Pacific coast from Yakutat to Alsek River, by Eliot Blackwelder. In Bulletin No. 314, 1907, pp. 82–88.

Topographic maps.

Juneau Special quadrangle; scale, 1:62500; by W. J. Peters. For sale at 5 cents each, or $3 per hundred.
Topographic map of the Juneau gold belt, Alaska. Contained in Bulletin 287. Plate XXXVI, 1906. Not issued separately.

In preparation.

Report on progress of investigations of mineral resources of Alaska in 1907, by Alfred H. Brooks and others. 1908. — pp., — pls.
Physiography and glacial geology of the Yakutat Bay region, Alaska, by R. S. Tarr, with a chapter on the bed-rock geology by R. S. Tarr and B. S. Butler.
The Ketchikan and Wrangell mining districts, Alaska, by F. E. and C. W. Wright.
Berners Bay Special map; scale, 1:62500; by R. B. Oliver. (In press.)
Kasaan Peninsula Special map; scale, 1:62500; by D. C. Witherspoon and J. W. Bagley.

CONTROLLER BAY, PRINCE WILLIAM SOUND, AND COPPER RIVER REGIONS.

The mineral resources of the Mount Wrangell district, Alaska, by W. C. Mendenhall. Professional Paper No. 15, 1903, 71 pp. Contains general map of Prince William Sound and Copper River region; scale, 12 miles = 1 inch. (Out of stock; can be purchased from Superintendent of Documents for 30 cents.)
Bering River coal field, by G. C. Martin. In Bulletin No. 259, 1905, pp. 140–150.
Cape Yaktag placers, by G. C. Martin. In Bulletin No. 259, 1905, pp. 88–89.
Notes on the petroleum fields of Alaska, by G. C. Martin. In Bulletin No. 259, 1905, pp. 128–139. Abstract from Bulletin No. 250.
The petroleum fields of the Pacific coast of Alaska, with an account of the Bering River coal deposits, by G. C. Martin. Bulletin No. 250, 1905, 64 pp.
Geology of the central Copper River region, Alaska, by W. C. Mendenhall. Professional Paper No. 41, 1905, 133 pp.
Copper and other mineral resources of Prince William Sound, by U. S. Grant. In Bulletin No. 284, 1906, pp. 78–87.
Distribution and character of the Bering River coal, by G. C. Martin. In Bulletin No. 284, 1906, pp. 65–76.
Petroleum at Controller Bay, by G. C. Martin. In Bulletin No. 314, 1907, pp. 89–103.
Geology and mineral resources of Controller Bay region, by G. C. Martin. Bulletin No. 335, 1908, — pp.

Topographic maps.

Map of Mount Wrangell; scale, 12 miles = 1 inch. Contained in Professional Paper No. 15. Not issued separately.

In preparation.

The Kotsina-Chitina copper region, by F. H. Moffit.
Chitina quadrangle map; scale, 1:250000; by T. G. Gerdine and D. C. Witherspoon.
Controller Bay region Special map; scale, 1:62500; by E. G. Hamilton. Contained in Bulletin 335.
General map of Alaska coast region from Yakutat Bay to Prince William Sound; scale, 1:1200000; compiled by G. C. Martin. Contained in Bulletin No. 335.

COOK INLET AND SUSITNA REGION.

The petroleum fields of the Pacific coast of Alaska, with an account of the Bering River coal deposits, by G. C. Martin. Bulletin No. 250, 1905, 64 pp.
Coal resources of southwestern Alaska, by R. W. Stone. In Bulletin No. 259, 1905, pp. 151–171.
Gold placers of Turnagain Arm, Cook Inlet, by F. H. Moffit. In Bulletin No. 259, 1905, pp. 90–99.
Mineral resources of the Kenai Peninsula; Gold fields of the Turnagain Arm region, by F. H. Moffit, pp. 1–52; Coal fields of the Kachemak Bay region, by R. W. Stone, pp. 53–73. Bulletin No. 277, 1906, 80 pp.
Preliminary statement on the Matanuska coal field, by G. C. Martin. In Bulletin No. 284, 1906, pp. 88–100.
A reconnaissance of the Matanuska coal field, Alaska, in 1905, by G. C. Martin. Bulletin No. 289, 1906, 36 pp. (Out of stock; can be purchased of Superintendent of Documents for 25 cents.)
Reconnaissance in the Matanuska and Talkeetna basins, by S. Paige and A. Knopf. In Bulletin No. 314, 1907, pp. 104–125.
Geologic reconnaissance in the Matanuska and Talkeetna basins, Alaska, by S. Paige and A. Knopf. Bulletin No. 327, 1907, 71 pp.

Topographic maps.

Kenai Peninsula, northern portion; scale, 1:250000; by E. G. Hamilton. Contained in Bulletin No. 277. Not published separately.
Reconnaissance map of Matanuska and Talkeetna region; scale, 1:250000; by T. G. Gerdine and R. H. Sargent. Contained in Bulletin No. 327. Not published separately.
Mount McKinley region; scale, 1:625000; by D. L. Reaburn. Contained in Professional Paper No. 45. Not published separately.

ALASKA PENINSULA AND ALEUTIAN ISLANDS.

Gold mine on Unalaska Island, by A. J. Collier. In Bulletin No. 259, 1905, pp. 102–103.
Gold deposits of the Shumagin Islands, by G. C. Martin. In Bulletin No. 259, 1905, pp. 100–101.
Notes on the petroleum fields of Alaska, by G. C. Martin. In Bulletin No. 259, 1905, pp. 128–139. Abstract from Bulletin No. 250.
The petroleum fields of the Pacific coast of Alaska, with an account of the Bering River coal deposits, by G. C. Martin. In Bulletin No. 250, 1905, 64 pp.
Coal resources of southwestern Alaska, by R. W. Stone. In Bulletin No. 259, 1905, pp. 151–171.
The Herendeen Bay coal field, by Sidney Paige. In Bulletin No. 284, 1906, pp. 101–108.

YUKON BASIN.

The coal resources of the Yukon, Alaska, by A. J. Collier. Bulletin No. 218, 1903, 71 pp.
The gold placers of the Fortymile, Birch Creek, and Fairbanks regions, by L. M. Prindle. Bulletin No. 251, 1905, 89 pp.
Yukon placer fields, by L. M. Prindle. In Bulletin No. 284, 1906, pp. 109–131.
Reconnaissance from Circle to Fort Hamlin, by R. W. Stone. In Bulletin No. 284, 1906, pp. 128–131.
The Yukon-Tanana region, Alaska; description of the Circle quadrangle, by L. M. Prindle. Bulletin No. 295, 1906, 27 pp.
The Bonnifield and Kantishna regions, by L. M. Prindle. In Bulletin No. 314, 1907, pp. 205–226.

The Circle Precinct, Alaska, by Alfred H. Brooks. In Bulletin No. 314, 1907, pp. 187–204.

The Yukon-Tanana region, Alaska; description of the Fairbanks and Rampart quadrangles, by L. M. Prindle, F. L. Hess, and C. C. Covert. Bulletin No. 337, 1908, — pp.

Topographic maps.

Fortymile quadrangle; scale, 1:250000; by E. C. Barnard. For sale at 5 cents a copy or $3 per hundred.

Yukon-Tanana region, reconnaissance map of; scale, 1:625000; by T. G. Gerdine. Contained in Bulletin No. 251, 1905. Not published separately.

Fairbanks and Birch Creek districts, reconnaissance maps of; scale, 1:250000; by T. G. Gerdine. Contained in Bulletin No. 251, 1905. Not issued separately.

Circle quadrangle, Yukon-Tanana region; scale, 1:250000; by D. C. Witherspoon. Contained in Bulletin No. 295. Not issued separately.

In preparation.

Water-supply investigations in Alaska, 1906 and 1907, by F. F. Henshaw and C. C. Covert.

Fairbanks quadrangle map; scale, 1:250000; by D. C. Witherspoon. Contained in Bulletin No. 337, 1908.

Rampart quadrangle map; scale, 1:250000; by D. C. Witherspoon. Contained in Bulletin No. 337, 1908.

Fairbanks Special map; scale, 1:62500; by T. G. Gerdine and R. H. Sargent.

SEWARD PENINSULA.

A reconnaissance of the Cape Nome and adjacent gold fields of Seward Peninsula, Alaska, in 1900, by A. H. Brooks, G. B. Richardson, and A. J. Collier. In a special publication entitled "Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900," 1901, 180 pp.

A reconnaissance in the Norton Bay region, Alaska, in 1900, by W. C. Mendenhall. In a special publication entitled "Reconnaissances in the Cape Nome and Norton Bay regions, Alaska, in 1900."

A reconnaissance of the northwestern portion of Seward Peninsula, Alaska, by A. J. Collier. Professional Paper No. 2, 1902, 70 pp.

The tin deposits of the York region, Alaska, by A. J. Collier. Bulletin No. 229, 1904, 61 pp.

Recent developments of Alaskan tin deposits, by A. J. Collier. In Bulletin No. 259, 1905, pp. 120–127.

The Fairhaven gold placers of Seward Peninsula, by F. H. Moffit. Bulletin No. 247, 1905, 85 pp.

The York tin region, by F. L. Hess. In Bulletin No. 284, 1906, pp. 145–157.

Gold mining on Seward Peninsula, by F. H. Moffit. In Bulletin No. 284, 1906, pp. 132–141.

The Kougarok region, by A. H. Brooks. In Bulletin No. 314, 1907, pp. 164–181.

Water Supply of Nome region, Seward Peninsula, Alaska, 1906, by J. C. Hoyt and F. F. Henshaw. Water-Supply Paper No. 196, 1907, 52 pp. (Out of stock; can be purchased of Superintendent of Documents for 15 cents.)

Water supply of the Nome region, Seward Peninsula, 1906, by J. C. Hoyt and F. F. Henshaw. In Bulletin No. 314, 1907, pp. 182–186.

The Nome region, by F. H. Moffit. In Bulletin No. 314, 1907, pp. 126–145.

Gold fields of the Solomon and Niukluk river basins, by P. S. Smith. In Bulletin No. 314, 1907, pp. 146–156.

Geology and mineral resources of Iron Creek, by P. S. Smith. In Bulletin No. 314, 1907, pp. 157–163.

The gold placers of parts of Seward Peninsula, Alaska, including the Nome, Council, Kougarok, Port Clarence, and Goodhope precincts, by A. J. Collier, F. L. Hess, P. S. Smith, and A. H. Brooks. Bulletin No. 328, 1908, 343 pp.

Topographic maps.

Nome Special, Seward Peninsula; scale, 1:62500; by T. G. Gerdine.
Solomon Special quadrangle, Seward Peninsula; scale, 1:62500; by T. G. Gerdine.

The following maps are for sale at *25 cents a copy*, or $15 per hundred:

Seward Peninsula, northeastern portion of, topographic reconnaissance of; scale, 1:250000; by T. G. Gerdine.
Seward Peninsula, northwestern portion of, topographic reconnaissance of; scale, 1:250000; by T. G. Gerdine.
Seward Peninsula, southern portion of, topographic reconnaissance of; scale, 1:250000; by T. G. Gerdine.

In preparation.

Water-supply investigations in Alaska, 1906 and 1907, by F. F. Henshaw and C. C. Covert.
Geology of the area represented on the Nome and Grand Central Special maps, by F. H. Moffit, F. L. Hess, and P. S. Smith.
Geology of the area represented on the Solomon and Casadepaga Special maps, by P. S. Smith.
The Seward Peninsula tin deposits, by A. Knopf.

NORTHERN ALASKA.

A reconnaissance from Fort Hamlin to Kotzebue Sound, Alaska, by way of Dall, Kanuti, Allen, and Kowak rivers, by W. C. Mendenhall. Professional Paper No. 10, 1902, 68 pp.
A reconnaissance in northern Alaska across the Rocky Mountains, along the Koyukuk, John, Anaktuvuk, and Colville rivers, and the Arctic coast to Cape Lisburne, in 1901, by F. C. Schrader and W. J. Peters. Professional Paper No. 20, 1904, 139 pp. (Out of stock; can be purchased of Superintendent of Documents for 40 cents.)
Coal fields of the Cape Lisburne region, by A. J. Collier. In Bulletin No. 259, 1905, pp. 172–185.
Geology and coal resources of Cape Lisburne region, Alaska, by A. J. Collier. Bulletin No. 278, 1906, 54 pp.

Topographic maps.

Fort Yukon to Kotzebue Sound, reconnaissance map of; scale, 1:625000; by D. L. Reaburn. Contained in Professional Paper No. 10. Not published separately.
Koyukuk River to mouth of Colville River, including John River; scale, 1:625000; by W. J. Peters. Contained in Professional Paper No. 20. (Out of stock.) Not published separately.

O



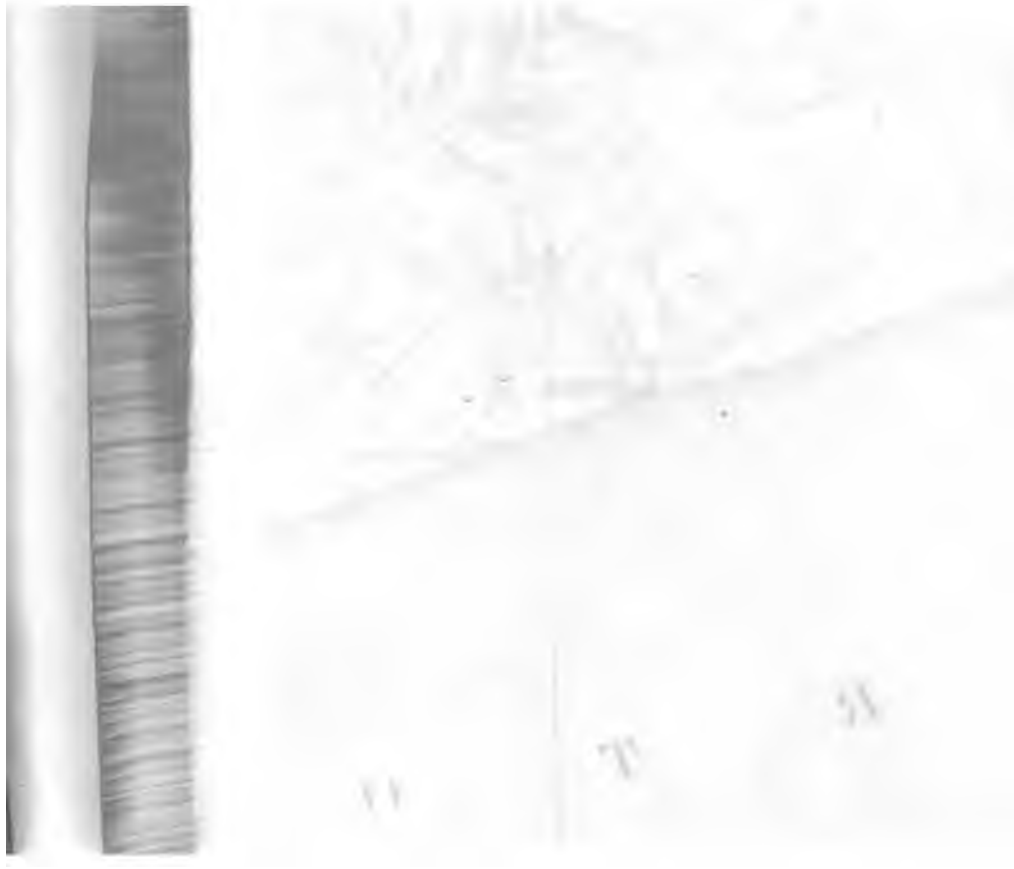

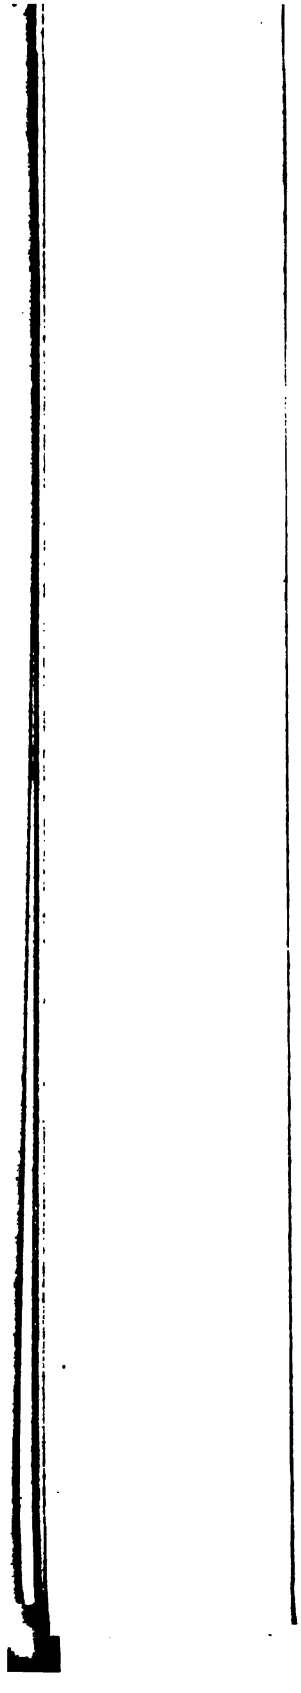

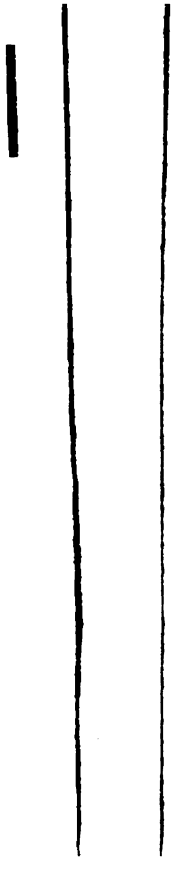

UNIVERSITY OF MICHIGAN
3 9015 06224 8888